

Article

Low-Power, Flexible Sensor Arrays with Solderless Board-to-Board Connectors for Monitoring Soil Deformation and Temperature

Stijn Wielandt¹, Sebastian Uhlemann¹, Sylvain Fiolleau¹, and Baptiste Dafflon¹

Earth and Environmental Sciences Area, Lawrence Berkeley National Laboratory, 1 Cyclotron Rd, Berkeley, CA 94720, USA; stijnwielandt@lbl.gov (S.W.); suhlemann@lbl.gov (S.U.); sfioleau@lbl.gov (S.F.); bdafflon@lbl.gov (B.D.)

* Correspondence: stijnwielandt@lbl.gov

Version March 16, 2022 submitted to Sensors

Abstract: Landslides are a global and frequent natural hazard, affecting many communities and infrastructure networks. Technological solutions are needed for long-term, large-scale condition monitoring of infrastructure earthworks, or natural slopes. However, current instruments for slope stability monitoring are often costly, require a complex installation process and/or data processing schemes, or have poor resolution. Wireless sensor networks comprising low-power, low-cost sensors have been shown to be a crucial part of landslide early warning systems. Here, we present the development of a novel sensing approach that uses linear arrays of three-axis accelerometers, used for monitoring soil deformation. By combining these deformation measurements with depth-resolved temperature measurements, we can link our data to subsurface thermal-hydrological regimes where relevant. In this research, we present a configuration of cascaded I2C sensors that (i) have ultra-low power consumption and (ii) enable an adjustable probe length. From an electromechanical perspective, we developed a novel board-to-board connection method that enables narrow, semi-flexible sensor arrays and a streamlined assembly process. The low-cost connection method relies on a specific FR4 printed circuit board design that allows board-to-board press-fitting without using electromechanical components or solder connections. The sensor assembly is placed in a thin, semi-flexible tube (inner diameter 6.35 mm) that is filled with an epoxy compound. The resulting sensor probe is connected to a AA battery powered data logger with wireless connectivity. We characterize the system's electromechanical properties and investigate the accuracy of deformation measurements. Our experiments performed with probes up to 1.8 m long demonstrate long-term connector stability, as well as probe mechanical flexibility. Furthermore, our accuracy analysis indicates that deformation measurements can be performed with a 0.390 mm resolution and a 95% confidence interval of ± 0.73 mm per meter of probe length. This research shows the suitability of low-cost accelerometer arrays for distributed soil stability monitoring. In comparison to emerging low-cost measurements of surface displacement, our approach provides depth-resolved deformation, which can inform about shallow sliding surfaces.

Keywords: sensor arrays; geotechnical sensors; solderless connectors; wireless sensor networks; deformation monitoring; accelerometer

1. Introduction

Landslides are a global and frequent natural hazard, affecting many communities and infrastructure networks. Between 2004 and 2016, 4,862 non-seismic fatal landslide events have been recorded in the Global Fatal Landslide Database [1]. Of those, 12% had a direct impact on

infrastructure; this is most likely an under-reported value [1,2]. Small failures ($< 10 \text{ m}^3$) are recognized to having the largest impact on infrastructure, representing 95% of events that impacted the Swiss transportation network between 2012 and 2016 [3]. While these events account for 74% of direct damages, they are rarely reported in regional or global landslide inventories. Climate change is expected to increase the frequency of extreme weather events, which are known to have adverse impacts on infrastructure slopes [4], and thus may cause even more failures in the future. Hence, there is an increasing need for novel instrumentation that can lead to a better understanding and enhanced monitoring of infrastructure conditions [5].

Smethurst et al. (2017) and Uhlemann et al. (2016) [5,6] provide a comprehensive overview of current technological solutions for slope stability monitoring. Their studies highlight the frequent use of technologies to monitor soil displacements, but also emphasize the need for depth-resolved, continuous measurement approaches. While slopes with known stability problems are often monitored using conventional instrumentation, such as inclinometers or piezometers, and/or site specific geophysical instrumentation or soil moisture sensor networks [7,8], such efforts are often related to significant costs for sensor installation and long-term monitoring. Even though such site-specific monitoring solutions are known to be valuable for managing infrastructure assets [9], stakeholders require new approaches for monitoring the conditions of longer lengths of earthworks [5]. While remote sensing or fiber optic sensing based solutions become increasingly available, they are either very costly, require complex installation and/or data processing schemes, and lack vertical resolution. Remote sensing data is highly sensitive to ground surface deformation (i.e., InSAR) and has been shown to be successful in imaging deformation of failing infrastructure [10,11], but the temporal resolution is poor and spatial resolution often not sufficient to detail failure events [10]. Fiber-optic sensing techniques, such as distributed strain or acoustic sensing (DSS and DAS, respectively), are becoming increasingly used to monitor infrastructure assets [12]. Since telecommunication fibers are often installed next to road or railways, these networks of fiber optic cables can provide a cost-efficient monitoring solution [13]. Yet, the interrogators required to record and analyse the signals are expensive and need a reliable power source. Particularly for remote sensing techniques, data processing is computationally expensive, limiting their use for real-time assessment of slope conditions [12].

Wireless sensor networks (WSNs) comprising low-power, low-cost sensors [14] can overcome some of those limitations and can be linked to observations from remote sensing or other ground-based sensing techniques [15]. WSNs are now being used as part of landslide early warning systems [16], highlighting their use for rapid assessment of slope conditions.

Here, we developed a novel low-power, low-cost sensing approach for soil deformation monitoring. In combination with low-power, long-range wireless connectivity [17], the proposed solution becomes a means for continuous monitoring of the stability of infrastructure earthworks, or natural slopes. Our solution is based on three-axis accelerometers, which are deployed as a linear array of sensors in a flexible probe, measuring the probe's deformation. This is comparable to commercially available ShapeAccelArrays (SAA, Measurand, Hanwell, New Brunswick, Canada, [18]) and the prototype for inclination measurements presented by Ruzza et al. (2020) [19]. Here we develop an integrated solution that houses sensors in a thin tube. The sensor probe is used with a low-cost logging unit that is described in detail in Wielandt et al. (2021) [20], resulting in a solution that has a small footprint, is sturdy and easy to install, is highly energy efficient (i.e., AA battery powered), and ready to be deployed as networks of sensors [21]. By combining these deformation measurements with depth-resolved temperature measurements, we can link our data to water and temperature dynamics [22–24]. In comparison to emerging, low-cost measurements of surface displacement (e.g., tiltmeter, extensimeter or GPS), our approach provides depth-resolved deformation, which can inform about shallow sliding surfaces and processes.

The development of these linear sensor arrays poses many challenges. From an electrical point of view, it requires the design of a low-power array of individually addressable sensors, with a configurable length of up to $\sim 2 \text{ m}$. In order to enable large-scale distributed wireless sensor

deployments, the design should also be low cost, and easy to manufacture and assemble [25]. This means that the electrical challenges are complicated by mechanical requirements and limitations that mandate specific design solutions and novel techniques. Critical mechanical requirements include a thin and flexible probe design with a fixed 50 mm spacing between sensors, and robustness in harsh field conditions. In order to fulfill all requirements, a modular approach is adopted. 200 mm long sensor sections are designed on semi-rigid, narrow, FR4 printed circuit boards (PCBs). These boards are cascaded by means of a novel, solderless board-to-board connection technique [26]. In contrast to existing (commercial) solutions, the proposed technique has a zero-cost impact on board manufacturing, and provides great mechanical robustness at a minimal cross-section, enabling 5 mm thin sensor arrays that can be placed in a thin, semi-flexible tube. The connector assembly is fully designed in PCB technology, does not require soldering, and consists of a male part containing metal-plated barbed pins, and a female part containing metal-plated slots. After cascading the boards and inserting them into the plastic tube, the tube is filled with an epoxy compound to withstand field conditions.

The electromechanical properties of the proposed design are experimentally evaluated and presented in this paper. We discuss the resistance for different signal traces, and evaluate the change of contact resistance over a one year time period. Furthermore, we assess these electrical parameters as a result of epoxying, heating, freezing, and bending the probe. Besides these tests that focus on the connector design, we study the probe's power consumption for different configurations, and we perform a mechanical evaluation of the probe's flexibility. Finally, we assess the accuracy of the probe for deformation measurements. Lab tests demonstrate the probe's ability to accurately detect soil movements. Furthermore, the probe operation is evaluated in an Arctic environment, illustrating that the combination of temperature sensors and accelerometers can be used to study soil movements in permafrost environments.

2. Materials and Methods

2.1. Inclination Measurements Using Accelerometers

Accelerometers are micro-electromechanical systems (MEMS) that measure a device's acceleration along -usually- three axes. The developments of consumer electronics over the past decade have resulted in a competitive offering of low-cost, high-performance accelerometer chips. In conditions with low to zero acceleration, these sensors can be used for inclination sensing by measuring Earth's gravity along their three axes [27].

Figure 1a depicts a static configuration with a gravitational acceleration vector \mathbf{g} applied to a tilted accelerometer. This acceleration of $9.81 \text{ m} \cdot \text{s}^{-2}$ is referred to as 1 g throughout the remainder of this paper. A reference coordinate system (xyz) can be aligned with \mathbf{g} , such that the z -axis opposes \mathbf{g} . Any applied acceleration is measured by the accelerometer as a vector $\mathbf{a} = [a_x, a_y, a_z]$. Under perfect alignment with the reference system, $a_z = -1g$, but because of the inclination of the sensor, both coordinate systems are rotated by θ , ψ , and ϕ . As illustrated in figure 1a, these angles express the rotation between a_x and the xy plane, a_y and the xy plane, and a_z and z , respectively. Basic trigonometry leads to Equations 1, 2 and 3, which can be used to calculate θ , ψ , and ϕ , from a_x , a_y , and a_z [28].

$$\theta = \tan^{-1} \left(\frac{a_x}{\sqrt{a_y^2 + a_z^2}} \right) \quad (1)$$

$$\psi = \tan^{-1} \left(\frac{a_y}{\sqrt{a_x^2 + a_z^2}} \right) \quad (2)$$

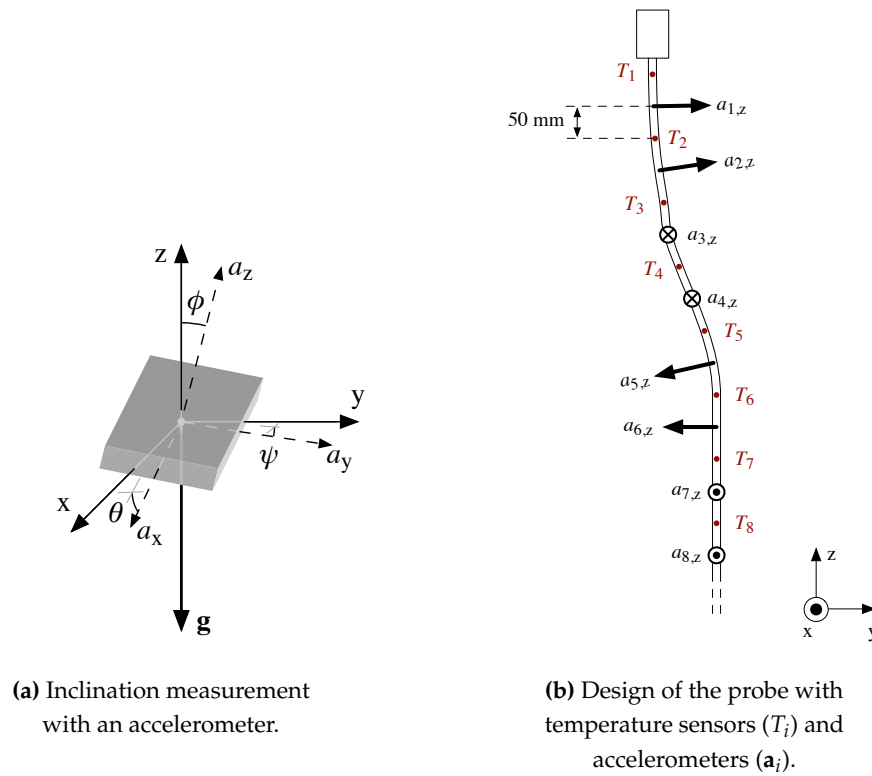


Figure 1. Accelerometer arrays can be used for deformation measurements.

$$\phi = \tan^{-1} \left(\frac{\sqrt{a_y^2 + a_x^2}}{a_z} \right) \quad (3)$$

The accuracy of an inclination measurement is affected by a number of error sources, including noise, drift, and offset [29]. Bad noise performance is usually caused by mechanical vibrations, a high measurement bandwidth, and instability of the supply voltage. For soil deformation sensing, the expected impact of noise is minimal because the outdoor environments of interest are usually vibration free, measurement bandwidths can be kept low, and supply voltage can be buffered. Sensor drift can happen over time and under influence of temperature and/or changes in the supply voltage. For subsurface applications, temperature changes are usually limited and slow. Furthermore, drift can be detected, compensated, and prevented by stabilizing the supply voltage and by performing measurements of temperature and battery voltage. Offset errors in absolute inclination measurements are usually eliminated through a calibration process. Deformation measurements, however, are not affected by offsets and do not require calibration, since only changes in inclination are measured.

2.2. Sensor Arrays for Deformation Monitoring

Figure 1b presents an array of accelerometers ($a_i, i \in \{1, \dots, n\}$) for soil deformation sensing. The fixed 100 mm spacing between accelerometers enables a precise assessment of the deformation of the probe over time. As depicted in figure 1b, the accelerometer chips are positioned in a spiralling formation around the probe's axis (which is usually aligned with the z-axis) with a 90° step size. The benefit of this formation is two-fold. First, in practice the accuracy of acceleration measurements often varies by axis [30], so if all accelerometers were mounted in the same plane, inaccuracies would accumulate anisotropically. This can be overcome by the 90° spiralling arrangement of the

accelerometers' coordinate systems around the z axis, which introduces an alternation of measurement axes along the probe. For example, a probe tilt in the zy plane in Figure 1b would be perceived along $a_{2,z}, a_{4,y}, -a_{6,z}, -a_{8,y}, \dots$, effectively evening out differences in inaccuracy between a_z and a_y measurements. Secondly, the proposed arrangement prevents any asymmetrical sensor drift from accumulating along the sensor array, whether it be time, voltage, or temperature induced. The probe is also equipped with temperature sensors (T_i), spaced at a 50 mm distance from the accelerometers. These temperature measurements can be used for the detection and/or correction of temperature effects on the accelerometers, and in some cases provide valuable information on subsurface processes, including water and temperature dynamics [31].

To obtain the global deformation along a probe, all accelerometer coordinate systems have to be aligned along a common direction. Here, we align all sensors with the bottom sensor \mathbf{a}_n . However, the practical realization of a cascaded sensor formation might not always follow a perfect rotational movement in 90° steps. In order to correct for the rotational movement and its potential errors, we use Rodrigues' rotation formula for three dimensional vector rotations. The aligned version (\mathbf{r}_i) of the acceleration vector \mathbf{a}_i is calculated following equation (4), and the rotation matrix (Rot_i) is computed following equation (5). Rot_i is determined in a calibration phase before deployment by placing the probe under a $\sim 45^\circ$ angle. This assures that a_x, a_y , and a_z are non-zero for all sensors.

$$\mathbf{r}_i = \text{Rot}_i \cdot \mathbf{a}_i \quad (4)$$

$$\text{Rot}_i = I + K_i \sin \gamma_i + (1 - \cos \gamma_i) K_i^2 \quad (5)$$

I is the 3×3 identity matrix, and γ_i is the angle between vector \mathbf{a}_n and \mathbf{a}_i as expressed in equation (6). \mathbf{k}_i is the unit vector that defines the axis of rotation in equation (7), and K_i is its cross-product matrix as defined in equation (8).

$$\gamma_i = \frac{a_{n,x} \cdot a_{i,x} + a_{n,y} \cdot a_{i,y} + a_{n,z} \cdot a_{i,z}}{\sqrt{a_{n,x}^2 + a_{n,y}^2 + a_{n,z}^2} \sqrt{a_{i,x}^2 + a_{i,y}^2 + a_{i,z}^2}} \quad (6)$$

$$\mathbf{k}_i = \frac{\mathbf{a}_n \times \mathbf{a}_i}{|\mathbf{a}_n| |\mathbf{a}_i| \sin \gamma_i} \quad (7)$$

$$K_i = \begin{bmatrix} 0 & -k_{i,z} & k_{i,y} \\ k_{i,z} & 0 & -k_{i,x} \\ -k_{i,y} & k_{i,x} & 0 \end{bmatrix} \quad (8)$$

After aligning all accelerometers, the relative displacement for each sensor $\mathbf{d}_i = [d_{i,x}, d_{i,y}, d_{i,z}]$ is determined with the bottom accelerometer as a reference. The displacement vector \mathbf{d}_i is calculated following equations (9), (10) and (11), which accumulate the displacements between successive sensors starting at the bottom of the probe. These relative displacements between neighboring sensors are defined by the inclination of the sensor (θ, ψ and ϕ , according to equations 1, 2 and 3, respectively), multiplied by their inter-sensor distance of 100 mm.

$$d_{i,x} = \sum_{j=n-1}^i \sin \theta_i \cdot 100 \quad [\text{mm}] \quad (9)$$

$$d_{i,y} = \sum_{j=n-1}^i \sin \phi_i \cdot 100 \quad [\text{mm}] \quad (10)$$

$$d_{i,z} = \sum_{j=n-1}^i \sin \psi_i \cdot 100 \quad [\text{mm}] \quad (11)$$

2.3. Electronic Design

In order to build the low-cost, flexible sensor probe envisioned in figure 1b, an electronic circuit with cascaded sensors has been developed. Figure 2 presents a low-complexity design that enables narrow, flexible board configurations and resembles the thin temperature probe design presented in [25]. The use of digital sensors with two-wire interface (TWI, also known as I²C) and address pins enables communication with multiple identical sensors on a single communications bus. In order to individually address the sensors, each sensor's address input is connected to a D flip-flop's output, as presented in the schematic. The configuration of D flip-flops effectively forms a shift register with each bit being connected to a separate temperature sensor/accelerometer pair. Using the 'D' and 'CLK' signals, a single address bit can be propagated along the entire sensor array. This approach allows cascaded sensor configurations of arbitrary length using just six signals, including the I²C signals ('SCL' and 'SDA'), power supply 'VCC', and ground 'GND'.

All selected components are compatible with the 2.0 V to 3.6 V range, which allows operation on a 3 V lithium battery or 2×AA batteries without voltage conversion circuitry, preventing energy loss [20]. The focus on low-power components maximizes the battery life of the connected data logger, but it also ensures voltage stability along the probe. Power supply noise is further reduced with RC-filters at every sensor's power inputs, ensuring a minimal impact on the measurements. Taking the electrical requirements into account, SN74LVC1G175DCK [32] was selected as a low-cost, low-power, discrete, small-footprint D flip-flop. Temperature measurements are performed with the TMP117AIDRVR [33], which satisfies the same electrical requirements and provides an extremely high resolution of 0.0078125°C and a factory assured accuracy of ±0.1°C in the −20...50°C range. The field of commercially available accelerometers is extensive, but the wide set of requirements has led to the selection of the ADXL345 from Analog Devices [30]. This chip provides a measurement resolution of 3.9 mg, which results in a displacement resolution of 0.39 mm under 100 mm sensor spacing. It is offered at a low price point, provides acceleration measurements in the ±2 g range, and has an LGA-14 footprint and a pin layout that facilitates its use on narrow circuit boards. Furthermore, the chip satisfies the previously formulated electrical requirements, which include compatibility with I²C and the presence of an address pin. The available documentation [28–30] provides a detailed description of the chip's error sources, including noise, drift, and offset. As previously discussed, the offset does not affect deformation measurements. However, temperature and supply voltage induced drift should be minimized, detected, and/or corrected. Temperature fluctuations are naturally minimized by the probe's deployment in the subsurface, while voltage fluctuations are minimized by RC-filters and the use of batteries with a stable output voltage independent of charge state and temperature (e.g., Li/FeS₂ Energizer L91 [34]). In order to enable the detection and correction of any occurring drift, each measurement with the deformation probe is accompanied by a soil temperature profile and battery voltage measurement. Sensor noise is minimized by a combination of measures; (i) the output rate of the accelerometer is set to 50 Hz, which provides the lowest noise level [30], and (ii) averaging of

$k \in \{1, 2, 4, 8, 16, 32\}$ measurements. We investigate the impact of averaging on the probe's power consumption and accuracy of the deformation measurements.

The developed sensor probe is intended for long-term, distributed soil temperature and deformation monitoring. This means that the probe should be connected to a low-power, battery operated, low-cost data logger that provides local data storage and/or wireless connectivity, time keeping provisions, and limited data processing. For this research we employed the logger presented in [20], which is equipped with an NRF52832 ARM Cortex M4, 32 Mb low-power NOR flash memory, a microSDHC expansion slot, a PCF2129AT real-time clock, and wireless connectivity through Bluetooth Low Energy and LoRa. The logger connects to the probe through a six wire interface and uses a TPS22919 load switch to cut off the probe's power supply when no measurements are performed. The I²C bus is operated at 50 kHz with a TCA9803 bus buffer with integrated current sources, guaranteeing signal integrity for probes of up to at least 2 m length. The process of initializing, reading, and averaging sensor data is shown in algorithm 1. The logger operates in the 1.8 V - 3.6 V range, which makes it compatible with the proposed 2×AA battery set of Energizer L91 Li/FeS₂ cells with a capacity of 3500 mAh in the temperature range of -40°C up to 60°C [34]. The logger's average power consumption equals 75.9 μW, not taking the sensor probe into account.

```

1: Turn on probe power supply
2: Wait 25 ms for signals to settle and devices to power up
3: for  $Sensor = 1, 2, \dots, n$  do
4:     Initialize temperature sensor, accelerometer and start measurements
5: end for
6: for  $step_{avg} = 1, \dots, k$  do
7:     Wait for measurements to complete
8:     for  $Sensor = 1, 2, \dots, n$  do
9:         Read new sensor values
10:    end for
11:    if  $step_{avg} < k$  then
12:        Restart accelerometer measurement
13:    end if
14: end for
15: Turn off probe power supply
16: Average  $k$  accelerometer measurements

```

The characterization of the probe’s power consumption is critical to assess its impact on the end device’s battery life. We used a Keithley DMM6500 6.5 digit digital multimeter to measure the current along the VCC line under a constant voltage of 3.3765 V. We evaluated the power consumption for different configurations, varying the number of sensors (n) and the number of averaged measurements

(k). As such, we obtained power profiles over time for the evaluated configurations. The total energy consumption for an entire probe measurement is calculated by integrating these power profiles over time.

2.4. Electromechanical Design

The envisioned concept results in a set of challenging mechanical requirements that affect the electrical design of the probe. The probe should consist of a thin, low-cost, weather resistant tube that is sufficiently flexible to follow soil movements, but rigid enough to allow the probe to be pushed into a tight hole in the ground. The sensor array schematically depicted in figure 2 should maintain an accurate spacing of 50 mm between sensors, and enable its insertion into a flexible tube. This means that this electrical setup should be rigid enough to provide fixed sensor spacing, but flexible enough to withstand the deformation of the probe, as well as thermal expansion. Furthermore manufacturability, cost, and production yield should be considered to facilitate large-scale, distributed deployments.

For the construction of the sensor array, several technological options exist. The components can be mounted on flexible circuit boards, but such setup would not provide the rigidity required for fixed sensor spacing and spiralling sensor configurations [35]. Thin, fiber based (FR4) circuit boards provide a low-cost, semi-flexible solution that enables fixed sensor spacing [36]. Because PCBs cannot be manufactured for the entire probe length, we adopted a modular approach with each 20 cm module containing two temperature sensors and two accelerometers. The resulting setup of thin, cascaded, FR4 circuit board sections provides a low-cost solution for various probe lengths, and enables the spiralling configuration presented in figure 1b. However, the electrical and mechanical connections between the cascaded boards poses another design challenge. Many connectivity solutions have been available for decades, but despite extensive evaluations of commercial technologies no adequate connector solution was found. The summary below indicates the shortcomings of existing solutions:

- Connector-cable-connector setups: This labor intensive, costly, and bulky solution is often found in prototypes and low-volume production devices [37]. Each sensor board has an incoming and outgoing connector soldered onto it, and all boards are connected with cable assemblies. The cost of the connector terminals, cable assemblies, soldering, and manual assembly easily exceeds the actual cost of the sensors.
- Direct PCB-to-PCB soldering: This technique is often found in cascaded LED strips and constitutes PCB edge pads that are aligned and soldered together. This approach is labor intensive, prone to production errors, and often mechanically unreliable, as mechanical stress can result in solder cracks [38].
- Board-to-board connectors: Solder mounted board-to-board connectors are commonly used in electronic designs and can accommodate the required fixed sensor spacing when mounted at the edge of the board. However these parts are usually costly, affect production yields and cost, are often unreliable under mechanical stress, and –most importantly– require too much board space, affecting the thickness of the entire probe [37].

Because of these disadvantages, a novel board-to-board connection technique was developed. The proposed approach does not require any components and does not require soldering. The technique relies on two complementary PCB designs that can be classified as female (figure 3a) and male (figure 3b). The main operating principle is that these two FR4 PCBs snap into each other as demonstrated in figure 3c, with the metallized areas of the boards being pressed together, creating reliable electric contacts.

The male connector consists of 0.8 mm thick FR4 board with a design that features an array of six 3.0 mm wide pins. These pins have exposed metallization (electroless nickel/immersion gold) on the top and bottom layer of the PCB and fit into the female part. The female connector contains a series of through-plated PCB slots of 0.9 mm × 3.2 mm, angled under $\pm 12^\circ$. The angles of the PCB slots introduce a degree of spring loading that ensures a reliable electrical contact between the pins

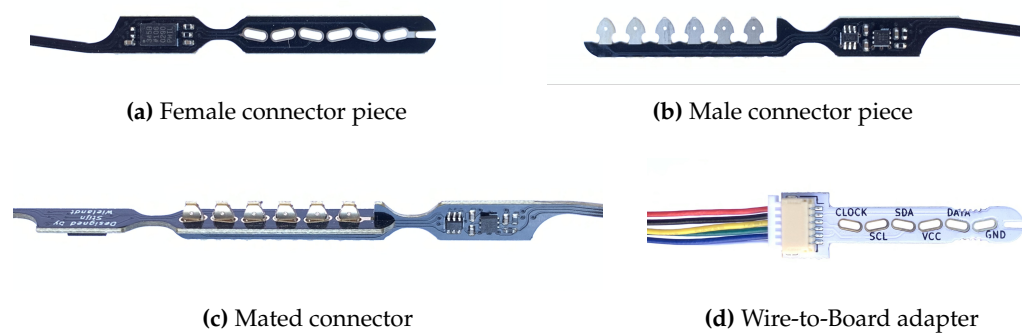


Figure 3. Close-ups of the proposed connector technology.

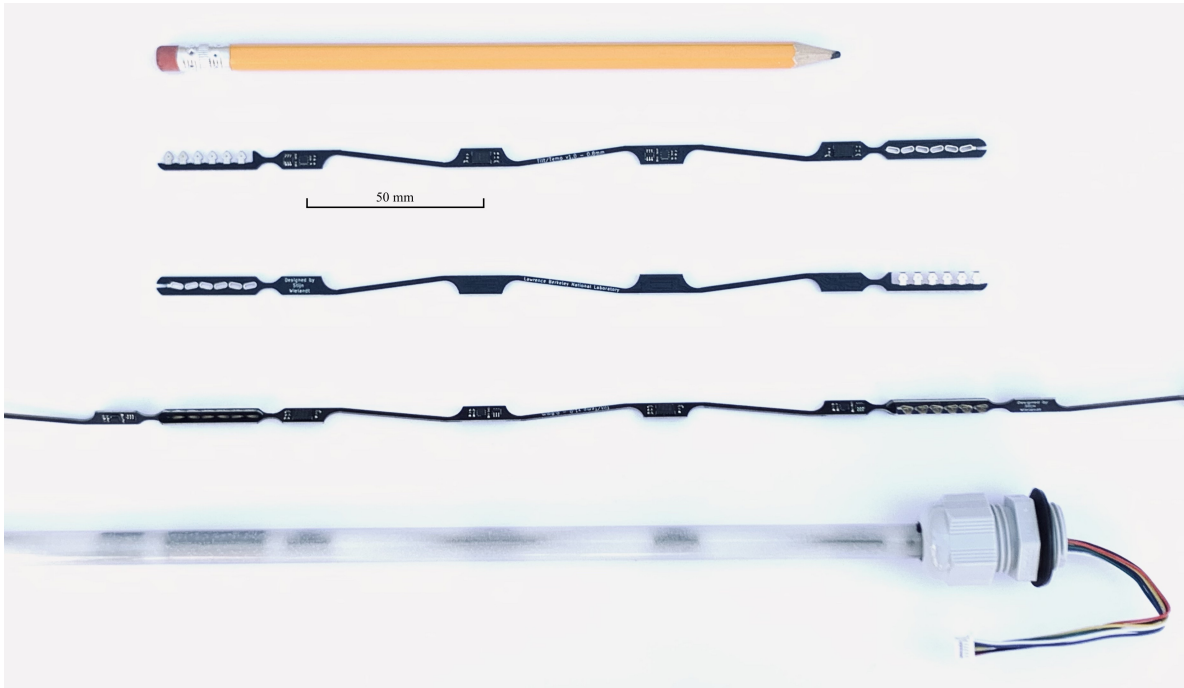


Figure 4. Modular design of the sensor probe. From top to bottom: (1) Top view of a sensor board, (2) Bottom view of a sensor board, (3) Cascaded sensor boards, and (4) Final probe assembly containing an array of cascaded sensor sections in a 3/8 in. (~10 mm) outer diameter tube, filled with epoxy.

and the plated slots. Furthermore, the barbed pin design in the male connector allows both parts to lock together. The final solution is a connector design that is entirely made in PCB technology using standard, low-cost production methods. As depicted in figure 3c the boards are mated under 90° angles, realizing the spiralling sensor formation that was presented in figure 1b. The assembly of a connector can be done in less than two seconds and does not require soldering. This solderless technique contributes to the reliability of the connector under mechanical stress, similar to existing –yet costly– press-fit connectors [37]. The total width of the boards is only 5.5 mm, so the sensor array can be placed in a thin, flexible tube. At the top of the probe, a wire-to-board adapter (illustrated in figure 3d) provides connectivity to the data logger through a 1 mm pitch 6-pin JST SH connector [39].

The sensor boards exhibit a particular PCB design with narrow (1.60 mm) sections that connect the sensors and connectors at the board ends (figure 4). These narrow board sections provide flexibility in multiple directions and reduce stress on electronic components and their solder joints. Other provisions to handle mechanical stress include fillets of the board outline around the sensors, and PCB trace tapering and curving instead of using 45° turns. One can also observe that the narrow

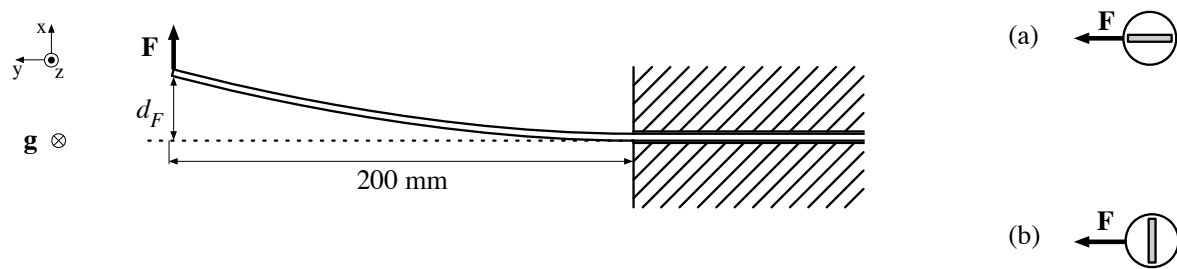


Figure 5. Test setup to measure the deformation d_F of a 20 cm long probe segment as a result of a sideways force F , which is applied (a) in the PCB-plane, or (b) perpendicular to the PCB plane.

interconnecting sections are designed in a zig-zag fashion. This implementation introduces a minimal amount of elasticity along the sensor array that relieves mechanical stress due to thermal expansion of the boards. The temperature at which the probes are assembled and filled with epoxy can easily be 50°C above the use case temperatures (e.g., in the Arctic). According to [40], a thermal expansion coefficient of $15.30 \text{ ppm}/^\circ\text{C}$ can be expected along the length of an FR4 board. This means that a 50°C temperature drop would result in a 1.377 mm crimp along a 1.8 m long probe.

The spiralling sensor assembly is inserted in a plastic tube of 9.5 mm outer diameter and 6.35 mm inner diameter. We selected cellulose acetate butyrate tubing because of its low cost, weather resistance, flexibility, and structural stability over a wide temperature range. Finally, the tube is filled with the Epoxies Inc. urethane blend 20-2360 [41], which was also selected for its structural stability over a wide temperature range.

2.4.1. Probe Flexibility Tests

To evaluate the developed design, a series of mechanical and electrical tests is performed. First, we evaluate the flexibility of the probe. Figure 5 represents the test setup for this experiment: a probe is anchored and a force F is applied 200 mm from the anchor point, causing a deformation d_F . The force and deformation are measured in a horizontal plane to rule out any gravitational impact on d_F . This experiment is performed in two configurations, taking into account the orientation of the sensor board in the studied 200 mm probe section. In configuration (a) F is applied in the PCB plane, whereas (b) studies the deformation for a force perpendicular to the PCB plane.

2.4.2. Connector Evaluation

Since the developed connectors constitute a novel technology, multiple tests and evaluations were performed to evaluate the stability, consistency, and reliability of the electrical contacts. For all measurements of contact resistance, we used the Keithley DMM6500 digital multimeter in a 4-wire configuration to eliminate any influence of measurement leads. All measurements were performed at room temperature unless noted otherwise.

In a first study, we evaluate the resistance of the GND, VCC, SDA, SCL, and CLK traces along two 1.2 m probes. These trace resistances are measured separately for each of the 12 200 mm probe sections without taking the contact resistance of the board-to-board connectors into account. Next, the trace resistances are measured for the entire length of the probes, which includes all 12 connectors. Aarts et al. (2008) [42] describe a very similar approach, evaluating contact resistance of several daisy chained interconnects. The measurements allow us to evaluate the average trace resistance per sensor board, and assess the impact of the connectors' contact resistance.

The next study evaluates the impact of different events on the trace resistances. For these tests we find the average change in trace resistance (ΔR) per 200 mm probe section by –again– measuring the change over an entire 1.2 m probe. In a first test, we measure the change in resistance after filling the probe with the epoxy compound. Next, the probe is frozen for 6 hours at -23.7°C , and the resistances are measured in the first 2 minutes of the defrosting process, as well as after temperature equilibration.

In a different test, a probe is placed in an oven at 103°C to 108°C for six hours. For safety purposes, no resistance measurements were performed on the hot probe, but the resistances were reassessed when the probe was back at room temperature.

The next experiment focuses on connector reliability under mechanical stress. This means that all resistance measurements are performed while bending the probe. We evaluate the average ΔR per 200 mm probe section again by performing measurements on a 1.2 m probe, as a function of probe bending radius.

The last connector experiment evaluates contact resistance over time. For these tests, we evaluate the average ΔR per 200 mm probe section again by performing resistance measurements on 1.2 m probes. We performed these measurements over the course of one year to analyze the effects of oxidation and creep in the connectors.

2.5. Functional Probe Evaluation and Accuracy Assessment

To estimate the total uncertainty of the probe's deformation different parameters have to be taken into account, including the sensors' measurement errors, the number of averaged measurements (k), the probe design (90° rotation of each segment), and the length of the probe. In order to evaluate the accuracy of the calculated deformation as a function of the number of averaged measurements (k) for a 1 m probe, 3,000 acceleration samples were acquired in a stable environment (0 mm displacement) at constant temperature. Then, a Monte Carlo simulation of 10,000 iterations was performed, randomly combining measured samples to create 10,000 virtual probes of 1 m long. For each sensor, the displacement in x and y direction was calculated following equations (9) and (10) respectively. Finally, the deformation error (ϵ_d) was evaluated for a confidence interval of 95% (percentile 2.5 and 97.5) considering the relative displacement between the first and last sensor.

As stated by the manufacturer, temperature changes can induce a 0 g offset of acceleration measurements. We evaluated this effect on ϵ_d for $\pm 1^\circ\text{C}$ and $\pm 10^\circ\text{C}$ temperature fluctuations, relying on the performance characteristics reported in the ADXL345 datasheet [30].

In order to evaluate the operation of the probe in a real-world scenario, and to better understand the impact of permafrost degradation on soil and carbon transport, 60 probes (1.2 m to 1.8 m long) were installed in September 2021 at a field site on the Seward Peninsula, AK. We focus on the deformation occurring over a five days time window along a probe embedded in permafrost to demonstrate its capability of tracking small soil movements.

3. Results

3.1. Power Consumption

Figure 6 presents the power profile of two probe configurations with different lengths and a different number of averaged measurements (k). The plots indicate the different phases of measurement algorithm 1: an initial peak of the power consumption occurs at power-up, and is followed by a wider peak that can be associated with sensor initialization and measurements of temperature and acceleration values. After this initial measurement, a series of narrow power peaks represents the remaining $k - 1$ acceleration measurements. This explains the longer duration of the $k = 32$ measurement with respect to the $k = 8$ configuration. It should also be noted that a probe measurement with $n = 12$ and $k = 32$ takes almost 2.5 s, which is significantly longer than the time needed to perform 32 measurements at the selected 50 Hz output rate. This phenomenon can be attributed to the relatively slow I²C bus CLK signal of 50 kHz and the amount of sensor data that is exchanged. As expected, the length of the probe clearly affects its average power consumption. For the 1.2 m and 1.8 m probe, we measured an average power consumption of respectively 6.17 mW and 13.20 mW, which corresponds to an average supply current of 1.83 mA and 3.91 mA. One could argue that these values allow the entire probe to be powered through a microcontroller's GPIO pin and that the load switch on the data logger is not strictly necessary to switch the probe on or off. However, a load switch does accommodate

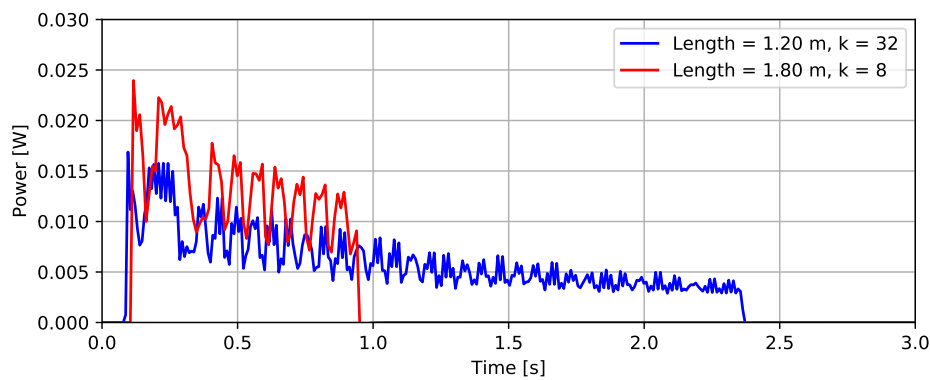


Figure 6. Power profiles for a 1.20 m long probe with 32 averaged measurements, and a 1.80 m long probe with 8 averaged measurements.

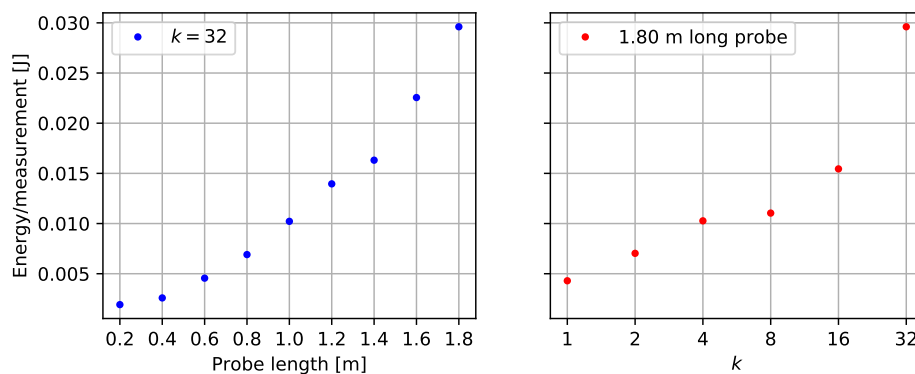


Figure 7. Energy per measurement as a function of probe length or the number of averaged measurements (k).

for larger current spikes without directly affecting the power supply of the microcontroller or sensors. Cutting off the power supply of the probe with the selected TPS22919 load switch contributes to the desired low-power operation of the probe: the probe's supply current between measurements is below the 1 nA detection limit of the used multimeter.

To assess the impact of the probe's power consumption on the battery life of a device, we evaluate the required energy per probe measurement, as presented in figure 7. These results demonstrate that the required energy increases more than linearly as the length of a probe increases. This is explained by the impact of probe length on both measurement duration, and power consumption. When considering the impact of k on the energy per measurement, one can observe that both parameters do not scale proportionally due to the energy cost of power-up, initialization, and temperature measurements. For the evaluation of battery life, we investigate a worst case battery life scenario of $k = 32$, $n = 18$, and a probe measurement interval of 15 minutes. Taking into account the data logger's average sleep power consumption of 75.9 μ W, and the logging energy of 4.747 mJ [20], we can calculate the daily energy budget of 7.01 J for the data logger, and 2.84 J for the sensor probe. For the proposed $2 \times$ AA 3,500 mAh battery set this translates to a battery life of 4,320 days (almost 12 years). However, for a more realistic battery life estimation, self-discharge and fluctuations in power consumption should be taken into account. Since the sensor probe represents only 29% of the device's total energy consumption in this worst case scenario, sacrifices in probe length or averaging (k) would only result in insignificant battery life improvements.

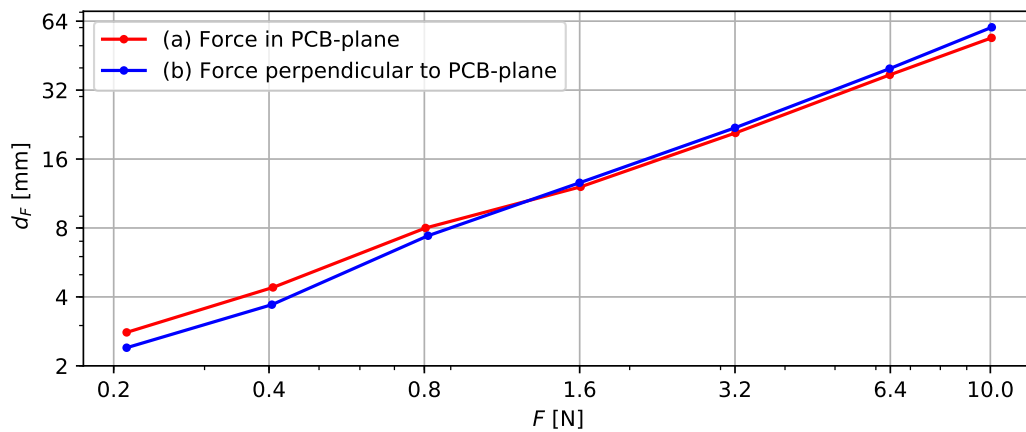


Figure 8. Deformation d_F of a 200 mm long probe segment as a result of a sideways force F either (a) in the PCB plane, or (b) perpendicular to the PCB plane.

3.2. Probe Flexibility

Figure 8 presents the deformation d_F of the probe by applying a force either (a) in the PCB plane, or (b) perpendicular to it. A small force of ~ 0.2 N results in a considerable deformation (2.4 mm or 2.8 mm) of the studied 200 mm probe section. Increasing this force to 10 N results in an extreme deformation of the probe, but d_F does not vary linearly with F . Scenario (a) and (b) exhibit similar results, so the flexibility of the probe can be considered nearly isotropical. In scenario (a), a < 1 N force results in a slightly larger deformation than in scenario (b), which contrasts expectations. The logarithmic scale amplifies the apparent significance, but the absolute differences of these d_F values are all ≤ 0.7 mm and could be caused by measurement inaccuracies.

To monitor slope instabilities, the applied forces due to soil movements should exceed the probe's resistance to deformation. However, accurate calculations of these interactions involve complex models that take into account soil and slope characteristics, as well as the physical parameters of the probe. Such calculations exceed the scope of this research, but a basic numerical approach can provide sufficient insight in the order of magnitude of the forces that can be expected. Das et al. (2012) [43] provide an example for the calculation of stress in a soil mass, assuming standard soil characteristics and a slope angle of 20° , resulting in a shear stress of 111.5 kN/m^2 . The approximate probe cross-section of 1 cm^2 results in a 11.15 N force. Given the extreme deformation observed under 10 N, one can conclude that the probe does not resist soil movements, and that the deformation of the probe is representative for the soil movement.

3.3. Electromechanical Connector Characteristics

To evaluate the reliability of the developed connector solution and assess its performance in various conditions, we present the results of a contact and trace resistance study. This includes changes in resistance as a function of time, temperature, and probe deformation.

3.3.1. Trace Resistance

Figure 9 presents the resistance of each signal trace along a 200 mm board section, with and without the connectors' contact resistance. First, we calculate an ideal theoretical scenario without interconnects. For this scenario, we approach the resistance of each copper PCB trace by assuming a length of 200 mm, a thickness of $35 \mu\text{m}$ (which is a manufacturing parameter), and a resistivity $\rho_{20} = 1.678 \cdot 10^{-8} \Omega\text{m}$ at 20°C [44]. All traces have a 0.2 mm width, except for the ground plane, which is close to 0.4 mm width in most places. The resulting theoretical trace resistances are respectively 0.479Ω and 0.240Ω per 200 mm probe section, and are visualized in figure 9. The individual trace

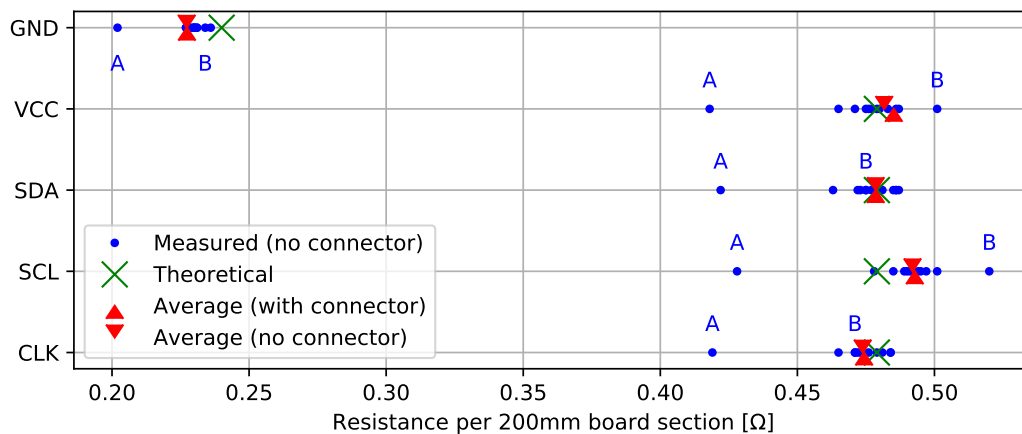


Figure 9. Trace resistance per 200 mm probe section, with and without connectors.

resistances (without connectors) for 200 mm board sections are spread closely around the theoretical values. GND trace resistance is slightly lower than the theoretical value, which can be attributed to the use of irregularly shaped ground planes that were theoretically approached by a 0.4 mm wide trace. Outlying trace resistance values for the same board have either been labeled as 'A' or 'B' in figure 9. The measurements for board 'A' consistently show a low resistance for each trace, which is most likely attributed to a board manufacturing variation (e.g., thicker copper layer). Outliers for board 'B' are less pronounced ($< 6\%$ above average) and limited to the VCC and SCL trace. Since these traces are located on the bottom PCB layer, one could assume a single-sided board manufacturing variation. When observing the average trace resistance with and without connector, it is clear that the impact of connector resistance is barely noticeable: the average increase of trace resistance is only 1 m Ω . Along a 1.8 m probe, this would lead to an average increase in contact resistance of 9 m Ω , which is negligible compared to the total PCB trace resistance. The connector resistance is also low in comparison to the used 1 mm pitch 6-pin JST SH connector at the end of the probe, which features an initial contact resistance of up to 20 m Ω [39]. In general the average trace resistance aligns well with the expected theoretical values, and small deviations can mostly be attributed to trace lengths that deviate from the theoretically assumed 200 mm. For a 1.8 m probe, the total resistances for the GND, VCC, SDA, SCL, and CLK traces are on average 2.046 Ω , 4.367 Ω , 4.307 Ω , 4.436 Ω , and 4.269 Ω , respectively. These results indicate the benefit of maximizing the GND trace width: this trace forms a return path for all signals, so a minimal GND resistance results in a smaller voltage drop for each signal of the probe. Figure 6 can be used to determine the maximum supply current of 7.15 mA along a 1.8 m probe. This results in a maximal supply voltage drop of 45.8 mV, which is not expected to affect sensor operation when using a > 3 V battery supply.

3.3.2. Thermal Effects and Epoxying

Figure 10 presents the change in contact resistance ΔR over a 200 mm probe section, as a result of epoxying, freezing, or heating the probe. The epoxy process does not seem to affect the contact resistance of the connectors, as all measured changes in resistance are close to 0 Ω , as theoretically expected. The freezing process clearly affects the trace resistance of a probe. Figure 10 depicts the theoretical trace resistance at -23°C and 0°C , calculated using $\rho_{-23} = 1.387 \cdot 10^{-8} \Omega\text{m}$ and $\rho_0 = 1.543 \cdot 10^{-8} \Omega\text{m}$ [44]. The measurements are centered around the 0°C trace resistance, which makes sense given the defrosting process. After equilibration to room temperature, all results return to close to their original values. The results of the heating experiment show increases of the trace resistance by up to 33 m Ω . Given the extreme deformation of the probe due to plastic softening and swelling during this experiment, these results are considered unexpectedly positive. For comparison, the used JST SH connector has a reported 40 m Ω contact resistance after environmental testing [39].

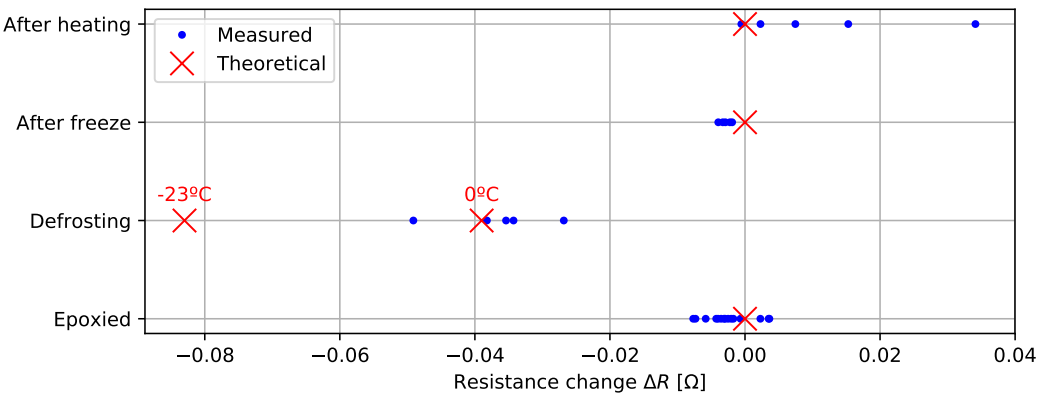


Figure 10. Trace resistance under freezing, heating and epoxying.

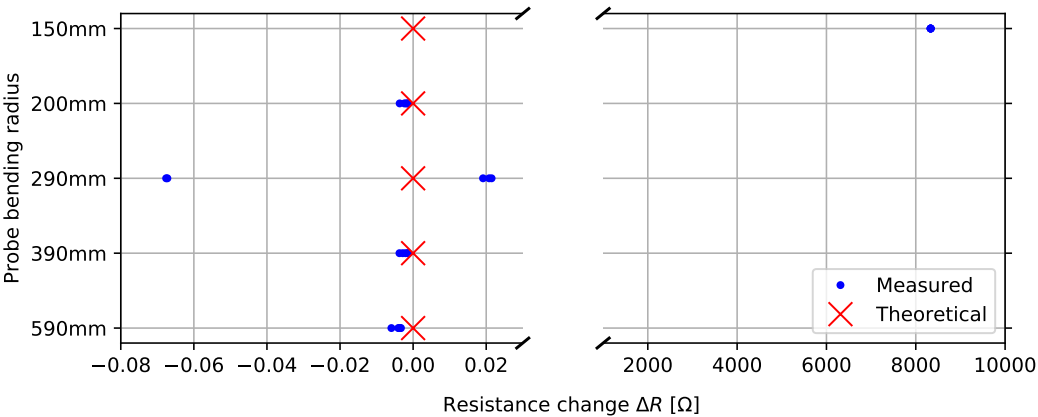


Figure 11. Trace resistance under bending.

Overall, no connector failures were experienced during any of these tests, and the heated probe was still working one year after the experiment.

3.3.3. Probe Bending

Figure 11 shows the connector’s performance as a function of probe bending. The average change in resistance is measured for each signal over a 200 mm probe section, as a function of bending radius. This test was planned to be destructive, determining the point of failure. The results show that no noticeable change in resistance is observed for a bending radius up to 390 mm. At 290 mm bending radius, some significant changes in contact resistance are observed, possibly due to settling contacts. The probe still performs well under a 200 mm bending radius, but under a 150 mm radius an average contact resistance of 8.333 kΩ is observed. This change became permanent after the experiment and represents the maximum measurement range for our setup (50 kΩ/6), so we can assume that one of the sensor boards snapped under this extreme bending. We can conclude from our tests that we were able to bend and reliably use the probe up to a bending radius of 200 mm, far beyond the expected realistic use case scenario.

3.3.4. Trace Resistance over Time

Figure 12 presents the change in trace resistance per 200 mm section over time. The results are obtained 1, 17, 66, and 352 days after assembly, respectively, allowing us to observe effects like oxidation and creep in the connectors. The measurements indicate a spread of up to 46 mΩ and the daily average change in resistance is mostly negative, which could indicate that contacts slightly improve over time, but it could also be a result of measurement inaccuracies due to variations in test

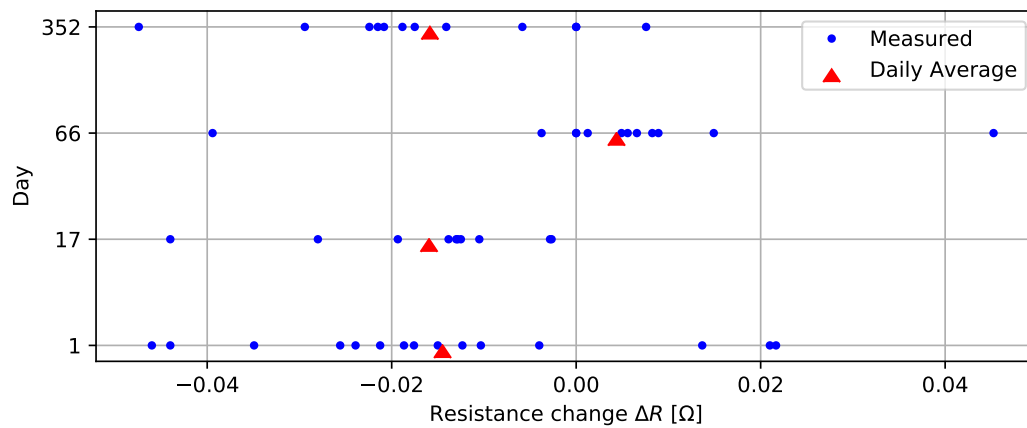


Figure 12. Trace resistance over time.

lead tip contact resistance. The results of this experiment demonstrate the long term stability of the developed connectors. No failures or negative trends due to oxidation or creep were detected. The protective properties of epoxy and the electroless nickel/immersion gold plating on the boards are expected to contribute to these positive results.

3.4. Accuracy Assessment

The probe's accuracy is assessed by studying the deformation errors (ϵ_d) for $k \in \{1, 2, 4, 8, 16, 32\}$ under 0°C , $\pm 1^\circ\text{C}$ and $\pm 10^\circ\text{C}$ temperature variations. Figure 13 shows the 95% confidence interval (2.5 and 97.5 percentiles) of ϵ_d deformation errors over a 1 m probe. For each scenario (k , temperature) the results were obtained through a series of 10,000 Monte Carlo simulations, as explained in section 2.5. Increasing the number of averaged measurements has a significant impact on the accuracy up to $k = 8$, reducing the 95th percentile error range from ± 1.92 mm to ± 0.82 mm. Thereafter, the error range decreases more slowly to ± 0.73 mm for $k = 32$. Temperature variations lead to increased errors of deformation measurements. A variation of $\pm 1^\circ\text{C}$ increases the 95% certainty interval with up to 0.72 mm, while a variation of $\pm 10^\circ\text{C}$ widens the interval with up to 2.88 mm. However, higher values for k still significantly improve the probe's accuracy, regardless of the temperature variations. Given the overall superior results and limited impact on battery life for higher values of k , we advise the use of $k = 8 \dots 32$ for all future measurements with the developed deformation probes.

3.5. Field Experiment

Figure 14 shows the data acquired by a probe ($k = 32$) deployed on the Seward Peninsula, AK in September 2021. For this probe, data of the first five days after installation showed movements of up to 0.01 m, with a clear slip plane at 1.1 m depth related to the interface between frozen and unfrozen conditions. The data show continuous deformation with almost constant deformation rates of about 2 mm/day between 0 and 0.6 m depth along the x -axis. This represents a significant displacement, since it exceeds the 95% confidence interval for $k = 32$ at $\pm 1^\circ\text{C}$ of ± 1 mm/m. Below this, deformation rates are decreasing until 1.1 m depth, and deformations below that are negligible. Similarly, no distinct movement can be observed along the y -axis for depths below 1.1 m, whereas above movements of up to 5 mm over this five day period were recorded. The temperature data show that below 1.1 m depth, the soil is frozen, whereas above the soil is unfrozen.

This clear deformation profile, with five sensors showing no movement, and 11 sensors showing continuous deformation (both along the x and y direction), highlights the accuracy, and real-world applicability of this approach. From the data we can show that deformations in the order of 1 mm can be retrieved (even though this is below the nominal accuracy), and that the sensors itself, when installed in a soil column, show no considerable drift or noise over the five days period. The inclusion of

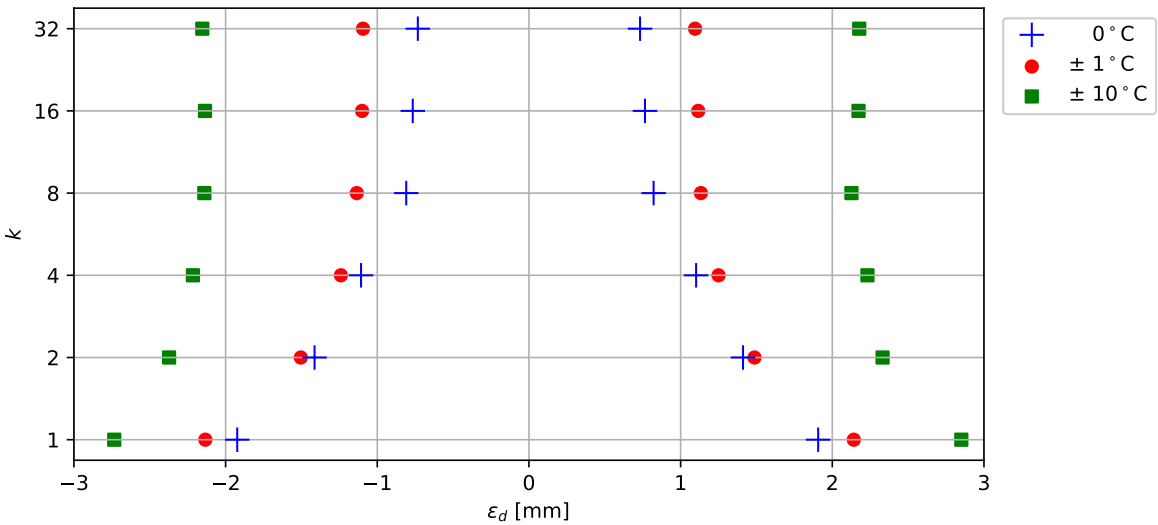


Figure 13. Deformation error (ϵ_d) in function of number of averaged measurements (k) expressed as 2.5th and 97.5th percentiles for 0°C , $\pm 1^\circ\text{C}$ and $\pm 10^\circ\text{C}$ temperature variations.

temperature measurements clearly indicates a relationship between freezing depth and soil movement, and will be the target for future investigations to better understand and predict soil transport in permafrost environments.

4. Conclusions

This study presents the design of a novel, low-power, flexible sensor array for monitoring soil deformation and temperature in slopes with shallow instabilities. In contrast to conventional approaches, the developed solution is low-cost, lightweight, robust, and easy to install, enabling large-scale deployments in densely distributed, wirelessly connected configurations. We provide a theoretical approach to deformation sensing based on three dimensional acceleration measurements. This results in a conceptual probe design consisting of an array of temperature sensors and accelerometers spaced 50 mm apart. In a discussion of the electronic design, we present a configuration of individually addressable sensors on an I²C bus. A discrete shift register with D flip-flops along the entire probe enables cascaded sensor setups of variable length by using just six signals. The ultra low-power design is compatible with an existing 2×AA battery powered wireless data logger. A study of the sensor probe's power consumption compares different probe lengths and measurement averagings (k), indicating that a worst case scenario of a 1.8 m long probe with $k = 32$ still results in a battery life of almost 12 years, with the probe only representing 29% of the device's total energy consumption. In order to meet the challenging mechanical requirements of the sensor probe, a specific electromechanical design is presented, using narrow FR4 printed circuit boards with a novel, solderless board-to-board connection method. The low-cost connection method does not require any components and enables extremely thin, semi-flexible probes of adjustable length. In the final assembly step, the sensor arrays are placed in a 9.5 mm OD tube that is filled with epoxy compound. Given the novelty of the proposed interconnection method, we include an extensive study of the contact resistance and its change as a function of time, temperature, and deformation. The results demonstrate long-term stability and resistance to bending up to a radius of 200 mm. For the entire probe assembly we evaluate the flexibility, showing significant deformation under small (< 1 N) forces, and nearly isotropical behavior. This demonstrates that the probe's deformation is representative for soil movement. We also provide an assessment of measurement accuracy, showing that deformation measurements with $k = 32$ and a constant temperature have a 95% confidence interval of ± 0.73 mm/m. Under $\pm 10^\circ\text{C}$ temperature variations, this increases to ± 2.17 mm/m. A set of probes was installed as part of a field experiment in a permafrost environment. The results show a continuous soil displacement at a rate of 2 mm/day

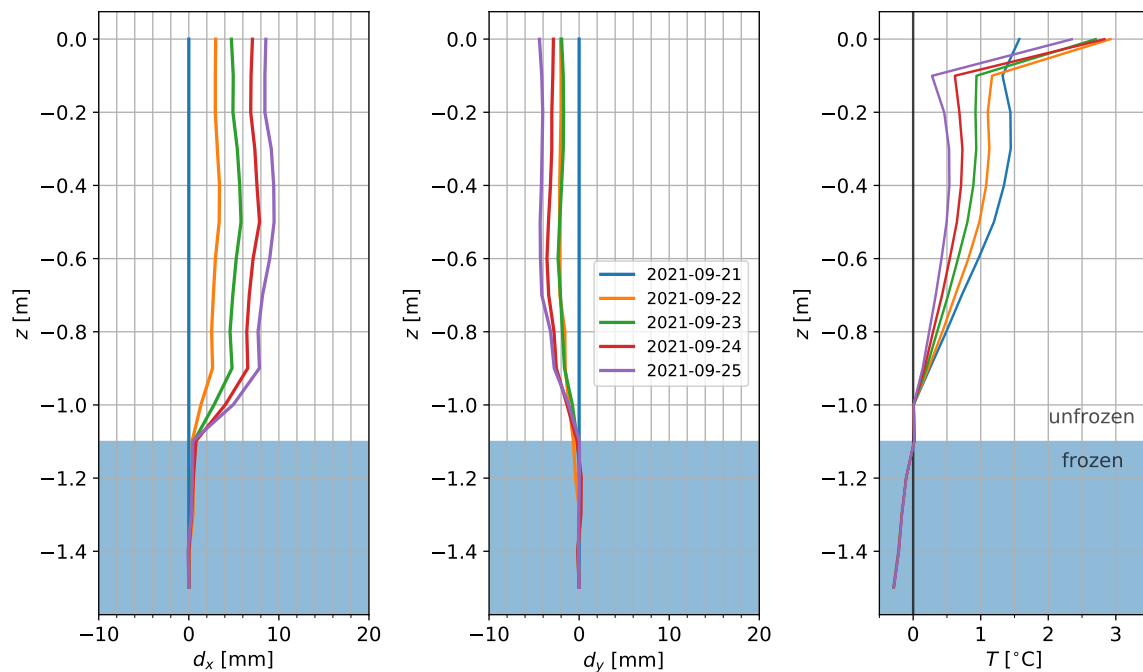


Figure 14. Field measurements obtained over five days at a field site on the Seward Peninsula, AK, USA, which is experiencing soil movements in response to permafrost degradation. Left and middle panel show the displacement along the x and y-axis, respectively, right column shows the soil temperature. Highlighted in blue is the frozen part of the subsurface, showing that the slip plane is co-located with the interface between frozen and unfrozen soil.

starting from the interface between frozen and unfrozen soil. This example emphasizes the importance of linked temperature and deformation measurements. Future work will focus on the installation of dense networks of distributed sensor arrays, wirelessly collecting temperature and deformation data in real time as part of an early warning system for slope instabilities.

5. Patents

The solderless connector solution that is presented in this paper has been filed as U.S. Patent Application serial no. 17/543,032.

Author Contributions: Conceptualization, S. W., S.U., and B.D.; Data curation, S. W.; Funding acquisition, S. U. and B. D.; Investigation, S. W., S. U., and S. F.; Methodology, S. W., S. U., and S. F.; Project administration, S. U. and B. D.; Software, S. W.; Supervision, S.U. and B.D.; Validation, S. W., S. U., and S. F.; Writing – original draft, S. W., S. F., and S. U.; Writing – review & editing, S. U. and B. D.

Funding: This work was supported by the U.S. Department of Energy, Office of Science, Office of Biological and Environmental Research, Next-Generation Ecosystem Experiments–Arctic Project (NGEE-Arctic), and the Laboratory Directed Research and Development Program of Lawrence Berkeley National Laboratory under U.S. Department of Energy Contract No. DE-AC02-05CH11231.

Conflicts of Interest: The authors declare no conflict of interest.

References

1. Froude, M.J.; Petley, D.N. Global fatal landslide occurrence from 2004 to 2016. *Natural Hazards and Earth System Sciences* **2018**, *18*, 2161–2181. doi:10.5194/nhess-18-2161-2018.
2. Taylor, F.E.; Tarolli, P.; Malamud, B.D. Preface: Landslide–transport network interactions. *Natural Hazards and Earth System Sciences* **2020**, *20*, 2585–2590. doi:10.5194/nhess-20-2585-2020.

3. Voumard, J.; Derron, M.H.; Jaboyedoff, M. Natural hazard events affecting transportation networks in Switzerland from 2012 to 2016. *Natural Hazards and Earth System Sciences* **2018**, *18*, 2093–2109. doi:10.5194/nhess-18-2093-2018.
4. Glendinning, S.; Hughes, P.; Helm, P.; Chambers, J.; Mendes, J.; Gunn, D.; Wilkinson, P.; Uhlemann, S. Construction, management and maintenance of embankments used for road and rail infrastructure: implications of weather induced pore water pressures. *Acta Geotechnica* **2014**, *9*, 799–816. doi:10.1007/s11440-014-0324-1.
5. Smethurst, J.A.; Smith, A.; Uhlemann, S.; Wooff, C.; Chambers, J.; Hughes, P.; Lenart, S.; Saroglou, H.; Springman, S.M.; Löfroth, H.; Hughes, D. Current and future role of instrumentation and monitoring in the performance of transport infrastructure slopes. *Quarterly Journal of Engineering Geology and Hydrogeology* **2017**, *50*, 271–286. doi:10.1144/qjgegh2016-080.
6. Uhlemann, S.; Smith, A.; Chambers, J.; Dixon, N.; Dijkstra, T.; Haslam, E.; Meldrum, P.; Merritt, A.; Gunn, D.; Mackay, J. Assessment of ground-based monitoring techniques applied to landslide investigations. *Geomorphology* **2016**, *253*, 438–451. doi:10.1016/j.geomorph.2015.10.027.
7. Ramesh, M.V.; Vasudevan, N. The deployment of deep-earth sensor probes for landslide detection. *Landslides* **2012**, *9*, 457–474. doi:10.1007/s10346-011-0300-x.
8. Holmes, J.; Chambers, J.; Meldrum, P.; Wilkinson, P.; Boyd, J.; Williamson, P.; Huntley, D.; Sattler, K.; Elwood, D.; Sivakumar, V.; Reeves, H.; Donohue, S. Four-dimensional electrical resistivity tomography for continuous, near-real-time monitoring of a landslide affecting transport infrastructure in British Columbia, Canada. *Near Surface Geophysics* **2020**, *18*, 337–351. doi:10.1002/nsg.12102.
9. Glendinning, S.; Helm, P.R.; Rouainia, M.; Stirling, R.A.; Asquith, J.D.; Hughes, P.N.; Toll, D.G.; Clarke, D.; Powrie, W.; Smethurst, J.; Hughes, D.; Harley, R.; Karim, R.; Dixon, N.; Crosby, C.; Chambers, J.; Dijkstra, T.; Gunn, D.; Briggs, K.; Muddle, D. Research-informed design, management and maintenance of infrastructure slopes: development of a multi-scalar approach. *IOP Conference Series: Earth and Environmental Science* **2015**, *26*, 012005. doi:10.1088/1755-1315/26/1/012005.
10. Özer, I.E.; van Leijen, F.J.; Jonkman, S.N.; Hanssen, R.F. Applicability of satellite radar imaging to monitor the conditions of levees. *Journal of Flood Risk Management* **2019**, *12*, 1–16. doi:10.1111/jfr3.12509.
11. Sharma, P.; Jones, C.E.; Dudas, J.; Bawden, G.W.; Deverel, S. Monitoring of subsidence with UAVSAR on Sherman Island in California's Sacramento–San Joaquin Delta. *Remote Sensing of Environment* **2016**, *181*, 218–236. doi:10.1016/j.rse.2016.04.012.
12. Schenato, L. A Review of Distributed Fibre Optic Sensors for Geo-Hydrological Applications. *Applied Sciences* **2017**, *7*, 896. doi:10.3390/app7090896.
13. Ajo-Franklin, J.B.; Dou, S.; Lindsey, N.J.; Monga, I.; Tracy, C.; Robertson, M.; Rodriguez Tribaldos, V.; Ulrich, C.; Freifeld, B.; Daley, T.; Li, X. Distributed Acoustic Sensing Using Dark Fiber for Near-Surface Characterization and Broadband Seismic Event Detection. *Scientific Reports* **2019**, *9*, 1328. doi:10.1038/s41598-018-36675-8.
14. Thoen, B.; Callebaut, G.; Leenders, G.; Wielandt, S. A Deployable LPWAN Platform for Low-Cost and Energy-Constrained IoT Applications. *Sensors* **2019**, *19*. doi:10.3390/s19030585.
15. Intrieri, E.; Gigli, G.; Mugnai, F.; Fanti, R.; Casagli, N. Design and implementation of a landslide early warning system. *Engineering Geology* **2012**, *147–148*, 124–136. doi:10.1016/j.enggeo.2012.07.017.
16. Ramesh, M.V. Design, development, and deployment of a wireless sensor network for detection of landslides. *Ad Hoc Networks* **2014**, *13*, 2–18. doi:10.1016/j.adhoc.2012.09.002.
17. Callebaut, G.; Leenders, G.; Van Mulders, J.; Ottoy, G.; De Strycker, L.; Van der Perre, L. The Art of Designing Remote IoT Devices—Technologies and Strategies for a Long Battery Life. *Sensors* **2021**, *21*. doi:10.3390/s21030913.
18. Abdoun, T.; Bennett, V.; Desrosiers, T.; Simm, J.; Barendse, M. Asset Management and Safety Assessment of Levees and Earthen Dams Through Comprehensive Real-Time Field Monitoring. *Geotechnical and Geological Engineering* **2013**, *31*, 833–843. doi:10.1007/s10706-012-9569-3.
19. Ruzza, G.; Guerriero, L.; Revellino, P.; Guadagno, F.M. A Multi-Module Fixed Inclinator for Continuous Monitoring of Landslides: Design, Development, and Laboratory Testing. *Sensors* **2020**, *20*, 3318. doi:10.3390/s20113318.

20. Wielandt, S.; Dafflon, B. Minimizing Power Consumption in Networks of Environmental Sensor Arrays using TDD LoRa and Delta Encoding. 2021 55th Asilomar Conference on Signals, Systems, and Computers, 2021, pp. 318–323. doi:10.1109/IEEECONF53345.2021.9723227.
21. Wielandt, S.; Dafflon, B. A Local LoRa Based Network Protocol with Low Power Redundant Base Stations Enabling Remote Environmental Monitoring. 2020 54th Asilomar Conference on Signals, Systems, and Computers, 2020, pp. 520–523. doi:10.1109/IEEECONF51394.2020.9443344.
22. Léger, E.; Dafflon, B.; Robert, Y.; Ulrich, C.; Peterson, J.E.; Biraud, S.C.; Romanovsky, V.E.; Hubbard, S.S. A distributed temperature profiling method for assessing spatial variability in ground temperatures in a discontinuous permafrost region of Alaska. *Cryosphere* **2019**, *13*, 2853–2867. doi:10.5194/tc-13-2853-2019.
23. Vogt, T.; Schneider, P.; Hahn-Woernle, L.; Cirpka, O.A. Estimation of seepage rates in a losing stream by means of fiber-optic high-resolution vertical temperature profiling. *Journal of Hydrology* **2010**, *380*, 154–164. doi:10.1016/j.jhydrol.2009.10.033.
24. Darrow, M.M.; Daanen, R.P.; Gong, W. Predicting movement using internal deformation dynamics of a landslide in permafrost. *Cold Regions Science and Technology* **2017**, *143*, 93–104. doi:10.1016/j.coldregions.2017.09.002.
25. Dafflon, B.; Wielandt, S.; Lamb, J.; McClure, P.; Shirley, I.; Uhlemann, S.; Wang, C.; Fiolleau, S.; Brunetti, C.; Akins, F.H.; Fitzpatrick, J.; Pullman, S.; Busey, R.; Ulrich, C.; Peterson, J.; Hubbard, S.S. A distributed temperature profiling system for vertically and laterally dense acquisition of soil and snow temperature. *The Cryosphere* **2022**, *16*, 719–736. doi:10.5194/tc-16-719-2022.
26. Wielandt, S.; Dafflon, B. Sensor probes including boards having solderless interconnects. U.S. patent application serial no. 17/543,032, filed 3 December 2021.
27. Yang, H.; Rao, Y.; Li, L.; Liang, H.; Luo, T.; Luo, B. Dynamic Measurement of Well Inclination Based on UKF and Correlation Extraction. *IEEE Sensors Journal* **2021**, *21*, 4887–4899. doi:10.1109/JSEN.2020.3029892.
28. Fisher, C.J. Using an Accelerometer for Inclination Sensing. Application Note AN-1057, Analog Devices, 2010.
29. Murphy, C. Choosing the Most Suitable MEMS Accelerometer for Your Application–Part 1. Application note, Analog Devices, 2017.
30. 3-Axis, ± 2 g/ ± 4 g/ ± 8 g/ ± 16 g Digital Accelerometer - ADXL345 Rev. E. Data sheet, Analog Devices, 2015.
31. Brunetti, C.; Lamb, J.; Wielandt, S.; Uhlemann, S.; Shirley, I.; McClure, P.; Dafflon, B. Estimation of depth-resolved profiles of soil thermal diffusivity from temperature time series and uncertainty quantification. *Earth Surface Dynamics Discussions* **2021**, *2021*, 1–25. doi:10.5194/esurf-2021-68.
32. SN74LVC1G175 Single D-Type Flip-Flop With Asynchronous Clear. Data sheet, Texas Instruments, 2015.
33. TMP117 High-Accuracy, Low-Power, Digital Temperature Sensor With SMBus and I2C-Compatible Interface. Data sheet, Texas Instruments, 2021.
34. Crell, C. Product Data Sheet - Energizer L91 Ultimate Lithium (L91GL1218). Data sheet, Energizer, 2018.
35. Tong, C. *Advanced Materials for Printed Flexible Electronics*; Springer, Cham: Bolingbrook, IL, USA, 2022.
36. Engel, P.A. *Structural Analysis of Printed Circuit Board Systems*; Springer: New York, NY, USA, 1993.
37. Kyeong, S.; Pecht, M.G. *Electrical connectors : design, manufacture, test, and selection*; John Wiley & Sons: Hoboken, NJ, USA, 2021.
38. Ganesan, S.; Pecht, M.G. *Lead-free Electronics*; John Wiley & Sons: Hoboken, NJ, USA, 2006.
39. SH Connector: 1.0mm pitch/disconnectable crimp style connectors. Data sheet, Japan Solderless Terminal, 2021.
40. Hinojosa, M.; Rodríguez, C.A.; Aldaco, J.A.; Morales-Castillo, J.; Leal, A.E.; Salinas, V. Study of the Thermomechanical Performance of FR-4 Laminates During the Reflow Process. *Journal of Materials Engineering and Performance* **2019**, *28*, 6761–6770. doi:10.1007/s11665-019-04424-1.
41. Unfilled low durometer clear urethane elastomers. Data sheet, Epoxies Inc., 2012.
42. Aarts, A.; Neves, H.P.; Puers, R.P.; van Hoof, C. Interconnect for Out-of-Plane Mems Assembly. 2008 International Interconnect Technology Conference, 2008, pp. 132–134. doi:10.1109/IITC.2008.4546946.
43. Das, B.M.; Sobhan, K. *Principles of Geotechnical Engineering Eighth Edition, SI*; Cengage Learning: Stamford, CT, 2012.
44. Matula, R.A. Electrical resistivity of copper, gold, palladium, and silver. *Journal of Physical and Chemical Reference Data* **1979**, *8*, 1147–1298.

662 © 2022 by the authors. Submitted to *Sensors* for possible open access publication under the terms and conditions
663 of the Creative Commons Attribution (CC BY) license (<http://creativecommons.org/licenses/by/4.0/>).