

# Magnetic Field Energy Harvesting with a Lead-Free Piezoelectric High Energy Conversion Material

Quan Wang<sup>†</sup>, Kyung-Bum Kim<sup>†</sup>, Sang Bum Woo<sup>†</sup>, and Tae Hyun Sung<sup>\*</sup>

Department of Electrical Engineering, Hanyang University, Seoul 133-791, Republic of Korea

\*Corresponding author. E-mail: [sungth@hanyang.ac.kr](mailto:sungth@hanyang.ac.kr)

<sup>†</sup>: Contributed equally to this work

Keywords: Piezoelectric energy harvester; AC magnetic field; Lead-free material; Sustainable energy; High energy conversion

## Abstract

A high-performance Lead-free Piezoelectric Energy Harvester (LPEH) based on a  $\text{Ba}_{0.85}\text{Ca}_{0.15}\text{Ti}_{0.90}\text{Zr}_{0.10}\text{O}_3 + \text{CuO}$  0.3 wt% (BCTZC<sub>0.3</sub>) composite was fabricated by sintering at 1450°C. The BCTZC<sub>0.3</sub> composite, which has an enhanced high-energy-conversion constant ( $d_{33} \times g_{33}$ ), shows improved piezoelectric power-generation performance when compared with conventional piezoelectric energy harvesters. The BCTZC<sub>0.3</sub>-based LPEH produces instantaneous maximum power of 8.2 mW and an energy density of 107.9 mW/cm<sup>3</sup> in a weak magnetic field of 250  $\mu\text{T}$ . This energy harvester can be used to charge a capacitor and operate a wireless sensor network (WSN) system to provide temperature sensing and radio-frequency (RF) transmission in a 250  $\mu\text{T}$  magnetic field. The proposed LPEH is a promising green-energy device for potentially self-powering WSN systems when applied.

## Introduction

Self-driven energy-harvesting technology, which concerns the gathering of energy from the environment, is attracting considerable research interest. Piezoelectric, electrothermal, triboelectric, and electromagnetic induction technologies are the main research areas in this field at present [1]. The power of energy-harvesting technologies has been demonstrated by their role in providing large amounts of energy for the operation of wireless sensor networks (WSNs). Traditional use of commercial batteries has become unsuitable and impractical for applications such as WSNs, since their limited battery lifecycles and potential environmental hazards become problems [2]. Particularly, piezoelectric energy harvesting offers high power-density levels and has a wide range of potential applications in the field [3]. A magnetic field represents an energy source that can be used in energy harvesting, with one example being it can be used to generate vibrations. Electronic devices, power cables, and the magnetic fields generated by them have the frequency of 60 Hz [4,5]. However, it is difficult to harvest an electrical source from weak magnetic fields [6]. Piezoelectric materials generate electricity when they are subjected to vibration stress [7]. A permanent magnet can be used as a tip mass at the end of a cantilever, and vibrations can be generated by the magnetic field, even in an energy harvester, in almost negligible magnetic fields [8,9]. However, it will be necessary to improve the efficiency of piezoelectric materials to improve their energy-harvesting properties, particularly in low magnetic fields. Piezoelectric energy-harvesting technology development will require material optimization efforts, including the development of high-quality piezoelectric compositions, mechanical optimization to enable more efficient conversion of the energy from the surrounding environment, and electrical optimization efforts to apply high-efficiency electric circuit techniques to maximize the power transfer [10,11]. This will require a technical field that has to have fusion research involving both the mechanical and electrical spheres. The aim of the study presented here is therefore to develop a piezoelectric energy harvester that is capable of high power generation owing to its enhanced energy-conversion constant [12,13]. In general, cantilever-type piezoelectric energy harvesters use bending vibration modes for electromechanical energy conversion. To improve the performance of a piezoelectric harvester that gathers electrical energy from ambient vibrations, it will

be essential to improve the piezoelectric energy-conversion constant ( $d_{33} \times g_{33}$ ) through material optimization [14,15]. The high energy density of this type of piezoelectric material can be expressed using equation (1), as follows.

$$u = \frac{1}{2}(d_{33} \times g_{33})\left(\frac{F}{A}\right)^2 \quad (1)$$

The performance of piezoelectric ceramics can be expressed using the energy-conversion coefficient ( $d_{33} \times g_{33}$ ), which is obtained by multiplying the piezoelectric charge factor ( $d_{33}$ ) by the piezoelectric voltage factor ( $g_{33}$ ) in a manner identical to that used in energy-harvesting equations. This coefficient is an important performance index in many applications. To improve the performance of the piezoelectric energy harvester, a material composition with a high energy-conversion constant ( $d_{33} \times g_{33}$ ) must be developed [16,17]. In a mechanical optimization process, we designed and manufactured a piezoelectric harvester with a high-output structure that is suitable for specific applications via multiphysics analysis [18,19]. In the electrical optimization process, we attempted to maximize the power density of this harvester using an impedance-matching technique, which is a type of maximum-power-transfer circuit technique [20,21]. To improve both the piezoelectric and dielectric properties of the materials, solid solutions are used at both the A and B sites of  $\text{BaTiO}_3$  (in general, A = Ca, Sr, and La, and B = Nb, Ta, and Zr) [22,23]. In particular,  $\text{Ca}^{2+}$  and  $\text{Zr}^{4+}$  doping has reportedly provided high piezoelectric coefficients ( $d_{33} = 620 \text{ pC/N}$ ) for  $\text{Ba}_{0.85}\text{Ca}_{0.15}\text{Ti}_{0.90}\text{Zr}_{0.10}\text{O}_3$  (BCTZ) [24]. Most studies have focused on control of sintering temperature of the material and the roles of dopant and ion substitution to produce increases in the piezoelectric charge coefficient ( $d$ ) when using the same composition, although this is accompanied by changes in the BCTZ microstructure [25,26]. To develop a lead-free piezoelectric composition, the acceptor-dopant ion  $\text{Cu}^{2+}$  is typically used to improve the output characteristics of piezoelectric materials and to reduce their sintering temperatures [27,28]. As a sintering aid, CuO can reduce the sintering temperature effectively, and it is also well known to improve the dense microstructure of these piezoelectric materials [29].

Here, we propose a high-performance lead-free piezoelectric energy harvester (LPEH) device based on a lead-free  $\text{Ba}_{0.85}\text{Ca}_{0.15}\text{Ti}_{0.90}\text{Zr}_{0.10}\text{O}_3 + \text{CuO}$  0.3 wt% (BCTZC<sub>0.3</sub>) system. The LPEH fabricated in

this work produces a high open-circuit voltage of approximately 104 V and instantaneous output power of 8.2 mW (power density: 107.9 mW/cm<sup>3</sup>) with a load resistance of 10 k $\Omega$  during periodic motion changes that involve bending and unbending in a 250  $\mu$ T magnetic field. This LPEH device was connected to a capacitor to form power modules for use in self-powered systems under power-line cables. Furthermore, the power generated by a 250  $\mu$ T magnetic field is enough to operate a commercial WSN system. This achievement is unprecedented with regards to optimization of composite-based energy harvesters and represents an initial approach towards the use of lead-free piezoelectric composites in these devices.

## Experimental


**Fabrication of a lead-free piezoelectric ceramic material:** The lead-free BCTZC<sub>0.3</sub> ceramic was produced using a conventional solid-state reaction method. The powders used were weighed BaCO<sub>3</sub> (99.0%), CaCO<sub>3</sub> (99.0%), TiO<sub>2</sub> (99.0%), ZrO<sub>3</sub> (99.0%), and CuO (99.9%), which were mixed via ball milling in alcohol for 24 h. After drying, the mixture was calcined in an alumina crucible at 1250 °C for 2 h. The calcined powder was then milled for another 12 h. The dried powder was subsequently mixed with 2% polyvinyl alcohol (PVA) and made into a bulk disk form at a pressure of 100 MPa. The green disk was then sintered in air at 1300–1450°C for 2 h and the sintered bulk surface was subsequently polished before the measurements were performed. The calcined powder was again mixed with a plasticizer (B-73225, FERRO, USA) and polyvinyl butyral resin (PVB) as a polymer for 24 h to prepare slurry with a ceramic-to-polymer relative weight ratio of 2:1. The slurry was then deformed in a vacuum for 30 min to remove any bubbles. A green sheet with a thickness of approximately 30  $\mu$ m was prepared using the finished slurry via a tape casting process. A square sample with dimensions of 30×40 mm<sup>2</sup> was prepared using a cutter (DC-5, DH), and the sheets were laminated on a layer-by-layer basis. In total, ten green sheets were laminated for 10 min at 60°C under a pressure of 10 kg in each case. To remove the organic additives from the laminated sheet, the specimens were heated slowly to 600°C and held at that temperature for 3 h in an electric furnace (AJ-

MLBF2, AJEON). To allow the film to undergo poling, an electric field was applied to the sintered thick film for 2 h at 2 kV/mm.

**Characterization of the lead-free piezoelectric ceramic material:** FE-SEM imaging and an energy dispersive spectroscopy (EDS) mapping analysis were performed using a Verios 460L SEM. The crystalline phase and orientation were analyzed via high-resolution XRD (HR-XRD; ATX-G, Rigaku Co.) and XPS spectroscopy (Invia Raman Microscope, Renishaw) measurements. The piezoelectric charge constant ( $d_{33}$ ) was measured using a  $d_{33}$  meter (PM100, Piezotest), and the piezoelectric and dielectric properties were determined using an impedance analyzer (HP4194A Hewlett Packard) using IEEE standards.

**Measurement of the energy-harvesting properties:** The BCTZC<sub>0.3</sub> films were attached to the top of a stainless-steel substrate (SUS304) and were tested using an oscilloscope (Tektronix, DPO4054B) to evaluate their power-generation characteristics with a shaker (Brüel & Kjær, 4809) and a high-speed bipolar amplifier (NF, HSA4014). The amplifier was driven by a function generator (Agilent, 33220A), and the shaker provided periodic excitation with a harmonic signal. To produce a magnetic field on the LPEH, an AC magnetic field was applied to the harvesters using a Helmholtz coil. The harvesters in the magnetic field were measured in a frequency range of 30 to 90 Hz using a function generator (Agilent, 33220A). The samples were collected as a function of the applied DC magnetic field from 0 to 250  $\mu$ T using a high-speed bipolar amplifier (NF, HSA4014) in a fixed AC magnetic field at 60 Hz (their resonance frequency). Energy harvesting through the fabricated LPEH was demonstrated around the power-line cable of an automatic voltage regulator (30 kV, 60 Hz) which was used as the magnetic field source.

## Results and discussion

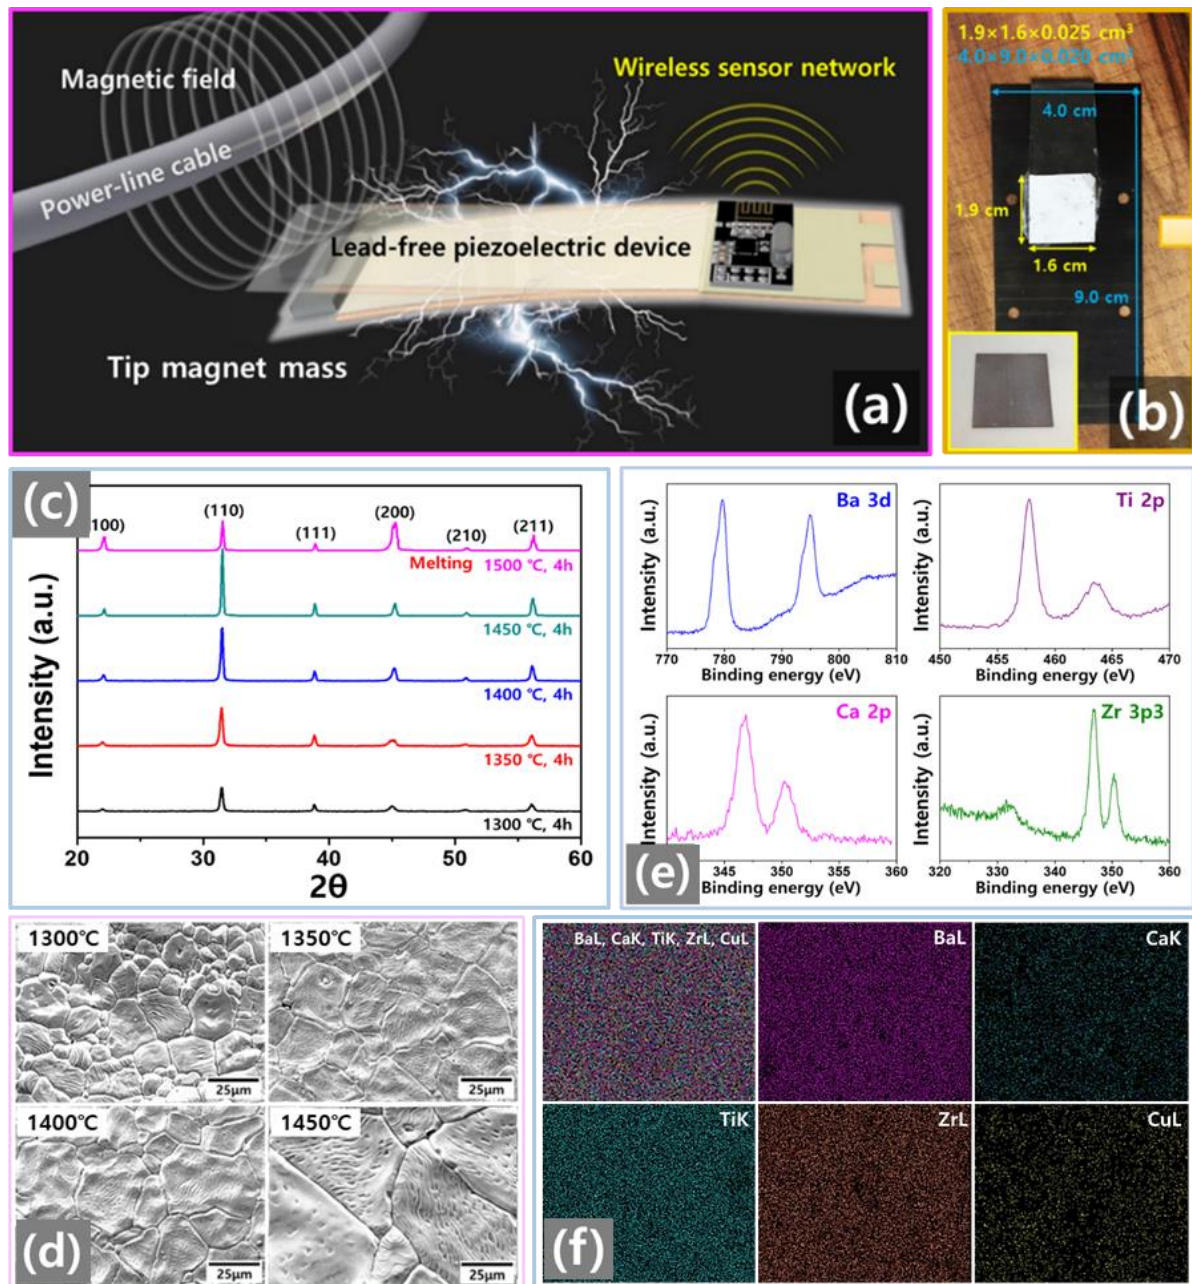


**Fig. 1** (a) Schematic of magnetic field energy harvesting using a lead-free piezoelectric device for a wireless sensor network. (b) Photograph of the LPEH device, with the inset showing the piezoelectric film of BCTZC<sub>0.3</sub> sintered at 1450 °C. (c) XRD graphs of BCTZC<sub>0.3</sub> ceramics sintered at various temperatures. (d) Surface FE-SEM images of the BCTZC<sub>0.3</sub> ceramics sintered at different temperatures. (e) XPS component analysis graphs of the BCTZC<sub>0.3</sub> ceramic sintered at 1450 °C. (f) Energy dispersive spectra (EDS) mapping analysis of the BCTZC<sub>0.3</sub> composites.



To demonstrate a high-energy-conversion device, BCTZC<sub>0.3</sub>-based lead-free piezoelectric ceramic comparable to the PZT-based piezoelectric ceramic served as an active material. For the magnetic field phase, a magnetic metal was used as the tip mass. A magnetic tip mass is advantageous for promoting improved energy-harvesting performance in a weak AC magnetic field, and the BCTZC<sub>0.3</sub> film composite fabricated on a spring-metal substrate had achieved a high output voltage coefficient in previous work. The LPEH consisted of a high-energy-conversion material and a magnetic tip mass, as shown in Fig. 1(a). The high-energy-conversion property of the LPEH in a weak magnetic field range contributed to improved energy-harvesting performance by the composite. The magneto effect in the LPEH results in the conversion of the magnetic field to mechanical strain, which is then converted to an electric charge through the lead-free BCTZC<sub>0.3</sub>. To realize a magneto harvester operating at 60 Hz, the piezoelectric energy material (1.9×1.6×0.25 cm<sup>3</sup>) was attached to a spring-metal substrate (4.0×9.0×0.02 cm<sup>3</sup>) as the LPEH, as shown in Fig. 1(b). The inset indicates the piezoelectric active material when sintered at 1450 °C. The energy-harvesting performance contribution of the sintering temperature on the LPEH is demonstrated in Fig. 3(i). In order to improve the lead-free piezoelectric energy-harvesting performance in a weak magnetic field, the energy conversion of the LPEH was increased by changing the sintering temperature. To design the optimum piezoelectric energy-harvesting composition, BCTZC<sub>0.3</sub> ceramics with improved power conversion constant ( $d_{33} \times g_{33}$ ) values were fabricated. These BCTZC<sub>0.3</sub> samples were sintered at various temperatures ranging from 1300 to 1450°C. Fig. 1(c) shows the results of an X-ray diffraction (XRD) analysis of the sintering temperatures that were utilized to investigate the optimum composition of the BCTZC<sub>0.3</sub> samples. Rhombohedral crystals with a perovskite structure and without a secondary phase were observed for the BCTZC<sub>0.3</sub> depending on the sintering temperature. As the sintering temperature was increased from 1300 to 1450°C, the [110] peak intensity also showed a comparative increase. This outcome is closely related to the increase in the grain size, as observed in the field emission-scanning electron microscope (FE-SEM) images indicated in Fig. 1(d). For the BCTZC<sub>0.3</sub> sample that was sintered at 1500°C, even if the [200] intensity increases, the [110] intensity decreases. This was observed as the melting phenomenon progressed. Fig. 1(d) shows surface images

of the BCTZC<sub>0.3</sub> samples with changes in the sintering temperatures. The BCTZC<sub>0.3</sub> samples that were sintered at 1350°C show various grain sizes ranging from 5 to 10 µm, and these grains grew from 20 µm to more than 100 µm. Hence, the grain size increases considerably when the sintering temperature is increased to 1450°C. With the sample sintered at 1500°C, the surfaces melted due to the high sintering temperature and the piezoelectric and dielectric properties thus could not be measured. Fig. 1(e) shows the results of an X-ray photoelectron spectroscopy (XPS) analysis of the BCTZC<sub>0.3</sub> sample sintered at 1450°C. Ba, Ti, Ca, and Zr components were detected, whereas no secondary phase corresponding to CuO was detected. Furthermore, the Ba, Ca, Ti, Zr, and Cu atoms are homogeneously dispersed on the surface of the BCTZC<sub>0.3</sub> sample, as in the energy dispersive spectrometer (EDS) mapping images in Fig. 1(f).



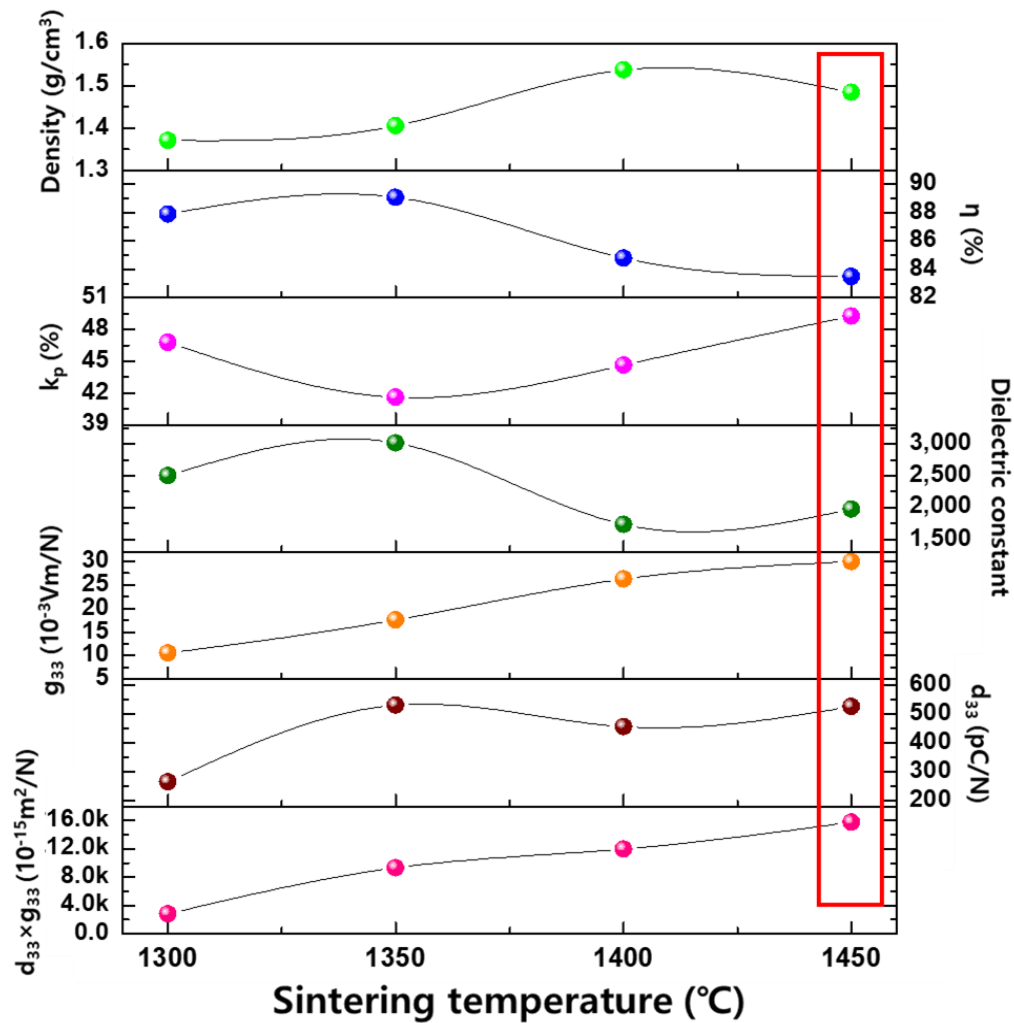

**Fig. 2** Piezoelectric and dielectric properties of the BCTZC<sub>0.3</sub> ceramics sintered at various temperatures.


Fig. 2 shows the piezoelectric and dielectric properties of the BCTZC<sub>0.3</sub> samples with respect to the sintering temperature used. As the sintering temperature was increased, the material density generally increased in all BCTZC<sub>0.3</sub> samples. The conversion efficiency ( $\eta$ ) exceeded 82% in all sintered samples. As the sintering temperature was increased, the conversion constant ( $k_p$ ) also generally increased, but the value of the quality factor ( $Q_m$ ) decreased. The piezoelectric voltage constant ( $g_{33}$ ) also showed an improvement caused by the increases in both the piezoelectric charge constant ( $d_{33}$ ) and the relative dielectric constant. The piezoelectric voltage constant ( $g_{33}$ ) can be determined using the equation: ( $g_{33} = d_{33}/\text{dielectric constant}$ ). The dielectric constant tends to decrease as the sintering temperature increases to more than 1400°C, which then leads to an improvement in the

piezoelectric voltage constant. Because this piezoelectric voltage constant improved, the BCTZC<sub>0.3</sub> sample that was sintered at 1450°C had a high power conversion constant. This phenomenon is related to both the grain growth and the increased intensity of the [110]-oriented crystal. Table 1 presents the values of the piezoelectric and dielectric characteristics of the samples based on various sintering temperatures. The BCTZC<sub>0.3</sub> specimen sintered at 1450°C has a high piezoelectric charge constant ( $d_{33}$ ) of 526 pC/N, a conversion constant ( $k_p$ ) of 49.3%, and a high power conversion constant ( $d_{33} \times g_{33}$ ) of  $15,780 \times 10^{-15}$  m<sup>2</sup>/N. Therefore, we used the BCTZC<sub>0.3</sub> sample sintered at 1450°C as the active material of the LPEH.

**Table 1**

Piezoelectric and dielectric properties of BCTZC<sub>0.3</sub> samples according to their sintering temperatures

Sintering temperature (°C)	Dielectric constant	Density (g/cm <sup>3</sup> )	$d_{33}$ (pC/N)	$g_{33}$ (10 <sup>-3</sup> Vm/N)	$k_p$ (%)	$d_{33} \times g_{33}$ (10 <sup>-15</sup> m <sup>2</sup> /N)	Efficiency (η)
<b>1300</b>	2500.4	1.37	265	10.6	46.8	2,809	0.88
<b>1350</b>	3016.6	1.40	530	17.6	41.6	9,322	0.89
<b>1400</b>	1734.3	1.54	456	26.3	44.6	11,990	0.85
<b>1450</b>	1976.2	1.48	526	30.0	49.3	15,780	0.84

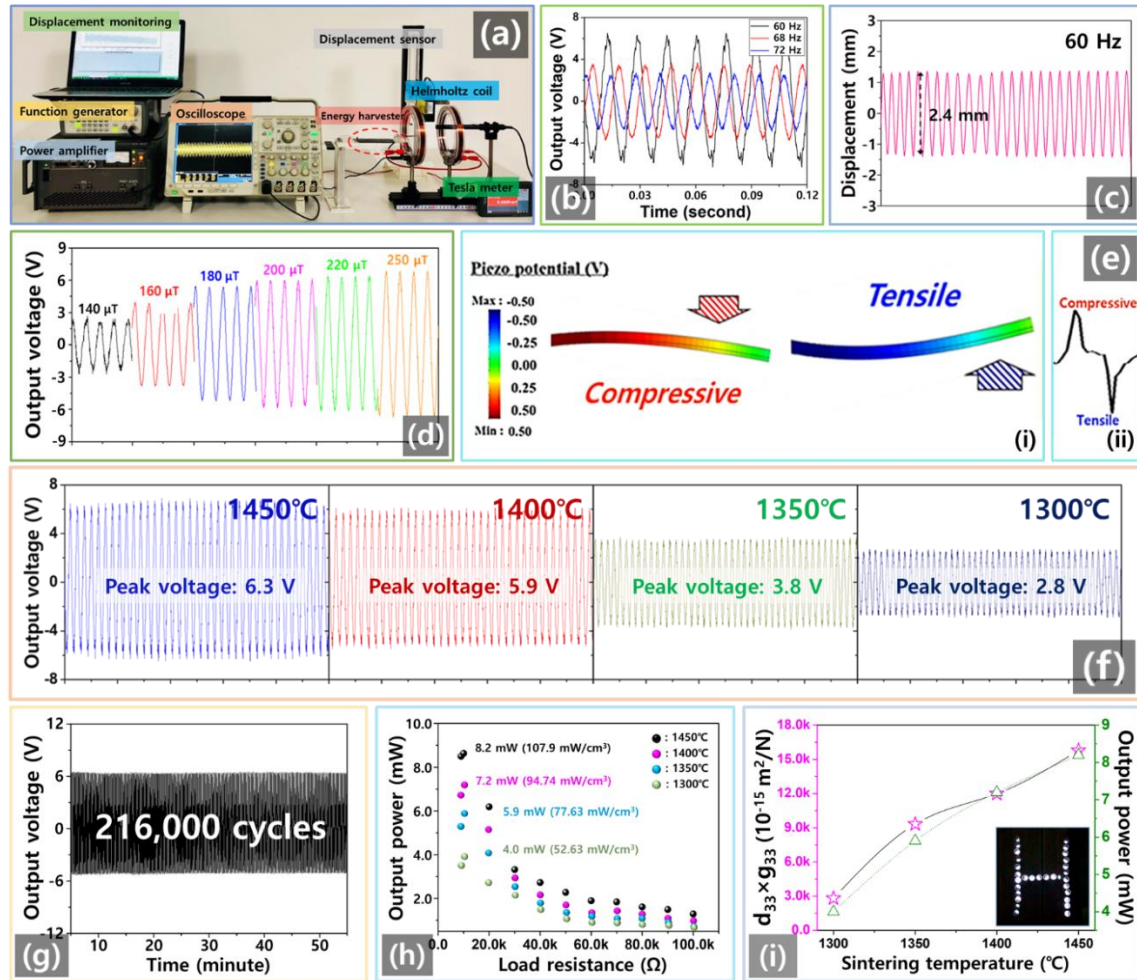

**Fig. 3** (a) Photograph of the experimental environment used to observe the power-generation characteristics of the LPEH in various magnetic fields ( $\mu\text{T}$ ). (b) Open-circuit output voltage (V) of the LPEH at various frequencies. (c) Displacement of the LPEH at a resonance frequency of 60 Hz. (d) Open-circuit output voltage (V) of the LPEH in differential magnetic fields ( $\mu\text{T}$ ). (e) Simulated data of the piezoelectric potential (V) when stress is applied. (f) Open-circuit output voltage (V) characteristics of LPEHs composed of BCTZC<sub>0.3</sub> films processed at various sintering temperatures ( $^{\circ}\text{C}$ ). (g) Open-circuit output voltage of the LPEH for a durability test of over 216,000 cycles performed in a magnetic field of 250  $\mu\text{T}$ . (h) Instantaneous maximum output power (mW) values of LPEHs with BCTZC<sub>0.3</sub> films sintered at various temperatures ( $^{\circ}\text{C}$ ) under specific load resistances ( $\Omega$ ) for impedance matching. (i) Power conversion constant ( $d_{33} \times g_{33}$ ) and instantaneous maximum output power (mW) values of LPEHs with BCTZC<sub>0.3</sub> films depending on their sintering temperatures ( $^{\circ}\text{C}$ ). The inset shows lighting when using 30 white light-emitting diodes.


The experimental setup that was used to measure the output power and the displacement generated via piezoelectric energy harvesting driven by a Helmholtz coil is shown in Fig. 3(a). The LPEH has a tip magnet that indicates the energy harvester response of the designed cantilever structure. It has a permanent Nd magnet at its tip, which bends when an external magnetic AC field at 60 Hz is applied. The field is generated using the Helmholtz coils. Using a power amplifier and a function generator, the magnetic field of the Helmholtz coil was adjusted over the range of 140 to 250  $\mu\text{T}$  and the magnetic field generated was measured using a tesla meter. In Fig. 3(b), these LPEHs were generated at various frequency conditions of the maximum power-generation characteristics of the BCTZC<sub>0.3</sub> films at a sintering temperature of 1450 °C. To measure the resonance frequencies (Hz) of the fabricated LPEHs, we used equation (2) with the following terms:  $E$  = Young's modulus;  $L$  = beam length;  $I$  = moment of inertia, and  $m$  = tip mass. The physical properties of the LPEH (e.g., its length, mass, area, thickness, and Young's modulus) determine its operational performance. The LPEH was designed to be tuned for a resonance frequency of 60 Hz. Fig. 3(c) shows the open-circuit output voltage (V) characteristics of the LPEHs with BCTZC<sub>0.3</sub> films that were sintered at 1450 °C based on the frequency (Hz) condition used. The maximum open-circuit output voltage was 6.3 V<sub>OC</sub> at 60 Hz, while the minimum open-circuit output voltage was 2.5 V<sub>OC</sub> at 58 Hz. The calculated LPEH resonance frequency was about 60 Hz:  $E = 6.3 \text{ GPa}$ ,  $L = 9 \times 10^{-2} \text{ m}$ ,  $I = 1.1 \times 10^{-10} \text{ m}^4$ , and  $m = 20 \text{ g}$ .

$$f_r = \frac{1}{2\pi} \sqrt{\frac{3EI}{L^3 m}} \quad (2)$$

The minimum output voltage (V) of the LPEH with the BCTZC<sub>0.3</sub> film sintered at 1450 °C was 2.2 V<sub>OC</sub> at a frequency of 72 Hz, while the maximum output voltage was 6.3 V at a frequency of 60 Hz. The maximum displacement of the tip mass of the LPEH was found to be 2.4 cm at a frequency of 60 Hz. Fig. 3(d) shows graphs of the LPEHs measured in terms of the electrical energy according to different magnetic fields (140–250  $\mu\text{T}$ ). The peak of the output voltage was gradually improved as the magnetic field was increased to 250  $\mu\text{T}$ . The maximum output voltage value was 6.3 V<sub>OC</sub> at a magnetic field of 250  $\mu\text{T}$ . Fig. 3(e) shows the results of simulations of the piezoelectric potential and voltage shapes during bending and unbending trials of the piezoelectric energy harvester, as

determined using the ATILA software package. A positive piezoelectric voltage is generated from compressive stress between the two electrodes when downward mechanical stress is applied. Otherwise, upward stress would lead to the generation of negative voltage from the tensile pressure. We can assume that the negative voltage and positive voltage outputs generated in the energy harvester are related to the direction in which the stress is applied. Fig. 3(f) shows the open-circuit output voltage signals obtained from the LPEHs with the BCTZC<sub>0.3</sub> films when plotted according to their sintering temperatures. The open-circuit output voltage also increases as the sintering temperature increases; the instantaneous maximum output voltage is 6.3 V<sub>OC</sub> at 1450 °C and the minimum output voltage is 2.65 V<sub>OC</sub> at 1300 °C. A mechanical durability experiment was performed to evaluate the practical applicability of the proposed LPEH. Fig. 3(g) shows the results of output voltage measurements by the LPEH, demonstrating electromechanical stability for over 216,000 cycles for 60 min with bending displacement of 2 cm. As indicated in Fig. 3(h), the instantaneous maximum output powers of the LPEHs with the BCTZC<sub>0.3</sub> films sintered at various temperatures are dependent on the load resistance over the range of 100 Ω to 100 kΩ. To measure the output power (P), the peak value of the output voltage (V) applied to the load resistance (R) divided by this load resistance (R) is used in the following equation:  $P = V^2/R$ . The output power (mW) increases steadily with an increase in the sintering temperature from 1300 to 1450 °C. The minimum output power of the LPEH with the BCTZC<sub>0.3</sub> sintered at 1300 °C is 4.0 mW, while the maximum output power of the LPEH with the BCTZC<sub>0.3</sub> sintered at 1450 °C is 8.2 mW. To measure the power density of each LPEH, the output power (P) and the volume (cm<sup>3</sup>) of the BCTZC<sub>0.3</sub> film were used in the following equation: power density = P/volume. The minimum power density (mW/cm<sup>3</sup>) of the LPEH with the BCTZC<sub>0.3</sub> film that was sintered at 1300 °C was 52.63 mW/cm<sup>3</sup>, while the maximum power density of the LPEH with the BCTZC<sub>0.3</sub> that was sintered at 1450 °C was 107.9 mW/cm<sup>3</sup>. The energy-conversion constant ( $d_{33} \times g_{33}$ ) values of the BCTZC<sub>0.3</sub> samples with their sintering temperatures are closely related to the output power (mW) of the LPEH. Fig. 3(i) presents graphs of the energy-conversion constants ( $d_{33} \times g_{33}$ ) and the output power (mW) levels of BCTZC<sub>0.3</sub> films with respect to the sintering temperature. The inset shows the lighting of 30 white light-emitting diodes (LEDs).


The graphs of the energy-conversion constant ( $d_{33} \times g_{33}$ ) and the output power (mW), show similar trends. For LPEHs using the BCTZC<sub>0.3</sub> films, an increase in the energy-conversion constant ( $d_{33} \times g_{33}$ ) was found to factor into the improvement of the LPEH output power (mW). The LPEH with the BCTZC<sub>0.3</sub> sintered at 1450°C was selected for use as a power source in self-powering WSNs. These results clearly indicate that an energy harvester with a suitably high energy-conversion constant can convert energy in environments characterized by weak magnetic fields into a usable form of electrical energy. The output signals from the LPEH and other previously reported piezoelectric energy harvesters as indicated in Table S1 (see Supporting Information).

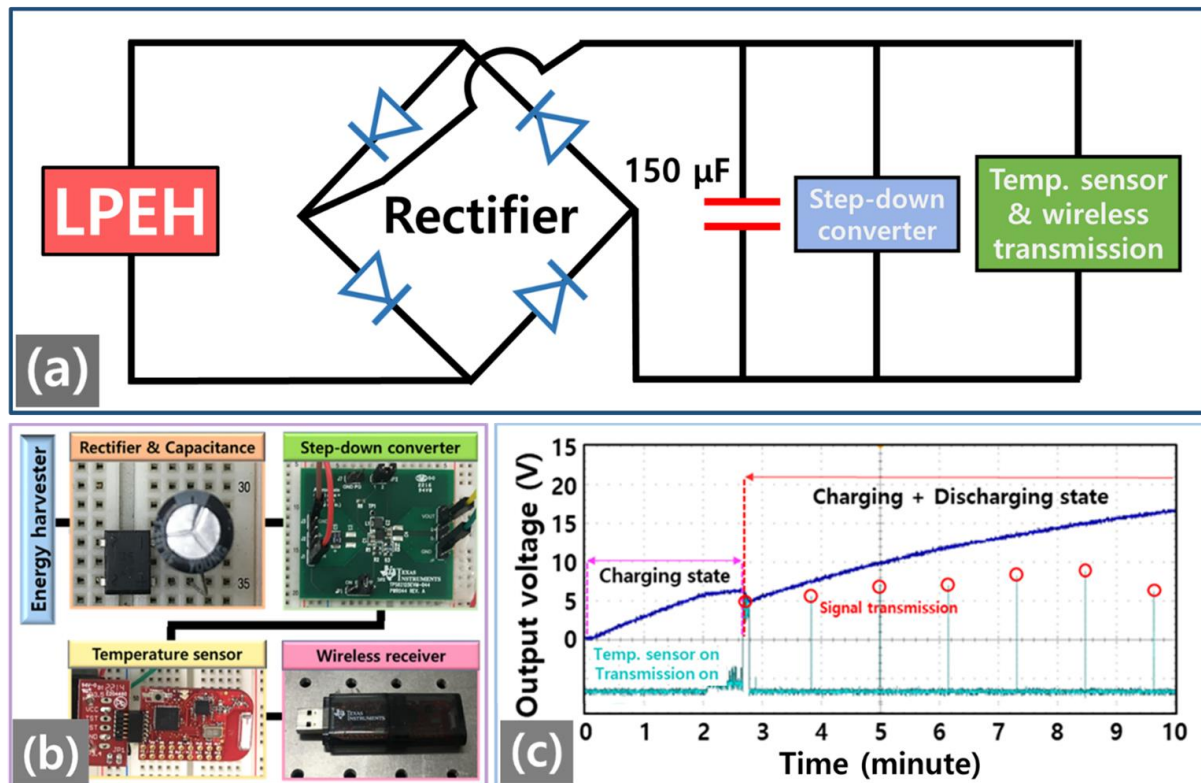

**Fig. 4** (a) Circuit diagram of self-powered wireless temperature monitoring system powered with the LPEH in a magnetic field of 250  $\mu\text{T}$ . (b) Photograph images of the self-powered wireless temperature monitoring system. (c) Characteristics of the self-charging voltage that drives the temperature sensor and RF transmission using a capacitor of 150  $\mu\text{F}$  with the LPEH in a magnetic field of 250  $\mu\text{T}$ .



Fig. 4(a,b) illustrates a promising application of the energy harvester, which is needed to operate a WSN, using the output voltage generated by the LPEH. The WSN system consists of a bridge rectifier, a capacitor, a step-down converter, a temperature sensor, a 2.4 GHz wireless transmission, and a wireless receiver (with photographs of the WSN system components). The AC voltage generated by the LPEH was converted into DC voltage using the rectifier. To supply electric power stably, the capacitor was charged to supply the required power using DC voltage. Using the step-down converter, the supplied power is constantly reduced to enable the operation of both the temperature sensor and the wireless transmitter, and the data pertaining to the ambient temperature is transmitted to a computer. To verify the feasibility of the use of lead-free generators in practical applications, it was also necessary to evaluate the operation of the WSN system. Fig. 4(c) presents the LPEH performance results after the successful charging of the capacitor (capacitance: 150  $\mu$ F) up to 6.5 V over 2.8 min in a field of 250  $\mu$ T. The energy generated by the harvester from the mechanical energy was used successfully to drive both a temperature sensor and a radio frequency transmitter using electricity that was first stored in a capacitor. The energy harvester generated the output voltage required to operate the WSN system in a magnetic field of 250  $\mu$ T. The capacitor was charged to 6.5 V in 2.8 min and was then able to supply sufficient energy to drive the WSN system to measure the ambient temperature and transmit the measured data to a computer every 0.8 min. The LPEH device could also be used in bending and unbending applications with a magnetic field to operate the WSN system. The energy-harvesting system is capable of real-time sensing based on transmission to the WSN system of the power generated from the AC magnetic field condition. This lead-free BCTZC<sub>0.3</sub> with a high energy-conversion constant can transmit the temperature data wirelessly to a notebook computer. Self-powered WSN technologies combined with a real-time monitoring and management system require further investigation of lead-free piezoelectric energy device systems in advanced electronics.

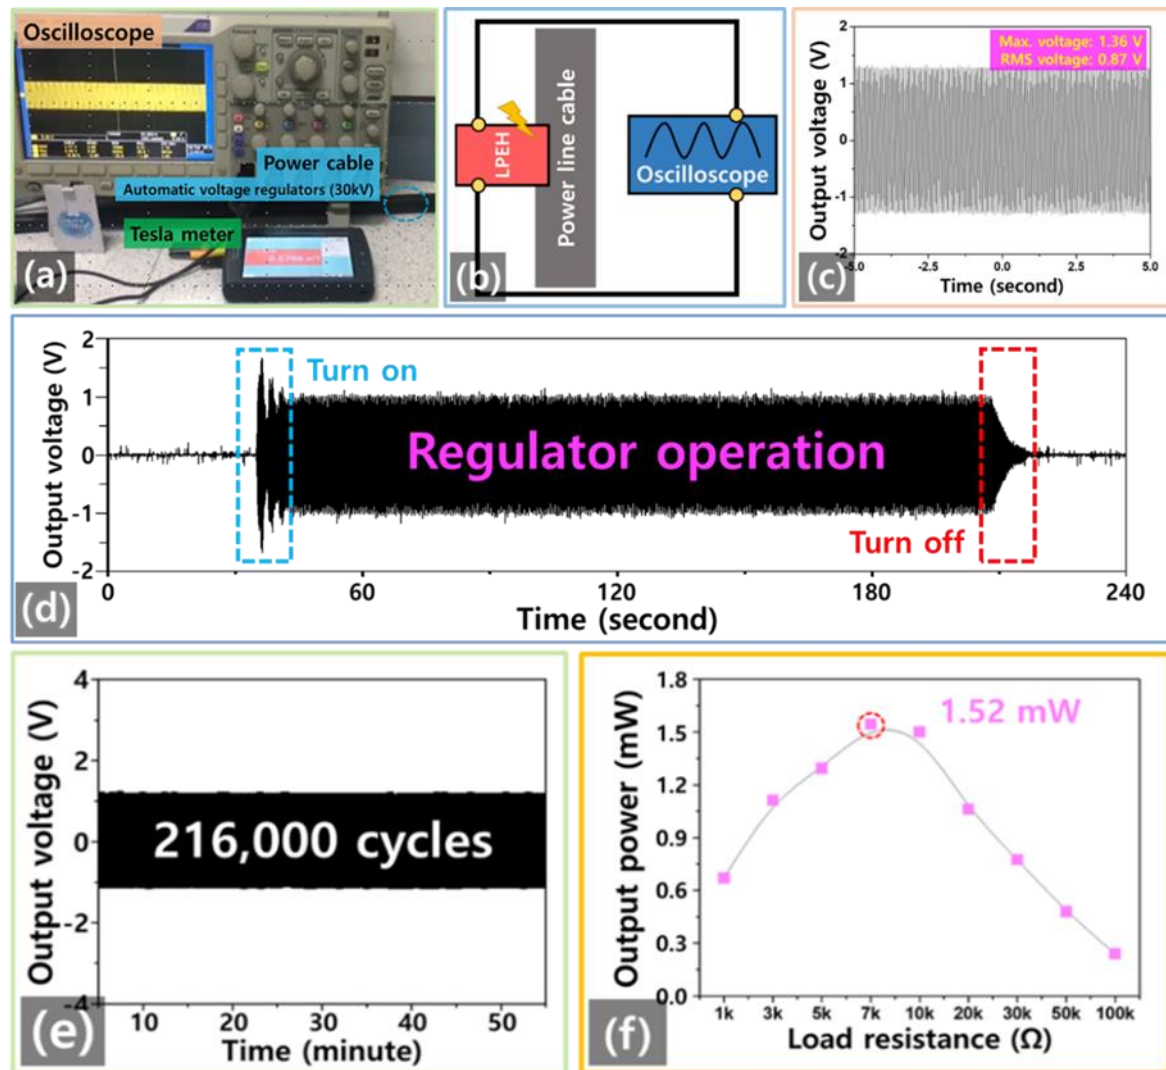

**Fig. 5** (a) Experimental setup to test the energy-harvesting performance from the power-line cable of an automatic voltage regulator (30 kV). (b) Diagram of the energy-harvesting circuit with the LPEH. (c) Open-circuit voltage of the LPEH from the magnetic field of a power-line cable. (d) Open-circuit voltage of the LPEH under a regulated turn on and off condition. (e) Open-circuit voltage of the LPEH for a durability test over 216,000 cycles performed in a weak magnetic field of 78  $\mu\text{T}$ . (f) Output power of the LPEH in the magnetic field of a power-line cable as a function of the load resistance (range of 1 k $\Omega$  to 100 k $\Omega$ ).

Fig. 5(a) shows the experimental environment that was used to harvest electrical energy from the power-line cable of an automatic voltage regulator (30 kV). During operation of the automatic voltage regulator, we measured the LPEH's output electrical performance. An energy-harvesting circuit

diagram is presented in Fig. 5(b). For the automatic voltage regulator operation period, the output voltages were fixed at approximately  $1.36 V_{\max}$  and  $0.87 V_{\text{rms}}$  in Fig. 5(c). Vertical displacement was generated by the LPEH at 60 Hz in a weak magnetic field of  $78 \mu\text{T}$ . Total displacement of 0.8 mm was generated from the change in the magnetic force acting between the magnets of the LPEH. Fig. 5(d) indicates that the LPEH generated an output voltage signal when the regulator was turned on and off. With regard to the regulator's turn on step, the voltage signal was instantaneously increased to 1.8 V as overcurrent. When the regulator operated normally, the output voltage was generated constantly. When the regulator was turned off, the voltage signal level decreased abruptly. To demonstrate the durability of the proposed LPEH, the output performance was tested over a period of 216,000 cycles, with the results shown in Fig. 5(e). This verified that the magnetic-force-based power-generation mechanism of the LPEH offers high stability and an output voltage of approximately 1.32 V. This phenomenon can be attributed to confirmation of the development of the proposed BCTZC<sub>0.3</sub>-based LPEH as an energy source from weak magnetic fields. The output power from this lead-free piezoelectric energy harvester was 1.52 mW at load resistance of 7 k $\Omega$  in Fig. 5(f). These results fully demonstrate that the LPEH based on the BCTZC<sub>0.3</sub> film could provide reliable energy source.

## Conclusions

We developed a LPEH based on BCTZC<sub>0.3</sub> with a high energy-conversion constant. With the lead-free BCTZC<sub>0.3</sub> sintered at 1450 °C, we obtained both enhanced piezoelectric properties and improved energy-harvesting characteristics. The LPEH generated maximum output power that reached 8.2 mW. Moreover, an energy density of 107.9 mW/cm<sup>3</sup> was achieved in a magnetic field of 250  $\mu\text{T}$ , which was sufficient to drive 30 commercial LEDs. The BCTZC<sub>0.3</sub>-based LPEH demonstrated remarkable stability without performance degradation over 126,000 cycles. The module successfully overcame earlier restrictions on power generation when using a lead-free piezoelectric energy harvester, thus enabling the operation as a self-charging energy harvester in a WSN system. The LPEH supplied electrical energy (output power: 1.52 mW) constantly under a power-line cable with a weak 78  $\mu\text{T}$  magnetic field. The proposed approach represents a significant advance in LPEHs based on BCTZC<sub>0.3</sub>.

film research for self-powering sensors in magnetic fields that could be used in ubiquitous wireless communication systems.

## Acknowledgements

This work was supported by the Korea Institute of Energy Technology Evaluation and Planning (KETEP) and by the Ministry of Trade, Industry, and Energy (MOTIE) of the Republic of Korea (No. 2018201010636A). Sample images were analyzed on the FEI Scios device installed at the Hanyang LINC+ 334 Analytical Equipment Center in Seoul.

## References

- [1] A. Siddique, S. Mahmud, B. V. Heyst, A comprehensive review on vibration based micro power generators using electromagnetic and piezoelectric transducer mechanisms. *Energy. Con. Man.* 106 (2015) 728–47.
- [2] T. Yildirim, M. H. Ghayesh, W. Li, G. Alici, Design and development of a parametrically excited nonlinear energy harvester. *Energy. Con. Man.* 126 (2016) 247–55.
- [3] T.G. Lee, H.J. Lee, D.H. Kim, H Xu, S. Park, J.S. Park, et al. Relation between structure and piezoelectric properties of  $(1-x)y\text{PbZrO}_3\text{-}x\text{PbTiO}_3\text{-}y\text{Pb}(\text{Ni}_{1/3}\text{Nb}_{2/3})\text{O}_3$  ceramics near triple point composition. *J. Eur. Ceram. Soc.* 36 (2016) 4049-57.
- [4] J. Ryu, J.E. Kang, Y. Zhou, S.Y. Choi, W.H. Yoon, D.S. Park, J.J. Choi, B.D. Hahn, C.W. Ahn, J.W. Kim, Ubiquitous magneto-mechano-electric generator. *Energy. Environ. Sci.* 8 (2015) 2402-2408
- [5] Y. Uzun, E. Kurt, Performance exploration of an energy harvester near the varying magnetic field of an operating induction motor. *Energy. Con. Man.* (72) 2013 156–62.
- [6] J. Ryu, A.V. Carazo, K. Uchino, H.E. Kim, Magnetoelectric Properties in Piezoelectric and Magnetostrictive Laminate Composites. *Japanese. J. App. Phys.* (40) 2001 4948.

- [7] J. Zhang, C. Wang, C. Bowen, Piezoelectric effects and electromechanical theories at the nanoscale. *Nanoscale*. 6 (2014) 13314-13327.
- [8] Y. Tadesse, S. Zhang, S. Priya, Multimodal Energy Harvesting System: Piezoelectric and Electromagnetic. *J. Inter. Mater. Sys. Struct.* 20 (2009) 625-632.
- [9] S. Saadon, O. Sidek, A review of vibration-based MEMS piezoelectric energy harvesters. *Energy. Con. Man.* 52 (2011) 500–4.
- [10] C.A. Howells, Piezoelectric energy harvesting. *Energy. Con. Man.* 50 (2009) 1847–50.
- [11] X. Zhang, Z. Zhang, H. Pan, W. Salman, Y. Yuan, Y. Liu, A portable high-efficiency electromagnetic energy harvesting system using supercapacitors for renewable energy applications in railroads. *Energy. Con. Man.* 118 (2016) 287–94.
- [12] K. Fan, J. Chang, F. Chao, W. Pedrycz, Design and development of a multipurpose piezoelectric energy harvester. *Energy. Con. Man.* 96 (2015) 430–9.
- [13] R.A. Islam, S. Priya, Realization of high-energy density polycrystalline piezoelectric ceramics. *App. Phys. Lett.* 88 (2006) 032903.
- [14] S. Priya, K. Uchino, J. Ryu, C.W. Ahn, S. Nahm, Induction of combinatory characteristics by relaxor modification of  $\text{Pb}(\text{Zr}_{0.5}\text{Ti}_{0.5})\text{O}_3$ . *App. Phys. Lett.* 83 (2003) 5020-5022.
- [15] L. APC, Piezoelectric ceramics: principles and applications. APC. International. 2002.
- [16] I.T. Seo, Y.J. Cha, I.Y. Kang, J.H. Choi, S. Nahm, T.H. Seung, J.H. Paik, J. High Energy Density Piezoelectric Ceramics for Energy Harvesting Devices. *Ame. Ceram. Soc.* 94 (2011) 3629-3631.
- [17] H. Kim, S. Priya, H. Stephanou, K. Uchino, Consideration of impedance matching techniques for efficient piezoelectric energy harvesting. *IEEE. T. U. F. Fre. Con.* 54 (2007) 1851-1859.
- [18] J. Ajitsaria, S.Y. Choe, D. Shen, D. Kim, Modeling and analysis of a bimorph piezoelectric cantilever beam for voltage generation. *S. Mater. Struct.* 16 (2007) 447.
- [19] H. Lee, H. Jang, J. Park, S. Jeong, T. Park, S. Choi, Design of a Piezoelectric Energy-Harvesting Shock Absorber System for a Vehicle. *Integ. Ferro.* 141 (2013) 32-44.
- [20] N. Kong, D.S. Ha, A. Erturk, D.J. Inman, J. Resistive Impedance Matching Circuit for Piezoelectric Energy Harvesting. *Int. Mater. Sys. Struct.* 21 (2010) 1293-1302.

- [21] J. B. Penella, M. P. Vidal, Piezoelectric Energy Harvesting Improvement with Complex Conjugate Impedance Matching. *J. Int. Mater. Sys. Struct.* 20 (2009) 597-608.
- [22] B. Jaffe, R. Roth, S. Marzullo, Properties of piezoelectric ceramics in the solid-solution series lead titanate-lead zirconate-lead oxide tin oxide and lead titanate-lead hafnate. *J. R. N. B. Standards.* 55 (1955) 239-254.
- [23] H.D. Chen, K.R. Udayakumar, C.J. Gaskey, L.E. Electrical properties' maxima in thin films of the lead zirconate–lead titanate solid solution system. *App. Phys. Lett.* 67 (1995) 3411-3413.
- [24] W. Liu, X. Ren, Correlation of grain size, phase transition and piezoelectric properties in  $\text{Ba}_{0.85}\text{Ca}_{0.15}\text{Ti}_{0.90}\text{Zr}_{0.10}\text{O}_3$  ceramics. *Phys. Rev. Lett.* 103 (2009) 257602
- [25] P. Wang, Y. Li, Y. Lu, Enhanced piezoelectric properties of  $(\text{Ba}_{0.85}\text{Ca}_{0.15})(\text{Ti}_{0.9}\text{Zr}_{0.1})\text{O}_3$  lead-free ceramics by optimizing calcination and sintering temperature. *J. Eur. Ceram. Soc.* 31 (2011) 2005-2012.
- [26] Y.B. Yao, C.L. Mak, Effects of Ca-dopant on the pyroelectric, piezoelectric and dielectric properties of  $(\text{Sr}_{0.6}\text{Ba}_{0.4})_4\text{Na}_2\text{Nb}_{10}\text{O}_{30}$  ceramics. *J. A. Com.* 544 (2012) 87-93.
- [27] F. R. Marcos, J.J. Reinoso, X. Vendrell, J. Romero, L. Mestres, P. Leret, J. Fernández, P. Marchet, Structure, microstructure and electrical properties of  $\text{Cu}^{2+}$  doped  $(\text{K},\text{Na},\text{Li})(\text{Nb},\text{Ta},\text{Sb})\text{O}_3$  piezoelectric ceramics. *Ceram. Inter.* 39 (2013) 4139-4149.
- [28] N. M. Hagh, K. Kerman, B. Jadidian, A. Safari, Dielectric and piezoelectric properties of  $\text{Cu}^{2+}$ -doped alkali Niobates. *J. Eur. Ceram. Soc.* 29 (2009) 2325-2332.
- [29] I.T. Seo, Y.J. Cha, I.Y. Kang, J.H. Choi, S. Nahm, T.H. Seung, J.H. Paik, High Energy Density Piezoelectric Ceramics for Energy Harvesting Devices. *J. Ame. Ceram. Soc.* 94 (2011) 3629-3631.
- [30] L. Dhakar, H. Liu, F. Tay, C. Lee, A new energy harvester design for high power output at low frequencies. *Sens. Act. A. Phys.* 199 (2013) 344-352.
- [31] Y. Yue, Y. Hou, M. Zheng, X. Yan, J. Fu, M. Zhu, High power density in a piezoelectric energy harvesting ceramic by optimizing the sintering temperature of nanocrystalline powders. *J. Eur. Ceram. Soc.* 37 (2017) 4625-4630.



- [32] Y. Liu, Y. Chang, E. Sun, F. Li, S. Zhang, B. Yang, Y. Sun, J. Wu, W. Cao, Significantly Enhanced Energy-Harvesting Performance and Superior Fatigue-Resistant Behavior in [001]-Textured BaTiO<sub>3</sub>-Based Lead-Free Piezoceramics. *ACS. App. Mater. Inter.* 10 (2018) 31488-31497.
- [33] K.B. Kim, C.I. Kim, Y.H. Jeong, Y.J. Lee, J.H. Cho, J.H. Paik, S. Nahm, Performance of unimorph cantilever generator using Cr/Nb doped Pb(Zr<sub>0.54</sub>Ti<sub>0.46</sub>)O<sub>3</sub> thick film for energy harvesting device applications. *J. Eur. Ceram. Soc.* 33 (2013) 305-311.
- [34] Y. Oh, J. Noh, J. Yoo, J. Kang, L. Hwang, J. Hong, Dielectric and piezoelectric properties of CeO<sub>2</sub>-added nonstoichiometric 0.03(Na<sub>0.5</sub>K<sub>0.5</sub>)0.97(Nb<sub>0.96</sub>Sb<sub>0.04</sub>)O<sub>3</sub> ceramics for piezoelectric energy harvesting device applications. *IEEE. Trans. U. F. Fre. Con.* 58 (2011) 1860-1866.
- [35] J. Wu, H. Shi, T. Zhao, Y. Yu, S. Dong, High- Temperature BiScO<sub>3</sub>- PbTiO<sub>3</sub> Piezoelectric Vibration Energy Harvester. *Adv. Func. Mater.* 26 (2016) 7186-7194.
- [36] I.T. Seo, C.H. Choi, D. Song, M.S. Jang, B.Y. Kim, S. Kim, Y.S. Kim, T.H. Sung, H.C. Song, Piezoelectric Properties of Lead- free Piezoelectric Ceramics and Their Energy Harvester Characteristics. *J. Ame. Ceram. Soc.* 96 (2013) 1024-1028.
- [37] X. Yan, M. Zheng, Y. Hou, M. Zhu, Composition-driven phase boundary and its energy harvesting performance of BCZT lead-free piezoelectric ceramic. *J. Eur. Ceram. Soc.* 37 (2017) 2583-2589.

## Supporting Information

### Table S1

Material	$d_{33} \times g_{33}$ ( $10^{-15} \text{m}^2/\text{N}$ )	Frequency (Hz)	Acceleration ( $\text{m/s}^2$ )	Power ( $\mu\text{W}$ )	Power density ( $\mu\text{W}/\text{mm}^3$ )	Ref.
PZT-5A bulk	9.3k	36	2	0.040	0.38	30
PZN-PZT+ $\text{MnO}_2$ bulk	-	90	10	0.098	1.5	31
PZT-5H bulk	11.7k	40	-	0.11	3.82	32
PZT CN	14k	20	-	17.3	2.08	33
<b>This work (BCTZ0.3C)</b>	<b>15.8k</b>	<b>60</b>	<b>2.0</b>	<b>8.2</b>	<b>107.9</b>	-
KNNS bulk	-	70	7	0.0008	0.01	34
BS-PT bulk	-	41	10	0.013	0.08	35
CNKN bulk	4.9k	93	-	-	12	36
BCTZ bulk	-	90	10	0.07	1.4	37

Table S1 shows the output signals from the LPEH and other previously reported piezoelectric energy harvesters, along with values pertaining to the acceleration ( $\text{m/s}^2$ ), resonance frequencies (Hz), and energy-conversion constants of these harvesters. Among the PZT series devices, the energy-conversion constant is 9.3 k when using bulk PZT-5A, and the corresponding output power and power density are 40  $\mu\text{W}$  and 0.38  $\mu\text{W}/\text{mm}^3$ , respectively. The maximum output power was observed when using the PZT-CN material, which had a high piezoelectric conversion constant of 14 k, a maximum output power of 17,300  $\mu\text{W}$ , and power density of 2.08  $\mu\text{W}/\text{mm}^3$  at its resonance frequency of 20 Hz. When using the lead-free piezoelectric materials of KNNS bulk, the output power was less than 20  $\mu\text{W}$  while the resonance frequency exceeded 70 Hz. The BCTZ bulk generated output power of 70  $\mu\text{W}$  at 90 Hz under acceleration of 10  $\text{m/s}^2$  [37]. The BCTZC0.3 shows maximum output power of 8,200  $\mu\text{W}$  and energy density of 107.9  $\mu\text{W}/\text{mm}^3$ . However, it was developed with reference to the vibration conditions, with resonance of 60 Hz and low acceleration of 2.0  $\text{m/s}^2$  when compared with many of the harvesters in the other studies. The excellent output characteristics generated using the BCTZC0.3 materials were realized by the stable crystal formation of the highly [110]-oriented crystal.

This material can thus serve as the basis for a reliable and sustainable high-performance energy harvester.