
Article

The Role of ADAS While Driving in Complex Road Contexts: Support or Overload for Drivers?

Gaetano Bosurgi¹, Orazio Pellegrino^{2,*}, Alessia Ruggeri³ and Giuseppe Sollazzo⁴

¹ Department of Engineering, University of Messina; gbosurgi@unime.it

² Department of Engineering, University of Messina; opellegrino@unime.it

³ Department of Engineering, University of Messina; aleruggeri@unime.it

⁴ Department of Engineering, University of Messina; gsollazzo@unime.it

* Correspondence: opellegrino@unime.it; Tel.: +39 090 676 5901

Abstract: The possibility of using some warnings inside modern vehicles should be an aid to the driving activity. However, the information transferred to users is not always received in the expected way due to the variability and complexity of the road environment.

This study, therefore, aims to identify a procedure that allows to ascertain whether drivers receive the data in an appropriate way even during particular manoeuvres, such as passing cyclists on a winding road or, on the contrary, if they represent an unnecessary overload.

To answer this question, an experimentation in a simulated environment was set up with which the drivers' visual behaviour was recorded in presence and absence of a driving aid device (On- Board Unit, OBU).

The results show that, in some situation, the information provided by the OBU helps to maintain a more virtuous driving behaviour but, in the most complex ones, drivers acquire information from a smaller number of sources, excluding the aid devices present inside the cockpit.

This procedure is useful for ADAS designers in order to refine these instruments but also for road managers who can improve safety by inserting appropriate signs or speed limits.

Keywords: ADAS; Driving behavior; Cyclists; Road safety; Visual behavior

1. Introduction

Modern vehicles, for some years now, have been equipped with increasingly refined electronic instruments. If at the beginning their task was to monitor and possibly fix eventual error of the vehicle, now they have taken on a role of great interaction with the driver as they aim to improve driving comfort and safety. As you know, of all the components of the road system, the state of the infrastructure and the vehicle are the most objectively controllable. The driver, on the other hand, includes considerable uncertainty and fragility, so that the development of new technologies has concentrated more on it.

The recent technological developments have allowed the production of instruments very attractive to the potential buyer and sufficiently economical, so in the overall cost they represent an element of great convenience for the industries, with the consequence that they are often not very useful and, in some cases, harmful.

However, infotainment devices should be distinguished from driving aids, since the former could represent an important source of dispersion of user resources, while the latter are, however, aimed at increasing road safety.

In the first case, the drivers' performance is often influenced by the presence of elements not directly associated with the road infrastructure (Jazayeri et al., 2021) that can lead to distraction phenomena and, consequently, to incorrect manoeuvres (Bowden et al., 2019; Lansdown et al., 2021). Visual distraction can therefore be defined as a diversion of the driver's attention to activities that are not necessary for safe driving. It is interesting to mention some fairly recent reports of the National Highway Traffic Safety Administration (NHTSA, 2019; 2020) where there is a prominent role of carelessness in accidents (to be precise 78% of all accidents in the United States and 65% of missed collisions) and, among them, 25% is caused by equipment on board the vehicle. Distraction leads to very unpleasant effects in driving behaviour, such as an increase in reaction time, a reduction in time-to-collision, a high probability of invasion of the opposite lane, sharp changes in speed and some reduction in headway (Briggs et al., 2011; Chen and Chiuhsiang, 2011; Chen et al., 2018; D'Addario and Donmez, 2019; Kuo et al. 2019).

In the near future, the digitization of roads, through communication protocols as Vehicle-to-Vehicle (V2V) and Vehicle-to-Infrastructure (V2I), will stress users to a large flow of information in real-time during driving which, according to the best intentions, should improve traffic safety (Ali et al., 2020; Fernandez-Isabel et al., 2020). Investigating such interaction is key to understanding what factors should be considered for the decay of performance, despite the benefits that such technology can bring to them (Birrel and Fowkes, 2014; Ma et al., 2020).

Among the various forms of overload of the user's capacity, the visual one, due for example to the use of the mobile phone or the navigator, is among the most dangerous as it diverts the gaze from the road and induces a sudden shortening of the driver's focal length (Dumitru et al., 2018; Gazder et al, 2019). Although the best thing is to divide the workloads on different channels (visual, auditory or tactile), even with the most modern instrumentation vision remains the main way of acquiring information from the road context (Pellegrino, 2009; Pellegrino, 2012; Bosurgi et al., 2013; Kircher et al., 2014; Bosurgi et al., 2015; Bongiorno et al., 2017; Risteska et al., 2021).

Traditionally, this mental stress to which the user is subjected is called Workload (WL) and depends on both the nature of the task and the ability of the individual: no acceptable determination can be considered if both elements are not considered. According to a universally recognized definition by the scientific community, according to O'Donnel & Eggemeier (1996) WL is that portion of the operator's capacity required to perform a particular action.

The problem of measuring the workload has been addressed for several decades, identifying some characteristics to which to assign particular importance depending on the task to be performed: sensitivity (to small but important changes in the scenario), diagnosticity (ability to identify the cause of discomfort), intervention (interdependence between variables present in the driving scenario), but also selectivity, reliability, reproducibility.

The success of low-cost sensors, together with the computing capabilities of modern microprocessors, makes it possible to measure workload in multiple ways and, therefore, should be classified appropriately. Their choice should be made according to the experimental context and knowing that, in most cases, a single type of measure will not be sufficient to understand the phenomenon. In general terms, the three main categories are as follows:

- Subjective measurements (questionnaires).
- Performance measures (primary and secondary).
- Physiological measurements.

To the first group (Subjective measurements) belong those methodologies that are based on the subjective judgment of the user about the experimented trial, generally, through appropriate questionnaires. Among those proposed in the literature, NASA TLX has found a wider application as it investigates more dimensions of the user's task and lends itself to a multiplicity of applications (Paxion et al., 2015).

Self-assessment scales bring with them other advantages, such as ease of application and low costs. Obviously, there are also many elements against their use. First, the difficulty of distinguishing between mental and physical load or, again, a subjective contribution too marked. In this regard, O'Donnell and Eggemeier (1986) warn of the danger of a possible dissociation between self-evaluation and performance measures.

The performance measures refer to the control of the vehicle by the driver, distinguishing between lateral and longitudinal control. To the first belong the variables based on the distance in curves such as the lane gap (Bosurgi et al., 2016) or the steering wheel (angle or speed). In this regard, the steering angle is not very representative, and it is always good to refer to its variation in time and, therefore, to the steering speed. The other variables, such as lateral acceleration and jerk, are also not very indicative when examined together with the trajectory and steering speed, because they directly derive from those.

Among the measures that can describe the longitudinal control and that could influence the workload, there are the speed variation (and, therefore, the acceleration or deceleration possibly related to a certain geometric element) and speed in the form of speed limit imposed by the operator, design speed or operating speed (Li et al., 2018; Aidman et al., 2015; Farah et al., 2007; Malhotra et al., 2018).

È importante considerare che tali variabili possono essere raccolte in modo continuativo nel tempo ed essere riferite, quindi, a particolari momenti dell'attività (un passaggio su una determinata curva, ad esempio). Al contrario delle misure soggettive che riportano un giudizio sommario da parte dell'operatore sul complesso della prestazione.

This type of measure, alone, cannot determine a definitive judgment on a certain performance, as two users could manifest the same result but with completely different levels of discomfort, affecting their ability and experience of driving. It's necessary, so couple it to another type of indicator.

The last category of measurements of WL is related to the physiology of the driver through the relief of variables such as visual activity in terms of saccharides, fixations and dilation of the pupil (Gaspar et al., 2016; Li et al., 2018), dermal conductivity (Bongiorno et al., 2017), heart rate, electromyography. The reliability of these indicators is now considered acceptable, and the only difficulties concern the study of the signal and the understanding of possible temporal latencies with respect to the stimulus to which the driver has been subjected (Kim et al., 2012).

It is important to consider that these variables can be collected continuously over time and be related, therefore, to particular moments of activity (a passage on a given curve, for example). In contrast to the subjective measures that report a summary judgment by the operator on the overall performance.

1.1 Research gap

The invasiveness of modern instruments in the vehicle that interact more or less actively is posing the problem of the driver's ability to acquire all this information.

In order to increase the attractiveness of its products, the automotive industry will put new, increasingly complex instruments on the market, which, however, will have to be subjected to an in-depth analysis to assess the effects on road safety.

This paper proposes a procedure for the verification of an On-Board Unit (OBU) mounted on a vehicle during the travel on a rural road, characterized by a complex geometry and a significant flow of cyclists on its lane.

The aim of the research is not to give general meaning to the results but to verify in some particular scenarios the effectiveness of the OBU.

2. Materials and Methods

2.1 General description of the experiment

The trial was carried out in a simulated environment in order to achieve certain advantages respect to a real on-road test, including:

- Repeatability and homogeneity of light, weather and traffic conditions.
- Safety of users involved in testing (including other vehicles).
- Ability to accurately represent situations that can hardly be found in reality (in this case, the presence of a particular flow of cyclists).
- Complete and accurate vehicle telemetry.
- Possibility to equip the driver with non-invasive instrumentation (biometric sensors) but that, in real driving conditions could cause sanctions by the authorities.

The road is within the municipality of Messina (near the village of Salice), is called SS113 and characterized by a very tortuous geometry, with circular curves of small radius separated by short tangents (see Fig. 1) which induce drivers to acquire information through signage, since visibility is often limited. The characteristics of the cross-section consist of a total width of 7.00 m, divided into two lanes per direction of travel.



Figure 1 – The rural road called SS113 reported in a simulated environment connects the localities "Colli San Rizzo" to "Locanda".

In order to investigate the influence of the OBU and the traffic consisting only of cyclists placed along the lane, 4 different driving conditions were organized on the same track, according to the following scheme:

- 1) Control condition, no traffic. Users will acquire all the necessary information from the external context and vertical signage. There will be no traffic of any kind.
- 2) Control condition, with traffic (cyclists). Users will acquire all the necessary information from the external context and the vertical signage. The traffic, as mentioned, will consist of groups of 3 cyclists at a time that will induce users to make the passing manoeuvre.
- 3) Smart condition, no traffic. Users will acquire all the necessary information from the external context and from the OBU present inside the vehicle. There will be no traffic of any kind.
- 4) Smart condition, with traffic (cyclists). Users will acquire all the necessary information from the external context and from the OBU present inside the vehicle. The traffic, as mentioned, will consist of groups of 3 cyclists at a time that will induce users to make the passing manoeuvre.

Always with the aim of simplifying the environmental context to have more robust statistical results, the weather and light conditions are the optimal ones, that is, travel in broad daylight and in the absence of rain.

The vehicle used for the test is a very common type (Citroen C3) in Italian road contexts.

2.2 The driving simulator at University of Messina

The experimentation has been performed using the driving simulator named SimEASY®, produced by AVSimulation, available in the Digital Laboratory for Road Safety (DiLaRS) of the University of Messina (Fig. 2). This simulator has the following features:

- A hardware characterized by three 29-inch full HD screens, a steering wheel characterized by a force feedback sensor to simulate the rolling motion of wheels and shocks, sound effects reproduced through several speakers and subwoofers.
- A software named SCANeR® studio, used to design tracks, generate the environmental context and run trials.
- Data collected with a frequency of 10 Hz.
- A family car (Citroen C3) powered by a 80 hp gas engine, with six manual gears and automatic clutch.



Figure 2 – The driving simulator of the Laboratory of Road Infrastructure in Messina (Italy).

2.3 The drivers' sample

The test sample consists of 14 users (4 women and 10 men) with homogenous characteristics regarding age (average 27 years), number of years of possession of a driving license (average 8 years), propensity to accidents (0 accidents) experience with driving simulator (none), visual pathologies (none). To ascertain these characteristics, users were given two questionnaires, one before driving and one after. Subjects who initially joined the trial but had important visual pathologies (excessive myopia) or who experienced nausea disorders while driving the simulator were discarded.

The inexperience of drivers towards the simulated environment has made it essential to have a training period of about 15 minutes to familiarize themselves with the driving controls and the general context.

All the trials were performed according to the American Psychological Association Code of Ethics and after an informed consent obtained from each Participant.

2.4 The eye tracker

Il comportamento visuale, in termini di fissazioni sugli oggetti di interesse e saccadi, è stato rilevato mediante l'eye tracker Tobii Glass rel. 1.0 che ha consentito di individuare con precisione gli oggetti fissati dal conducente.

The visual behaviour, in terms of fixations and saccades was detected by the eye tracker Tobii Glass rel. 1.0 that allowed to accurately identify the objects of interest fixed by the driver inside the visual field.



Figure 3 – The Tobii Glasses Eye Tracker® (v. 1.0) used during testing for tracking and processing of eye movements.

On the right side of the eye trackers are mounted the infrared sensor, the microphone, and the camera. This causes the saccades and the fixations to be recorded only by the right eye. In the left lens, however, no recording or projections of infrared waves are made.

On the glasses are two cameras capable of recording at a frequency of 30 Hz. The first camera detects the reflection of an infrared illuminator pointing towards the right pupil; using specific image analysis techniques, it is possible to derive eye movements from this data. The second camera looks frontally and reproduces the scene perceived by the user (Fig. 4). Its viewing angles are 56 degrees horizontally and 44 degrees vertically.



Figure 4 – Gaze analysis during a trial.

Inside the cockpit, by writing a script in Python language, an On-Board Unit has been set up (Fig. 5) that simulates the communication between Vehicle and Infrastructure (V2I - Vehicle to Infrastructure) and that, in particular, it shall indicate the warnings for exceeding the speed limit and for dangerous curves.

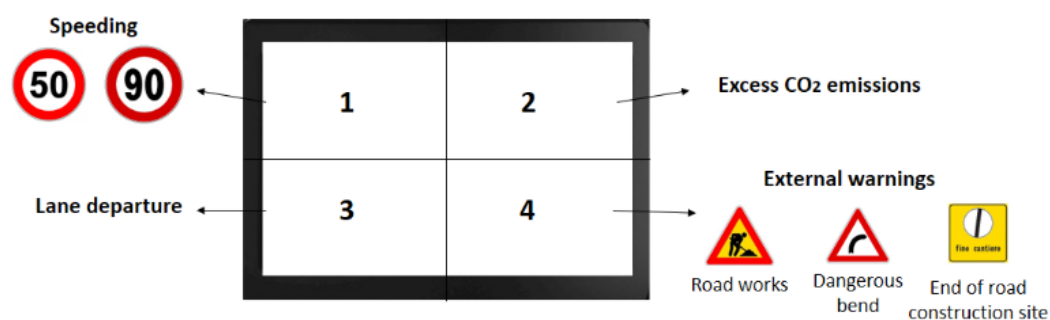


Figure 5 – Division of the OBU display according to the type of warning (Bosurgi et al.,2022)

If the user does not behave incorrectly, then the OBU screen remains blank, but instead displays warnings until the user corrects their behaviour (Marra, 2021).

As shown in figure 5, you can distinguish four quadrants where, in the quadrant 1, 2, 3 are shown the feedback related to inappropriate and/or dangerous driving behaviour. In quadrant 4, on the other hand, informative feedback on some critical aspects of the layout is shown.

2.5 Questionnaire NASA TLX

The workload was deduced during the experiment by means of physiological variables related to visual behaviour. However, at the end of the driving activity, drivers (in addition to the general forms mentioned above) were given the NASA TLX questionnaire with which it was possible to verify the consistency between subjective and physiological measurements.

In particular, users completed the questionnaire at the end of the first two driving conditions called "Control" (without aids by the OBU) and at the end of the last two conditions called "Smart" (characterized by the presence of the OBU).

As is well known, the main feature of this method is its multi-dimensionality since it consists of six subgroups representing variables somewhat independent: mental, physical and temporal demands, frustration, effort and performance. The multidimensional scale provides an overall workload score on a 100-point scale, based on the weighted average of the six subscales.

At the end of the survey the overall workload (OW) was determined, that is the total workload to which each user was subjected.

2.6 Two-ways ANOVA

The data set regarding the users' activity was, then, processed by a One-way ANOVA to establish how they were affected by the absence/presence of smart alerts or the absence/presence of cyclists and which of these is the most critical.

Concerning the independent variable, the following were considered:

- Driving condition (2 levels: Control and Smart).
- Traffic (2 levels: no cyclists, with cyclists)

The response variable (or Dependent Variable DV) is always represented, alternatively, by the followings:

- Driver's Visual Acquisition (DVA): represents the percentage of time the driver does not gaze the road to acquire information from road signs. It shall be assessed by calculating the ratio of two times f and t , where f is the time of fixation necessary for a driver to acquire information on signs and t is the travel time of the same user. In this trial, the DVA has been calculated for two types of vertical signal (dangerous curve and speed limit), distinguishing the four conditions already illustrated.

- Speed Violation (SV): indicates the speed of the vehicle.

- Overall Workload (OW): The NASA TLX questionnaire was administered to each user at the end of the guide in control condition and at the end of the guide in smart conditions.

The reliability of the results depends on the satisfaction of the assumptions based on ANOVA analysis. In this case, the assumptions regard the following:

- The dependent variable must be measured at the continuous level.
- The two within-subjects' factors (i.e., two independent variables) should consist of at least two related groups that indicates that the same subjects are present in both groups.
 - The observations are independent, without relationship between the observations in each group or between the groups themselves.
 - Absence of significant outliers.
 - Tests for normality by means of residuals.
 - Check the sphericity, i.e. the variances of the differences between all combinations of related groups, were equal. When these conditions are violated, the Mauchly tests for sphericity can be performed, adjusting the analysis by a correction criterion as the Greenhouse-Geisser method.

The following pairs of null or alternative hypotheses must be verified:

- H0: The means of all Driving condition or Traffic are equal.
- H1: The mean of at least one Driving Condition or Traffic group (Control or Smart, without or with cyclists) is different.

3. Results and discussion

Statistical processing using ANOVA has produced some interesting results. In detail, by representing the results using box-and-whiskers plot graphs in the following figures, some interesting deductions can be drawn.

3.1 One-way ANOVA with Dependent Variable DVA50.

In Figure 6, the DVA50 dependent variable related to the vision of the signs indicating the limit of 50 km/h was analysed. The 4 Driving Conditions reported in abscissa, as already said, refer respectively to: 1) Control condition, without cyclists; 2) Control condition, with the presence of cyclists; 3) Smart condition, without cyclists; 4) Smart condition, with the presence of cyclists.

The result of the ANOVA, reported also in table 1, evidences that there are not statistically significant deviations between the 4 conditions. This means that users, in any condition, always pay attention to this type of warning in the same way. From this point of view, the use of an OBU does not have an advantage over traditional signage but does not cause further load to the task. The interpretation of this result is not easy: probably, the user who goes along a very winding road may not consider the speed control important, since it is the same geometry that constrains him to maintain a certain driving behaviour.

The positive aspect of this result is that the OBU does not lead to an overload of work, even in conditions of greater stress that refer to the scenario in which it is necessary to overcome cyclists (condition 4), although the frequency of observation of the signal is slightly higher and there is a wider dispersion of data.

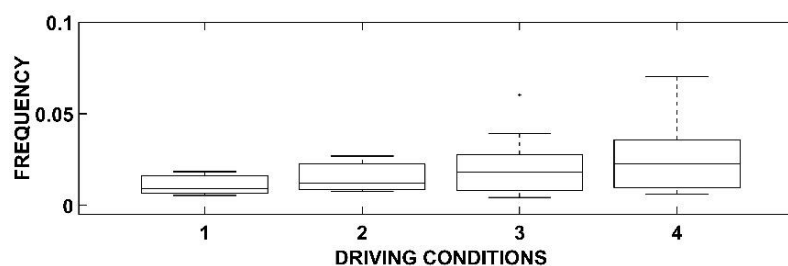


Figure 6 - Box-and-whiskers plot for the total number of fixations DVA₅₀ speed**Table 1** – ANOVA results for DVA50 speed


Source	SS	df	MS	F	Prob>F
DVA50	0,00619	3	0,00206	2,01	0,1246
Error	0,05352	52	0,00103		
Total	0,05971	55			

3.2 One-way ANOVA with Dependent Variable DVA_{dang}.

In Figure 7, the DVA dependent variable related to a dangerous curve warning has been analysed. The four Driving Conditions reported in abscissa refer, as in the previous case, respectively to: 1) Control condition, without cyclists; 2) Control condition, with the presence of cyclists; 3) Smart condition, without cyclists; 4) Smart condition, with the presence of cyclists.

The outcome of the ANOVA, shown also in Table 2 shows that, even this time, there are not statistically significant deviations between the four conditions with the only exception of Condition 2 (Control Condition with the presence of cyclists) and Condition 3 (Smart Condition without cyclists). We see that 3 is a better scenario because the signal sampling rate is statistically lower than Condition 2. The result, at least within these two scenarios, is slightly different from the previous case, as the user needs to find information on an insidious curve, especially in the presence of cyclists and in the absence of an instrumental aid such as the OBU.

The positive aspect of this result is that the OBU does not lead to an overload, even in conditions of greater stress that refer to the scenario in which it is necessary to overcome cyclists (4).

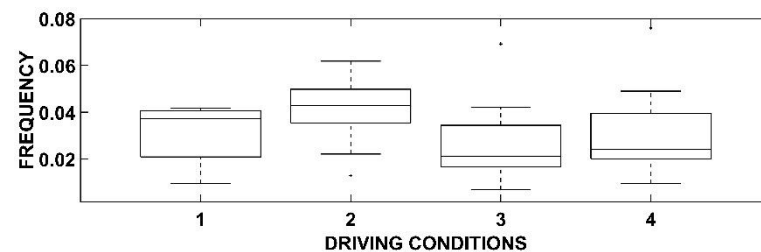**Figure 7** - Box-and-whiskers plot for the total number of fixations DVAdang**Table 2** – ANOVA results for DVAdang (dangerous curve)

Source	SS	df	MS	F	Prob>F
DVA _{dang}	0,00271	3	0,0009	2,56	0,0651
Error	0,01837	52	0,0003		
Total	0,02108	55			

3.3 One-way ANOVA with Dependent Variable Speed Violation.

In Figure 8, the dependent variable Speed Violation was analysed for exceeding the road speed limit set at 50 km/h.

The 4 Driving Conditions reported in abscissa refer, as in the previous cases, respectively to: 1) Control condition, without cyclists; 2) Control condition, with the presence of

cyclists; 3) Smart condition, without cyclists; 4) Smart condition, with the presence of cyclists.

The outcome of the ANOVA, also reported in Table 3, shows a statistically significant distinction between the conditions in which there is the presence of cyclists (2 and 4), compared to those in which the driver is isolated.

In this situation, the OBU did not exert any influence on driving behaviour, even if the user would have had to manage a complex manoeuvre such as cyclists' passing. This critical issue was addressed by the driver based only on his driving skills and information that transfers the context directly through the visual channel. A useful consideration could regard the driving conditions 2 and 4: in both there is the presence of cyclists and, although there are no statistically significant differences, it is noted that the average values of speed without the use of on-board equipment are significantly higher than those recorded when the driver could count on the help of the OBU. This means that in a fairly complicated driving environment, the OBU helps mitigate misconduct.

It is worth making a final assessment of the fact that there is a greater speed of users in the presence of cyclists. This behaviour, at first sight unjustified, is explained by the fact that the driver has the need to limit in space and time a manoeuvre that, on this type and geometry of road, is very dangerous and achieves its goal by increasing speed.

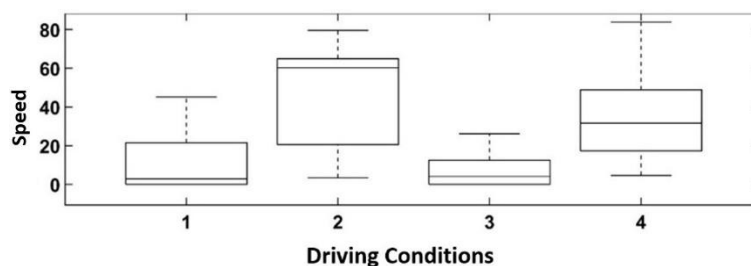


Figure 8 - Box-and-whiskers plot for the Speed

Table 3 – ANOVA results for Speed

Source	SS	df	MS	F	Prob>F
Speed	15704,7	3	5234,89	12,62	<0,0001
Error	21574,7	52	414,9		
Total	37279,4	55			

3.4 One-way ANOVA with Dependent Variable Overall Workload.

In this case, for simplicity, no graphs and tables are shown. The analysis was carried out considering only two scenarios: absence and presence of the OBU. The results lead to a Prob>F of 0.681 (F value= 0.17) and, therefore, there is no statistically significant difference between these two conditions. The result should have a positive meaning and is in line with the findings deduced with the other indicators. The OBU itself does not represent an additional load on the driver's capacity. To have an answer, however, on its actual usefulness this index is not very representative. Please note that NASA TLX is determined through a questionnaire after the test and, although it takes into account many aspects of the task, it does not allow to record its value continuously during the journey.

Comparing all the cases presented here, it emerges that it is not possible to assign a value to the usefulness of an OBU in general terms. This plays a certain positive role only in certain contexts that must be neither too simple (the driver does not need to find more information), nor too complex, otherwise the driver does not have the ability to process additional information.

In the latter case, it can be said that the OBU never represents a primary channel for knowledge of the external context but is used as a support to the process of acquiring information only when these are not excessive.

4. Conclusions

This paper deals with the study of the effect of an On-Board Unit within a vehicle in order to assess its effectiveness or its harmfulness in a fairly complex driving environment.

Compared to other researches reported in the state of the art, here the authors have introduced different levels of difficulty in the road object of experimentation, evaluating the driving behaviour in terms of performance indicators. The results reveal a situation that is not easily generalizable a priori. In some situations, the stress element was so modest that it was handled very easily by the user, without any need of the OBU. In much more complex situations, the OBU was neglected because the user had presumably reached the limit of their ability to process additional information. In intermediate conditions, however, the OBU was very useful as the user improved its performance.

The significance of this research is that it is very difficult to ascertain quantitatively and in general terms the effectiveness of these driving aids. The preeminent role is always assumed by the road and, in particular, by its geometry that must be immediately understandable without additional overload when there are particular traffic components or difficult weather conditions.

The research suggests a practical application to both drivers and road managers. In case of critical findings in the performance of drivers, these subjects can play an active role to improve road safety, both refinements of instrumentation (for example, software dedicated to particular road types or traffic conditions) introducing mitigation elements into the infrastructure (additional signage, tighter speed limits, traffic calming devices).

The next steps of the research will tend to evaluate further scenarios considered highly likely and to identify more accurate summary indices of user performance.

Author Contributions: Conceptualization, methodology, software, validation, formal analysis, investigation, resources, data curation, writing—original draft preparation, all authors have participated in the same measure.

Institutional Review Board Statement: Not applicable for studies where the impact on humans is substantially absent.

Informed Consent Statement: Informed consent was obtained from all subjects involved in the study.

References

- [1] Aidman, E., Chadunow, C., Johnson, K., Reece, J. (2015). Real-time driver drowsiness feedback improves driver alertness and self-reported driving performance. *Accident Analysis and Prevention*, 81, pp. 8-13.
- [2] Ali, Y., Sharma, A., Haque, M.M., Zheng, Z., Saifuzzaman, M. (2020). The impact of the connected environment on driving behavior and safety: A driving simulator study. *Accident Analysis and Prevention*, 144.
- [3] Birrel, S., and Fowkes, M. (2014). Glance behaviours when using an in-vehicle smart driving aid: A real-world, on-road driving study. *Transportation Research Part F: Traffic Psychology and Behaviour*, 22, 113-125.
- [4] Bongiorno N., Bosurgi G., Pellegrino O., Sollazzo G. (2017). How is the Driver's Workload Influenced by the Road Environment? *Procedia Engineering*, Vol. 187, pp. 5-13.
- [5] Bosurgi G., D'Andrea A., Pellegrino O. (2015). Prediction of Drivers' Visual Strategy Using an Analytical Model. *Journal of Transportation Safety and Security*, 7 (2), pp. 153-173.
- [6] Bosurgi, G., Bongiorno, N., Pellegrino, O. (2016). A nonlinear model to predict drivers' track paths along a curve. *International Journal of Civil Engineering*, 14 (5), pp. 271-280. DOI: 10.1007/s40999-016-0034-1.

-
- [7] Bosurgi G., D'Andrea A., Pellegrino O. (2013). What variables affect to a greater extent the driver's vision while driving? *Transport*, 28 (4), pp. 331-340.
- [8] Bowden, V.K., Loft, S., Wilson, M.D., Howard, J., Visser, T.A.W. (2019). The long road home from distraction: Investigating the time-course of distraction recovery in driving. *Accident Analysis and Prevention*, 124, pp. 23-32.
- [9] Briggs, G.F., Hole, G.J., Land, M.F. (2011). Emotionally involving telephone conversations lead to driver error and visual tunnelling. *Transp. Res. Part F: Traffic Psychol. Behav.*, 14 (4), pp. 313–323. <https://doi.org/10.1016/j.trf.2011.02.004>.
- [10] Chen, H., Chiuhsiang, J. (2011). The effects of various naturalistic conversations on driving performances during simulated driving. In: Wang, A. (Ed.), *Ergonomics for All: Celebrating PPCOE's 20 years of Excellence*. CRC Press, Kaohsiung, Taiwan.
- [11] Chen, H.Y.W., Hoekstra-Atwood, L., Donmez, B. (2018). Voluntary- and involuntary distraction engagement: An exploratory study of individual differences. *Hum. Factors* 60, pp. 575–588.
- [12] D'Addario, P., Donmez, B. (2019). The effect of cognitive distraction on perception-response time to unexpected abrupt and gradually onset roadway hazards. *Accid. Anal. Prev.* 127, pp. 177–185.
- [13] Dumitru, A.I., Gîrbacia, T., Boboc, R.G., Postelnicu, C.C., Mogan, G.L. (2018). Effects of smartphone based advanced driver assistance system on distracted driving behavior: A simulator study. *Computers in Human Behavior*, 83, pp. 1-7.
- [14] Farah, H., Polus, A., Bekhor S., Toledo, T. (2007). Study of passing gap acceptance behavior using a driving simulator, *Advances in Transportation Studies. An International Journal, Special Issue*.
- [15] Fernández-Isabel, A., Fuentes-Fernández, R., de Diego I.M. (2020). Modeling multi-agent systems to simulate sensor-based Smart Roads. *Simulation Modelling Practice and Theory*, 99.
- [16] Gaspar, J.G., Ward, N., Neider, M.B., Crowell, J., Carbonari, R., Kaczmarski, H., Ringer, R.V., Johnson, A.P., Kramer, A.F., Loschky, L.C. (2016). Measuring the useful field of view during simulated driving with gaze-contingent displays. *Human Factors*, 58(4), pp. 630–641.
- [17] Gazder, U., Al-Malki, Y., Alam, M.S. (2019). Risk of Using Smart Devices for Drivers. 2nd Smart Cities Symposium, University of Bahrain.
- [18] Jazayeri, A., Martinez, J.R.B., Loeb, H.S., Yang, C.C. (2021). The Impact of driver distraction and secondary tasks with and without other co-occurring driving behaviors on the level of road traffic crashes. *Accident Analysis and Prevention*, 153.
- [19] Kim, S. J., Hong, J.-H., Li, K. A., Forlizzi, J., Dey, A. K. (2012). Route guidance modality for elder driver navigation. In J.K. (Ed.), *Pervasive*. Berlin: Springer-Verlag.
- [20] Kircher, K., Fors, C., Ahlstrom, C. (2014). Continuous versus intermittent presentation of visual eco-driving advice. *Transportation Research Part F: Traffic Psychology and Behaviour*, 24, pp. 27-38.
- [21] Kuo, J., Lenné, M.G., Mulhall, M., Sletten, T., Anderson, C., Howard, M., Rajaratnam, S., Magee, M., Collins, A. (2019). Continuous monitoring of visual distraction and drowsiness in shift-workers during naturalistic driving. *Safety Science*, 119, pp. 112-116.
- [22] Lansdown, T.C., Kovanda, E.J., Spence, L. (2021). Student driver propensity to engage with distractions – a self-report survey. *Transportation Research Part F: Psychology and Behaviour*, 81, pp. 650-660.
- [23] Li, P., Merat, N., Zheng, Z., Markkula, G., Li, Y., & Wang, Y. (2018). Does cognitive distraction improve or degrade lane keeping performance? Analysis of time-to-line crossing safety margins. *Transportation Research Part F: Traffic Psychology and Behaviour*, 57, pp. 48–58.
- [24] Ma, J., Gong, Z., Tan, J., Zhang, Q., Zuo, Y. (2020). Assessing the driving distraction effect of vehicle HMI displays using data mining techniques. *Transportation Research Part F*, 69, pp. 235-250.

-
- [25] Malhotra, N., Charlton, S., Starkey, N., Masters, R. (2018). Driving speed choice: The role of conscious monitoring and control (reinvestment) when driving. *Transportation Research Part F: Traffic Psychology and Behaviour*, 57, pp. 115-128.
- [26] NHTSA (2019). *Distracted Driving in Fatal Crashes, 2017*, Research Note.
- [27] NHTSA. (2020). *Distracted Driving (DOT HS 812 700)*. <https://www.nhtsa.gov/risky-driving/distracted-driving>
- [28] O'Donnell, R. D.; Eggemeier, F. T. 1986. Workload assessment methodology, in *Handbook of Perception and Human Performance*, vol 2, Cognitive Processes and Performance. Ed. By Boff, K. R.; Kaufman, L.; Thomas, J. P. 1st edition. New York: Wiley, 42:1-42:9. ISBN 0471885444.
- [29] Paxion J., Galy E., Berthelon C. (2015). Overload depending on driving experience and situation complexity: Which strategies faced with a pedestrian crossing? *Applied Ergonomics*, 51, pp 343-349. <https://doi.org/10.1016/j.apergo.2015.06.014>
- [30] Pellegrino O. (2009). An analysis of the effect of roadway design on driver's workload. *Baltic Journal of Road and Bridge Engineering*, 4 (2), pp. 45-53
- [31] Pellegrino O. (2012). Prediction of driver's workload by means of fuzzy techniques. *Baltic Journal of Road and Bridge Engineering*, 7 (2), pp. 120-128.
- [32] Risteska, M., Kanaan D., Donmez, B., Chen, H.Y.W. (2021). The effect of driving demands on distraction engagement and glance behaviors: Results from naturalistic data. *Safety Science*, 136.

Disclaimer/Publisher's Note: The statements, opinions and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of MDPI and/or the editor(s). MDPI and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions or products referred to in the content.