

**Article** 

Not peer-reviewed version

# Lignocellulosic Residues from Fruit Trees: Availability, Characterization, and Energetic Potential Valorization

<u>Gianluca Cavalaglio</u>, <u>Giacomo Fabbrizi</u>, Filippo Cardelli, Leonardo Lorenzi, <u>Mariarosaria Angrisano</u>, <u>Andrea Nicolini</u>

Posted Date: 3 May 2024

doi: 10.20944/preprints202405.0144.v1

Keywords: biofuels; bioenergy; agricultural orchards residues; bio-based economy; fruit-production estimates; allocated lands



Preprints.org is a free multidiscipline platform providing preprint service that is dedicated to making early versions of research outputs permanently available and citable. Preprints posted at Preprints.org appear in Web of Science, Crossref, Google Scholar, Scilit, Europe PMC.

Copyright: This is an open access article distributed under the Creative Commons Attribution License which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Disclaimer/Publisher's Note: The statements, opinions, and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of MDPI and/or the editor(s). MDPI and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions, or products referred to in the content.

Article

## Lignocellulosic Residues from Fruit Trees: Availability, Characterization, and Energetic Potential Valorization

Gianluca Cavalaglio <sup>1</sup>, Giacomo Fabbrizi <sup>2,\*</sup>, Filippo Cardelli <sup>2</sup>, Leonardo Lorenzi <sup>2</sup>, Mariarosaria Angrisano <sup>1</sup> and Andrea Nicolini <sup>2</sup>

- <sup>1</sup> Department of Engineering, Pegaso Telematic University, 80143 Naples, Italy; gianluca.cavalaglio@unipegaso.it (G.C.); mariarosaria.angrisano@unipegaso.it (M.A.)
- <sup>2</sup> CIRIAF-CRB (Biomass Research Centre), Department of Engineering, Università degli Studi di Perugia, via G. Duranti, 67, 06125 Perugia, Italy; filippo.cardelli@studenti.unipg.it (F.C.); andrea.nicolini@unipg.it (A.N.); leonardo.lorenzi@dottorandi.unipg.it (L.L.); giacomo.fabbrizi@unipg.it (G.F.)\*
- \* Correspondence: giacomo.fabbrizi@unipg.it

**Abstract:** Reducing the carbon footprint of energy production is one of the most pressing challenges facing humanity today. Lignocellulosic biomass residues from fruit production industries show promise as a viable energy source. This paper presents a study of the Italian context concerning the utilization of orchard lignocellulosic residues for energy production as electricity or bioethanol. The potential of various orchard residues was assessed through chemical and physical analysis, and an equivalent electrical energy of about 6441.62 GWh or an amount of 0.48 Mt/y of bioethanol was obtained based on the average annual dry residue mass availability of about 3.04 Mt/y. These data represent the 9.30% of the national electrical energy production from renewable sources, as well as the 6.21% of the Italian demand for gasoline in 2022. Electricity generation from these residues shown its potential as a reliable and sustainable baseload power source, as well as source of renewable transportation fuel. The studied process could be a valuable reference to expand these concepts on global scale to achieve a greener and more sustainable energy future.

**Keywords:** biofuels; bioenergy; agricultural orchards residues; bio-based economy; fruit-production estimates; allocated lands

#### 1. Introduction

Recurring energy crises, highlights the importance of diversifying energy sources. Achieving energy parity is difficult for countries that strongly rely on fossil fuels [1]. Biomass has long been recognized as a renewable energy source that can help bridge this gap while minimizing greenhouse gases emissions due to its distinct advantages, including carbon neutrality, carbon sequestration, energy storage capabilities, higher energy density, residue utilization, and the potential for baseload power generation providing a constant and consistent energy supply [2]. There is a growing interest in using agricultural residues among the various types of biomass due to their abundancy and no competition with food industries [3,4]. Orchard residues offer an untapped opportunity for sustainable energy generation and the Italian context is a good case scenario due to its abundant fruit industry. This study aims to quantify the amount of energy that can be harnessed from these residues, thereby shedding light on the potential of the fruit industry as an energy resource. Data on the production scale and yield of the Italian fruit industry were collected from reliable sources, including governmental reports and industry databases. Detailed information on the chemical composition and physical properties of orchard residues will be analyzed to assess their suitability for energy conversion processes. The energy retrieval potential will be estimated by considering two valorization pathways: cogeneration and biofuels production. Through the assessment of

2

lignocellulosic biomass derived from orchard residues and its energy retrieval potential in the Italian fruit industry, this study aims to contribute valuable insights into sustainable energy generation.

#### 1.1. Background Context

Italy has historically been one of the main fruit-producing countries in Europe and the Mediterranean area, owing to its orographic and climatic conditions [5] As a consequence, the country also generates a large amount of lignocellulosic residues from fruit-production activities, which are usually burned or buried and rarely used as animal feed [6,7]. Burning prunings, although sometimes tolerated, is an illegal waste disposal that can negatively impact air quality [8] and poses a fire risk, particularly in dry periods [9]. This practice can also lead to decreased soil fertility and necessitates the addition of appropriate nitrogen fertilizers [10]. Shredding residues in the field may also have potential negative effects, such as increasing the occurrence of fungal diseases [11]. Harvesting, storing, and further using prunings to produce energy in the form of heat and electricity is a feasible and promising option that is still largely unexploited in several countries, including Italy, and has potential as a renewable energy source when applying circular economy principles [12]. Lignocellulosic residues from the fruit industry, properly stored and treated as wood chips, pellets, or briquettes, can be used as fuel in boilers for heating and/or water vapor production, which can be used in a thermodynamic turbine-alternator circuit to generate electricity [13]. Lignocellulosic residues can also be used to produce liquid biofuels, such as biodiesel, bioalcohols (e.g., bioethanol, biomethanol, biobutanol), biogas, and syngas [12,14]. However, the suitability of residues for these purposes depends on their constituent structures, particularly regarding their cellulose, hemicellulose, and lignin content [15]. Due to its Mediterranean climate the Italian fruit industry primarily produces olives, grapes, and citrus fruits which also account for substantial volumes in relation to European and global production [7]. In minor quantities the industry also produces apples, peaches, cherries, plums, apricots, and other fruits in smaller quantities. Italy is among the top European producers of dried fruits, including hazelnuts, almonds, walnuts, as well as pistachios and pecans [7,16]. In the ISTAT Annual Report 2021 [17], the annual production of fruits in Italy is reported. The dataset covers the five-year period from 2016 to 2020. From the subsequent analysis of these data, the produced mass of the most important productions such as olives, grapes, and citrus fruit were excluded, because alone they account for 79884±4581 kT, 25577±3090 kT, and 27034±1704 kT respectively produced on average between 2016-2020. The secondarily important fruits, such as apricot, cherry, peach, nectarines, plum, apple, pear, actinidia, almond, hazelnut, and carob jointly produce 5319±597 kT of fruit mass on average per year in the same period. Figure 1, shows data reported in the ISTAT Annual Report 2021 [17], illustrates the annual production of the secondarily produced fruits in Italy.

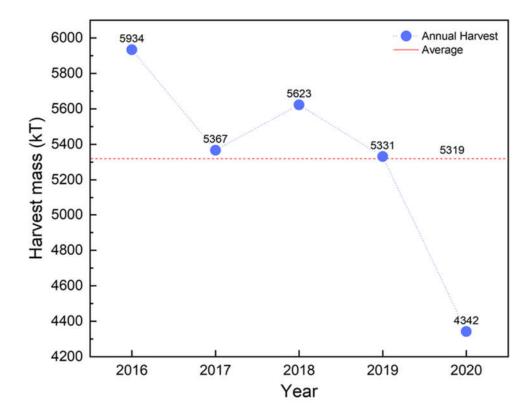


Figure 1. Annual production of the secondarily produced fruits in Italy.

In the ISTAT Annual Report 2021 are also available data regarding the amount of allocated land per fruit species in hectare for the same investigated period. In Figure 2 are displayed data indicating the hectares of land allocated to produce each of the main fruit species produced in Italy. The data are presented on average. As well as in the case of the harvested produced mass of fruit, also in this case the data regarding olive, grapes, and citrus fruit production were excluded from the analysis, because account for 681000±12000 ha, 1144000±3000 ha, and 138000±9000 ha respectively on average on the 2016-2020 five years period.


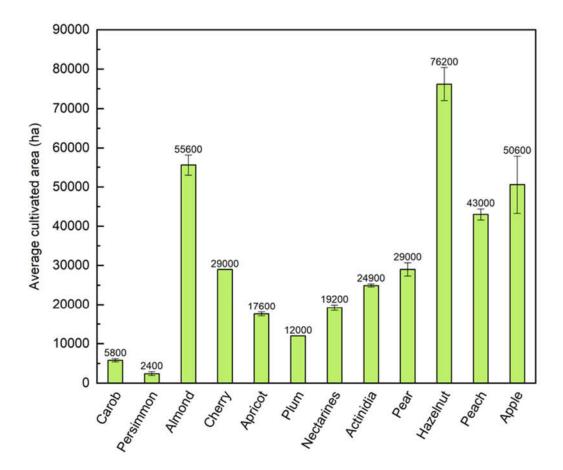



Figure 2. Cultivated area for fruit production in Italy broken-down by the main species on average.

Figure 2 was further analyzed to determine the distribution in percentage of areas on a total average area allocated for the fruit production of 365400±9972 ha. Results are presented in Figure 3. These data illustrate the percentage distribution of the average land area allocated to the cultivation of each one of the fruit species in Italy between 2016 and 2020. The joint amount of hazelnut, almond, and apple allocated area represents the half of the total allocated area with an average value of 49.92±0.03%.

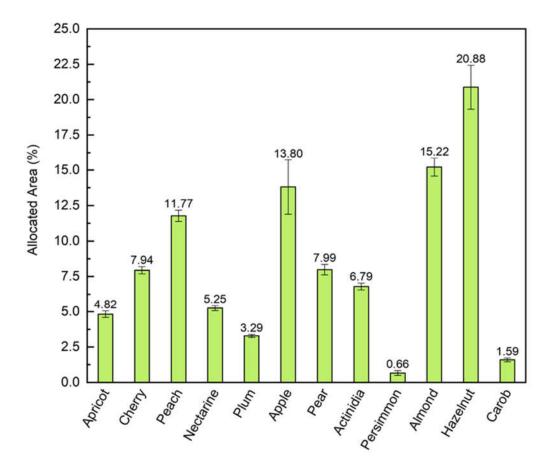

**Figure 3.** Shows the percentage distribution of areas allocated to fruit cultivation per each species in Italy.

All data reported by ISTAT [17] were compared with other data from other sources regarding the area cultivated in Italy. The joint report by the National Agency for the Protection of the Environment (ANPA) and the National Observatory on Waste (ONR) entitled "Waste in the agrofood sector - Sector study" [18] was used to collect data. According to this report, in Italy, 15000 ha of land are allocated to apricot, 95000 ha to peach, 12000 ha to plum, 65000 ha to apple, 45000 ha to pear, and 70000 ha to hazelnuts orchards. The Biomass Research Centre (CRB) provided additional data on the allocated area in its "NPBAEU-CRB" [19], indicating that 93000 ha, 62000 ha, 43000 ha, 87000 ha, and 69000 ha (according to ITABIA estimates) are allocated respectively to produce peach, apple, pear, almond and hazelnut. In the end, Di Blasi [20] collected more data, indicating that 82000 ha, 39900 ha, 78700 ha, 118200 ha, and 69300 ha of land are allocated to apple, pear, peach, almond, and hazelnut production respectively. These data were collected and reported in Figure 4 for comparison purposes. The process of collecting and estimating data is different from report to report, for this reason there is a fluctuation in the values. For a further comparison in Figure 4 also an average data value was plotted. As in the previous dataset, the area allocated to olives, grapes, and citrus fruits production was not taken into consideration.

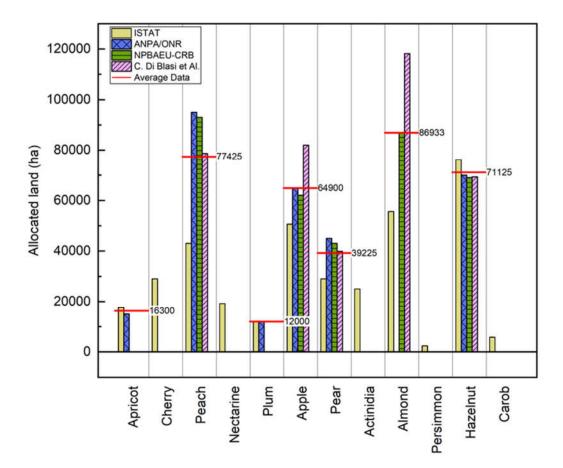

**Figure 4.** Data comparison between different studies about the allocated area to fruit production in Italy. The average data are reported as a red stick at the corresponding value.

#### 1.2. The Lignocellulosic Residues from Fruit Industries

To properly maintain productive orchard is necessary to perform periodical pruning campaign. Pruning residues can be distinguished into different types based on their prune methods, and based on chemical characteristics which vary depending on the fruit tree species selected. Generally, residues have a moisture content between 35% and 45% at the time of harvest [12]. Accurate estimation of residual biomass quantities is crucial for an effective planning of biomass energy strategies [21]. Table 3 shows estimates of annual lignocellulosic residues mass production derived from prunings of various fruit tree species in Italy. The data are obtained from different sources and pertain to different time periods. However, the estimates are largely similar and can be considered reliable references. An average data of dry residues produced yearly for each species is reported without considering data about fresh prunings.

**Table 1.** Estimates of annual lignocellulosic pruning production from fruit trees in Italy. Different datasets were reported in this table. Specification of the data and the source are included in the legend table.

Description	A	В	С	D	E	F	G	Н	Average
Prunings	(Mt/	y) (Mt/y	y) (Mt/y)	(Mt/y)	(Mt/y)	(Mt/y)	(Mt/y)	(Mt/y)	(Mt/y)
Grape	2.90	1.50	1.28	1.11	1.19	1.47	1.58	0.88	1.29±0.23
Olive	2.40	1.20	1.14	1.07	1.15	1.34	1.43	0.80	1.16±0.19
Apple	0.20	0.10	0.09	0.13	0.12	0.29	0.28	0.09	$0.16 \pm 0.08$
Pear	0.10	0.05	0.05	0.05	0.03	0.18	0.17	0.05	$0.08 \pm 0.05$
Peach	0.20	0.10	0.16	0.19	0.14	0.46	0.42	0.15	0.23±0.13

Lemon	0.30	0.20	0.19	0.67*	0.67*	0.77*	0.80*	0.48	0.29±0.13 (0.73±0.06)
Almond	0.20	0.10	0.15	0.12	0.12	0.22	0.12	0.09	$0.13\pm0.04$
Hazelnut	0.20	0.10	0.07	0.14	0.09	0.22	0.17	0.08	0.12±0.05
Total	-	-	-	-	-	-	-	-	3.46±0.37

Table Legend						
Column name	Content and references					
A	Fresh prunings estimated mass by Di Blasi [20]					
В	Dry prunings estimated mass by Di Blasi [20]					
C	Dry prunings estimated mass by ITABIA [19]					
D	Dry prunings estimated mass by CRPA [19]					
E	Dry prunings estimated mass by ANPA ONR [18]					
F	Dry prunings mass including the contribution of the residual biomass at the end of the production cycle. Estimate by CRPA [19]					
G	Dry prunings mass including the contribution of the residual biomass at the end of the production cycle. Estimate by ANPA ONR [18]					
H	Dry residues estimated mass by ITABIA [22]					

<sup>\*</sup> residues from citrus fruits trees and not only from lemons.

Column A and B present data on the total quantity of residues produced in the wet state immediately after cutting and in the dry state respectively [20]. The total quantity of green residues (Column A) was estimated by multiplying the specific production of residues (expressed in t/ha) [20] by the invested area. The data in column B were derived by considering the percentage moisture of the green residue. The data in Column C, D and F were obtained by ITABIA reports. In column C are reported the data that are considering the dry residue that is estimated to be effectively available for energy production over a three-year period (2000-2002). The actual availability of dry residue from fruit tree pruning may be 45-50% of the maximum potential availability due to logistical-economic considerations, allocation of different production areas, size of companies, and their organization [19]. Column D presents data processed by the Agency for Protection of the Environment and Technical Services (APAT), which merged in 2008 into the ISPRA Higher Institute for Environmental Protection and Research. The data shows the availability of dry residue referring to the year 2002. Finally, the data of column F were processed considering the lignocellulosic biomasses coming also from the final tree cut. The data in columns E and G were processed by the National Agency for the Protection of the Environment (ANPA) and the National Observatory on Waste (ONR). In columns E only pruning waste were considered, while in column G also contributions of wood at the end of the production cycle were considered [18]. The two separated dataset were obtained based on the calculation of regional masses of residues from statistical data relating to agricultural production, integrated with bibliographic data on the relationship between the quantity of residues per unit of product (by-product/product ratio). To obtain the dataset of column G an elaboration was carried out taking into account for each fruit species: the area in production, the quantity of collected product, the main waste (prunings)/product ratio, the average moisture at collection, the fraction of waste currently recycled, and the secondary waste (wood) available at the end of the production cycle. Of this fraction was monitored the average life cycle of the tree plant between planting and cutting, the average moisture of the wood at pruning-time, and the fraction of the secondary waste currently recycled. In the end, Column H shows dry residue estimates available in 2008 by the Italian Biomass Association ITABIA [22]. To obtain the dataset the authors collected data from the main studies carried out in the years prior to 2008 both on a local, regional and national scale considering all lignocellulosic matrix wastes from the cultivation of herbaceous and arboreal plants in the national territory, including residues used for animal bedding and fertilization. Since residue yields vary depending on factors such as tree species, cultivation techniques, production technologies,

geographic location, production land, seasons, harvesting methods, and pruning methods, obtaining reliable and accurate data requires, extensive field surveys, and rigorous survey classification. As a result, estimating lignocellulosic biomass residues is a complex and costly activity [23]. According to all the databases the total amount of dry residue that can be collected in italian orchards can be estimated as  $3.46\pm0.37$  Mt/y.

#### 2. Materials and Methods

Samples of lignocellulosic residues were collected at the Unipg's experimental orchards located in Fosso di Provancio, Perugia. The pruning process and the residues collection was performed between November 2022 and March 2023. The sampled fruit tree species were Abate pear variety, Florina variety of apple, President variety of plum, Redhaven variety of peach, T. Giffoni variety hazelnut, and lotus. Olive tree samples were obtained from local production site near Perugia, consisting of the Frantoio, Moraiolo, and Leccino varieties, which are commonly found in central Italy. Samples were taken from trees of varying ages, from 8 to 25 years old, and located in random positions in the different orchards. Branches of different types were sample e.g., various thicknesses, fruit-bearing branches, vertical shoots. After pruning leaves were totally removed from each of the sampled branches. This sampling procedure was performed to obtain a tree representative biomass average composition. The collected samples were air-dried for three weeks and then reduced in size using an industrial chipper to obtain pieces of around 25-40 mm. The woodchips were then further processed using a rotary blade mill (RETSCH, Haan, Germany) and an ultra-mill (RETSCH, Haan, Germany) to obtain particles with a diameter of 0.5-1 mm, which were required for the characterization processes.. The higher heating value (HHV) was determined using a LECO AC-350 calorimeter (St. Joseph, Michigan, USA). To conduct the analysis, each milled sample was transformed into a pellet using a Parr 2811 Pellet Press manual pelletizer (Parr Instrument Company, Moline, Illinois, USA). The pellets were formed with only the pressure of the piston and residual humidity, without adding any additives. Mass and moisture were determined for each pellet analyzed. A TGA-701 LECO Thermogravimetric Analyzer (St. Joseph, Michigan, USA) was employed to determine moisture, dry matter, volatile matter, and ash content as well as to determine the combustion profile of each sample with a 10 °C/min ramp from 30 to 950 °C in oxidant (100%  $\,$ oxygen, 1 L/min) and inert atmosphere (100% nitrogen, 1 L/min). Prior to each combustion profile analysis, a 30 min flux with the oxidant or inert gas was respectively performed before the analysis to ensure the desired atmosphere at the start. The content of carbon, hydrogen, and nitrogen was determined by a Truspec CHN LECO Elementary Analyzer (St. Joseph, Michigan, USA) in compliance with the ASTM D-5373 standard procedure. The hydrogen content was used to determine the lower heating value (LHV) on dry basis using equation 1 in accordance with standard procedure ISO 18125:2017:

LHV(
$$MJ/kg$$
)=[(HHV ( $MJ/kg$ )\*1000)-(206\*%H)]/1000 (1)

Where %H is the content of hydrogen.

To assess the potential of these biomass as sources of glucose to produce liquid biofuel a lignocellulosic characterization was carried out using an internal procedure derived from NREL 42618 [26] to determine the content of cellulose, hemicellulose, and lignin. The characterization process involved a two-step acid hydrolysis of the sample. In the first step, a solution of 3 mL of 72% sulfuric acid was added to a 300±10 mg sample of biomass with a moisture content lower than 10% and incubated at 32 °C for 60 minutes. In the second step the solution was diluted to 4% (w/w) through addition of water and incubated at 121 °C in an autoclave for 60 min. At the end of the process, the lignin was gravimetrically determined, while the liquid fraction was analyzed with a Dionex Ultimate 3000 HPLC (Thermo Fisher Scientific, Sunnyvale, CA, USA) equipped with an ERC RefractoMax refractive index detector (Thermo Fisher Scientific, Waltham, MA, USA) and a Bio-Rad Aminex HPX-87H column (Bio-Rad Laboratories, CA, USA) to determine the sugar monomers deriving from the cellulosic and hemicellulosic fraction of the biomass. To determine the content of heavy metals in ashes a Optima 8000 ICP-OES (Perkin Elmer, Waltham, Massachusetts, United States)

9

with 20 L/min argon, 8 L/min nitrogen, and 10 L/min high purity oil free air was used. For each experimental procedure and each sample, analysis were perform in triple to ensure replicability and obtain a standard deviation in measurements.


#### 3. Results

Table 2 displays all the data obtained for the 8 fruit tree samples about the physical and chemical characterization. The results from proximate analysis (volatile matter, ash, fixed carbon, and moisture), ultimate analysis (carbon, nitrogen, and hydrogen content), and calorific values (higher heating value, and lower heating value) are reported along with their standard deviation. All the data are reported on dry basis.

**Table 2.** Average results of the calorific values, proximate and ultimate analysis.

		Proximate analysis (wt.% d.b.) Ultimate Analysis (wt.% d.b.)							
Species	Moisture (%)	Volatile Matter (%)	Fixed Carbon (%)	Ash (%)	Nitrogen content (%)	Carbon content (%)	Hydrogen content (%)	HHV (MJ/kg)	LHV (MJ/kg)
Pear	11.63±0.01	76.26±0.04	20.24±0.02	3.50±0.02	0.4±0.2	42.9±0.8	6.10±0.14	18.03±0.05	16.8±0.7
Persimmon	9.87±0.03	74.8±0.3	20.8±0.2	$4.4 \pm 0.1$	$0.39\pm0.03$	42.9±0.6	6.10±0.05	18.63±0.09	$17.4 \pm 0.7$
Plum	15.40±0.01	77.3±0.2	19.9±0.2	2.82±0.03	$0.03 \pm 0.01$	41.1±0.7	6.3±0.2	17.32±0.09	16.1±0.5
Peach	9.30±0.03	76.9±0.1	18.33±0.08	4.71±0.07	$0.23 \pm 0.04$	42.6±0.6	6.05±0.09	17.55±0.01	16.3±0.6
Hazelnut	10.39±0.05	77.4±0.1	20.03±0.07	2.59±0.07	$0.16 \pm 0.03$	43.8±0.8	6.1±0.1	17.56±0.01	16.3±0.6
Olive	10.75±0.07	77.9±0.4	19.1±0.4	2.99±0.05	$0.19 \pm 0.02$	42.5±1.1	6.3±0.4	17.1±0.4	15.9±0.2
Grape	17.83±0.07	76.9±0.1	19.5±0.1	3.65±0.01	$0.05 \pm 0.01$	40.67±0.05	5.34±0.07	18.23±0.02	17.1±0.5
Apple	10.23±0.09	77.50±0.08	18.97±0.07	3.53±0.02	0.22±0.01	43.9±0.3	5.85±0.02	17.5±0.2	16.3±0.4

The measured values for the calorific values can be compared and validated by consulting data available in the literature. The study by Stolarsky [27], which reports values for fruit tree lignocellulosic biomass samples collected in the Poznan region of Poland the following values: peach tree HHV 20.10 MJ/kg, LHV 18.80 MJ/kg, pear tree UHV 19.20 MJ/kg, LHV 17.80 MJ/kg, apple tree HHV 19.20 MJ/kg, LHV 17.90 MJ/kg, hazelnut tree HHV 19.60 MJ/kg, LHV 18.20 MJ/kg, plum tree HHV 19.60 MJ/kg, LHV 18.20 MJ/kg. Zivkovic [23] reports the following HHV values: plum tree 18.65 MJ/kg, apple tree 17.8 MJ/kg, pear tree 18.0 MJ/kg, peach tree 19.4 MJ/kg, grape tree 18.3 MJ/kg collected in Serbia. Monarca [28] reports a HHV of 17.67 MJ/kg and a LHV of 16.45 MJ/kg for hazelnut samples collected from the Cimini and Sabatini mountains in Viterbo (Italy). Bilandzija [29] surveyed hazelnut production in Croatia and obtained a LHV of 17.47 MJ/kg on a dry basis. Di Giacinto [30] sampled hazelnut prunings with values of 19.70 MJ/kg and 18.39 MJ/kg are reported for HHV and LHV, respectively. Zambon [31] reported a HHV of 19.02 MJ/kg and a LHV of 16.71 MJ/kg for hazelnut prunings. Finally, in the case of olive tree pruning, Zambon [25] reported a HHV of 19.47 MJ/kg and a LHV of 16.17 MJ/kg, while Di Giacinto [30] reported a HHV of 19.93 MJ/kg and a LHV of 17.85 MJ/kg. Borja Velázquez [31] indicated a HHV of 15.23 MJ/kg. To compare the data obtained in this study with other from literature, Figure 5 summarize the situation for hazelnut with LHV and HHV from different sources.

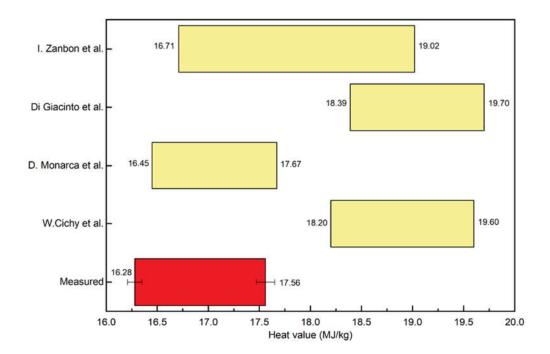


**Figure 5.** Comparison between this study measurements of the HHV and LHV of hazelnut prunings with measurements of other studies. At the near ends of each floating bar the value for LHV (on the left) and HHV (on the right) is shown.

The ultimate analysis obtained through CHN analysis, can be compared and validated by consulting data available in the literature. Table 2 shows the average content values of nitrogen (N%), hydrogen (H%) and carbon (C%) measured for each biomass along with their respective standard deviations. Several comparisons with bibliographical data are possible. Stolarsky [27] reports the following percentage values: peach tree C% 51.1, H% 6.3, N% 0.9; pear tree C% 49.0, H% 6.3, N% 0.8; apple tree C% 48.6, H% 6.2, N% 0.5; hazelnut tree C% 49.8, H% 6.4, N% 0.8; plum tree C% 49.5, H% 6.3 N% 0.6.

About the hazelnut tree: Monarca [28] reports C% 47.78, H% 5.61, and N% 0.35, respectively; Bilandzija [29] report C% 46.46, H% 6.57, and N% 0.78; Di Giacinto [30] which reports C% 48.7, H% 6.17, and N% 1.09. Finally, another data by; Borja Velázquez [32] reports the following values: C% 37.97, H% 6.91, and N% 0.55 for olive tree.

Finally, proximate analysis data obtained through TGA can be compared to data found in literature to assess the likelihood of our orchards residues to others. Particularly, Stolarsky [27] report the following ash content values: peach tree 2.0%, pear tree 3.8%, apple tree 1.9%, hazelnut 2.5%, plum tree 1.5%. Di Giacinto [30] report an ash value of 6.57% for hazelnut trees and 5.01% for olive trees. Furthermore, with LECO TGA-701 a combustion behavior test has been performed in oxidant (oxy-DTG) and inert (inert-DTG) atmosphere respectively. Data are displayed in Figure 6 as differential thermogravimetric (DTG) curves (% wt./min) in both atmospheres showing the mass changes varying temperature.

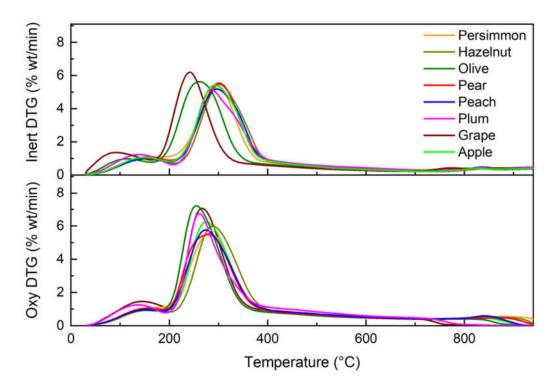

**Figure 6.** DTG combustion behavior of the lignocellulosic orchard residues samples in inert and oxidant atmospheres respectively.

From Figure 6 can be seen at temperatures between 50-150 °C a small weight change with a peak near 100 °C. This behavior of the samples is attributed to moisture evaporation. The DTG curves show also a similar result for each sample with another peak of weight loss between 200 – 400m°C, but in Oxy-DTG the presence of oxygen produces a moderate anticipation of the weight loss in terms of temperature resulting in almost any case in a DTG peak temperature lower in Oxy-DTG. These peaks are due to volatiles release and decomposition of the different woods. In Table 3 comparing the data can be seen how the presence of oxygen enhances the decomposition at a certain temperature where the oxygen will cause ignition of the volatiles, in fact DTG max are higher in Oxy-DTG, at the same time when the temperature is high enough oxygen promotes the heterogeneous oxidation of the remaining char obtaining a lower solid residue, mainly constituted only by ash.

**Table 3.** DTG analysis in inert and oxidant atmosphere.

	Inert atmosphe	re		Oxydant atmosphere					
Commiss	DTG peak	DTG max	Solid re	esidue DTG peak	DTG max	x Solid residue			
Samples	temperature (°0	C) (%/min)	char + a	ish (%)temperature (	°C) (%/min)	ash (%)			
Pear	290.1	5.82	6.06	297.2	5.54	2.42			
Persimmo	n 283.0	5.54	8.44	290.7	5.82	2.77			
Plum	276.5	5.83	1.78	254.2	8.11	1.88			
Peach	286.5	5.57	5.75	264.9	6.22	2.96			
Hazelnut	297.2	5.99	6.18	274.4	6.28	2.11			
Olive	264.5	5.85	3.17	242.1	7.86	1.93			
Grape	243.0	7.00	2.36	278.7	7.26	2.23			
Apple	279.6	5.76	4.74	258.3	6.40	2.30			

To complete the ash analysis a measurement of heavy metals has been assessed, showing low values for each of the considered elements particularly for cadmium. Ashes analysis is reported in Table 4.

Table 4. ashes heavy metal content. Cadimum instrumental detection limit was set to 0.01 ppm. .

		Species content (mg/kg)							
Elements	Apple	Grape	Olive	Hazelnu	t Peach	Plum	Persimmon	Pear	
Cadmium (Cd	)<0.01	< 0.01	< 0.01	<0.01	< 0.01	< 0.01	< 0.01	<0.01	
Chromium (Cr)	0.5±0.1	1.7±0.3	0.6±0.2	1.1±0.1	0.7±0.1	1.8±0.2	0.4±0.1	0.9±0.1	
Copper (Cu)	$5.0 \pm 0.5$	197.2±0.6	21.2±0.1	79.9±0.8	$5.7 \pm 0.2$	20.0±0.4	$3.0\pm0.2$	$4.0\pm0.9$	
Nickel (Ni)	$1.1 \pm 0.2$	$36.4 \pm 0.6$	$2.6 \pm 0.1$	21.2±0.2	$0.9 \pm 0.1$	$1.0\pm0.3$	$0.9\pm0.2$	$3.9 \pm 0.4$	
Lead (Pb)	$1.4 \pm 0.2$	$0.7 \pm 0.1$	$1.8 \pm 0.2$	$1.2\pm0.3$	$0.8 \pm 0.3$	$1.2 \pm 0.4$	$0.6\pm0.1$	$0.9\pm0.2$	
Zinc (Zn)	46.0±0.4	$0.7\pm0.2$	13.1±0.3	25.4±0.6	32.4±0.4	51.0±0.7	18.1±0.6	$30.3 \pm 0.5$	

Finally, a lignocellulosic characterization process has been performed to determine the content of cellulose, hemicellulose, and lignin. Data are shown in Table 5.

**Table 5.** Lignocellulosic characterization of the 8 residual lignocellulosic biomass collected from Unipg experimental orchards.

Species	Hemicellulose (%)	Cellulose (%)	Lignin (%)
Pear	$16.45 \pm 0.12$	$34.60 \pm 0.22$	19.90 ± 1.21
Persimmon	$14.98 \pm 0.14$	$35.55 \pm 0.52$	$28.24 \pm 0.79$
Plum	$16.25 \pm 0.15$	$36.73 \pm 0.48$	$24.26 \pm 1.25$
Peach	$12.70 \pm 0.07$	$38.38 \pm 0.63$	$23.31 \pm 2.21$
Hazelnut	$16.78 \pm 0.09$	$39.88 \pm 0.17$	$22.98 \pm 1.12$
Olive	$15.52 \pm 0.16$	$40.00 \pm 0.59$	$23.12 \pm 0.98$
Grape	$12.93 \pm 0.24$	$40.33 \pm 0.25$	$22.93 \pm 1.14$
Apple	$13.70 \pm 0.14$	$40.90 \pm 0.47$	$25.31 \pm 1.06$

Comparing the obtained data with literature, Senol [33] report the following percentage values for hazelnut trees: hemicellulose 33.20%, cellulose 47.78%, and lignin 18.07%. Mamanì [34] reports the following percentage values for olive tree residues: hemicellulose 17.26%, cellulose 31.88%, lignin 9.26%, and ash 3.29%. It is important to note that the lignocellulosic residues used in different studies may come from different geographical areas and that the characterization procedures may differ from the NREL method used in this study. An analysis of the lignocellulosic characterization results reveals that a percentage of lignin greater than 20% was found for all biomasses (22.93 - 28.24%), except in the case of olive trees (19.90%). According to Yuan [35], a lignin percentage higher than 20% strongly inhibits the yields of the enzymatic hydrolysis process required to transform the obtained cellulose. Therefore, pretreatment to reduce the lignin content of these biomasses should be considered before using them as feedstock in a biorefinery. Steam explosion or organosoly processes are options to obtain a high-in-cellulose and low-in-lignin raw material that can undergo enzymatic hydrolysis followed by a fermentation process [36].

#### 3.1. Estimation of the Potential Energy Production from Orchard Lignocellulosic Residues

To have an estimate of the potential annual energy production that orchard lignocellulosic biomass could produce, data from average residues production must be taken into consideration for each species, and then processed using the chemical and physical information obtained as result during this experimental campaign. The estimate for the Equivalent Electrical Energy was derived by assuming an average national thermoelectric system efficiency of around 46% [24]. To estimate the maximum potential bioethanol amount after a delignification pretreatment an enzymatic hydrolysis efficiency of 70% and a conversion factor from glucose to ethanol of 51% has been considered [26]. Data about potential energy and bioethanol production are shown in Table 6.

**Table 6.** Energy production potentially available from lignocellulosic biomass sources on yearly basis from some fruit trees species in Italy.

Species	Dry residue mass (Mt/y)		Cellulose Content (%)	Equivalent Electrical Energy (GWh)	Bioethanol (Mt/y)
Grape	1.29±0.23	$17.13 \pm 0.54$	$40.33 \pm 0.25$	2823.60±503.4	0.20±0.03
Olive	1.16±0.19	$15.88 \pm 0.20$	$40.00 \pm 0.59$	2353.77±385.5	0.18±0.03
Apple	$0.16 \pm 0.08$	$16.26 \pm 0.37$	$40.90 \pm 0.47$	332.43±166.2	0.030±0.015
Pear	$0.08 \pm 0.05$	$16.77 \pm 0.69$	$34.60 \pm 0.22$	171.43±107.1	0.010±0.006
Peach	$0.23 \pm 0.13$	$17.38 \pm 0.72$	$38.38 \pm 0.63$	510.78±288.7	0.030±0.017
Hazelnut	0.12±0.05	$16.28 \pm 0.63$	$39.88 \pm 0.17$	249.63±104.0	0.020±0.008
Total	3.04±0.34			6441.62±731.7	0.48±0.05

In 2020, Italy's gross electricity production was 280.5 TWh, of which 24.7% was generated from renewable sources including wind, geothermal, photovoltaic, hydropower, and bioenergy [25]. The data analysis reveals that the equivalent electrical energy that could potentially be produced only from the lignocellulosic orchard cultivation residues derived from 6 species amounts to approximately 2.30% of the country's gross national electricity production and has the potential to contribute up to 9.30% of the national electrical energy production from renewable sources. Italian demand for gasoline in 2022 was 7.88 Mt [37] and European gasoline demand in 2019 was 98 Mt [38] the contribution from Italian lignocellulosic residues of these 6 species could respectively be 6.21% and 0.49% of the total demand, with a range of price at selling between 4.7 – 0.17 \$/L [38]. Has been estimated that worldwide only from 123 crop species taken in consideration 474.4 Mt/y of residue can be collected and consequently used to answer to energetic demand [39] potentially giving hundreds of the amount of energy produced in the Italian orchards case scenario.

#### 4. Conclusions

This study investigated the potential of utilizing orchard lignocellulosic residues for energy production in the Italian context, focusing on electricity generation and bioethanol production. These possibilities offer sustainable alternatives to fossil fuels, reducing greenhouse gas emissions. Worldwide, similar strategies can be applied, leveraging the abundant agricultural residues also in fruit industries. Technological advancements, policy support, circular economy principles, and global collaboration are essential for widespread adoption and the transition to renewable energy sources. This study emphasizes the significance of orchard residues in achieving a greener and more sustainable energy future through the production of electricity and bioethanol.

**Author Contributions:** Conceptualization F.C.; methodology, analysis, investigation, original draft preparation, data curation G.F. and F.C.; analysis L.L.; review, editing, supervision and visualization, G.F.; funding acquisition, G.C. and M.A.; project administration and supervision A.N. All authors have read and agreed to the published version of the manuscript.

**Funding:** This research received no external funding.

**Data Availability Statement:** The datasets generated during and/or analysed during the current study are available from the corresponding author on reasonable request.

**Conflicts of Interest:** The authors declare no conflicts of interest. The authors have no relevant financial or non-financial interests to disclose.

### References

European Commission (EC) CDA (31-12-2021): "amending Delegated Regulation (EU) 2021/2139 as regards
economic activities in certain energy sectors and Delegated Regulation (EU) 2021/2178 as regards specific
public disclosures for those economic activities (Text with EEA relevance)"

- 2. Kaltschmitt, Martin, Wolfgang Streicher, and Andreas Wiese, eds. Renewable energy: technology, economics and environment. Springer Science & Business Media, 2007.
- 3. Field, Christopher B., J. Elliott Campbell, and David B. Lobell. "Biomass energy: the scale of the potential resource." Trends in ecology & evolution 23, no. 2 (2008): 65-72. https://doi.org/10.1016/j.tree.2007.12.001
- 4. Kluts, Ingeborg N., Marnix LJ Brinkman, Sierk A. de Jong, and H. Martin Junginger. "Biomass resources: agriculture." Biorefineries (2017): 13-26.
- 5. C. Fideghelli, La frutticultura italiana alla vigilia del terzo decennio degli anni 2000, I Tempi della Terra, n. 9, pp. 22-29, 2021.
- 6. Pari, Luigi, Vincenzo Alfano, Daniel Garcia-Galindo, Alessandro Suardi, and Enrico Santangelo. "Pruning biomass potential in Italy related to crop characteristics, agricultural practices and agro-climatic conditions." Energies 11, no. 6 (2018): 1365. https://doi.org/10.3390/en11061365
- 7. https://agriculture.ec.europa.eu/farming/crop-productions-and-plant-based-products/fruit-and-vegetables\_en [last access: 24.04.2024]
- 8. LEGGE 13 luglio 1966, n. 615 Provvedimenti contro l'inquinamento atmosferico. G.U. n.201 del 13-08-1966.
- 9. F. Militano, Incendi, emergenza e tutela dell'ambiente, Ali Ribelli Edizioni, 2022.
- 10. S. Amicabile, Manuale di agricoltura. HOEPLI 2016.
- 11. G. Vannacci, Patologia Vegetale, Edises 2021.
- 12. Biomasse ed energia Caratteristiche tecniche delle biomasse e dei biocombustibili. ENAMA, 2011.
- 13. Ferronato, Navarro, Vincenzo Torretta, Marco Ragazzi, and Elena Cristina Rada. "Waste mismanagement in developing countries: A case study of environmental contamination." UPB Sci. Bull 79, no. 2 (2017): 185-196.
- 14. Verità, Simona, and Luigi Bruzzi. "Biocombustibili ed energia pulita." Biocombustibili ed energia pulita (2013): 0-0.
- 15. Yue, Dajun, Fengqi You, and Seth W. Snyder. "Biomass-to-bioenergy and biofuel supply chain optimization: Overview, key issues and challenges." Computers & Chemical Engineering 66 (2014): 36-56. https://doi.org/10.1016/j.compchemeng.2013.11.016
- 16. Grant, Federica, and Laura Rossi. "The Italian observatory on food surplus, recovery, and waste: The development process and future achievements." Frontiers in Nutrition 8 (2022): 787982. https://doi.org/10.3389/fnut.2021.787982
- 17. Annuario Statistico Italiano, ISTAT, 2021.
- 18. ANPA, I. "rifiuti del comparto agro-alimentare." Studio di settore, Rapporti 11 (2001): 2001.
- 19. Barbanera, Marco, Pietro Bartocci, and Gianluca Cavalaglio. "Documento propedeutico alla redazione del Piano Nazionale Biocarburanti e Biomasse-II Edizione-Aggiornamento 2011." (2011).
- 20. Di Blasi, Colomba, V. Tanzi, and M. Lanzetta. "A study on the production of agricultural residues in Italy." Biomass and Bioenergy 12, no. 5 (1997): 321-331. https://doi.org/10.1016/S0961-9534(96)00073-6
- Gonzalez-Salazar, Miguel Angel, Mirko Morini, Michele Pinelli, Pier Ruggero Spina, Mauro Venturini, Matthias Finkenrath, and Witold-Roger Poganietz. "Methodology for estimating biomass energy potential and its application to Colombia." Applied Energy 136 (2014): 781-796. https://doi.org/10.1016/j.apenergy.2014.07.004,
- 22. Flamini, Riccardo. "L'utilizzo dei sottoprodotti della filiera viti-vinicola per la produzione di bioenergie: studio della cellulosa, emicellulosa e Monosaccaridi estraibili dai sarmenti di vite e dalle vinacce per la produzione di bioetanolo di seconda generazione." la valorizzazione dei sottoprodotti nell'ambito agrozotecnico, industriale ed energetico (2013): 85.
- 23. Zivkovic, Milovan, Mirko Urosevic, Snezana Oljaca, Mico Oljaca, Kosta Gligorevic, Ivan Zlatanovic, and Ranko Koprivica. "Aspects of using potential energy products of biomass after pruning fruit and grape plantations in the Republic of Serbia." Poljoprivreda i Sumarstvo 59, no. 1 (2013): 167.
- 24. https://www.arera.it/it/docs/08/003-08een.htm [last access: 24.04.2024]
- 25. https://www.terna.it/it/sistema-elettrico/statistiche/pubblicazioni-statistiche [last access: 24.04.2024]
- 26. Giannoni, Tommaso, Mattia Gelosia, Alessandro Bertini, Giacomo Fabbrizi, Andrea Nicolini, Valentina Coccia, Paola Iodice, and Gianluca Cavalaglio. "Fractionation of Cynara cardunculus L. by Acidified Organosolv Treatment for the Extraction of Highly Digestible Cellulose and Technical Lignin." Sustainability 13, no. 16 (2021): 8714. https://doi.org/10.3390/su13168714

- 27. Stolarski, Mariusz Jerzy, Paweł Dudziec, Michał Krzyżaniak, and Ewelina Olba-Zięty. "Solid biomass energy potential as a development opportunity for rural communities." Energies 14, no. 12 (2021): 3398. https://doi.org/10.3390/en14123398.
- 28. Monarca, D., M. Cecchini, M. Guerrieri, and A. Colantoni. "Conventional and alternative use of biomasses derived by hazelnut cultivation and processing." In VII International Congress on Hazelnut 845, pp. 627-634. 2008. 10.17660/ActaHortic.2009.845.98
- 29. Bilandzija, Nikola. "Energy potential of fruit tree pruned biomass in Croatia." Spanish Journal of Agricultural Research 10, no. 2 (2012): 292-298. ISSN 1695-971X, ISSN-e 2171-9292
- 30. Di Giacinto, Simone. "Modello di campionamento per le biomasse residuali: il caso del nocciolo nella provincia di Viterbo. Stima dei quantitativi di potature, caratterizzazione chimica, fisica ed energetica della biomassa e prospettive di utilizzo." (2014).
- 31. Zambon, Ilaria, Fabrizio Colosimo, Danilo Monarca, Massimo Cecchini, Francesco Gallucci, Andrea Rosario Proto, Richard Lord, and Andrea Colantoni. "An innovative agro-forestry supply chain for residual biomass: Physicochemical characterisation of biochar from olive and hazelnut pellets." Energies 9, no. 7 (2016): 526. https://doi.org/10.3390/en9070526
- 32. Velázquez-Martí, Borja, Isabel López-Cortés, Domingo Salazar-Hernández, and Ángel Jesús Callejón-Ferre. "Modeling the calorific value of biomass from fruit trees using elemental analysis data." Biomass Volume Estimation and Valorization for Energy (2017): 271-292. http://dx.doi.org/10.5772/65276
- 33. Şenol, Halil. "Biogas potential of hazelnut shells and hazelnut wastes in Giresun City." Biotechnology reports 24 (2019): e00361. https://doi.org/10.1016/j.btre.2019.e00361
- 34. Mamaní, Arminda, Yolanda Maturano, Victoria Mestre, Laura Montoro, Liliana Gassa, Cristina Deiana, and Fabiana Sardella. "Valorization of olive tree pruning. Application for energy storage and biofuel production." Industrial Crops and Products 173 (2021): 114082. https://doi.org/10.1016/j.indcrop.2021.114082
- 35. Yuan, Yufeng, Bo Jiang, Hui Chen, Wenjuan Wu, Shufang Wu, Yongcan Jin, and Huining Xiao. "Recent advances in understanding the effects of lignin structural characteristics on enzymatic hydrolysis." Biotechnology for Biofuels 14 (2021): 1-20. https://doi.org/10.1186/s13068-021-02054-1
- 36. Fabbrizi, Giacomo, Tommaso Giannoni, Leonardo Lorenzi, Andrea Nicolini, Paola Iodice, Valentina Coccia, Gianluca Cavalaglio, and Mattia Gelosia. "High Solid and Low Cellulase Enzymatic Hydrolysis of Cardoon Stems Pretreated by Acidified  $\gamma$ -Valerolactone/Water Solution." Energies 15, no. 7 (2022): 2600. https://doi.org/10.3390/en15072600
- 37. https://dgsaie.mise.gov.it/consumi-petroliferi [last access: 24/04/2024]
- 38. Procentese, Alessandra, Francesca Raganati, Giuseppe Olivieri, Maria Elena Russo, Marco De La Feld, and Antonio Marzocchella. "Agro food wastes and innovative pretreatments to meet biofuel demand in Europe." Chemical Engineering & Technology 42, no. 5 (2019): 954-961.
- 39. Holmatov, Bunyod, Joep F. Schyns, M. S. Krol, P. W. Gerbens-Leenes, and Arjen Y. Hoekstra. "Can crop residues provide fuel for future transport? Limited global residue bioethanol potentials and large associated land, water and carbon footprints." Renewable and Sustainable Energy Reviews 149 (2021): 111417.

**Disclaimer/Publisher's Note:** The statements, opinions and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of MDPI and/or the editor(s). MDPI and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions or products referred to in the content.