

Article

Not peer-reviewed version

Mechanistic Modeling of TEG Dehydrator Emissions in Oil and Gas Industry

Jacob Mdigo , [Arthur Santos](#) ^{*} , Gerald Duggan , Prajay Vora , [Kira Shonkwiler](#) , [Daniel Zimmerle](#)

Posted Date: 29 January 2026

doi: 10.20944/preprints202601.2286.v1

Keywords:

methane emissions; TEG dehydrator; MAES; inventory; glycol pump emissions; mechanistic modeling; oil and gas



Preprints.org is a free multidisciplinary platform providing preprint service that is dedicated to making early versions of research outputs permanently available and citable. Preprints posted at Preprints.org appear in Web of Science, Crossref, Google Scholar, Scilit, Europe PMC.

Copyright: This open access article is published under a [Creative Commons CC BY 4.0 license](#), which permit the free download, distribution, and reuse, provided that the author and preprint are cited in any reuse.

Disclaimer/Publisher's Note: The statements, opinions, and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of MDPI and/or the editor(s). MDPI and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions, or products referred to in the content.

Article

Mechanistic Modeling of TEG Dehydrator Emissions in Oil and Gas Industry

Jacob Mdigo , Arthur Santos *, Gerald Duggan, Prajay Vora, Kira Shonkwiler and Daniel Zimmerle

The Energy Institute, Colorado State University, CO, 80524, Fort Collins, USA

* Correspondence: arthur.santos@colostate.edu

Abstract

This work presents a mechanistic modeling approach for simulating methane emissions from triethylene glycol (TEG) dehydrators used in oil & gas (O&G) operations. The model was developed as a modular component of the Mechanistic Air Emissions Simulator (MAES) tool, incorporating species-specific absorption and emission dynamics through two-level, second-order polynomial regression (PR) models trained on ProMax simulation data: (1) species-level regression models that track the transfer rates of individual gas species within the dehydrator unit streams, and (2) outlet flow stream regression models that predict the fraction of inlet gas distributed among the outlet streams of the dehydrator unit. These behaviors were characterized over a range of glycol circulation ratios, wet gas pressures, and temperatures. The model was validated using root mean square error (RMSE) analysis. The species-level PR achieved low root mean square error (RMSE) values (< 0.03) for light hydrocarbon species across all dehydrator components, ranging from 0.0009 for methane to 0.029 for normal pentane. Similarly, the outlet-level PR yielded RMSE values below 0.002 for the dry gas fraction, 0.001 for the flash tank fraction, and 0.002 for the still vent fraction, demonstrating strong agreement between predicted and reference ProMax values. When deployed at field facilities, the model significantly improved MAES-simulated dehydrator emissions, revealing that gas-assisted glycol pump emissions are the dominant contributors to both dehydrator-level and site-level methane emissions under uncontrolled conditions. Further analysis of the 154 dehydrator units reported by operators under the AMI 2024 project showed that 54 units (31%) used gas-driven glycol pumps, of which 6 units (11%) operated with uncontrolled flash tanks, and 22 units (40.7%) were identified as potentially oversized. Of the six dehydrator units with uncontrolled gas-assisted pumps, pump emissions accounted for 90.25% of total dehydrator emissions and 63.10% of total site-level emissions. These findings highlight substantial opportunities for emissions mitigation through equipment upgrades.

Keywords: methane emissions; TEG dehydrator; MAES; inventory; glycol pump emissions; mechanistic modeling; oil and gas

1. Introduction

Produced natural gas (NG) often contains water vapor, which, aside from reducing the gas's heating value, can cause significant operational challenges, such as corrosion and hydrate formation [1–6]. To prevent these problems and comply with pipeline quality standards – in the United States (U.S.) limited to 4–7 pounds of water per million standard cubic feet of gas [7–9] – the water vapor is removed through natural gas dehydration [4,10] using dehydrator units installed at NG processing facilities. This process ensures equipment and pipeline integrity, maintains flow assurance, and reduces unplanned downtime, maintenance, and operating costs.

Dehydrators achieve water removal through absorption, commonly using TEG as the desiccant [11]. Alternative desiccants, including ethylene glycol (EG), diethylene glycol (DEG), molecular sieves, and silica gel [12], have been applied in specific contexts but are less prevalent due to the

superior efficiency and regeneration characteristics of TEG [3,11]. During operation, a portion of the NG is co-absorbed with the water vapor into the glycol and subsequently released as emissions when the pressure is reduced [13] or during glycol regeneration. Additional emissions arise from the use of gas-assisted glycol pumps, which circulate glycol through the dehydrator unit, and from stripping gas [14], when it is employed to enhance glycol regeneration efficiency and purity. Collectively, glycol dehydrators are recognized sources of methane emissions, the dominant constituent of NG, primarily through still column vents and flash tank emissions [15–19].

Methane (CH_4) is a potent greenhouse gas with a global warming potential 82.5 times greater than carbon dioxide over a 20-year period, contributing significantly to climate change [20–22]. In the U.S., CH_4 emissions are regulated by the Environmental Protection Agency (EPA) [23] and associated programs such as National Emission Standards for Hazardous Air Pollutants (NESHAP) [24], owing to their significant influence on climate and air quality. Consequently, the continuous monitoring and control of these emissions are essential to mitigate their environmental and health impacts.

Additionally, with advancements in CH_4 detection technologies, such as satellites [25,26], and increasing demands for transparency in emissions reporting, reducing these emissions has become critical not only to help companies meet internal environmental goals but also to improve operational efficiency, enhance market access, and support a positive public reputation [27–31].

Emissions from dehydrators are substantial [14], with EPA inventories attributing 12–17 billion cubic feet (Bcf) of CH_4 annually to dehydrators and glycol pumps in U.S. production and gathering sector [32,33]. Despite their scale, and dehydrators industrial relevance, there is limited publicly available literature detailing how glycol absorbs individual NG species under varying dehydration conditions. Most of the existing data remains locked within proprietary commercial software, posing a significant barrier to transparency and accessibility. This data gap limits not only broader understanding and innovation in emissions modeling and mitigation but also the ability to validate reported emissions. Furthermore, gaining a deeper process-level understanding enables identification of operational improvements and mitigation opportunities.

Popular tools such as Glycalc [34] and ProMax BRE [35] are commonly used to estimate emissions from dehydrators and are permitted by the EPA for regulatory reporting under Method 1 in Subpart W [35,36] for larger dehydrators of throughput ≥ 0.4 MMscfd. However, both tools come with key limitations. Glycalc, although open source, is no longer actively maintained, which restricts its long-term reliability. ProMax BRE, on the other hand, is a closed-source commercial software that requires operators to purchase a license, limiting accessibility and transparency. A primary limitation in applying both tools for emissions estimation is the treatment of dehydrators as isolated units. This simplification overlooks process dynamics, reducing the ability to represent variable operating conditions and failure events, which can lead to misrepresentation of emissions driven by fluctuations in gas throughput or failures occurring upstream or within the dehydrator unit. Nevertheless, these tools remain useful for understanding the absorption behavior of various NG species in glycol under different operating conditions, such as temperature and pressure. This understanding forms the foundation of the present work on implementing a dehydrator model within MAES.

MAES simulates CH_4 and other air emissions from O&G facilities with high resolution, up to 1 second, effectively capturing spatiotemporal variability in emission behavior [37–39]. The tool integrates two core modeling approaches to couple O&G equipment within emissions simulations: (1) traditional inventory models that rely on emission factors and activity data, and (2) mechanistic models that use state machines to dynamically track equipment operating states and fluid flows. The mechanistic approach offers a more representative and process-informed estimation of emissions, improving accuracy over conventional annualized factor-based methods. It further employs Monte Carlo (MC) methods to account for uncertainty and statistical variability in emissions and equipment behavior. For a detailed classification of specific models employing either traditional or mechanistic approaches, see Santos et al.(2025), Section S-6, Table S-5 [38].

Prior to this work, MAES relied on a simplified heater model [39,40] to estimate emissions from dehydrators. While functional for baseline estimates, this approach overlooked key emission sources, most notably the gas-assisted glycol pump, and lacked the mechanistic fidelity needed to represent the dynamic operation of dehydrators accurately. As a result, significant dehydrator emissions were either underestimated or omitted entirely.

This study presents a mechanistic, state-machine-based dehydrator model parameterized by species-specific absorption curves derived from ProMax simulations. The remainder of this paper is structured as follows: Methods (2) outlines the methodology used to generate absorption and emission rate curves and fit polynomial regression models. Results and discussion (3) presents and discusses the simulation results, emphasizing key trends, model performance, practical applications, and model limitations. Finally, conclusion (4) summarizes the main findings and discusses their implications for emissions estimation. Throughout this study, the symbols CH₄ and C1 are used interchangeably to denote methane.

2. Methods

2.1. Overview

This section describes the development of a mechanistic model for simulating emissions from dehydrators at O&G sites. The model incorporates key process parameters and emission sources simulated in ProMax to enable equipment-level resolution, prior to integration into MAES. This section is organized into the following subsections: dehydrator unit configuration and operational conditions (2.2), ProMax simulation setup (2.3), effects of flow rate on methane absorption (2.4), regression modeling (2.5), integration of the dehydrator model into MAES (2.6), and model validation (2.7).

2.2. Dehydrator Unit Configuration and Operational Conditions

Gas dehydration can be accomplished through two primary methods: absorption, which uses liquid desiccants, and adsorption, which relies on solid media [6,11]. Among these, absorption is the most widely employed technique in NG processing. Common liquid absorbents include EG, DEG, and TEG. Of these, TEG is mostly used [41] due to its favorable thermophysical properties and its ability to be regenerated to a high degree of purity, enabling efficient and cost-effective water removal [42].

The main components of a conventional glycol dehydration system include a contactor tower, reboiler, heat exchanger, glycol pump (gas-assisted, air-driven, or electric-powered), and, optionally, a flash tank, as illustrated in Figure 1. The figure also highlights potential emission sources (circled in red), in addition to component leaks commonly associated with a dehydrator unit.

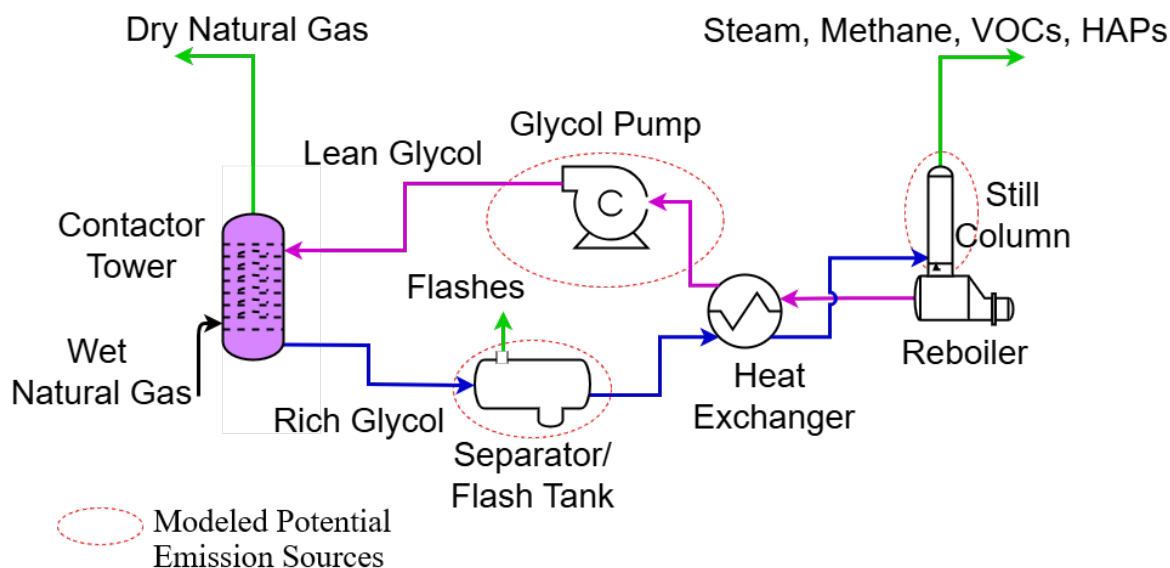


Figure 1. Dehydrator Unit showing major dehydrator unit components and potential main emissions sources circled in dotted red.

The dehydration process begins in the contactor tower, where wet NG flows counter-current to lean TEG, allowing the glycol to absorb water vapor [43]. The contactor typically operates at pressures between 600 and 1000 psig and temperatures ranging from 90 to 100 °F to optimize absorption efficiency [41]. Gas temperatures above 140 °F hinder dehydration, as the gas holds onto water vapor more tightly and reduces mass transfer to the glycol. Conversely, temperatures below 40 °F increase glycol viscosity, limiting its capacity to absorb water. Therefore, maintaining gas temperatures within an optimal range is critical.

From the contactor tower, the dried gas exits through the top, while the water-rich glycol is routed from the bottom to the reboiler for regeneration. The rich glycol may pass through a flash tank, where a portion of the absorbed gas flashes off at reduced pressures, typically 40 – 100 psig, before entering the reboiler. Flash tanks can recover up to 90% of the absorbed gas [44], which may then be reused, vented, or flared.

In the reboiler, water is boiled off from the glycol. Because water boils at 212 °F and TEG begins to degrade at approximately 440 °F (with a boiling point near 550 °F), the reboiler typically operates between 212 °F and 400 °F to balance effective water removal with glycol preservation. The resulting steam, together with residual absorbed gas components such as CH₄, exits through the still column above the reboiler.

To improve efficiency, a heat exchanger is used to transfer heat from the hot, regenerated lean glycol to the cooler, rich glycol. This process conserves energy and lowers the temperature of the lean glycol to better match the inlet wet gas stream, thereby reducing foaming and minimizing glycol losses through entrainment in the gas phase. Simultaneously, it raises the temperature of the rich glycol, decreasing the energy required in the reboiler to boil off water from the glycol. Ideally, the temperature difference between the contactor inlet gas and the lean glycol should be maintained within 10 – 15 °F to minimize glycol losses and prevent the formation of liquid hydrocarbons, which can impair the dehydration process.

Glycol pumps provide the pressure needed to return lean glycol to the top of the contactor. In gas-assisted pumps, a portion of the wet gas is used to drive the pump piston. The assist gas mixes with the rich glycol and flashes off in the flash tank as the pressure is reduced or is boiled off with the steam during glycol regeneration.

Finally, stripping gas, commonly sourced from a NG stream, can be injected into the reboiler to enhance the removal of water from the glycol at reduced temperatures. Stripping gas reduces the partial pressure of water vapor in the reboiler’s vapor space. By lowering the mole fraction of water in the vapor phase, it reduces the partial pressure of water vapor (Dalton’s law of partial pressures) [45,46], which enhances water removal even at lower temperatures [47,48]. This technique enables achieving lean-glycol purities of up to 99.95% at typical reboiler temperatures [47,49]. In contrast, systems without stripping gas achieve a purity of up to 98.8% [48]. The injected gas is released, along with other emissions, through the still column with the steam during regeneration.

2.3. ProMax Simulation Setup

ProMax is a process simulation software tool used to model and optimize processes in gas processing, refining, and chemical facilities [50]. It integrates different equations of state, such as the Peng-Robinson and Soave-Redlich-Kwong (SRK) equations of state, to understand gas behavior under different operating conditions [51]. ProMax, as a modeling tool, allows users to model different processes, but also has predesigned common processes such as the amine tool for removal of acid gases from NG and the dehydration tool for the NG dehydration process. The dehydration tool with the Peng-Robinson environment was used in this study to examine the absorption behavior of gas species [52] in TEG. ProMax simulation results were used to examine the mass transfer of NG species and the volumetric distribution of gas across the dehydrator outlet streams, namely the dry gas, flash tank vapor, and still vent stream. This understanding facilitate modeling of dehydrator emissions from two primary points: (1) the flash tank, if present, and (2) the still column (vent) [53].

To set up the simulations, the ProMax Scenario Tool [54] was used to define and systematically vary three parameters that primarily influence gas absorption behavior: glycol circulation ratio, wet gas pressure, and temperature. The circulation ratio ranged from 1 to 7 gal/lb of water removed, in 0.5 intervals. Each circulation ratio was simulated at three wet gas temperatures, (77°F, 95°F, and 122°F), and for three wet gas pressures (400 psia, 800 psia, and 1200 psia). This full factorial combination resulted in 117 distinct simulation scenarios (13 circulation ratios × 3 temperatures × 3 pressures). Each combination of these variables constituted a unique simulation case. Lean glycol temperature at the contactor was maintained 10°F above the inlet wet natural gas while glycol regeneration in the reboiler was maintained at 400°F to remain below the TEG degradation threshold of 440°F and above the 212°F water boiling temperature. The wet gas was assumed to be water-saturated, with its composition given in Table 1. This setup ensured uniform coverage of operational variability and allowed for reliable polynomial regression fitting across all pressure-temperature-flow conditions.

Table 1. Mole fraction composition (%) of the inlet wet gas stream

CH ₄	C ₂ H ₆	C ₃ H ₈	i-C ₄	n-C ₄	i-C ₅	n-C ₅	n-C ₆	n-C ₇	C ₈	C ₉	N ₂	CO ₂	H ₂ S
68.978	11.654	5.694	0.823	1.916	0.441	0.423	0.508	1.183	0.592	0.197	5.668	1.907	0.015

Methane (C1) and ethane (C2) absorption mass flow rates were plotted to examine their mass transfer behavior in TEG under varying inlet gas temperatures, pressures, and glycol circulation ratios. The gas flow rate was maintained at 0.5 million standard cubic feet per day (MMscfd) across all simulations. C1 and C2 were selected for detailed curve fitting because C1 is the primary greenhouse gas of concern, and C2 plays a key role in distinguishing anthropogenic from biogenic emission sources in top-down approaches [55–58].

C1 and C2 absorption rates were calculated as:

$$\text{Absorption Rate} = \left(\frac{\text{Inlet Mass Flow Rate} - \text{Outlet Mass Flow Rate}}{\text{Inlet Mass Flow Rate}} \right) \times 100$$

(1)

This approach was extended to all other gas species by running equivalent ProMax simulations while systematically varying process conditions. For each case, the gas total mass flow rates and species mass fractions were recorded for four primary streams: inlet wet gas, dry gas (post-contactor), flash tank vapor, and still vent. These data enabled the tracking of species-specific absorption in TEG at the contactor and quantification of emissions from the flash tank and still column. At each set of simulation parameters, the absorption or emission rate of the species at a given process stage was calculated using the generalized expression in equation (2), which extends the formulation introduced in equation (1) by relating the mass flow rate of outlet streams to that of the inlet wet gas.

$$R_{i,s} = \frac{\dot{m}_{i,s}}{\dot{m}_{i,\text{wet}}} \times 100 \quad (2)$$

where:

- $R_{i,s}$ is the transfer ratio (%) of species i at stage s ,
- $\dot{m}_{i,s}$ is the mass flow rate of species i at stage s ,
- $\dot{m}_{i,\text{wet}}$ is the mass flow rate of species i in the wet gas stream (inlet),
- $s \in \{\text{dry gas, flash tank, still vent}\}$ represents the dry gas (contactor outlet), flash tank, or still vent streams.

Each transfer ratio calculated using Equation (2) represents the fraction of a given species from the inlet wet gas stream that appears in a specific outlet stream (*dry gas, flash tank, or still vent*) for each simulation parameter set, thereby supporting a mass balance assessment across the dehydration process.

2.4. Effects of Flow Rate on Methane Absorption

While Equation (2) considers circulation ratio, temperature, and pressure as the primary variables, the influence of gas flow rate on species absorption was also evaluated. To this end, a set of ProMax simulations were conducted to determine whether changes in gas flow rate affects C1 absorption rates, while keeping all other parameters constant, i.e., pressure, temperature, and glycol circulation ratio. This assessment informs the dehydrator model design assumption: absorption behavior is flow-independent. The analysis was conducted by running ProMax simulations under matched operating conditions, using a fixed gas flow rate of 0.5 MMscfd and a set of 36 randomly selected flow rate variables ranging from 2.9 to 17.5 MMscfd. For each scenario, the inlet and outlet C1 mass flow rates were recorded, and the absorption rates were computed using Equation (1).

2.5. Regression Modeling

2.5.1. Species Regression Models

Second-order polynomial regression (PR) models were fitted to the stage transfer ratios calculated from equation (2), using 70% of the simulation parameter sets selected at random. For each species and each dehydration outlet stage, namely, the dry gas stream, flash tank emission, and still vent, an independent PR model given by equation (3) was developed. The remaining 30% of data was reserved for model testing and validation.

$$\hat{R}_{i,s} = \mu + \beta_1 C_{gly} + \beta_2 T + \beta_3 P + \beta_4 C_{gly}^2 + \beta_5 C_{gly} T + \beta_6 C_{gly} P + \beta_7 T^2 + \beta_8 TP + \beta_9 P^2 \quad (3)$$

where:

- $\hat{R}_{i,s}$ is the predicted stage transfer ratio (%) of species i at stage s , computed from the PR model;
- μ is the intercept, (the constant term);
- C_{gly} , T , and P represent the lean glycol circulation ratio, the inlet wet gas temperature, and pressure at the contactor, respectively;
- β_1 through β_9 are regression coefficients fitted for species i in stage s .

2.5.2. Outlet Fluid Flows Regression Models

ProMax simulations were conducted to evaluate how inlet wet gas is partitioned across the three vapor-phase outlet streams of the dehydrator unit: dry gas, flash tank emissions, and still vent. A fixed inlet gas flow rate of 1 thousand standard cubic feet per day (Mscfd), (≈ 415.7 standard cubic feet per hour (scfh)) was used. For each simulation case, the vapor flow rates at each outlet were recorded in scfh. The percentage fraction of each outlet stream was then computed as the ratio of the vapor outlet flow rate to the inlet wet gas vapor flow rate, multiplied by 100:

$$\text{Outlet Flow Fraction}_s (\%) = \left(\frac{\text{Outlet Flow Rate}_s}{\text{Inlet Wet Gas Flow Rate}} \right) \times 100 \quad (4)$$

where s refers to each outlet stream: dry gas, flash tank emissions, and still vent.

For each parameter set, absorption rates were used to develop three separate second-order PR models corresponding to the contactor, flash tank, and still column stages. Seventy percent of the dataset, randomly selected, was used for model training, while the remaining thirty percent was reserved for model testing to evaluate out-of-sample predictive performance.

The generated PR model uses three operational parameters: glycol circulation ratio (C_{gly}), wet gas temperature (T), and wet gas pressure (P). The input terms used in the regression model are:

$$\text{Terms} = [1, C_{gly}, T, P, C_{gly}^2, C_{gly}T, C_{gly}P, T^2, TP, P^2]$$

For each outlet stream s , the flow fraction is computed as:

$$\text{Fraction}_s = \frac{1}{100} \sum_{j=1}^{10} \alpha_{s,j} \cdot \text{term}_j \quad (5)$$

where $\alpha_{s,j}$ are the fitted polynomial coefficients for outlet s (dry gas, flash tank, or still vent), and term_j are the evaluated polynomial terms based on the current operating conditions.

The sum of the three outlet fractions is expected to equal to one. This data-driven approach enables the model to dynamically estimate dry gas flow (sales gas), flash tank emissions and still vent releases from the dehydrator unit under varying real world operating conditions.

2.6. MAES - Dehydrator Model Integration

The dehydrator model is designed to model emissions mechanistically as described in section A of the supplementary information (SI). Similar to traditional MAES models, mechanistic models require three critical input files: site-specific operational data, preprocessed gas composition files, and a site configuration schematic. The operational data captures site throughput and equipment-level details, including state transition probabilities where applicable. Gas composition files are tailored to each facility and generated in advance to enhance simulation efficiency. The gas composition files reflect how gas properties evolve as the gas flows through interconnected equipment, accounting for changes in downstream conditions such as temperature and pressure. Site configuration schematics illustrate the flow of fluid between the equipment. These inputs enable MAES to simulate emissions dynamically and accurately along the process stream. The dehydrator model input parameters are described in the SI, section B. The model calculates gas composition at each dehydrator outlet using the species-specific absorption or emission rates from Equation (3) and the overall outlet flow fractions from Equation (5).

For each outlet stream s (i.e., dry gas, flash tank, still vent) and species i , the outlet mass concentration is computed as:

$$\text{Outlet Mass Fraction}_{s,i} = \frac{A_{s,i} \cdot x_i}{f_s} \quad (6)$$

where

- $A_{s,i}$: absorption or emission rate for species i in outlet stream s , expressed as a dimensionless fraction;
- x_i : mass concentration of species i in the inlet gas stream, in units of kg/scf;
- f_s : volumetric flow fraction of the inlet gas that exits through outlet stream s , also dimensionless.

This equation calculates the normalized mass of species i per unit volume of outlet stream s (in kg/scf), accounting for the portion of each species directed to outlet s and the corresponding fraction of the total inlet gas volume discharged through that stream.

Outlet Gas Streams from the Dehydrator Model

The glycol dehydrator model simulates multiple outlet gas streams, as illustrated in Figure 2 and as described below. The stream names in parentheses correspond to the designated flow identifiers within the MAES framework. The first three streams arise from the contactor tower, where the wet gas interacts with TEG and Equation (5) is applied to calculate them:

- Dry Gas (gas_sales): The dehydrated methane-rich gas that exits the contactor tower and is sent to gas sales. This is the primary product stream and excludes any volume used to power gas-assisted glycol pumps.
- Flash Tank Flashes (flash_tank_flashes): Hydrocarbons released from the rich glycol stream due to depressurization in the flash tank. This stream captures emissions separated from the glycol after leaving the contactor.
- Still Vent Emissions (still_vent_emissions): Hydrocarbons absorbed alongside water vapor in the contactor and later released from the still column during glycol regeneration as the rich glycol is heated and water is boiled off.

Additional emission streams are incorporated based on auxiliary processes and control configurations:

- Glycol Pump Flash Tank Emissions (glycol_pump_flash_tank_emissions): Emissions from gas-assisted glycol pumps, routed to the flash tank if one is present.
- Glycol Pump Still Vent Emissions (glycol_pump_still_vent_emissions): If no flash tank is installed, the gas-assisted pump emissions are redirected to the still vent.
- Stripping Gas Emissions (stripping_gas_emissions): Emissions from any stripping gas introduced during glycol regeneration and vented through the still column with the steam.

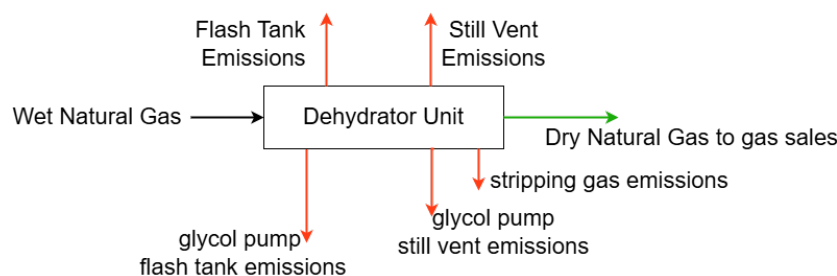


Figure 2. Schematic of a dehydrator unit showing primary outflows of the model. The flash tank and still vent represent the main emission points in the dehydration process, excluding fugitive leaks.

If emission control devices are connected to the flash tank, still vent, or both, the model reroutes the corresponding outlet flows to the appropriate control devices. Flash tank vapors, for instance, may be reused as reboiler fuel [59]. In such cases, since the model does not simulate emissions from reboiler fuel consumption, these flows are routed to flares, where specified destruction efficiencies are applied to estimate the resulting emissions.

2.7. Model Validation

To validate the performance of the PR models, 30% of the dataset, reserved during the training phase, was used for testing. This validation applied to both the species absorption models (3) and the outlet flow fraction models (5). Model accuracy was evaluated by calculating the RMSE between the PR model predictions and the corresponding ProMax results.

3. Results and Discussion

3.1. Absorption Curve Fits

Understanding NG species absorption rates, particularly for C1 and C2, is essential because the gas absorbed by TEG is ultimately released during glycol regeneration. The absorbed gas serves as a direct source of emissions, occurring at the flash tank, the still vent, or both. Therefore, accurately modeling absorption behavior under varying pressures, temperatures, and glycol circulation ratios is critical to predicting dehydrator emissions in MAES.

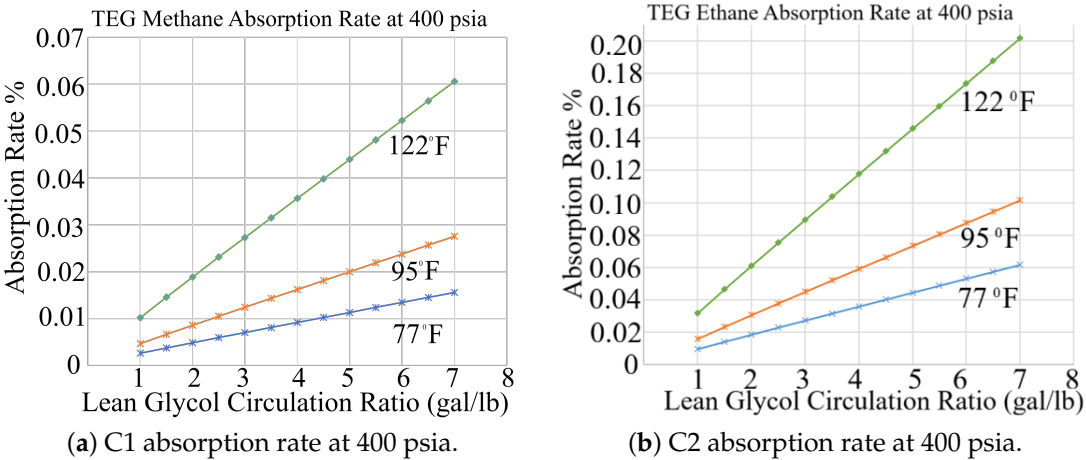


Figure 3. Simulated absorption rates of (a) C1 and (b) C2 in TEG at 400 psia across three operating temperatures (77 °F, 95 °F, and 122 °F). Absorption increases with glycol circulation ratio and temperature, with C2 consistently exhibiting higher solubility than C1.

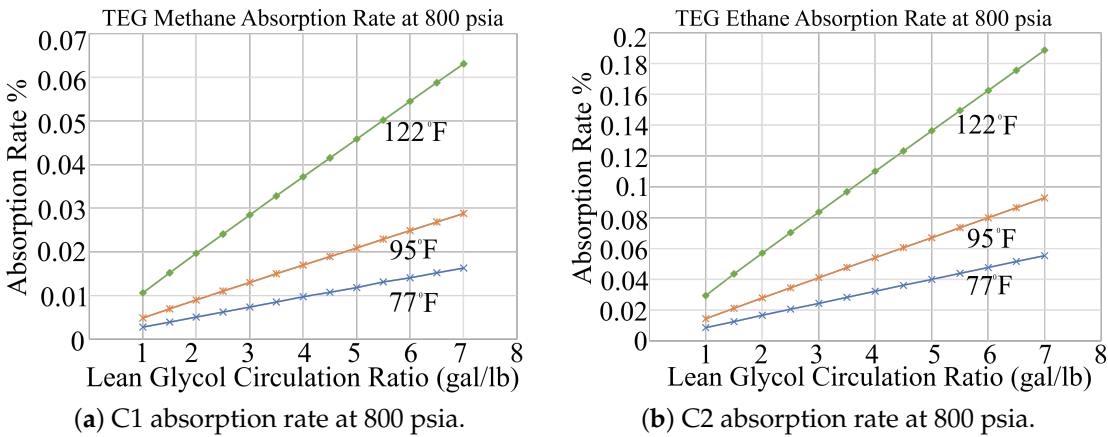


Figure 4. Simulated absorption rates of (a) C1 and (b) C2 in TEG at 800 psia. At this intermediate pressure, C1 absorption increases with temperature and circulation ratio, whereas C2 absorption decreases. Across all operating conditions, C2 remains substantially more soluble than C1.

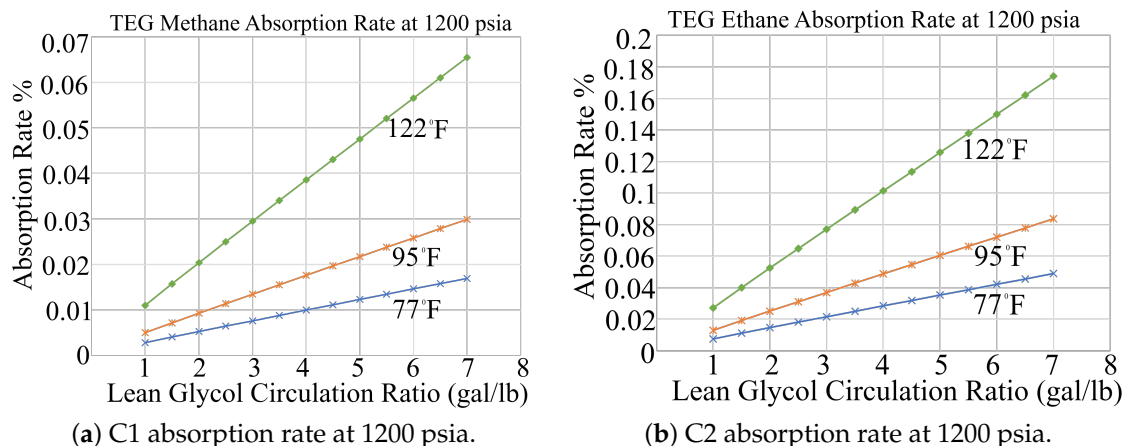


Figure 5. Simulated absorption behavior of (a) C1 and (a) C2 in TEG at 1200 psia. At this elevated pressure, C1 absorption increases under all conditions, whereas C2 absorption decreases. C2 remains considerably more soluble than C1, representing the upper bound of absorption behavior modeled in MAES.

3.2. Effects of Flow Rate on Methane Absorption Rate

Figure 6 shows that when all other simulation parameters are held constant, changes in inlet gas flow rate have a negligible effect on the absorption rate. The perfect correlation ($R^2 = 1.0$) confirms that C1 absorption is independent of inlet gas volumetric flow rate, supporting the model's assumption that flow rate does not significantly influence absorption.

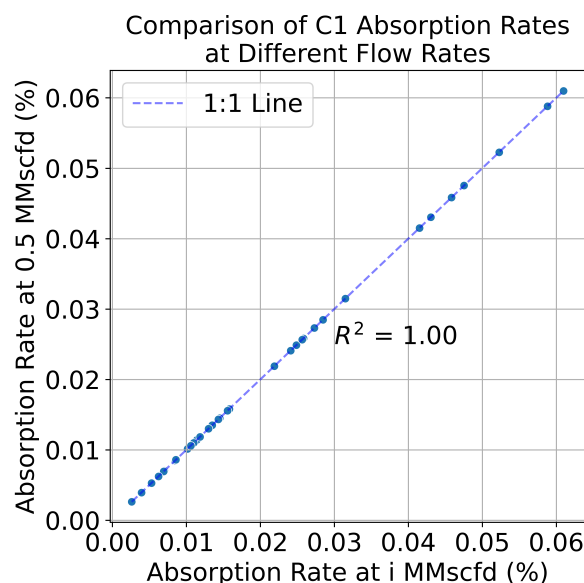


Figure 6. Effect of flow rate on C1 absorption rate. Gas flow rates, (i), were varied from 2.9 to 17.5 MMscfd, with a fixed baseline case at 0.5 MMscfd as described in sub-section 2.4.

Therefore, absorption behavior is driven primarily by thermodynamic conditions (pressure and temperature) and solvent interaction (circulation rate and contact time), rather. Under the assumptions used in these ProMax simulations, the absorber operates under steady-state conditions with sufficient residence time, represented by three ideal absorber stages which conceptually represent equilibrium contact points between the wet gas and lean glycol within the contactor, a value selected based on standard guidance from Gas Processors Suppliers Association (GPSA) [60] for trayed or packed columns in the absence of site-specific contactor details.

3.3. Polynomial Regression (PR) Models Validation

Performance of the second-order PR models in the MAES dehydrator model was evaluated by comparing predicted absorption and emission rates with ProMax simulation outputs. The focus was on the outlet flow fractions and species-level behavior across the three primary dehydrator components: the contactor tower, flash tank, and still vent. Species validation was performed for light hydrocarbons (C1-C5), heavier species (C6-C9), and inorganics (H₂S, CO₂, and N₂).

As shown in Tables 2 and 3, the resulting RMSE values are consistently low, confirming the model’s ability to capture the non-linear absorption and emission behavior across a wide range of operating conditions.

Table 2. RMSE values for light hydrocarbons (C1 to NC5) across dehydrator components

Stage	C1	C2	C3	IC4	NC4	IC5	NC5
Contactor	0.00091	0.00215	0.00455	0.00749	0.01138	0.02257	0.02935
Flash Tank	0.00097	0.00239	0.00371	0.00406	0.00527	0.00539	0.00589
Still Vent	0.00027	0.00231	0.00572	0.00859	0.01281	0.02157	0.02560

Table 3. RMSE values for heavier hydrocarbons and inorganics (C6 to N2)

Stage	C6	C7	C8	C9	H ₂ S	CO ₂	N ₂
Contactor	0.08505	0.33100	1.10766	3.79135	0.02016	0.00514	0.00035
Flash Tank	0.00643	0.01000	0.01515	0.02205	0.01521	0.00772	0.00035
Still Vent	0.05813	0.12121	0.27333	0.66913	0.02213	0.00631	1.91E-05

The fitted equations were applied to generate facility-specific gas composition (GC) files that describe species-level absorption at the contactor and emissions at the flash tank and still vent. These pre-processed GC files are input into MAES, improving computational efficiency by eliminating the need for real-time species calculations during simulation runs.

The outlet flow fractions were similarly modeled using pressure, temperature, and glycol circulation ratio, and the PR models in equation (5) validated against ProMax output. Table 4 shows that these outflow models also achieve low RMSE values, further supporting their use in the MAES framework.

Table 4. RMSE values for outlet fluid flows (gas sales, flash tank emissions, and still vent emissions)

Model Outlet Flows	RMSE
Dry gas fraction	0.002273
Flash tank fraction	0.001411
Still vent fraction	0.002056

To ensure physical consistency, if any of the three primary calculated outlet stream fractions, f_s , from equation (5) are negative, an outcome that may occur under extreme operating conditions, default average values from Table 5 are substituted. These default values are computed as the mean fractions obtained from the ProMax simulation dataset used to generate the polynomial regression models (5).

Table 5. Average outlet stream fractions from ProMax simulations

Outlet Stream	Fraction
Dry Gas	0.9995568
Flash Tank	0.0002856
Still Vent	0.0001450

This scenario may arise when operating conditions, e.g., the circulation ratio, fall outside the range for which the model was trained. Since the dry gas fraction is just below 1, and the flash tank and still vent fractions are small positive values, the PR model may slightly overestimate the dry gas fraction (i.e., ≥ 1) and underestimate the others (i.e., < 0), particularly the still vent fraction. These deviations reflect extrapolation beyond the model’s calibrated domain and are corrected by substituting with the average values. This ensures mass balance consistency.

3.4. Model Application

The dehydrator model was first applied in the AMI 2024 Project [61], where MAES was used to simulate measurement-informed inventories for midstream O&G facilities in the Appalachian Basin. For the scope of this paper, the model was deployed at sites operating TEG dehydrators to evaluate its performance under real-world field conditions. This application marked the model’s first large-scale use in an operational inventory setting and enabled direct comparison with reported emissions data. Importantly, it expanded MAES’s capabilities to simulate emissions arising from key dehydrator processes, including absorption of gas species into glycol, emissions resulting from the use of gas-assisted pumps, and the injection of stripping gas during glycol regeneration. This allowed for a more comprehensive assessment of dehydrator contributions to total site CH₄ emissions. Figure 7 compares reported and simulated emissions for three midstream sites in the basin [62]: (a) with and (b) without the gas pump dehydrator model.

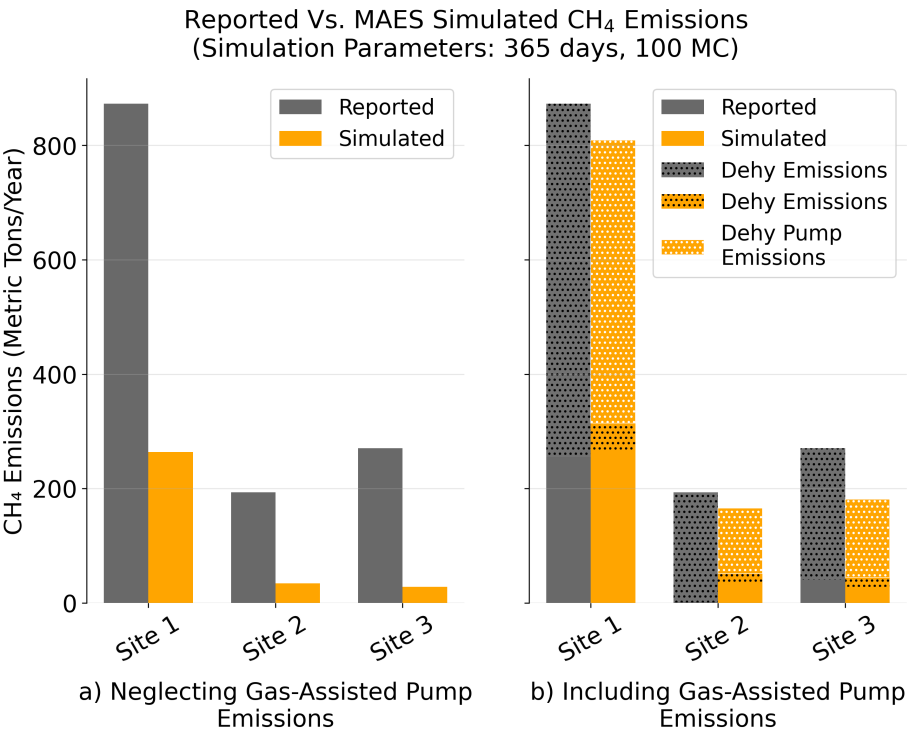


Figure 7. Comparison of reported and MAES-simulated CH₄ emissions for three midstream facilities under two modeling scenarios: (a) MAES dehydrator model neglecting gas-assisted pump emissions, and (b) the model with gas-assisted pump emissions included, explicitly highlighting hatched dehydrator emissions. Each subplot displays reported emissions (gray bars) alongside simulated emissions (orange bars) for each site.

In subplot 7(a), MAES significantly underestimates site-level CH₄ emissions due to neglecting gas pump emissions. Once the neglected emissions were incorporated, as shown in subplot 7(b), simulated emissions more closely aligned with reported values across all three facilities. In panel (b), the simulated bars are further decomposed using hatched patterns to represent emissions from the dehydrator unit, with a white-hatched overlay indicating the portion attributable to gas-assisted glycol pump operations. The black-hatched portions of the reported bars represent total dehydrator emissions, which include both gas-assisted pump emissions and emissions from gas absorbed in the contactor tower. The results underscore the significant impact of incorporating a fully characterized dehydrator model into MAES for emissions modeling, particularly at facilities equipped with gas-assisted glycol pumps.

In subplot 7(b), MAES-simulated methane emissions were consistently lower than reported values across all three midstream sites, largely due to differences in modeling approaches. While reported emissions rely on static estimates based on wellhead gas compositions, the MAES framework dynamically simulates gas behavior as it flows through interconnected equipment, capturing changes in composition along the process stream. Moreover, unusually high glycol circulation ratios also influenced significant discrepancies at the sites, that is, 18.3, 31.5, and 71.6 gal/lb of water removed for sites 1, 2, and 3 respectively; well above both EPA's recommended 3–5 gal/lb range [63] and the model's calibrated range of 1–7 gal/lb. These ratios suggest the presence of oversized glycol pumps, potentially due to declining production over the years.

Contribution of Glycol Pumps to Dehydrator Emissions

Operational site data from the AMI 2024 Project revealed that out of 174 modeled dehydrator units across five study partners, 54 units (31.0%) used gas-assisted glycol pumps [62]. Among these, 6 units (11.1%) had uncontrolled flash tanks, and 22 units (40.7%) were identified as potentially oversized, an issue that amplifies emissions. Oversizing is primarily a legacy design issue; pumps were originally sized to handle peak production rates, but as throughput declined over time, these higher-capacity pumps remained in place. This has resulted in circulation ratios well above the EPA-recommended 3–5 gal/lb range [63], with some facilities exceeding 80 gal/lb due to pump designs that require a minimum circulation rate [64]. These high circulation rates increase CH₄ absorption and enhance the uptake of more soluble aromatic hydrocarbons, such as benzene, toluene, ethylbenzene, and xylene (BTEX) compounds, into the glycol, which are subsequently released during regeneration. Oversized pumps exacerbate this issue by maintaining unnecessarily high circulation rates, requiring additional gas to operate, and thereby compounding total emissions. As shown in section C of the SI, for the six units with uncontrolled flash tanks, 90.25% of total dehydrator emissions were attributed to gas-assisted glycol pump emissions, with site-level contributions ranging from 83.2% to 92.4%. When compared to overall site emissions, pump-related emissions accounted for an average of 63.1%, underscoring a key opportunity for targeted CH₄ mitigation.

These findings highlight two important insights:

1. Replacing gas-assisted pumps with instrument-air or electric-driven pumps could immediately eliminate a major source of dehydrator emissions.
2. Implementing emission control devices on flash tanks and still vent columns, or reusing the flashed gas, can potentially reduce overall site emissions by 63%.

3.5. Model Limitations

The current dehydrator model, while effective for simulating steady-state emissions, is subject to some limitations. First, it does not capture failure modes or upset conditions, such as gas-assisted pump malfunctions, that can significantly impact emissions. For example, during the 2024 AMI campaign, a dehydrator failure event was observed emitting 138 kg/hr [62], highlighting the influence of rare upset events on total emissions. This is equivalent to a failure rate of 0.00143678 based on

quarterly scans on 174 dehydrator units over four quarters. Additional data are needed to incorporate these failure rates into the model to more accurately represent dehydrator malfunction emissions.

The model was calibrated using ProMax-generated data and operates within a validated glycol circulation range of 1–7 gal/lb of water removed. Facilities with operating conditions outside this range, may exhibit model extrapolation errors. In addition, because the model relies exclusively on ProMax simulations for calibration, any biases or simplifications inherent in ProMax could propagate into the model's predictions.

The model also omits emissions from fuel combustion in the reboiler, a non-trivial source of CO₂, as well as potential CH₄ slip. Future development should incorporate this feature to capture additional emission sources from dehydrator units and improve understanding of their overall contribution.

4. Conclusions

This study developed and validated a mechanistic, facility-specific model for estimating methane and hydrocarbon emissions from TEG dehydration units in midstream O&G operations. The MAES dehydrator model integrates species-level absorption and emission regressions, state-machine logic, and detailed flash and still vent modeling to simulate emissions under realistic operating conditions.

ProMax simulations further demonstrated that methane and ethane absorption rates are independent of gas throughput, as it serves only as a scaling factor for total absorbed mass. While higher throughput increases the absolute quantity of gas absorbed, the absorption rate for each species remains unchanged under the same pressure, temperature, and glycol circulation conditions. This validates the use of flow-independent polynomial regression models. The interaction of the wet inlet gas with lean glycol at the contactor tower results in an average dry gas fraction of 0.9995568 exiting the top of the tower, with corresponding average fractions of 0.0002856 at the flash tank and 0.0001450 at the still column. The flash tank and still vent fractions represent the primary sources of dehydrator emissions in the absence of gas pumps and stripping gas, and contribute directly to CH₄ release if not routed to appropriate control devices.

When applied to midstream facilities in the 2024 AMI project, the model closely aligned with reported emissions and provided critical source-level insights. Gas-assisted glycol pumps were confirmed as the dominant contributor, accounting for 90.25% of total dehydrator-related emissions and 63.10% of total site-level emissions under uncontrolled conditions. The analysis also revealed that 40.7% of the gas-assisted pumps were significantly over-sized, resulting in circulation ratios far above the EPA-recommended 3–5 gallons per pound (gal/lb), with some facilities operating above 80 gal/lb. These elevated circulation rates result in excessive absorption of methane and BTEX compounds into the glycol, which are subsequently released during regeneration, providing little to no additional reduction in the water content of the dry gas.

Limitations include the lack of modeling for upset conditions, the restricted circulation ratio range, reliance solely on ProMax simulations, and the omission of fuel combustion emissions from the reboiler. However, by using pre-fitted species regressions and enabling scalable simulation across multiple sites, this model addresses the transparency, accuracy, and reproducibility gaps in existing tools.

Future work will focus on incorporating failure modes, refining fuel-use estimates, expanding the circulation ratio range in ProMax simulations to enable new PR model fits, and investigating the impact of glycol purity on absorption rates.

Supplementary Materials: The following supporting information can be downloaded at the website of this paper posted on Preprints.org.

Funding: This material is based upon work supported by the Department of Energy under Award Number DE-FE0032311.

Acknowledgments: This study was conducted as part of the AMI 2024 project and supported by the Department of Energy under Award Number DE-FE0032311 in collaboration with EEMDL. The authors would like to appreciate the participating operators and the entire EEMDL team for their valuable support and collaboration.

Conflicts of Interest: This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

Appendix A. Dehy Model State-Machine Architecture

The MAES dehydrator model was modeled to estimate emissions mechanistically, whereby emissions depend on the state of the dehydrator unit and the rate of fluid flow coming from the upstream equipment. In this simplified illustration (Figure A1), the dehydrator is modeled as always operating, representing a baseline scenario for dehydrator emissions modeling. A failure state has not yet been incorporated, as this model represents an initial stage of development. However, as field data on dehydrator performance and malfunctions become available, future iterations will integrate failure modes to capture dynamic operational variability.

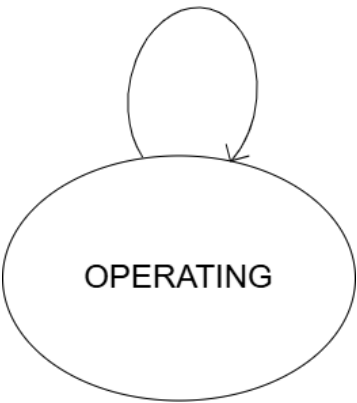


Figure A1. Mechanistic dehydrator model represented in a persistent Operating state.

Appendix B. Dehy Model Input Parameters

Table A1. Description of Dehydrator Model Input Parameters

Column	Description
Facility ID	Unique numerical identifier for the facility where the dehydrator unit is located.
Unit ID	Name or tag used to identify the specific dehydrator unit within the facility.
Flash Tank	Boolean (TRUE/FALSE) indicating whether a flash tank is installed in the system.
Operating Hours	Number of hours the dehydrator operates annually (e.g., 8760 for continuous operation).
Glycol Pump	Type of pump used to circulate glycol (Instrument Air, Electric, or Gas-Assist), which influences pump-related emissions.
Lean Glycol Circulation Ratio	Ratio of lean glycol volume to water removed, in gal/lb, which affects absorption efficiency.
Lean Glycol Circulation Rate	Flow rate of lean glycol into the contactor, measured in gpm.
Wet Gas Temperature	Temperature of the wet gas entering the contactor, in °F.
Wet Gas Pressure	Pressure of the wet gas entering the contactor, in psia.
Wet Gas Flow Rate	Volumetric flow rate of the wet gas stream entering the contactor, in Mscfd.
Glycol Type	Type of glycol used in the unit (e.g., TEG).
Model ID	Name of the JSON configuration file that defines the structure and behavior of the dehydrator model within MAES.
Tank Flash Controlled Flag	Boolean indicating whether flash tank emissions are routed to an emissions control device.
Still Vent Controlled Flag	Boolean indicating whether still vent emissions are routed to control equipment such as a flare or VRUs.
Stripping Gas Flow Rate	Flow rate of stripping gas used during glycol regeneration, measured in scfm.
Glycol Pump Injection Ratio	Ratio of gas volume (in scfm) used to drive gas-assisted glycol pumps per unit of lean glycol flow (in gpm); typically set to zero for air- or electric-driven pumps.

Appendix C. Glycol Pump Emissions

Site	GlycolPumpEmissions	DehydratorEmissions	SiteEmissions	Pump_DehyEmissionsContr.(%)	Pump_SiteEmissionsContr.(%)
Site 1	51.47	61.1	98.2	84.23	52.41
Site 2	139.63	153.28	173.06	91.1	80.68
Site 3	0.27	0.31	21.37	86.81	1.26*
Site 4	503.46	545.04	806.8	92.37	62.40
Site 5	117.45	131.62	153.26	89.23	76.63
Site 6	92.57	111.25	181.36	83.2	51.04
Total	904.85	1002.61	1434.05	90.25	63.10

* Only operated 51 hours per year
Units: mt/year

Figure A2. Summary of simulated methane emissions from six dehydrator units with uncontrolled flash tanks, showing contributions from gas-assisted glycol pumps to total dehydrator and site-level emissions.

References

1. Hammerschmidt, EG. Formation of gas hydrates in natural gas transmission lines. *Industrial & engineering chemistry* **1934**, 26, 851–855.

2. Hammerschmidt, EG. Preventing and removing gas hydrate formations in natural gas pipe lines. *Oil Gas J* **1939**, 37, 66–72.

3. U.S. Environmental Protection Agency. Glycol Dehydrators. <https://www.epa.gov/natural-gas-star-program/glycol-dehydrators>, 2023. Accessed: 2025-07-03.

4. Association, G.P.S. *GPSA Engineering Data Book*, 14th ed.; Gas Processors Suppliers Association, 2011. Section 20, Hydrates in Natural Gas Systems.

5. Council, N.R.; on Earth, D.; on Earth Sciences, B.; on Earth Resources, C.; on Assessment of the Department of Energy’s Methane Hydrate Research, C.; Program, D.; as a Future Energy Resource, E.M.H. *Realizing the energy potential of methane hydrate for the United States*; National Academies Press, 2009.

6. Carroll, J. *Natural gas hydrates: a guide for engineers*; Gulf Professional Publishing, 2020.
7. Mountain West Pipeline, LLC. FERC Gas Tariff Second Revised Volume No. 1. <https://www.mwpipe.com/mwpipe/pdf/MWP-TARIFF.pdf>, 2022. Accessed: 2025-08-26.
8. Company, N.N.G. Gas Quality Requirements. <https://www.northernnaturalgas.com/infopostings/GasQuality/Pages/Requirements.aspx>, 2025. Accessed: 2025-08-26.
9. Empire Pipeline, Inc.. FERC Gas Tariff First Revised Volume No. 1. <https://informationalpostings.natfuel.com/empire/docs/empiretariff.pdf>, 2020. Accessed: 2025-08-26.
10. Office of Oil and Gas, Energy Information Administration. Natural Gas Processing: The Crucial Link between Natural Gas Production and Its Transportation to Market. Technical report, U.S. Energy Information Administration, 2006. Online PDF; accessed 2025-08-26.
11. Kidnay, A.J.; Parrish, W.R.; McCartney, D.G. *Fundamentals of natural gas processing*; CRC press, 2019.
12. Jechura, J. Gas Dehydration. https://people.mines.edu/jjechura/wp-content/uploads/sites/120/2019/02/CBEN408_08_Dehydration.pdf, 2019. Accessed: 2025-08-26.
13. Kimray, Inc.. Gas Dehydration System Overview. <https://kimray.com/training/gas-dehydration-system-overview>, n.d. Accessed: 2025-07-03.
14. Myers, D. Methane emissions from the natural gas industry. Volume 14. Glycol dehydrators. Final report, March 1991-April 1996. Technical report, Radian Corp., Austin, TX (United States), 1996.
15. Kirchgessner, D.A.; Lott, R.A.; Cowgill, R.M.; Harrison, M.R.; Shires, T.M. Estimate of methane emissions from the US natural gas industry. *Chemosphere* **1997**, *35*, 1365–1390. [https://doi.org/10.1016/S0045-6535\(97\)00232-1](https://doi.org/10.1016/S0045-6535(97)00232-1).
16. U.S. Environmental Protection Agency. Methane Emissions from the Natural Gas Industry, Volume 14: Glycol Dehydrators. Technical Report EPA-600/R-96-080n, U.S. Environmental Protection Agency, Office of Air and Radiation, 1996. Accessed: 2025-10-12.
17. U.S. Environmental Protection Agency. Methane Emissions from the Natural Gas Industry, Volume 15: Gas-Assisted Glycol Pumps. Technical Report EPA-600/R-96-080o, U.S. Environmental Protection Agency, Office of Air and Radiation, 1996. Accessed: 2025-10-12.
18. Climate and Clean Air Coalition (CCAC) and Oil and Gas Methane Partnership (OGMP). Technical Guidance Document 5: Glycol Dehydrators. Technical report, United Nations Environment Programme, 2017. Accessed: 2025-10-12.
19. Alberta Energy Regulator. Manual 015: Estimating Methane Emissions. Technical report, Alberta Energy Regulator, 2023. Accessed: 2025-10-12.
20. Forster, P.; Storelvmo, T.; Armour, K.; Collins, W.; Dufresne, J.L.; Frame, D.; Lunt, D.J.; Mauritsen, T.; Palmer, M.D.; Watanabe, M.; et al. The Earth's Energy Budget, Climate Feedbacks, and Climate Sensitivity. In *Climate Change 2021: The Physical Science Basis. Contribution of Working Group I to the Sixth Assessment Report of the Intergovernmental Panel on Climate Change*; Masson-Delmotte, V.; Zhai, P.; Pirani, A.; Connors, S.L.; Péan, C.; Berger, S.; Caud, N.; Chen, Y.; Goldfarb, L.; Gomis, M.I.; et al., Eds.; Cambridge University Press: Cambridge, United Kingdom and New York, NY, USA, 2021; pp. 923–1054. <https://doi.org/10.1017/9781009157896.009>.
21. Environmental Defense Fund. Methane: A Crucial Opportunity in the Climate Fight. <https://www.edf.org/climate/methane-crucial-opportunity-climate-fight>, 2023. Accessed: 2025-07-08.
22. Climate and Clean Air Coalition. Methane. <https://www.ccacoalition.org/short-lived-climate-pollutants/methane>, 2023. Accessed: 2025-07-08.
23. U.S. Environmental Protection Agency. U.S. Environmental Protection Agency. <https://www.epa.gov/>, 2025. Last updated July 31, 2025; Accessed 2025-08-26.
24. U.S. Environmental Protection Agency. National Emission Standards for Hazardous Air Pollutants Compliance Monitoring. <https://www.epa.gov/compliance/national-emission-standards-hazardous-air-pollutants-compliance-monitoring>, 2025. Last updated January 14, 2025; Accessed 2025-08-26.
25. Jacob, D.J.; Turner, A.J.; Maasakkers, J.D.; Sheng, J.; Sun, K.; Liu, X.; Chance, K.; Aben, I.; McKeever, J.; Frankenberg, C. Satellite observations of atmospheric methane and their value for quantifying methane emissions. *Atmospheric Chemistry and Physics* **2016**, *16*, 14371–14396. <https://doi.org/10.5194/acp-16-14371-2016>.
26. Jacob, D.J.; Varon, D.J.; Cusworth, D.H.; Dennison, P.E.; Frankenberg, C.; Gautam, R.; Guanter, L.; Kelley, J.; McKeever, J.; Ott, L.E.; et al. Quantifying methane emissions from the global scale down to point sources using satellite observations of atmospheric methane. *Atmospheric Chemistry and Physics Discussions* **2022**, 2022, 1–44. <https://doi.org/10.5194/acp-2022-204>.

27. Regulation (EU) 2024/1787 of the European Parliament and of the Council of 13 June 2024 on methane emissions reduction in the energy sector and amending Regulation (EU) 2019/942.
28. MiQ. MiQ Standard: The Methane Emissions Performance Standard for the Oil and Gas Industry. <https://miq.org/the-technical-standard/>, 2021. Accessed: 2025-09-30.
29. (UNEP), U.N.E.P. OGMP 2.0 Framework for reducing methane emissions. <https://www.unep.org>, 2020. Accessed: April 1, 2025.
30. on Climate Change (IPCC), I.P. 2019 Refinement to the 2006 IPCC Guidelines for National Greenhouse Gas Inventories. <https://www.ipcc.ch/report/2019-refinement-to-the-2006-ipcc-guidelines-for-national-greenhouse>, 2024. Accessed: April 1, 2025.
31. Stern, J.; Olczak, M. EU methane import requirements: Can a regulation change how and from where the EU buys gas? Energy Transition Insight ET 44, Oxford Institute for Energy Studies, 2025. Accessed April 11, 2025.
32. U.S. Environmental Protection Agency. Methane Emissions from Natural Gas Dehydrators. Technical report, EPA Natural Gas STAR Program, 2007. Durango, CO Case Study.
33. U.S. Environmental Protection Agency. Reducing Methane Emissions from Dehydrators. Technical report, EPA Natural Gas STAR Program, 2010. Vernal, UT Case Study.
34. Gas Technology Institute. GRI-GLYCALC Software Version 4.0. <https://www.gti.energy/gri-glycalc-software-version-4-0/>, 2023. Accessed: 2025-07-08.
35. Bryan Research & Engineering, LLC. ProMax Glycol Dehydration Emissions. <https://www.bre.com/ProMax-Glycol-Dehydration-Emissions.aspx>, n.d. Accessed: 2025-07-03.
36. U.S. Environmental Protection Agency. Subpart W Final Rule: Overview and Implementation Guidance. https://www.epa.gov/system/files/documents/2024-07/subpartwrulewebinar_july2024.pdf, 2024. Accessed: 2025-07-03.
37. Mollel, W.; Zimmerle, D.; Santos, A.; Hodshire, A. Using Prototypical Oil and Gas Sites to Model Methane Emissions in Colorado's Denver-Julesburg Basin Using a Mechanistic Emission Estimation Tool. *ACS ES&T Air* **2025**, 2, 723–735. <https://doi.org/10.1021/acsestair.4c00168>.
38. Santos, A.; Mollel, W.; Duggan, G.P.; Hodshire, A.; Vora, P.; Zimmerle, D. Using Measurement-Informed Inventory to Assess Emissions in the Denver-Julesburg Basin. *ACS ES&T Air* **2025**, 2, 1598–1611.
39. Mollel, W.; Mdigo, J.; Santos, A.; Vora, P.; Duggan, J.; Zimmerle, D. MAES Study Sheet Guide. Technical report, Colorado State University Libraries, 2024. Mountain Scholar Repository. Accessed: 2025-09-30.
40. Santos, A.; Mdigo, J.; Hodshire, A.; Zimmerle, D.; Ravikumar, A.P. Beyond Snapshots: Bridging the Gaps between Aerial Surveys and Temporally Resolved Inventory Models. Manuscript in progress, 2026.
41. Trueba Jr, L.; Gaston, T.; Brackin, J.; Miller, J.; You, B.H. Effective strategies to reduce triethylene glycol consumption in natural gas processing plants. *Case Studies in Chemical and Environmental Engineering* **2022**, 5, 100196.
42. Al-aswed, A.A.h. Natural Gas Dehydration Process by Mono & Tri-Ethylene-Glycol. *transportation* **2030**, 29, 33.
43. Bahadori, A.; Vuthaluru, H.B. Simple methodology for sizing of absorbers for TEG (triethylene glycol) gas dehydration systems. *Energy* **2009**, 34, 1910–1916.
44. U.S. Environmental Protection Agency. Install Flash Tank Separators in Glycol Dehydrators. Technical report, Natural Gas STAR Program, U.S. EPA, 2006. Accessed: 2025-07-09.
45. Dalton, J. Experimental essays, on the constitution of mixed gases; on the force of steam or vapour from water and other liquids in different temperatures, both in a Torricellian vacuum and in air; on evaporation; and on the expansion of elastic fluids by heat. *Memoirs of the Literary and Philosophical Society of Manchester* **1802**, 5, 535–602.
46. Smith, J.M.; Van Ness, H.C.; Abbott, M.M. *Introduction to Chemical Engineering Thermodynamics*, 7th ed.; McGraw-Hill: New York, 2005.
47. Kohl, A.L.; Nielsen, R. *Gas purification*; Elsevier, 1997.
48. Neagu, M.; Cursaru, D.L. Technical and economic evaluations of the triethylene glycol regeneration processes in natural gas dehydration plants. *Journal of Natural Gas Science and Engineering* **2017**, 37, 327–340.
49. Kimray, Inc.. Glycol Regeneration: 5 Ways to Maximize Glycol Purity. <https://kimray.com/training/glycol-regeneration-5-ways-maximize-glycol-purity>, 2023. Accessed: 2025-07-09.
50. Bryan Research & Engineering, LLC. Bryan Research & Engineering (BRE). <https://www.bre.com/>, 2025. Accessed: 2025-07-09.

51. Dustman, T.; Drenker, J.; Bergman, D.; Bullin, J.A. An Analysis and Prediction of Hydrocarbon Dew Points and Liquids in Gas Transmission Lines. In Proceedings of the Proceedings of the 85th GPA Annual Convention, Gas Processors Association, Dallas, TX, 2006. Accessed: 2025-07-09.
52. Bryan Research & Engineering, LLC. ProMax Glycol Dehydration Emissions. <https://www.bre.com/ProMax-Glycol-Dehydration-Emissions.aspx>, 2024. Accessed: 2025-07-09.
53. Kirchgessner, D.A.; Richards, R.G.; Heath, F.; Smith, R.D. Advanced dehydrator design recovers gas, reduces emissions. *Oil and Gas Journal* **2004**, *102*, 52–61.
54. Bryan Research & Engineering, LLC. ProMax Scenario Tool. <https://www.bre.com/Blog/ProMax-Scenario-Tool.aspx>, 2023. Accessed: 2025-07-09.
55. Allen, D. Attributing atmospheric methane to anthropogenic emission sources. *Accounts of Chemical Research* **2016**, *49*, 1344–1350.
56. Lowry, D.; Fisher, R.E.; France, J.L.; Coleman, M.; Lanoisellé, M.; Zazzeri, G.; Nisbet, E.G.; Shaw, J.T.; Allen, G.; Pitt, J.; et al. Environmental baseline monitoring for shale gas development in the UK: Identification and geochemical characterisation of local source emissions of methane to atmosphere. *Science of the Total Environment* **2020**, *708*, 134600.
57. Daley, H.M.; Dickerson, R.R.; Stratton, P.R.; He, H.; Ren, X.; Koss, A.; Brewer, A.; Baidar, S.; Hmiel, B.; Bon, D.; et al. Methane and Ethane Emission Rates, Intensities, and Trends: Aircraft Mass Balance Insights over the Denver-Julesburg Basin, Fall 2021. *Authorea Preprints* **2025**.
58. Ngulat, M.; Santos, A.; Hodshire, A.L.; Vaughn, T.; Daley, H.M.; Dickerson, R.R.; Weibring, P.; Richter, D.; Walega, J.; Fried, A.; et al. Significant Reduction in Ethane Emissions in the Denver-Julesburg Basin From 2015 to 2021 From Oil and Natural Gas Operations. *Authorea Preprints* **2025**.
59. U.S. Environmental Protection Agency. Flash Tank Separators. <https://www.epa.gov/natural-gas-star-program/flash-tank-separators>, 2023. Accessed: 2025-07-14.
60. Hernandez-Valencia, V.N.; Hlavinka, M.W.; Bullin, J. Design glycol units for maximum efficiency. In Proceedings of the Proceedings of the Annual Convention-Gas Processors Association. Gas Processors Association, 1992, pp. 310–310.
61. Mديو, J.; Santos, A.; Duggan, J.; Vora, P.; Shonkwiler, K.; Zimmerle, D. Development and Validation of a Triethylene Glycol (TEG) Dehydrator Emissions Model for Oil and Gas Facilities Using the Mechanistic Air Emissions Simulator (MAES) Tool. Manuscript in preparation.
62. Mديو, J.; Santos, A.; Ravikumar, A.; Zimmerle, D. Using Mechanistic Air Emissions Simulator Model to Develop Methane Measurement-Informed Inventory for Midstream Oil and Gas Facilities in the Appalachian Basin. Manuscript in preparation.
63. U.S. Environmental Protection Agency. Optimizing Glycol Circulation Rates in Glycol Dehydrators. Technical report, Natural Gas STAR Program, 2006.
64. Kimray, Inc.. How to Calculate Your Glycol Circulation Rate to Determine Your Kimray Glycol Pump Speed. <https://kimray.com/sites/default/files/uploads/training-demos/How%20to%20Calculate%20Glycol%20Circulation%20Rate.pdf>, 2021. Accessed: 2025-08-26.

Disclaimer/Publisher's Note: The statements, opinions and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of MDPI and/or the editor(s). MDPI and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions or products referred to in the content.