

Article

Computer Programming for Analysis and Design of Edge Supported Rectangular Two-Way Solid Slab by Es En 1992-1-1:2015

Chala Basha Chawaka ^{1*}



1. Current address: Engineering and Technology College, Wallaga University, Naqamte 395, Ethiopia.

* Correspondence Email: chalab.721@gmail.com

Abstract: This study's main target was to analyze and design rectangular edges supported two ways solid slabs by using ES EN 1992-1-1:2015. Slab design is often carried out either manually or with the use of design and analytic software. The researcher sees that some software cannot accept some countries' standard codes. For example, currently in Ethiopia analysis and design of two-way solid slab is done using readily available Excel sheet template. But working with this might have many problems, firstly the structure that is already analyzed by SAP or SAFE or any other international software application that uses international codes but which cannot design structure using ES EN 1992; for instant euro codes and designed by excel sheet can create failure and uneconomical analysis and design result. In this paper, the slab is designed and analyzed based on the chosen concrete grade, chosen reinforcement bar diameter, chosen steel grade for design and analysis of slabs calculations like load, moment, shear, and deflection checking using the moment coefficient method for analysis and design and Microsoft Visual Basic 2010 for coding. All input values are given by the International Standard units and are also used to represent output values. Using manual calculations delays time and mostly the result is not correct. But using this Computer program can increase computation accuracy and save time. The procedure the researcher followed is, first the manual calculation has been done and then SADSE2021 has been done. The result is that both are 99.9 percent identical, and the disadvantage of this method is that it cannot be used to determine the detailed drawing.

Keywords: Computer Program; User manual; Visual Basic; Solid Slab, and simply supported

1. Introduction

Concrete is the most widely used construction material worldwide, and the most widely used material after water [23,13]. This is due to the inherently useful characteristics of concrete: easily and globally obtainable raw materials, relative ease of processing and handling, and its ability to go from a fluid state, where it can fill a mold, to a solid state, where it can then bear a structural load [23]. It is a stone like substance produced when prepared carefully through the combination of cement, sand, gravel and water. The shape and size of the finished concrete can be set during the mixture of the elements by putting the mixture into a mold of desired dimensions [23,19,10]. Concrete are usually reinforced with various other materials that have high tensile strength and the most abundantly used is reinforcement steel bars. This is called Reinforced Concrete. Reinforced concrete provides plenty of advantages to the users such as high compressive strength, high tensile strength, good fire and weather resistance, flexibility in molding them into countless shapes and sizes and low maintenance cost [12,19,22,23]. However, it is not without its disadvantages such as the requirement of mixing, casting and curing; all of which would affect the concrete strength, the high cost of the forms to mold the concrete and the its tensile strength is one-tenth of its compressive strength [12].

Slabs is one of the most widely used structural element as it forms the floors and roofs in order to support loads normal to the surface floor. The slabs can be simply supported or even continuously span over more than one supports [6,9,21]. Rectangular slabs that are supported only on two sides opposite of each other by walls or beams where the loads are uniformly distributed along the direction that is parallel to the supports [22,14]. If the slab is square and is restrained similarly on all four sides, the load is distributed equally in both directions [6,14]. There are two types of two-way solid slabs which are simply supported slab and restrained slab. Simply supported slabs have its all four sides deflect about both axes under loads where its corners would lift and curl up from the support [3].

1.1. Analysis And Design Of Reinforcement Concrete

The design of a structure can be regarded as the process of choosing materials and elements proper for the structure. Depending on the requirements of the structure, design methods can be split into two categories which are: Ultimate Limit State and Serviceability Limit State. Ultimate Limit State covers the strength and stability of the structure under maximum design load in which the structure is expected to withstand. This also means that no part of the structure should encounter failure such as cracking, collapsing or buckling. Serviceability Limit State covers conditions in which specified service requirements are no longer met [23,11].

Ultimately, reinforced concrete design to EC 2 has these following procedures; flexural design, shear design, deflection checking, cracking checking and detailing. Flexural design is based on bending moments acting on the structural element. It is the design of the specifications of the reinforcement steel bars such as diameter size and spacing to be used with concrete with regards to the loads. Shear design is the design of reinforcement steel bars to link each other in order to resist shear forces. Shear forces is transmitted through crack member via a combination of other un-cracked concrete in zone of compression, dowelling action of the flexural reinforcement and aggregates that interlock across the cracks of tension. Deflection checking requires that the span of the structural element is not high enough to lead to excessive deflection such as sagging of floors, partitions being crushed, buckling and so on. Cracking checking is to limit the width of individual cracks for durability and corrosion protection [23,11,17]. Codes of practices and design standards such as ACI, Euro-code and British Standards are sets of technical specifications that act as a control of important details of design and construction [2]. These codes of practices have the sole purpose to produce sound and safe structures in order to protect the public from inadequately designed structures and constructions. For example the American Concrete Institute or ACI was founded in 1904 and acts as the leading authority and resource worldwide in the development and distribution of many design standards. Their main mission has always been the same which is to provide knowledge and information for the best use of concrete. ACI 318 Building Code Requirements for Structural Concrete is one of the most used design standards in America which is to provide minimum requirements for the design and construction of structural concrete under the requirements of a common code of building that is incorporated with it [4]. Whereas Euro-codes are a set of technical rules that are consensus-agreed developed by the European Committee of Standardization's for the structural design of works regarding construction mainly used in the European Union. The standards are published separately where each member has a number of parts. By March 2010, the Euro-codes were considered mandatory for European public works [7].

Software comprises the electronic instructions that govern the computer's functions [8,18]. A program consists of sequences of instructions to a computer, where it is written to perform specified task on a computer [18,4]. Unlike a program where a program is developed by individuals for their own personal use, software is much more complex. It is meant for multiple users and therefore has a good interface, designed systematically, thoroughly tested and implemented carefully. Software is most often very complex and too large for one person to create and develop single handedly [8,15]. For example, given

software that records names and addresses in a database. The program and database is considered a part of the software but the database is not a program [7,4].

2. Research Methodology

Computer programming is the process of performing a particular computation (or more generally, accomplishing a specific computing result), usually by designing and building an executable computer program. Programming involves tasks such as analysis, generating algorithms, profiling algorithms' accuracy and resource consumption, and the implementation of algorithms (usually in a chosen programming language, commonly referred to as coding).

2.1. Methods

The researcher used:

1. Microsoft visual basic 2010 for coding;
2. Microsoft Access 2010 For data base and;
3. The analysis of slab is conducted using limit state coefficient method and uses limit state method

2.2. Procedures

The researcher follows certain steps and procedures to develop the program. Those are:

- (a) The coding of the application in Microsoft Visual Basic 2010 is completed.;
- (b) Determine the thickness of the slab, in step with the procedures provided, and Check the kinds of Slab. The ratio of longer span to shorter span is equal to or greater than 2, considered a one-way slab. In a two-way slab, the ratio of longer span to shorter span is a smaller amount than 2 [7];
- (c) Calculation of Nominal cover, effective depth, and effective span: The deflection of the slab will be kept in check if the ratios of effective span to the effective depth of one-way slabs are obsessed from the provisions in ES EN 1992-1-1:2015. Supported ES EN 1992-1-1:2015: For Mild exposure = 20 mm, For Moderate exposure = 30 mm, Effective depth = depth of slab - clear cover - 1/2 diameter of bar, The Effective span of the slab shall be lesser than the 2, L = clear span + d (effective depth). L = Centre to center distance between the support [22,14,15,21];
- (d) Calculate the factored loads and Determine moment coefficients;
- (e) Calculation of shear force and bending moments: the entire factored (design) loads are to be determined by adding the estimated loading of the slab, load of the ground finish, given or assumed live loads, etc. ES EN 1992-1-1:2015 after multiplying each of them with the respective partial safety factors. Loading values are taken from the Code ES EN 1992-1-1:2015. Thereafter, the planning positive and negative bending moments and shear forces are to be determined using the respective coefficients given in Tables 12 and 13 of ES EN 1992-1-1:2015;
- (f) Calculating the steel's area and the spacing between its reinforcing bars; $M_u = 0.87f_y.A_{st}.d[1 - ((A_{st}).(f_y)) / (f_{ck})(bd)]$
- (g) Reinforcement spacing equals $((a_{st}) / (A_{st})) * 1000$ Where d is the diameter of the steel bars and ast is $d_2 / 4$;
- (h) Check for shear: For the safety of the given slab, design shear stress must be higher than nominal shear stress. $v = V_u / (b * d)$ where d = effective depth, v = factored shear, and $v =$ nominal shear stress;

The design shear value and the reinforcing Percent can be calculated using the code ES EN 1992-1-1:2015. The percentage of steel reinforcement is equal to $A_{st,prov} * 1000 / S_{prov}$. The steel portion of the given tension zone will be designated as

Astprov. Sprov is the defined bar spacing in the tension zone. Design shear should be higher than the nominal shear value to assume that a slab section is secure. For Deflection, check: $\max(l/d) > \text{real}(l/d)$, If the predicament mentioned is true Slab is resistant to deflection. (l/d) max: l =length in shorter span, d =effective depth, taken from the code ES EN 1992-1-1:2015.

3. Results and Discussion

3.1. Results:Introduction

A software comprises the electronic instructions that govern the computer's functions. A program consists of sequences of instructions to a computer, where it is written to perform specified task on a computer [7,15]. Unlike a program where a program is developed by individuals for their own personal use, software is much more complex. It is meant for multiple users and therefore has a good interface, designed systematically, thoroughly tested and implemented carefully. Software is most often very complex and too large for one person to create and develop single handedly [4,15,18]. For example, given a software that records names and addresses in a database. The program and database is considered a part of the software but the database is not a program [18]. In this paper the researcher developed computer program which used to provide an easy interface for users to use and input values to the program which will carry out the calculations in a short amount of time and successfully allow the program to carry out calculations for the analysis of reinforced concrete design for two-way restrained slabs.

3.2. System Analysis and Design For Structural Elements/SADSE2021

SADSE2021 is Computer programming that is developed for "System Analysis and Design of Structural Elements". In this Research the Part of SADSE2021 presented here is only SADSE2021 for Two Way Solid Slab only. The Program is developed using Microsoft Visual Basic 2010. Here in this research paper researcher uses visual basics for Calculations as described below. Having Microsoft Visual Basic 2010 on your desktop or PC; Visual basic allows users to perform any functions related to slab analysis and design by using the Moment Coefficient method. Steps to create a Microsoft Visual Basic 2010 project SADSE2021 include:

- Open Microsoft Visual Basic 2010 (Using Microsoft Visual Studio 2010);
- Click the File menu, select File → new project;
- Select "Windows Forms Application" in the pop-up New Project window and name the project.
- Click File menu → Save All.

Then, once the program is finished in its programming and coding, the program will:

- (a) Able to be executed with any computer that has Microsoft Basic installed and its requirements;
- (b) Read inputs given such as Characteristic Actions;
- (c) Characteristic Strength of concrete and steel;
- (d) length and width of slab;
- (e) nominal cover;
- (f) slab thickness;
- (g) Slab Position Case;
- (h) Characteristic Strength of concrete and steel;

Once inputs are correctly added clicking "Calculate" button will begin the calculation process and analyze the Two-Way Restrained Slab, Calculations will not be shown on-screen but it will give the answers on the screen for the following:

- (a) Area of the slab, A in mm^2 ;
- (b) Design action, n in kN/m^2 ;
- (c) Ratio of Ly/Lx , case;

(d)	Bending moment coefficients for short span sx and sy;	189
(e)	Bending moments: Msx1, Msx2, Msy1 and Msy2 in kN/mm2;	190
(f)	Diameter of bar in mm, Fctm in kN/mm2;	191
(g)	Effective depths, dx and dy in mm;	192
(h)	Minimum and maximum reinforcement area in mm2;	193
(i)	Areas of reinforcements for long spans and short spans with their respective mid spans and support, As in mm2/m2;	194
(j)	Values of k and z for the calculation of area of reinforcement,;	195
(k)	Design shear forces: Vsx1, Vsx2, Vsy1 and Vsy2;	196
(l)	Maximum shear force, Ved;	197
(m)	Design Shear Resistance, Vrd,c;	198
(n)	Diameter of bar in mm, Fctm in kN/mm2;	199
(o)	Minimum Shear Force, Vmin;	200
(p)	Maximum Bar Spacing for Main and Secondary Bars;	201

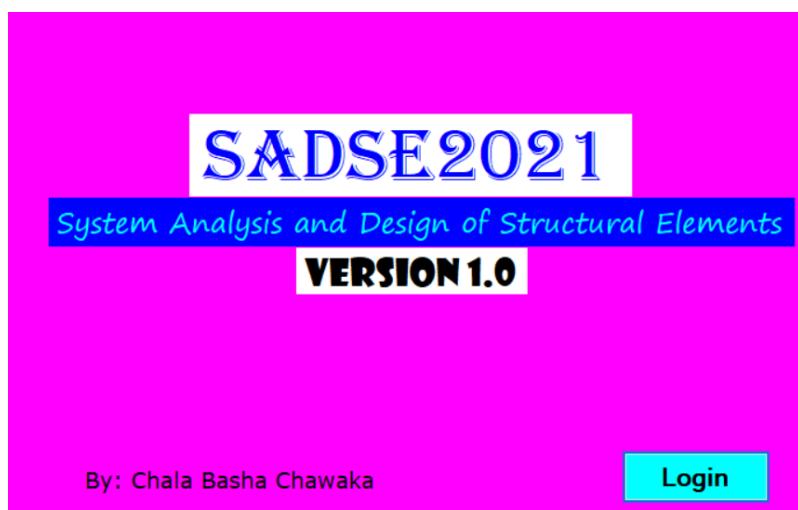


Figure 1. Screen of SADSE2021

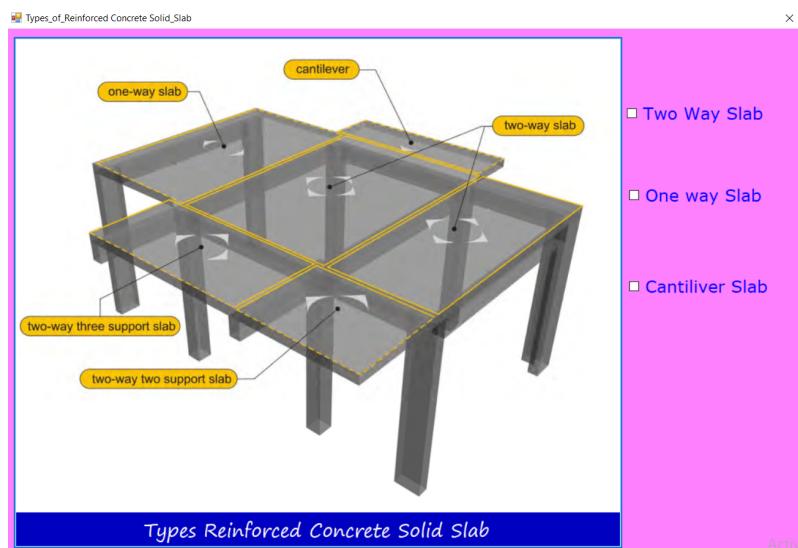


Figure 2. Screen for Selection of Types of RC Solid Slab

Table 1. Variables and Description

Abbreviation	Variables	Description
Fk	Characteristic value of an action	Value assigned to a basic variable, an action or a resistance from which the design value can be found by the application of a partial factor
Gk	Characteristic permanent action	Action whose variation in magnitude, is despicable over the time, or whose variation is monotonous until a determined limit value is reached.
fc	Compressive strength of concrete	the Strength of hardened concrete measured by the compression test.
fcd	Design value of concrete compressive strength	a coefficient taking account of long-term effects on the compressive strength.
fck	Characteristic compressive cylinder strength of concrete at 28 days	characteristic compressive strength of 150 mm size cubes tested at 28 days.
fcm	Mean value of concrete cylinder compressive strength	measure of the concrete's ability to resist loads which tend to compress it.
fctk	Characteristic axial tensile strength of concrete	the maximum stress that a material can bear before breaking when it is allowed to be stretched or pulled
fctm	Mean value of axial tensile strength of concrete	mean value of axial tensile strength of concrete at 28 days.
fy	Yield strength of reinforcement	an indication of maximum stress that can be developed in a material without causing plastic deformation.
fyd	Design yield strength of reinforcement	the ultimate tensile strength of any bar shall be greater than ...
fyk	Characteristic yield strength of reinforcement	it should satisfy basic characteristics such as yield strength.
k	Coefficient ; Factor	the numerical factor of a term containing constant and variables.
or l or L	Length; Span	the distance measured by a human hand, from the tip of the thumb to the tip of the little finger.

3.3. Discussion: Numerical Examples

Design the reinforcement for a simply supported slab 200 mm thick and spanning in two directions. The effective span in each direction is 4.5 m and 6.3 m and the slab supports a live load of 10 kN/m². The characteristic material strengths are $fc = 30$ N/mm² and $fy = 460$ N/mm².

203

204

205

206

207

3.4. Solution 1 (Using SADSE 2021)

208

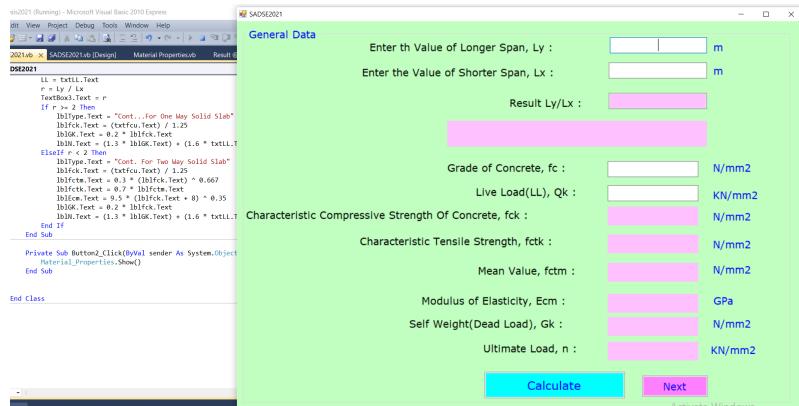


Figure 3. Material Property of Concrete insertion page

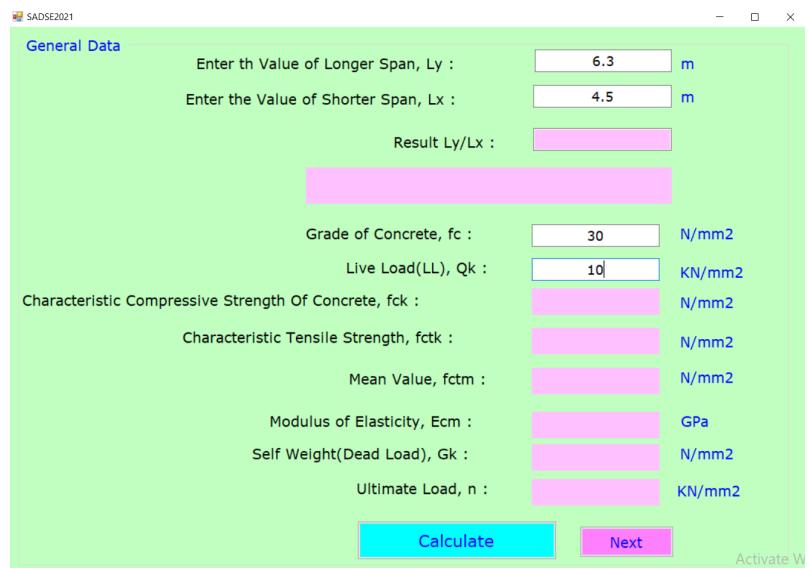


Figure 4. Material Property of Concrete

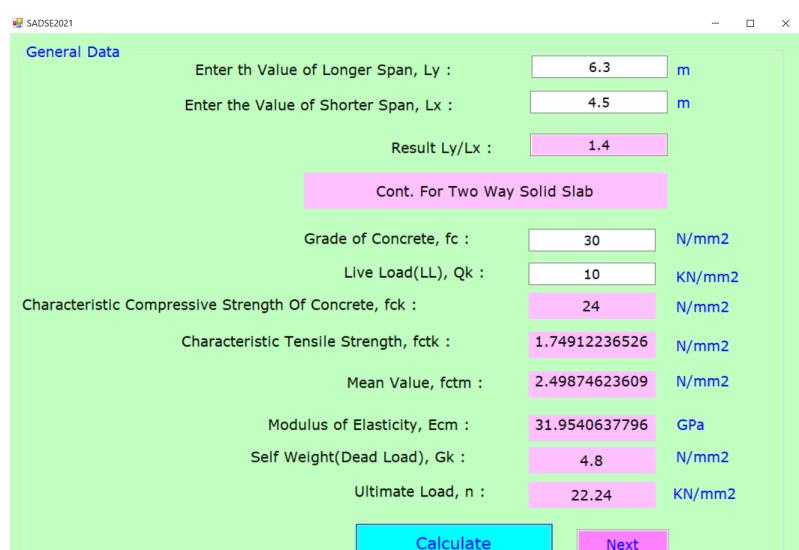


Figure 5. Material Property of Concrete Result



Figure 6. Screen @ Short Span



Figure 7. Screen to input data @ Short Span

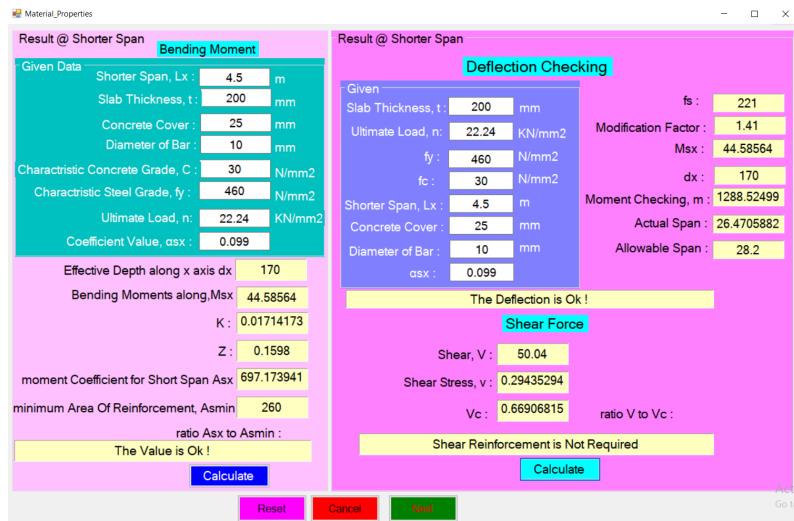


Figure 8. Result for the input data @ Short Span



Figure 9. Screen @ Long Span

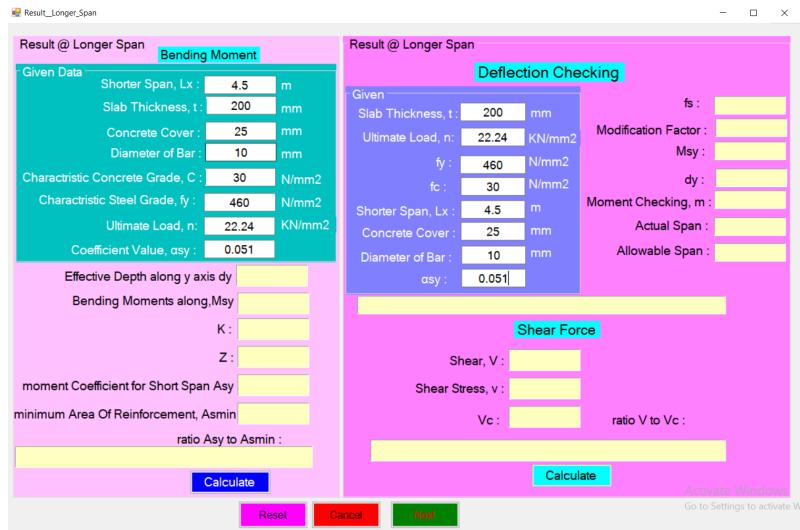


Figure 10. Input data @ Long Span

Figure 11. Results @ Long Span
3.5. Solution 2 Using Manual Calculation

$$ly / IX = 6.3 / 4.5 = 1.4 < 2 \rightarrow \text{Two-way slab}$$

From Table 3.14, $\alpha_{sx} = 0.099$, $\alpha_{sy} = 0.051$

Self-weight of slab = $0.2 \times 24 \times 103 = 4.8 \text{ kN/m}^2$

Ultimate load, n = $1.3Gk + 1.6Qk$

$$n = (1.3 \times 4.8) + (1.6 \times 10) = 22.24 \text{ kN/m/m width}$$

Short Span	215
1) Bending	216
From Table 3.1, ES EN 1992-1-1:2015, mild exposure conditions, cover, c = 25 mm.	217
Assume Ø bar = 10mm.	218
$dx = h - c - \frac{\Ø}{2} = 200 - 25 - 5 = 170 \text{ mm}$	219
$msx = \alpha s x n l x^2 = 0.099(22.24)(4.5)^2 = 44.97 \text{ kN.m/m}$	220
$k = M / (fc_u b d^2) = (45.5 \times 10^6) / (30(1000)(170)^2) = 0.017 < 0.15$	221
$z = d0.5 + (0.25 - k / 0.9)$	222
$z = 0.94 < 0.95d$, so take $z = 0.94d$	223
$Asx = msx / (0.87 f_y z) = (44.58 \times 106) / (0.87 \times 460(0.94 \times 170)) = 697.17 \text{ mm}^2 / \text{m}$	224
Checking Asmin, from Table 3.1, ES EN 1992-1-1:2015, $f_y = 460 \text{ N/mm}^2$	225
$Asmin = 0.13 b h / 100 = (0.13(1000 \times 200)) / 100 = 260 \text{ mm}^2 / \text{m}$	226
$Asx > Asmin \rightarrow \text{ok}$	227
Provide T10 bars at 100 mm Centre, $As = 786 \text{ mm}^2 / \text{m}$	228
2) Deflection Checking	229
$M / (bd^2) = (45.5 \times 10^6) / (1000 * 170^2) = 1.57$	230
From Table 3.1, ES EN 1992-1-1:2015, for $f_s = 221 \text{ N/mm}^2$ the span-effective depth modification factor = 1.41. Therefore; Allowable span / d > Actual span / d $20 * 1.41 = 4500 / 170$	231
$28.2 > 26.5 \rightarrow \text{ok}$	232
3) Shear	234
$V = WL / 2 = ((22.72 \times 4.5)) / 2 = 50.04 \text{ kN}$	235
Shear stress,	236
$v = V / bd = (50.04 * 103) / (1000 * 170) = 0.29 \text{ N/mm}^2 < 0.8 \text{ f}_{cu}$	237
$100As / bd = (100 \times 786) / (1000 \times 170) = 0.46$	238
$So, v_c = 0.63 \times (30 / 25) / 3 = 0.67 \text{ N/mm}^2$,	239
$v < v_c$, so no shear reinforcement is required.	240
Long Span	241
1) Bending	242
From Table 3.1, ES EN 1992-1-1:2015, mild exposure conditions, cover, c = 25 mm.	243
Assume Ø bar = 10mm.	244
$dy = h - c - \frac{\Ø}{2} = 200 - 25 - 10 - 5 = 160 \text{ mm.}$	245
$msy = \alpha s y n l x^2 = 0.051(22.72)(4.5)^2 = 0.051(22.72)(4.5)^2 = 22.97 \text{ kNm/m}$	246
$k = M / (fc_u b d^2) = (23.5 \times 10^6) / (30(1000)(160)^2) = 0.099 < 0.156z = d0.5 + (0.25 - k / 0.9)$	247
$z = d0.5 + (0.25 - 0.099 / 0.9)$	248
$z = 0.156 < 0.95d$, so take $z = 0.95d$	249
$Asy = msy / (0.87 f_y z) = (22.97 \times 10^6) / (0.87 \times 460(0.95 \times 160)) = 487.59 \text{ mm}^2 / \text{m}$	250
Checking Asmin, from ES EN 1992-1-1:2015, $f_y = 460 \text{ N/mm}^2$	251
$Asmin = 0.13 b h / 100 = (0.13(1000 \times 200)) / 100 = 260 \text{ mm}^2 / \text{m}$	252
$Asx > Asmin \rightarrow \text{ok}$	253
Provide T10 bars at 200 mm centre, $As = 393 \text{ mm}^2 / \text{m}$	254
2) Checking for Transverse Steel	255
From Table 3.27, $f_y = 460 \text{ N/mm}^2$	256
$100As / bh = 100(393) / 1000 \times 200$	257
$0.31 > 0.025$ (Asmin) → ok	258
As we have seen above, the Calculation Made by Manual and SADSE2021 is 99.9 percent the same and the drawback of this method is to determine the detail drawing.	259

4. Discussion

Computer Programming is essentially a process that comes from an original formulation for computing problems that turns into an executable program in which it will carry out the written formula. You can program and code a simple calculator to carry out simple calculations [4,5]. There is much software that assists in the creation of new software such as Microsoft Small Basic, Microsoft Visual Basic and Java. Here in this study the researcher developed a computer program for the analysis and Design of Edge supported rectangular

reinforced Concrete two-way solid slab that takes Ethiopian code of provisions and utilizes ES EN 1992-1-1:2015 using Microsoft Visual Basic 2010 for coding. This coding has done to overcome the delay in the manual calculations, to obtain the accuracy in the result calculations. As slab is an important element in the structural design aspect, it has to be designed very carefully. Also the unit conversion is not allowed in the coding, and all the dimensions are to be submitted in meters only. The Calculation Made by Manual and SADSE2021 is 99.9 percent the same and the drawback of this method is to determine the detail drawing.

5. Conclusions

As slab is an important element in the structural design aspect, it has to be designed very carefully. Here, the unit conversion is not allowed in the coding, and all the dimensions are to be submitted in meters only. The Calculation Made by Manual and SADSE2021 is 99.9 percent the same and the drawback of this method is to determine the detail drawing.

Funding: This research received no external funding.

Institutional Review Board Statement: Not applicable

Informed Consent Statement: Not applicable

Data Availability Statement: Not applicable.

Acknowledgments: First of all, I would like to thank God of Almighty; Whose Spirit is always guiding me with his council to the world of wisdom. In addition to that, I would like to express my heart full gratitude to a heroine who I always like to thank her with all my heart is my mother Mrs. Bashatu Mijena who has done a lot alone for me. She is the person behind the scene of my life and success. The other who I need to acknowledge is my University Wallaga University), College of Engineering and Technology and Department of Civil Engineering for their support in every direction.

Conflicts of Interest: There is no potential source of conflict.

Abbreviations

The following abbreviations are used in this manuscript:

ACI : American Concrete Institute	295
As,min : Minimum area of reinforcement	296
As,req : Required area of reinforcement	297
As,prov : Provided area of reinforcement	298
b : Width of slab	299
bw : Smallest width of the section in tensile area	300
Cnom : Nominal Cover	301
d : Breadth of slab	302
dx, y : Effective depth in x,y direction	303
EN : European Standards	304
fctm : Mean values of the axial tensile strength of concrete	305
fck : Characteristic strength of concrete	306
fyk : Characteristic strength of steel	307
h : Slab Thickness	308
RC : Reinforced Concrete	309
m2 : Square meter	310
MPa : Mega Pascal	311
kN/mm2 : Kilo newton per square millimeter	312
n : Total ultimate load per unit area	313
ned : Design action	314
Ly : Length of longer span	315
Lx : Length of shorter span	316
Msx : Maximum moment per unit width	317
Vsx : Design shear force	318

Ved : Maximum shear force	319
Vrd,c : Design shear resistance without shear reinforcement	320
Vmin : Minimum shear force	321
Smax,slabs : Maximum bar spacing for slabs	322
SADSE : System Analysis and Design of Structural Elements	323
	324

6. Appendix

Public Class SADSE2021	326
Dim Ly As Double	327
Dim Lx As Double	328
Dim r As Double	329
Dim fc As Integer	330
Dim fck As Double	331
Dim LL As Integer	332
Dim Gk As Double	333
Dim Qk As Double	334
Lx = TextBox2.Text	335
Ly = TextBox1.Text	336
fc = txtfcu.Text	337
LL = txtLL.Text	338
r = Ly / Lx	339
TextBox3.Text = r	340
If r >= 2 Then	341
lblType.Text = "Cont...For One Way Solid Slab"	342
lblfck.Text = (txtfcu.Text) / 1.25	343
lblGK.Text = 0.2 * lblfck.Text	344
lblIN.Text = (1.3 * lblGK.Text) + (1.6 * txtLL.Text)	345
ElseIf r < 2 Then	346
lblType.Text = "Cont. For Two Way Solid Slab"	347
lblfck.Text = (txtfcu.Text) / 1.25	348
lblfctm.Text = 0.3 * (lblfck.Text) ^{0.667}	349
lblfctk.Text = 0.7 * lblfctm.Text	350
lblEcm.Text = 9.5 * (lblfck.Text + 8) ^{0.35}	351
lblGK.Text = 0.2 * lblfck.Text	352
lblIN.Text = (1.3 * lblGK.Text) + (1.6 * txtLL.Text)	353
lblIdx.Text = txtt.Text - txtCov.Text - (txtBar.Text) / 2	354
lblMsx.Text = txtco.Text * txtN.Text * (txtLx.Text) ²	355
lblK.Text = (lblMsx.Text * 10 ⁶) / ((txtfc.Text * 1000) * (lblIdx.Text)) ²	356
lblZ.Text = 0.94 * lblIdx.Text	357
lblAsx.Text = (lblMsx.Text * 10 ⁶) / ((txtfy.Text * 0.87 * 0.94 * lblIdx.Text))	358
lblAsmin.Text = (0.13 * 1000 * txtt.Text) / 100	359
If lblAsx.Text > lblAsmin.Text Then	360
lblr.Text = "The Value is Ok!"	361
ElseIf lblAsx.Text < lblAsmin.Text Then	362
lblr.Text = " The Value is Not Ok !"	363
If txtAll1.Text > txtAct1.Text Then	364
lblAltoAct.Text = "The Deflection is Ok!"	365
ElseIf txtAll1.Text < txtAct1.Text Then	366
lblAltoAct.Text = "The Deflection is Not Ok!"	367
lblIdx1.Text = lblIdx.Text	368
lblMsx1.Text = lblMsx.Text	369
lblm.Text = lblMsx1.Text / 1000 * (lblIdx1.Text) ²	370
lblIV.Text = ((txtn1.Text) * (txtLx1.Text)) / 2	371

```
lblv1.Text = lblV.Text * 103 / (1000 * lbldx1.Text) 369
lblvc.Text = 0.63 * (txtfc1.Text / 25)0.33 370
If lblv1.Text > lblvc.Text Then 371
    lblRatioVvc.Text = "Shear Reinforcement is required" 372
ElseIf lblv1.Text < lblvc.Text Then 373
    lblRatioVvc.Text = "Shear Reinforcement is Not Required" 374
btnCalc3.Click 375
lbldy3.Text = (txtt3.Text - txtCov3.Text - (txtBar3.Text) / 2) - 10 376
lblMsy3.Text = txtco3.Text * txtN3.Text * (txtLx3.Text)2 377
lblK3.Text = (lblMsy3.Text * 106) / ((txtfc3.Text * 1000) * (lbldy3.Text))2 378
lblZ3.Text = 0.94 * lbldy3.Text 379
lblAsy3.Text = (lblMsy3.Text * 106) / ((txtfy3.Text * 0.87 * 0.94 * lbldy3.Text)) 380
lblAsmin3.Text = (0.13 * 1000 * txtt3.Text) / 100 381
If lblAsy3.Text > lblAsmin3.Text Then 382
    lblr3.Text = "The Value is Ok !" 383
ElseIf lblAsy3.Text < lblAsmin3.Text Then 384
    lblr3.Text = " The Value is Not Ok !" 385
If txtAll4.Text > txtAct4.Text Then 386
    lblAltoAct4.Text = "The Deflection is Ok !" 387
ElseIf txtAll4.Text < txtAct4.Text Then 388
    lblAltoAct4.Text = "The Deflection is Not Ok !" 389
lbldy4.Text = lbldy3.Text 390
lblMsy4.Text = lblMsy3.Text 391
ElseIf lblAllowperEff.Text < lblActualperEff.Text Then 392
    lblAlltoAct.Text = "Deflection Check is Not Ok ! Then Refer ES EN 1992-1-1:2015" 393
    lblActualperEff.Text = (txtL.Text * 103) / lblEffd.Text 394
    lbl.Text = lblAsreq.Text / (1000 * lblEffd.Text) 395
    lblP.Text = (txtfc.Text * 0.5) / 1000 396
    lbls.Text = ((txtfy.Text) * (lblAsreq.Text) / (lblAsPro.Text) * ((lblSelfw.Text + (0.3 * 397
        txtL.Text)) / ((lblG.Text) * (lblSelfw.Text)) + (lblQ.Text) * (txtLive.Text)) * (1 / lbl.Text)) 398
    lblF3.Text = 310 / lbls.Text 399
    If lblRenfK.Text < lblkk.Text Then 400
        lblComp.Text = "Compression Reinforcement is not Required !" 401
    ElseIf lblRenfK.Text > lblkk.Text Then 402
        lblComp.Text = "Compression Reinforcement is Required and Then Refer ES EN 403
        1992-1-1:2015 For It." 404
        lblSelfw.Text = "" 405
        lblActualperEff.Text = "" 406
        lblAllowperEff.Text = "" 407
        lblAsPro.Text = "" 408
        txtCover.Text = "" 409
        lblP.Text = "" 410
        lblUlt.Text = "" 411
        lblEffd.Text = "" 412
        txtDiaBar.Text = "" 413
        txtL.Text = "" 414
        lblAsreq.Text = "" 415
        lblComp.Text = "" 416
        lbl.Text = "" 417
        lblMom.Text = "" 418
        lblRenfK.Text = "" 419
        txtCover.Text = "" 420
        txtL.Text = ""
        txtt.Text = ""
```

txtfc.Focus()
End Sub
End Class

421
422
423

7. Reference

1. Abass, H. A., E. Elbeltagi, and M. Youssef. "Developing a Computerized Framework for Applying Value Engineering in Construction Projects (Dept. C (structural))." *MEJ. Mansoura Engineering Journal* 40.3 (2020): 74-87. 424
425
426
2. Abdulrahman, Lozan M., et al. "A state of art for smart gateways issues and modification." *Asian Journal of Research in Computer Science* (2021): 1-13. 427
428
3. Ahmad, Waqas, et al. "A scientometric review of waste material utilization in concrete for sustainable construction." *Case Studies in Construction Materials* 15 (2021): e00683. 429
430
4. Akin, A., and M. P. Saka. "Harmony search algorithm based optimum detailed design of reinforced concrete plane frames subject to ACI 318-05 provisions." *Computers Structures* 147 (2015): 79-95. 431
432
5. Alkhattib, Soliman, and A. Deifalla. "Reliability-based assessment and optimization for the two-way shear design of lightweight reinforced concrete slabs using the ACI and EC2." *Case Studies in Construction Materials* 17 (2022): e01209. 433
434
6. Anas, S. M., Mehtab Alam, and Mohd Shariq. "Damage response of conventionally reinforced two-way spanning concrete slab under eccentric impacting drop weight loading." *Defence Technology* (2022). 435
436
7. Brunesi, E., et al. "Cyclic testing of a full-scale two-storey reinforced precast concrete wall-slab-wall structure." *Bulletin of Earthquake Engineering* 16.11 (2018): 5309-5339. 437
438
8. Campus, Cruz-Main. "HAND CALCULATION AND EXTENDED THREE DIMENSIONAL ANALYSIS OF BUILDINGS (ETABS) SOFTWARE: AN ANALYSIS AND DESIGN FOR A THREE (3) STORY BUILDINGS." *EPRA International Journal of Multidisciplinary Research (IJMR)*: 57. 439
440
9. Gbree, Abrham, Getu Segni, and Garomsa Fikadu. "Assessment of shear strength of interior reinforced concrete beam-column joint." *Zede Journal* 37 (2019): 1-11. 441
442
10. Hu, Menghan, et al. "Seismic failure of multi-span simply supported RC slab-on-girder bridge in 2008 Wenchuan earthquake: Case study." *Engineering Failure Analysis* 95 (2019): 140-153. 443
444
11. Kadhim, Majid MA, et al. "Analysis and design of two-way slabs strengthened in flexure with FRCM." *Engineering Structures* 256 (2022): 113983. 445
446
12. Meditz, Moritz. "History and Technique in Reinforce Concrete Formworks: A study of Pier Luigi Nervi Approach." (2022). 447
448
13. Megid, Wael A., and Kamal H. Khayat. "Variations in surface quality of self-consolidation and highly workable concretes with formwork material." *Construction and Building Materials* 238 (2020): 117638. 449
450
14. Pichon, Pierre, et al. "Light Extraction and Brightness Enhancement of Luminescent Rectangular Slabs." *Advanced Photonics Research* (2022): 2100356.. 451
452
15. Priyanka, M. Devi, and V. Ramesh. "Comparative Study on Slab Deflections." *IOP Conference Series: Earth and Environmental Science*. Vol. 982. No. 1. IOP Publishing, 2022. 453
454
16. Sabe, Victor T., et al. "Current trends in computer aided drug design and a highlight of drugs discovered via computational techniques: A review." *European Journal of Medicinal Chemistry* 224 (2021): 113705.. 455
456
17. Sener, Kadir C., and Amit H. Varma. "Steel-Plate Composite Walls with Different Types of Out-of-Plane Shear Reinforcement: Behavior, Analysis, and Design." *Journal of Structural Engineering* 147.2 (2021): 04020329. 457
458
18. Shams, Mohamed A., Mohamed A. Shahin, and Mostafa A. Ismail. "Numerical analysis of slab foundations on reactive soils incorporating sand cushions." *Computers and Geotechnics* 112 (2019): 218-229. 459
460
19. Zhang, Yating, Yuan Hua, and Xingyi Zhu. "Investigation of the durability of eco-friendly concrete material incorporating artificial lightweight fine aggregate and pozzolanic minerals under dual sulfate attack." *Journal of Cleaner Production* 331 (2022): 130022. 461
462
20. Shinde, Chandrasas Bhimrao Patil1 Pradip Shanker, and Bajirao Mahadeo Mohite3 Shrikant Subhash. "Analyze, Design and Estimation of Multistoried Building Parking System for a Specified City." 463
464
21. Varghese, Jerry Paul, and Manju George. "Parametric investigation on the seismic response of voided and solid flat slab system." *International Journal of Innovative Science, Engineering and Technology* 5.3 (2018): 255-259. 465
466
22. Wang, Yong, et al. "Numerical modelling of in-plane restrained concrete two-way slabs subjected to fire." *Fire Safety Journal* 121 (2021): 103307. 467
468
23. Wangler, Timothy, et al. "Digital concrete: a review." *Cement and Concrete Research* 123 (2019): 105780. 469
470