

Article

Not peer-reviewed version

---

# Building Doors with Integrated Location-Based Emergency Call Functionality

---

[Tzu-Wen Kuo](#) \* and [Ching-Yuan Lin](#)

Posted Date: 27 January 2025

doi: 10.20944/preprints202501.1961.v1

Keywords: smartphones; distress signals; search and rescue; burning building; firefighter; disaster prevention; rescue time; surviving victim; QR code; trapped person



Preprints.org is a free multidisciplinary platform providing preprint service that is dedicated to making early versions of research outputs permanently available and citable. Preprints posted at Preprints.org appear in Web of Science, Crossref, Google Scholar, Scilit, Europe PMC.

Copyright: This open access article is published under a Creative Commons CC BY 4.0 license, which permit the free download, distribution, and reuse, provided that the author and preprint are cited in any reuse.

Article

# Building Doors with Integrated Location-Based Emergency Call Functionality

Tzu-Wen Kuo <sup>1,\*</sup> and Ching-Yuan Lin <sup>2</sup>

<sup>1</sup> Department of Architecture, National Taiwan University of Science and Technology, Taiwan; kuoarchitect@yahoo.com

<sup>2</sup> Department of Architecture, National Taiwan University of Science and Technology, Taiwan; linyuan@mail.ntust.edu.tw

\* Correspondence: kuoarchitect@yahoo.com; Tel.: 002886911777000

**Abstract:** The aim of this study is to explore how to shorten firefighter search time during indoor fires to rescue more people, through enhancing disaster prevention capabilities with building technologies. In indoor fires, fatalities are often caused by the failure of firefighters to rescue individuals in a timely manner. How to effectively increase the probability of survival while waiting for rescue behind closed doors warrants in-depth research and analysis. Therefore, to ensure that people live in a safe environment, there is an urgent need for a building door panel material with an emergency call function to prevent such incidents from occurring. By utilizing the PRISMA method, the authors conducted a comprehensive review of existing literature to identify the key issues and limitations associated with the current search and rescue techniques. Subsequently, the identified primary factors were analyzed using the TRIZ method to determine the key factors influencing the success of rescuing trapped individuals, and a notification system was designed to address this issue. Based on the premise that it is advisable to wait for rescue during a fire, we utilize a smartphone to scan a QR code and transmit the exact location information to the fire department. Through extensive participation and feedback from firefighters, the author has developed a rescue notification door panel and has obtained a patent for it. This system can significantly reduce the time required for search and rescue operations in fire incidents. The experimental results show a reduction of one-third in search time.

**Keywords:** smartphones; distress signals; search and rescue; burning building; firefighter; disaster prevention; rescue time; surviving victim; QR code; trapped person

---

## 1. Introduction

Given the unpredictable nature of fire scenes, where lives can be lost in dark, smoke-filled environments within minutes or even seconds, it is crucial for firefighters to locate trapped individuals as quickly as possible. Although people can use smartphones to call for help, firefighters are often entering the scene for the first time in their life to rescue and extinguish fires. Searching for trapped individuals in an unfamiliar, dark, and smoke-filled environment remains a slow and dangerous task. Therefore, when trapped individuals retreat to a specific room to wait for rescue, building doors equipped with location-based emergency call functionality are essential. These doors enable firefighters to determine the exact location of the trapped individuals, facilitating a quicker rescue from the fire scene.

Fire is the most common disaster in the built environment causing huge economic losses and jeopardizing human safety [1]. More and more buildings are facing over aging problems and lack regular maintenance. These issues bring about challenges in terms of fire emergency prevention and control [2]. It is very difficult for people to successfully escape under fire condition, so many people will be trapped in the building [3]. If the escape route is blocked by smoke or fire, then occupants must be to make further choices about whether to continue or not [4]. Trapped victims may be too

weak to call for help, making it crucial to locate and rescue them quickly [5]. In many cases, firefighters do not know where survivors will be. Among of the challenges in the search and rescue operation is how to locate victims [2]. One way to reduce such hazards is to provide firefighters with timely access to accurate location information [6]. Information of the trapped victims an essential component for better emergency response [7]. Retreating to a specific room to wait for rescue will be the last resort for those unable to successfully evacuate on their own. However, as of now, the indoor location of trapped individuals during a fire still cannot be transmitted to firefighting units to inform them of the exact position of the victims. Therefore, the author identified a research opportunity to integrate a distress signaling and location function into building materials.

Previous research has mainly focused on voluntary evacuation actions [8], and that study did not consider evacuating vulnerable individuals, and those stranded at the fire site due to uncertain factors. To verify the accuracy of the whereabouts of trapped individuals, a thermal image camera (TIC) has been introduced in recent years to assist search and rescue operations in Taiwan [9,10]. Due to the limitations of indoor positioning technology, rescuing individuals in smoke-filled environments remains a significant challenge to this day. The search and rescue tasks of firefighters at a fire scene are generally divided into rescue operations on non-fire floors and firefighting and search tasks on fire floors. This study was limited to the investigation of search and rescue missions on non-fire floors. The objective of this study was to explore methods for enabling firefighters to swiftly rescue trapped individuals at fire scenes. The author proposed an innovative "call-for-help notification system" (CFHNS). When a fire breaks out, the trapped person can scan the quick response (QR) code on the door with a smartphone, which immediately sends the coordinates of the trapped person to firefighters, who can then identify the correct indoor location of the trapped person. Scanning QR codes has become a routine activity for anyone using a smartphone, making it highly practical for use in emergency situations. This also facilitates easier promotion and implementation by government authorities. From firefighters participated in the verification, 95% of the 141 firefighters believed that providing the location map of the person to be rescued was effective, and 96.4% believed that it could shorten the search times. Although AI-assisted positioning systems can be utilized, their high cost makes them impractical for implementation in all buildings and challenging for government adoption. In comparison, a QR-based system is more feasible and cost-effective to implement. This paper has a certain degree of innovation because the scientific and technological method of this paper has been granted a patent certificate by the Taiwan Intellectual Property Office; So, it proved to be a novel search and rescue assistance system. The target of this scientific study is to convey new knowledge and information. After all, successful research must not only be academically reliable, but also easily applicable to the industry.

## 2. Materials and Methods

The methodology and objectives of the research are goaled at finding more reliable and valid answers to the problem or identifying better solutions. To determine current research gaps and propose innovative strategies or research conception, we conducted a systematic review and meta-analysis (PRISMA) to uncover issues related to factors influencing firefighter search and rescue operations. Specifically, we found a lack of technological equipment among indoor fire search personnel. Next, we used the TRIZ (Teoriya Resheniya Izobreatatelskikh Zadatch) method to determine how to design and manufacture novel assistive search devices. Finally, based on quantitative positivism, we have collaborated with the fire department and invited a specific fire brigade from a certain district to participate in the experiment, we verified the use of firefighters participating in the CFHNS.


### 2.1. Journal Article Search Plan

The intention of this literature review was to identify new aids to improve with fire search and rescue operations for firefighters. The author used the Scopus database as the main database due to its high-quality selection of the articles and journals [11].

#### (1) Search Limit



The inclusion criteria involved selecting articles that had been previously cited and were related to firefighter search and rescue topics. The exclusion criteria included irrelevant topics, duplicate articles, articles of different types, and different regimens.

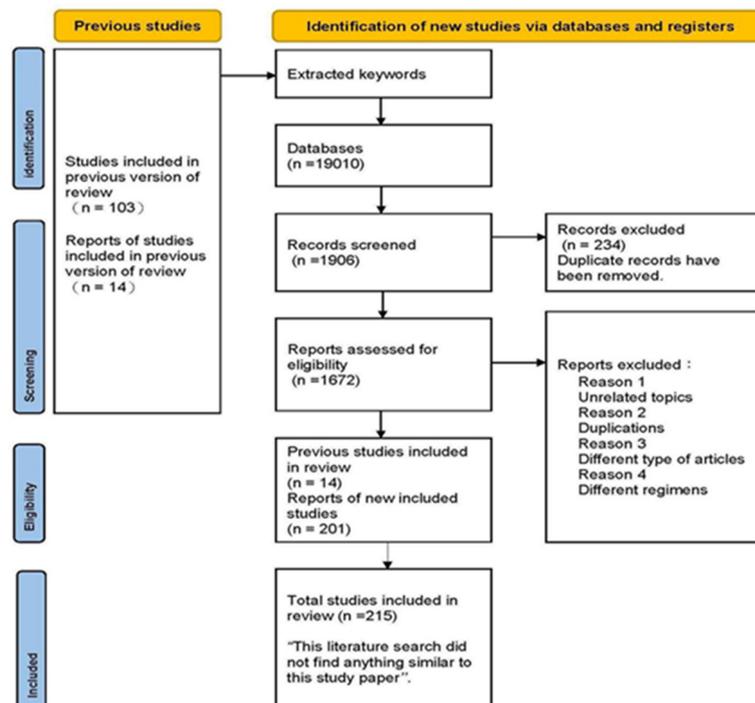

**Figure 2.** Flow chart of the approach adopted for the literature review.

And then we discovered that, apart from employing robots for indoor fire rescue, there are no other technological methods for smoke-filled search scenarios. Finally, 215 articles were selected for review according to the PRISMA guidelines.


Thereafter, we identified the keywords for the key factors. We then used these identified keywords to address the critical issues and constraints, including speed, time loss, and reliability. Next, the authors applied the TRIZ method to identify key factors influencing the success of rescuing trapped individuals (e.g., codes 4, 10, 11, 21, 27, 28, 30, and 35, as shown in Table 1) and designed a door panel with emergency call functionality to address these issues.

TRIZ provides us with a methodology for engineering creativity [16–18]. Using the theory of inventive problem solving (TRIZ), with its contradiction matrix technology and forty invention principles [19,20], we can define a reliable answer [21,22]. We take the three most important parameters of a multiple contradictions query with matrix: speed, loss of time, and reliability.

**Table 1.** TRIZ contradiction matrix. (A method that provides suggested keywords for innovative solutions by contrasting conflicting parameters.).

	No.9 Speed	No.25 Loss of Time	No.27 Reliability
No.9 Speed			11.Cushion in advance 27.Cheap short-living objects 28.Mechanics substitution 35.Parameter changes
No.25 Loss of Time			4.Asymmetry 10.Preliminary action 30.Thin films
No.27 Reliability	11.Cushion in advance 21.Skipping 28.Mechanics substitution 35.Parameter changes	4.Asymmetry 10.Preliminary action 30.Thin films	

The most common use of mobile maps is for navigation [23]. If trapped individuals can send a location map to firefighters, they will be rescued more quickly. Therefore, a medium to represent the map is needed. A QR code can serve as this map and can be transmitted using a mobile phone. Thus, integrating a QR code with the door panel represents a practical smart building material. The procedure for the solution is illustrated in Figure 3.

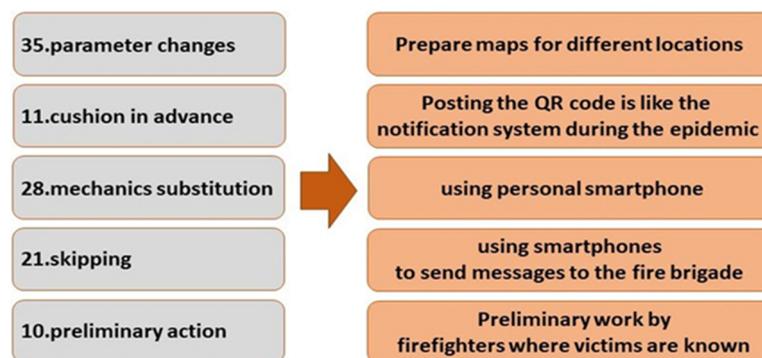

**Figure 3.** The solution program generated by the inventive principles of TRIZ. (Source: Authors).

### 2.3. Design Of Experiment


Since the COVID-19 outbreak occurred during the study period, the Taiwanese Government stipulated that entering and exiting public places required a smartphone to scan a QR code. If an infected person entered or exited the indoor space, the Government could quickly determine who is likely to be infected, and that manage this via notifications. Therefore, since the action of scanning a QR code with a smartphone is already familiar in Taiwan, we used this technology for our experiments [24,25]. We utilized open-source software to create an indoor map and convert it into a QR code, as shown in Figure 4(a).



**Figure 4(a).** Floor Plan Converted into QR Code Representation.

This study aims to be applied in real-life situations. Therefore, with the assistance of the fire department, the department provided a training facility for the researchers to conduct the experimental plan. Based on the provided site, we created an indoor map and then used open-source

software to convert the floor plan into a QR code. In future practical implementations, the fire department will need to provide the platform for converting floor plans into QR codes. The map was drawn using the drawing method of Taiwan's annual fire safety declaration map. The instructions were: Print this QR code, paste it on the door, scan it with your smartphone, and send it to a firefighter for confirmation. As can be seen in Figure 4(b).

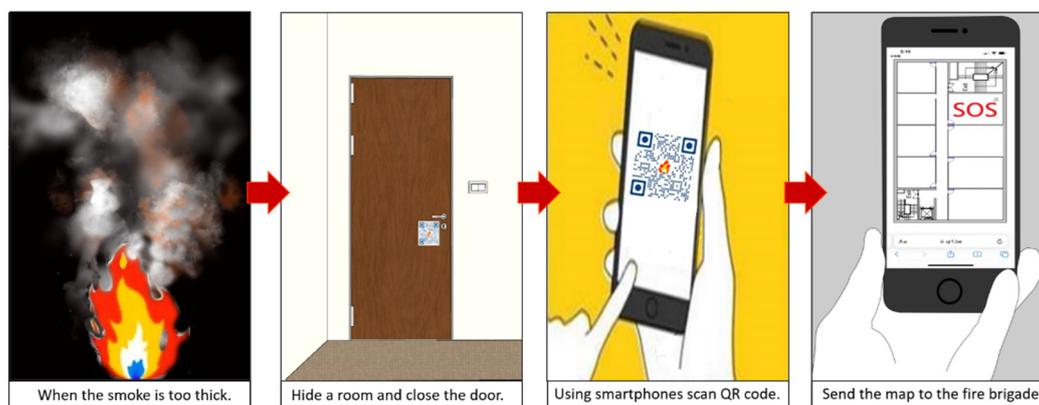

**Figure 4(b).** Operation flow chart of trapped people positioning notification system. (Source: Authors).

We selected a fire department from a region in Taiwan for this study. Although only 156 firefighters participated in the experiment, this number exceeds the typical number of responders deployed to a single fire incident. Furthermore, this represents a staged training cohort. In this four-day field experiment, the participating firefighters were divided into a Treatment Group and a Control Group each day.

This case pertains to a research project involving human behavior in Taiwan, specifically the Experimental Plan on Minimal Risks. It has been submitted to the Northern District Alliance for ethical review and is on record as compliant with regulations. In studies involving human participants, the researchers declare that they have obtained informed consent from all participants involved in the experimental research, with the consent provided via paper questionnaires.

The experimental design outlined above is based on the 'Journal Article Search Plan' and the 'Execution and Discovery of Journal Articles.' Appropriate parameters are identified from TRIZ's List of 39 Features. Then, by using the TRIZ contradiction matrix, key inspiration keywords are discovered, which, through associative thinking within the framework of design thinking, lead to solutions. Finally, a plan is developed to design and conduct the experiment.

### 3. Experiments and Results

Research and Development is a challenge that must be addressed in applied sciences. In the field of smart building technology for disaster prevention, extensive literature reviews are conducted to identify research gaps. Using the TRIZ matrix technique, a theory for innovative invention, the study aims to determine the key methods required to locate trapped individuals in a fire scene. The next step is to evaluate how to verify the feasibility of these methods and ensure they can be adopted and implemented by relevant government departments.


The primary purpose of a comprehensive literature review is to identify the most promising innovative research focus and to conduct a preliminary feasibility assessment. Because the more thoroughly and deeply we understand specific background knowledge, the more comprehensive and meticulous our critical thinking on the problem will be. By way of PRISMA systematic article review, we really found that firefighters lacked the scientific and technological skill to determine the location of trapped people. At present, in addition to TIC and Robot, there does not seem to be a faster aid to assist firefighters in searching for victims in an indoor fire scene, while the TIC and Robot were ineffective in quickly and effectively rescuing trapped individuals. Through reviewing the articles retrieved from PRISMA, we identified three parameters of worsening features and improving

features – speed, time, and reliability – from the 39 engineering parameters in TRIZ. These parameters correspond to five of the 40 inventive principles in TRIZ, we further developed design thinking and deduced technical solutions to problems. Finally, the CFHNS was manufactured. Simply put, it means designing Figure 4 step by step based on the information presented in Table 1 and Figure 3. After implementing the door panel with the emergency call functionality, the authors invited firefighters to test the system in real-life scenarios. The aim was to verify whether this solution could shorten rescue times.

After an experiment conducted by the Fire Department, we found that the CFHNS improved rescue efficiency. In an actual building fire, this notification system may reduce the number of casualties. Using smartphones to send distress signals and provide search information to firefighters during an indoor fire. This ensures that the research results not only have academic depth but also practical applicability in the industry. The study was purposed to obtain creative solutions for search and rescue operations in indoor fires using design thinking. The CFHNS has obtained a new type of patent certificate provided by the Intellectual Property Office of Taiwan region of China. The patent certificate number is TWM625231U. The purpose of applying for the patent is to demonstrate that there is no plagiarism or theft of others' work. There is no intention to monopolize or sell the intellectual property rights. We hope that it will be widely utilized by various sectors. In the realm of architectural disaster prevention technology within the discipline of fire engineering, we must discuss how to use new technology in rescue. With the assistance of new technology, firefighters can save people and put out fires more quickly.

### 3.1. Implementation of the Experiments

This research focused on exploring techniques to enable firefighters to rapidly rescue individuals trapped in fire situations. Therefore, an open-source software was used to create a quick response code representing the map of the experimental location, as shown in Figure 5, and posted around the door handle to facilitate use during emergency calls. For safety reasons, smoke was not used in the fire simulation environment to facilitate the observation and recording of the time required for participants to search for individuals. However, the participants' helmet visors were covered with opaque film to simulate the visual obstruction caused by smoke in a fire scenario. Each firefighter participating in the experiment was equipped with full rescue mission attire and gear to ensure the reliability of the practical test and the realism of the simulation. The experimental site was designed by the authors, and the standard search paths established for the experiment were consistent. In other words, whether the search was conducted in a clockwise or counterclockwise direction, the distance of the path remained the same, adhering to a uniform indoor carpeted search pattern.

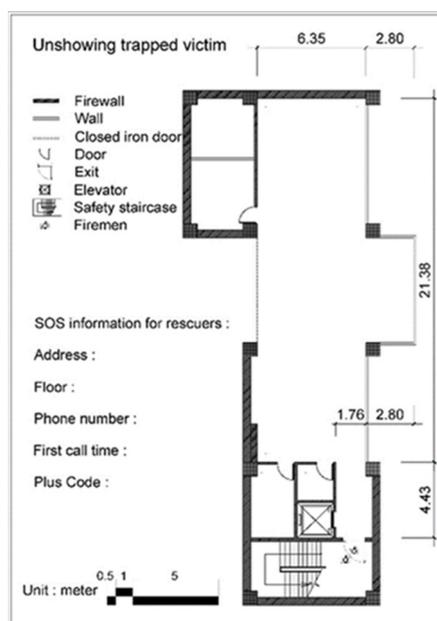

**Figure 5.** Floor plan of the building of the experiment. (Source: Authors.).

### 3.2. Participants of the Experiment


During the search task experiment, 10 participants abandoned the execution. The study's limitations are constrained by the number 156, which represents the number of participants in the routine training of the fire brigade. This is their first time entering the designed experimental space. We conducted two experiments in which participants were divided into those who did not know the location of the victim and those who knew the location of the victim. Participants were all dressed in standard firefighter gear, that thermal protective clothing (TPC) and self-contained breathing apparatus (SCBA) and put on a fuzzy mask to simulate the visual appearance of the dense smoke space.

### 3.3. Test Research Hypotheses

Currently, there are no breakthrough solutions for searching for trapped individuals during indoor fires. This research gap exists due to a lack of interdisciplinary approaches and integration with advanced technologies in previous studies. In a fire scene with smoke, when waiting for rescue behind a closed door, the smoke generally does not reach a height of 180 cm. Based on this logical and well-founded assumption, scanning a quick response code posted on the door handle with a mobile phone is expected to be executed correctly.

Additionally, the authors hypothesize that providing firefighters with a map indicating the locations of trapped individuals, as opposed to a map without such markers, will enable a faster search for the trapped individuals during a fire. The experimental results indeed confirmed this. The map with trapped individuals' locations is shown in Figure 6. If this experiment demonstrates that providing firefighters with such location maps shortens the time needed to find the trapped individuals, the authors can predict that this approach could significantly improve survival chances in fire situations.

In the third step of the diagram in Figure 4, a test QR code is shown. Anyone can scan it with their mobile phone to display a map. As long as this map accurately represents your current location, different doors can have unique QR codes attached, which can be used for emergency rescue or to provide information about the building location of the door. In other words, this represents a door panel made from smart building materials.

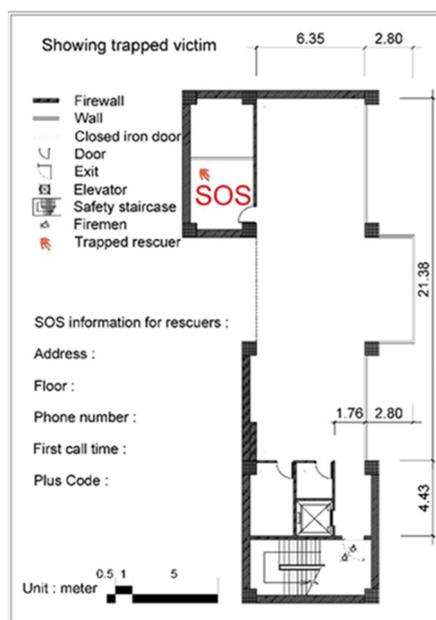

**Figure 6.** Floor plan showing the location of the person to be rescued. (Source: Authors.).

Maps are a low-threshold tool for understanding your surroundings, providing a visual representation of the geographical aspects of your location [26]. The two floor plans depicted in Figures 5 and 6 represent the actual layout of the space. The designated search area for the experiment needed to align with the timing of each routine training session. Therefore, the authors controlled the size of the experimental site to fit within these constraints, rather than utilizing the entire floor area.

### 3.4. Experimental Procedure

It is common for firefighters to crawl when searching in a hot and smoke-filled environment [27,28]. Following the standard procedure of searching every corner of all rooms. Firefighters from various districts will participate in an experiment where they will search for a dummy model in need of rescue during a simulated fire. The experiment was conducted over four consecutive days, with participants divided into two groups each day. The experimental site was specially designed, ensuring that no firefighter had previously entered the area. One group was informed of the victim's location, while the other group was not. The difference in search times between these groups is the data that the researchers aimed to analyze. During general search training, even if a floor plan is provided, the location of the person to be rescued unknown. In this experiment, the clear display of the location map of the person to be rescued has been added. The researchers observed the two experiments, and the firefighting instructors also maintained their safety, as indicated in Figure 7.



**Figure 7.** Firefighters' attire and equipment, and the execution status of the search task: (a) Execution of the counterclockwise wall-following search task. (b) Execution of the clockwise wall-following search task. (c) Search situation upon discovering the room. (d) Demonstration of the implementation of firefighter clothing and equipment.

In the first experiment group, participants are required to look at a floor plan without victims, which is illustrated in Figure 5. Firefighters simulate blindly searching for trapped individuals in

dark and unclear spaces. However, in an actual indoor fire incident, it is possible that a floor plan of the location may not be available during the search for trapped individuals.

In another experiment group, participants are required to look at a floor plan that display a trapped person, which is illustrated in Figure 6. Firefighters simulated searching for trapped individuals in a dark, smoke-filled environment, with the trapped individuals already positioned at specific locations.

In both experiments, the search time for each group of participants was recorded until the trapped person was found or the search was abandoned.

### 3.5. Analysis of Data and Results

The timing of indoor fire incidents, the building purpose of the location, the proximity to the fire brigade, the number of individuals, the age of people, and personal physical fitness affect the rescue time collectively. In this field experiment, the author compared the differences in results by manipulating one "variable," specifically the availability of victim location information on the floor plan. The group in which the independent variable was manipulated is the Experimental Group, which had access to the victim location information. The group where the independent variable remained unchanged is the Control Group, which did not have access to the victim location information, representing the typical scenario in firefighting rescue operations.

Without knowing the location of the trapped person to be rescued, a total of 41 teams, and 36 of them have completed the search task. An average of 258 seconds (4 minutes 18 seconds) to find the trapped person, excluding 5 teams (a total of 10 peoples), They were unable to discover the trapped person and abandoned the search mission, which accounts for over 12%. The researchers observed that the main reason for the abandonment of tasks by the five teams was the failure to perform basic search training techniques properly, which resulted in an inability to locate the trapped individuals. Some even struggled to recognize door handles or door panels. Due to continuously circling the area and lacking patience, they ultimately decided to abandon the task. In actual fire rescue operations, it is possible for the search to be abandoned. The actual proportion cannot be estimated, which will result in a more pronounced difference. Due to the exclusion of search times from participants who abandoned the task, we can only compare the time taken to complete the search task between the two groups. This limitation is one of the constraints of our study.

The Shapiro-Wilk test was performed to assess whether the data in the control group followed a normal distribution. The test statistic was 0.9518 with a p-value of 0.1188. Since the p-value is greater than the significance level of 0.05, we fail to reject the null hypothesis, suggesting that the data in the control group is consistent with a normal distribution. For the sample size of the control group is 36 which is greater than 30, the z-distribution is used for calculating confidence interval.

The confidence interval for the control group, (235.45,280.33), indicates that the true population mean is likely to fall within this range with 95% confidence. A total of 42 teams have completed the search mission with known positions of the trapped person. An average of 171 seconds (2 minutes 51 seconds) to find the trapped person. Knowing the location of the trapped person faster than not knowing the location of the trapped person to be rescued.

For the experimental group, the Shapiro-Wilk test yielded a test statistic of 0.9501 and a p-value of 0.0654. As the p-value exceeds 0.05, the null hypothesis of normality cannot be rejected. Thus, the data in the experimental group is also likely to follow a normal distribution. For the sample size of the control group is 42 which is greater than 30, the z-distribution is used for calculating confidence interval. The confidence interval for the experimental group, (149.31, 191.60), suggests that the true population mean for this group is also captured within this range with 95% confidence.

Notably, the confidence intervals for the two groups do not overlap, providing strong evidence of a difference in the population means. The experimental group is 1 minute and 27 seconds faster than the control group, which can shorten the search time by 33.72%. According to estimates, the use of a " call-for-help notification system " in buildings can reduce search time by at least one-third.


The descriptive statistics in terms of mean, median, standard deviation, maximum, and minimum are as follows: The average is 170.45 and 257.89, the median is 156.50 and 244.50, all

exhibited a slight positive skew distribution. The standard deviation is 69.91 and 68.70. The maximum values are 371 and 405, and the minimum values are 56 and 140. To test the equality of variances, the Levene's test is performed. The F-test shows  $p = 0.609 > 0.05$ , and the correction is made by Welch's t-test (Table 2). It indicates a significant difference in the means of the two groups for  $p = 4.03E-07 < 0.05$ . The mean difference between the two groups is 87.44, with confidence intervals supporting this significant difference. The result should demonstrate that knowing the location of the trapped individuals significantly reduces the time firefighters need to find and rescue them.

**Table 2.** Levene's test and t-test for the control and experiment group.

Groups	Variances	Levene's test (equal variances)		t-test (equal means)						
		F	significance	t	df	Significance (two-tailed)	Mean deviation	Standard error	95% confidence interval	
									Lower limit	Upper limit
Control and Experiment	Assuming equal variances	0.265	0.609	5.550	76.000	3.99E-07	87.44	15.73	83.89	90.98
	Without assuming equal variances			5.558	74.562	4.03E-07	87.44	15.73	83.89	90.99

However, conducting search operations within a confined space in the simulation laboratory has demonstrated that even in small areas, search time can be reduced. Therefore, it is logical to infer that larger spatial areas would further shorten search times. As evidenced by Figure 8.

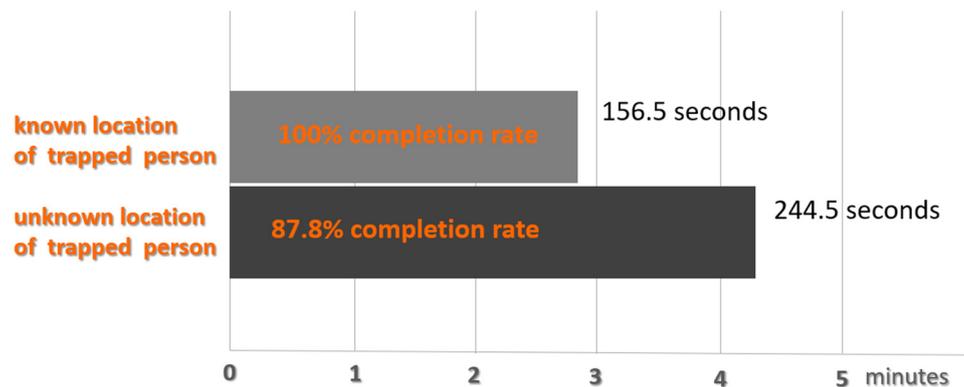

**Figure 8.** Comparison of Using and Not Using the Call-for-Help Notification System.

### 3.6. Discovery of the Rescue Time Factor

Through the firefighting efforts and search-and-rescue operations conducted by fire personnel, evacuation time can be extended, and the number of casualties reduced. A smartphone voice-guided evacuation system (SVGES) is a previously studied device that can provide active escape guidance during an indoor fire operating the system in reverse allows firefighters to reach victims. However, due to electronic route signs (ERS) being destroyed by fire [8,29], this system may suffer from fire damage, making firefighters unable to navigate forward. Nonetheless the results of this study take advantage of a new technology that can assist firefighters in their search and rescue missions. Although this technology is not complicated, thus far, it has not been practically used in countries around the world.

In general, researchers focus on the relationship between available safety egress time (ASET) and required safety egress time (RSET) [8,30–33], whereas an acceptable margin of safety time is not considered. Therefore, it should be possible to rewrite the engineering and survival timelines [34–37] with the addition of the items of rescue waiting time and firefighter search time [38], As indicated in

Figure 9. Because the survival rate is inversely proportional to the waiting time for rescue, the mathematical formulae can be rewritten as Equation 1 and Equation 2:

$$ASET - T_{fighter} \approx RSET, \dots\dots\dots(1)$$

$$RSET = (T_{detect} + T_{warn} + T_{pre} + T_{travel}) / J^n \equiv ASET - T_{margin}, \dots\dots\dots(2)$$

ASET : Available safe egress time.

RSET : Required safety escape time.

$T_{fighter}$  : Search time required for firefighters to rescue trapped victims.

$T_{detect}$  : Fire detector detection time.

$T_{warn}$  : Fire alarm activation time (warning time).


$T_{pre}$  : Recognition time and response time (pre-evacuation time).

$T_{travel}$  : Evacuation time (travel time).

$T_{margin}$  : An acceptable margin of safety.

$n$  : Number of turn nodes on the escape path ( $n > 0$ ).

$J$  : Correct path node direction (if correct = 1; otherwise, 0).

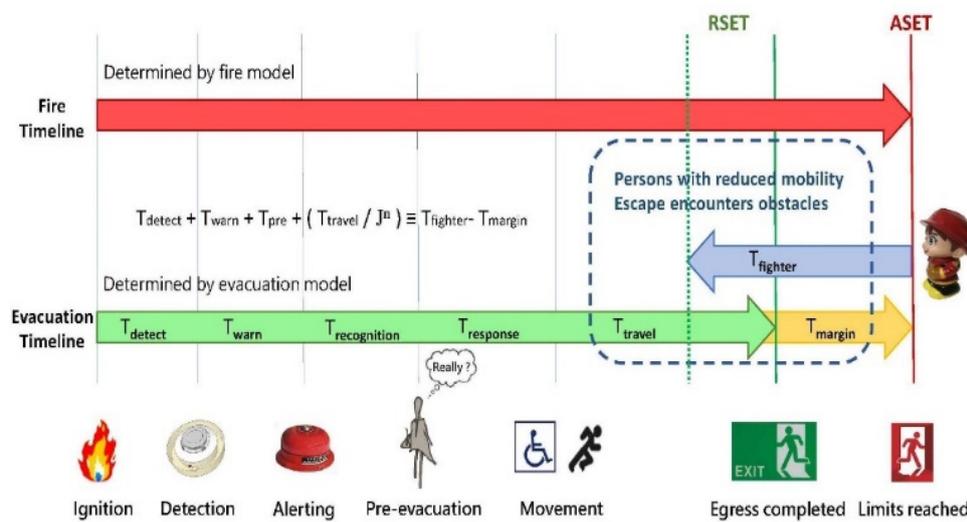

**Figure 9.** Extend the margin of evacuation time through the intervention of firefighters.

In summary, we observed that when nodes ( $j$ ) appear along the search path, firefighters need to perform searches to the left or right. As the number of nodes ( $n$ ) increases, this is mathematically represented by a square operation. The author found that the same principle applies to the choice of escape paths during evacuation. Therefore, the escape time formula described above should divide the travel time value by  $j$  raised to the power of  $n$ , as detailed in Equation 2.

Due to human panic during indoor fires and the lack of clarity about the fire environment, individuals are often unable to accurately identify the nearest safe exit or the best evacuation route. They may also be unaware of the lethal concentration of toxic smoke they have inhaled. Furthermore, whether following the escape route of other evacuees is the correct choice remains uncertain. Given the complex and realistic scenarios of fires, retreating to a room and waiting for rescue is often the safer option. During an indoor fire, unless one is certain of reaching a safe escape route to the ground floor as quickly as possible, it is generally advisable, as promoted by the fire department, to retreat to a room and wait for rescue. As shown in the mathematical formula and Figure 9, if firefighters can intervene more quickly than before, the chances of rescue are greatly improved. Once the trapped person's location is known, the next step is to trust the professional firefighters to come and save you.

#### 4. Discussion

According to the average statistics from the Fire Department in the Taiwan region of China, firefighters die in indoor fires every year. For this reason, in 2019, the Taiwan Government amended the Fire Services Act to give firefighters the right to retreat without entering a burning building

during search and rescue operations. The fundamental reason for this decision is that the locations and presence of trapped people at the scene of a fire remain unclear. Whether faced with fire or smoke, it is still dangerous for firefighters wearing fiber-optic rescue signal life jackets to rush into a blaze because the extent of the fire and the location of trapped individuals are unknown [39]. However, pressure can be created by public opinion and superior officials, and fire site commanders may still order firefighters to enter a burning building during disaster relief and later regret their decisions. Therefore, the ability of those trapped in the fire to call firefighters for help is the most important factor for enabling successful search and rescue operations.

#### *4.1. Study Limitations and Alternatives*

Unfortunately, although disadvantaged groups may also face fire hazards, people with physical and mental disabilities unable to use smartphones cannot be considered in this study an increasing number of people are wearing or implanting biometric and medical sensors with wireless interfaces. For example, a wrist band, heart monitor, long-term implantable continuous glucose monitor, and a smartphone could be wirelessly interconnected to form a wireless body area network [40]. This could form another research direction or development technology. One key principle of retreating to a specific room to wait for rescue is to do so before the smoke becomes overwhelming and affects breathing. Then, apply tape to the room door to prevent smoke from entering. [41]. This increases the chances of being found and successfully rescued.

Since the experimental scenario designed was simple, it posed a lower risk of injury to participants. However, it lacks the realism of an actual fire scene. Therefore, it is recommended that future firefighter training exercises include obstacles, partitions, smoke, and background fire sounds to enhance the realism of rescue tasks.

This study is based on a QR code system, which has its limitations. For example, it can only be interacted with by users who have smartphones. Additionally, the transmission of smartphone signals indoors relies on the availability of indoor signal equipment and wiring that has not been damaged by the fire. Therefore, the best option in such situations is to seek shelter in a room with access to outdoor light and wait for rescue, as this ensures the smartphone can still receive signals through the building from external sources.

#### *4.2. Implications and Applications Issues of the Study*

In the era of the internet, design thinking does not necessarily demand sophisticated technology [42]. We do not have to rely on expensive indoor positioning equipment to solve problems. Disaster prevention technology should not mean adding expensive equipment to achieve disaster prevention. We need cheap disaster prevention technology to protect human life and construct smart buildings for a better future.

Currently, it is necessary to build very expensive indoor positioning software and hardware. The standard is unrealistic and cannot be popularized in the market; therefore, finding a suitable solution is urgent. A QR code can be designed and posted by an architect when applying for the annual public safety declaration and can be annually updated and corrected. Fire departments are responsible for map database management and information security management. In addition to being used for fires, emergency systems can also be used for earthquake disasters or other emergencies.

#### *4.3. The Feasibility of Practical Implementation*

The rapid urbanization process over the last century has deeply changed the way we live and interact with each other [43]. For people to work or live in a smart building, it is necessary to use science and technology to prevent indoor fires that may endanger public safety.

The practical implementation of the above patent has been authorized by the author (inventor) by the New Taipei City Fire Department for trial use. The follow-up promotion and implementation are subject to the Government's budget. In addition to the publicity and promotion of government

orders, local fire departments still need to build a QR code map database and manage information security issues obtained from storage. As for the posting of the QR code and the construction of a basic indoor location map, it is recommended that fire equipment engineers or architects are authorized to carry this out. To reduce the workload of local firefighters, periodic repair work may also be carried out during the annual safety inspection declaration.

The installation of QR codes is regarded as the layout of fire sign equipment, and architects or fire equipment engineers should be responsible for installation and regular maintenance. Markers with the same specifications as flame-proof carpets or flame-proof curtains can be used, or waterproof and antifouling stickers can be output and pasted. Regular maintenance is carried out when an annual public safety inspection is declared, and the maintenance time for the QR codes of various buildings is the declaration time, in accordance with the current laws and regulations.

#### *4.4. Status and Recommendations for Future Research*

A fire alarm generally happens earlier than an SOS call. When being trapped, adopting this call-for-help notification system (CFHNS) can help firefighters' rescue operations. Upon receiving a distress call, firefighters can quickly be on their way to the scene. Although mobile phones can communicate with firefighters, it is difficult for firefighters to determine the correct location of a trapped person from a description. Not every type of building has corresponding room codes or text nameplates. After all, firefighters had never arrived at the scene of the fire, and that cannot easily determine the correct position of trapped people. Therefore, it is very important to know the location of a surviving victim in advance.

Thus far, firefighters can only adopt the traditional methods of comprehensive search tactics [44–46] In general, when a fire breaks out and independent evacuation is not an option, firefighters are already on their way to rescue those who are trapped. Firefighters can receive a map of the location of the trapped people while in the fire truck travelling to the scene, and this is conducive to the deployment of firefighters to prepare for search and rescue operations.

Although dense smoke in a fire scene may hinder smartphones from scanning QR codes at a distance [40], using the smartphone's flashlight to illuminate and scan QR codes at close range is a different matter. Furthermore, we cannot overlook any feasible rescue solutions for implementation. However, This study comprises a literature review and patent application, and its results demonstrate originality. We hope that follow-up research will invite more firefighters to carry out rescue operations in a simulation fire space to demonstrate its effect and provide clues for improvement. In fact, if firefighters know the exact location of trapped individuals, it would undoubtedly shorten rescue times and reduce the risk of injury or death among firefighters. This is evident. However, in an era of rapid technological advancements, there is a noticeable lack of specialized research focused on fire rescue equipment.

We should all reflect on the fact that if a scientifically developed disaster relief equipment or device cannot be commercially profitable, we should still work hard on research and development, because this is scientific and technological research that contributes to the sustainable development of mankind.

## **5. Conclusions**

Based on pragmatism theories, This study, within the domain of building disaster prevention engineering, has developed a rescue notification door panel material designed for use while waiting for rescue. This technology can reduce the search time for firefighters in dark areas during indoor fires and is expected to be officially adopted by fire departments.

This research presents one of the latest breakthroughs and technological advancements in the field of building technology for disaster prevention. Therefore, this paper could influence the way that firefighters enter fires in the future to find trapped people, for prevent firefighters from dangerously entering the fire scene to conduct a search.

On the floor where the fire originates, the fire hose used by firefighters serves as a guiding path during the search for trapped individuals at the fire scene. We propose equipping the hose with

flashing lights and UWB positioning devices. This new era of technology should make buildings smarter, especially when combined with the smartphones that are carried with us every day, to ensure the safety of human lives. This can be combined with previously invented SVGES and is more suitable for practical use. Vulnerable individuals are not suitable for self-escape without the assistance of others. As a principle, we recommend waiting for firefighters to come for rescue.

The findings of this study should be integrated with the current annual fire safety reports for practical application, which would facilitate the overall implementation and future maintenance efforts. The "call-for-help notification system" undoubtedly has the potential to enhance public safety in buildings. Despite the widespread use of artificial intelligence in modern life and technology, the infrastructure for disaster prevention and mitigation technologies remains insufficient.

We have identified and analyzed shortcomings in intelligent building fire protection systems. Future research efforts will focus on improving intelligent fire suppression technology.

**Intellectual property:** The patent certificate number is TWM625231U and can be searched using Google Patents. The "call-for-help notification system" has obtained a new patent certificate, as confirmed by the Intellectual Property Office of Taiwan.

**Ethical declaration statement:** This study has obtained approval from the Research Ethics Committee of National Taiwan University, in strict adherence to the principles and regulations stipulated in the Declaration of Helsinki. The Institutional Review Board Statement Protocol code is NTU-REC NO.202303ES017, and the date of approval is 3 May 2023.

**Data availability statement:** All data generated or analyzed during this study are included in this published article. The data that support the findings of this study are available from the corresponding author upon reasonable request. Correspondence and requests for materials should be addressed to Kuo, T.-W. The Institutional Review Board of the Research Ethics Committee believes that the data should be destroyed after December 31, 2023. The original data may be retained by the New Taipei City Fire Department.

**Disclosure statement:** Conflict of interest: The authors declare that they have no known competing interests or personal relationships that could have influenced the work reported in this paper.

**Author contributions statement:** Tzu-Wen Kuo: Analysis and interpretation of the data; drafting, collecting data, and revising the paper. Tzu-Wen Kuo not only completed the main body of the article, including language editing and correction, but also revised the article after review, with the largest workload. Ching-Yuan Lin: Final approval of the version to be published. Ching-Yuan Lin corrected the article and proposed many modifications. The Fire Department sent personnel to participate in the experiment to provide data, and Tzu-Wen Kuo analyzed some experimental data. All authors reviewed the manuscript.

**Biographical note:** Ching-Yuan Lin is an experienced scholar and senior professor at National Taiwan University of Science and Technology. His primary research field is fire-related studies. He also serves as an exam committee member for the National Architect Examination and is a highly esteemed figure in the Taiwanese architectural industry. Tzu-Wen Kuo is a lecturer in the Department of Architecture and Urban Design at the Chinese Culture University. His main research area is the field of technological disaster prevention. Currently, he is a practicing architect in Taiwan and teaches at a cram school for architectural license exams. He is also a PhD candidate at National Taiwan University of Science and Technology.

**Funding details:** This research project has not received funding. No funding was received.

**Acknowledgements:** As a result of revising the manuscript based on the reviewers' feedback, the authors' academic contributions have been enhanced. The authors acknowledge the research support provided by the New Taipei City Government Fire Department (NTFD) for this study. The authors also extend their gratitude to the firefighter brigade of the NTFD for providing the raw data. Furthermore, the authors would like to express appreciation to Hsiao-Tung Chang, the Dean of the

Department of Architecture at Chinese Culture University, for their invaluable assistance in reviewing and approving the ethical experiment proposal. The author would also like to thank Dr. Yong-Jun Lin, Associate Research Fellow at the Center for Weather and Climate Disaster Research, National Taiwan University, for his revisions to the statistical tests.

## References

1. Chen, J., Li, N., Shi, Y., Du, J. Cross-cultural assessment of the effect of spatial information on firefighters' wayfinding performance: A virtual reality-based study. *International Journal of Disaster Risk Reduction* 2023, 84, 103486; <https://doi.org/10.1016/j.ijdr.2022.103486>
2. Yang, Q., Zhang, X., Zhang, Z., He, L., Yan, X., Na, J. Fire Scenario Zone Construction and Personnel Evacuation Planning Based on a Building Information Model and Geographical Information System. *ISPRS Int. J. Geo-Inf.* 2022, 11(2), 110; <https://doi.org/10.3390/ijgi11020110>
3. Chen, J., Zhang, X., Su, G., Chen, T. Study on fire-rescue command system and key technology of ultra high-rise building. *5th International Congress on Image and Signal Processing 2012*, 6469834, pp. 1906–1910; <https://doi.org/10.1109/CISP.2012.6469834>.
4. Purser, D.A., Bensilum, M. Quantification of behavior for engineering design standards and escape time calculations. *Safety Science* 2001,38(2), pp. 157–182; [https://doi.org/10.1016/S0925-7535\(00\)00066-7](https://doi.org/10.1016/S0925-7535(00)00066-7)
5. Tai, Y., Yu, T.-T. Using Smartphones to Locate Trapped Victims in Disasters. *Sensors* 2022, 22(19), 7502; <https://doi.org/10.3390/s22197502>
6. Li, N., Becerik-Gerber, B., Soibelman, L., Krishnamachari, B. Comparative assessment of an indoor localization framework for building emergency response. *Automation in Construction* 2015, 57, pp 42–54; <https://doi.org/10.1016/j.autcon.2015.04.004>
7. Nunavath, V., Prinz, A. Data sources handling for emergency management: Supporting information availability and accessibility for emergency responders. *Lecture Notes in Computer Science (including subseries Lecture Notes in Artificial Intelligence and Lecture Notes in Bioinformatics)* 2017, 10274 LNCS, pp 240–259; [https://link.springer.com/chapter/10.1007/978-3-319-58524-6\\_21](https://link.springer.com/chapter/10.1007/978-3-319-58524-6_21)
8. Kuo, T.-W., Lin, C.-Y.; Chuang, Y.-J., Hsiao, G.L.-K. Using Smartphones for Indoor Fire Evacuation. *Int. J. Environ. Res. Public Health* 2022, 19(10), 6061; <https://doi.org/10.3390/ijerph19106061>
9. Tsai, Pei-Fen.; Liao, Chia-Hung.; Yuan, Shyan-Ming. Using Deep Learning with Thermal Imaging for Human Detection in Heavy Smoke Scenarios. *Sensors* 2022, 22(14), 5351; <https://doi.org/10.3390/s22145351>
10. Kobayashi, T.; Seimiya, S.; Harada, K.; Noi, M., Barker, Z.; Woodward, G.K.; Willig, A.; Kohno, R. Wireless technologies to assist search and localization of victims of wide-scale natural disasters by unmanned aerial vehicles. *International Symposium on Wireless Personal Multimedia Communications* 2018, pp. 404–410; <https://doi.org/10.1109/WPMC.2017.8301846>
11. Michael, Fire., Carlos Guestrin. Over-optimization of academic publishing metrics: observing Goodhart's Law in action. *Giga-Science* 2019, 8(6); <https://doi.org/10.1093/gigascience/giz053>
12. Van Noorden, R., Maher, B., Nuzzo, R. The top 100 papers Nature explores the most-cited research of all time. *Nature* 2014, 514(7524), pp 550–553; [https://www.researchgate.net/publication/267728073\\_The\\_top\\_100\\_papers](https://www.researchgate.net/publication/267728073_The_top_100_papers).

13. Ranasinghe, U., Jefferies, M., Davis, P., Pillay, M. Conceptualising project uncertainty in the context of building refurbishment safety: A systematic review. *Buildings* 2021, 11(3), 89; <https://doi.org/10.3390/buildings11030089>
14. Anastasiadou, M.; Santos, V.; Dias, M.S. Machine Learning Techniques Focusing on the Energy Performance of Buildings: A Dimensions and Methods Analysis. *Buildings* 2022, 12(1), 28; <https://doi.org/10.3390/buildings12010028>
15. Khodadadi, A.; von Buelow, P. Design exploration by using a genetic algorithm and the Theory of Inventive Problem Solving (TRIZ). *Automation in Construction* 2022, 141,104354; <https://doi.org/10.1016/j.autcon.2022.104354>
16. Fiorineschi, L.; Frillici, F.S., Rotini, F.; Conti, L., Rossi, G. Adapted Use of the TRIZ System Operator. *Appl. Sci.* 2021, 11(14), 6476; <https://doi.org/10.3390/app11146476>.
17. Zhang, P.; Jing, S.; Nie, Z., Zhao, B.; Tan, R. Design and Development of Sustainable Product Service Systems Based on Design-Centric Complexity. *Sustainability* 2021, 13(2), 532; <https://doi.org/10.3390/su13020532>
18. Qiu, C.; Tan, J.; Liu, Z.; Mao, H.; Hu, W. Design Theory and Method of Complex Products: A Review. *Chinese Journal of Mechanical Engineering* 2022, 35, 103; <https://doi.org/10.1186/s10033-022-00779-0>
19. Howard, T.J.; Culley, S.; Dekoninck, E.A. Reuse of ideas and concepts for creative stimuli in engineering design. *Journal of Engineering Design* 2011, 22(8), pp 565–581; <https://doi.org/10.1080/09544821003598573>
20. Seo, Dong-Gil.; Kim, Mi-Seon.; Gu, Seon-Hwan.; Song, Young-Joo. A Study on the Safety of Evacuation according to Evacuation Delay Time and Fire Door Openness: Based on Residence Types. *Korean Institute of Fire Science & Engineering* 2020, 34, 2, pp 156–165; <https://doi.org/10.7731/KIFSE.0c0708c4>
21. Ng, P.K.; Prasetio, M.D.; Liew, K.W.; Salma, S.A.; Safrudin, Y.N. A TRIZ-Inspired Conceptual Development of a Roof Tile Transportation and Inspection System. *Buildings* 2022, 12(9), 1456; <https://doi.org/10.3390/buildings12091456>
22. Yu, X.; Fan, Z.; Wan, H.; He, Y.; Du, J; Li, N.; Yuan, Z.; Xiao, G. Positioning, navigation, and book accessing/returning in an autonomous library robot using integrated binocular vision and QR code identification systems. *Sensors* 2019, 19, 783; <https://doi.org/10.3390/s19040783>
23. Griffin, A.L., Reichenbacher, T., Liao, H., Wang, W., Cao, Y. Cognitive issues of mobile map design and use. *Journal of Location Based Services* 2024; <https://doi-org.ntust.idm.oclc.org/10.1080/17489725.2024.2371288>
24. Hsiao, G.L.-K.; Tang, C.-H., Huang, T.-C.; Lin, C.-Y. Firefighter Wayfinding in Dark Environments Monitored by RFID. *Fire Technology* 2016, 52(1), pp 273–279; <https://doi.org/10.1007/s10694-015-0477-y>
25. Yoon, B., Kim, H., Youn, G., Rhee, J. 3D Position Estimation of Objects for Inventory Management Automation Using Drones. *Applied Sciences (Switzerland)*2023, 13(19), 10830; <https://doi.org/10.3390/app131910830>
26. Tessem, B., Bjørnstad, S., Chen, W., Nyre, L. Word cloud visualisation of locative information. *Journal of Location Based Services* 2015, 9(4), 254–272; <http://dx.doi.org/10.1080/17489725.2015.1118566>

27. Olsson, F., Rantakokko, J., Nygard, J. Cooperative localization using a foot-mounted inertial navigation system and ultrawideband ranging. *International Conference on Indoor Positioning and Indoor Navigation 2014*, 7275476, pp 122–131; <https://doi.org/10.1109/IPIN.2014.7275476>
28. Rantakokko, J., Strömbäck, P., Andersson, P. Foot-and knee-mounted INS for firefighter localization. *Institute of Navigation International Technical Meeting 2014*, pp 145–153; <https://www.ion.org/publications/abstract.cfm?articleID=11480>
29. Lovreglio, R.; Kinater, M. Augmented reality for pedestrian evacuation research: Promises and limitations. *Safety Science* 2020, 128, 104750; <https://doi.org/10.1016/j.ssci.2020.104750>
30. Tinaburri, A. Principles for Monte Carlo agent-based evacuation simulations including occupants who need assistance. From RSET to RiSET. *Fire Safety Journal* 2022, 127, 103510; <https://doi.org/10.1016/j.firesaf.2021.103510>
31. Zhang, G.; Huang, D.; Zhu, G.; Yuan, G. Probabilistic model for safe evacuation under the effect of uncertain factors in fire. *Safety Science* 2017, 93, pp 222–229; <http://dx.doi.org/10.1016/j.ssci.2016.12.008>
32. Martin F.; Jesper K.; Håkan F.; Axel M.; Daniel N. The Variation of Pre-movement Time in Building Evacuation. *Fire Technology* 2019, 55, pp 2491-2513; <https://doi.org/10.1007/s10694-019-00881-1>
33. Gwynne, S.M.V.; Boyce, K.E. *SFPE Handbook of Fire Protection Engineering*, 5th ed.; Chapter 64 Engineering Data; National Fire Protection Association: Greenbelt, MD, USA, 2016; <https://library.villanova.edu/Find/Record/1597879/TOC>
34. Lin, B.S.-M.; Lin, C.-Y.; Kung, C.-W.; Lin, Y.-J.; Chou, C.-C.; Chuang, Y.-J.; Hsiao, G.L.-K. Wayfinding of Firefighters in Dark and Complex Environments. *Int. J. Environ. Res. Public Health* 2021, 18(15), 8014; <https://doi.org/10.3390/ijerph18158014>
35. Siddiqui, A.A.; Ewer, J.A.; Lawrence, P.J.; Galea, E.R.; Frost, I.R. Building Information Modelling for performance-based Fire Safety Engineering analysis – A strategy for data sharing. *Journal of Building Engineering* 2021, 42, 102794; <https://doi.org/10.1016/j.jobee.2021.102794>
36. Yuan, D.-J., Jin, H., Chen, Z.-C., Liu, S.-N. Evacuation Experiment Study in Up and Down Escape Staircase of Underground Road. *Advances in Civil Engineering* 2021, <https://doi.org/10.1155/2021/8834180>
37. Tjolleng, A., Chang, J., Jeong, L., Kim, M., Jung, K. Ergonomic design recommendations for designing an optical fiber rescue signal to life jacket. *International Journal of Industrial Engineering : Theory Applications and Practice* 2020, 27(3), 463–472; [https://www.researchgate.net/publication/344983790\\_Ergonomic\\_Design\\_Recommendations\\_for\\_Designing\\_an\\_Optical\\_Fiber\\_Rescue\\_Signal\\_to\\_Life\\_Jacket](https://www.researchgate.net/publication/344983790_Ergonomic_Design_Recommendations_for_Designing_an_Optical_Fiber_Rescue_Signal_to_Life_Jacket)
38. Lee, C.-A.; Sung, Y.-C.; Lin, Y.-S.; Hsiao, G.L.-K. Evaluating the severity of building fires with the analytical hierarchy process, big data analysis, and remote sensing. *Natural Hazards* 2020, 103(2), pp1843–1856; <https://doi.org/10.1007/s11069-020-04057-x>
39. Gewin, V. How to write a first-class paper. *Nature* 2018, 555, pp 129–130; <https://www-nature-com.ntust.idm.oclc.org/articles/d41586-018-02404-4>
40. Kim, J.-I.; Gang, H.-S.; Pyun, J.-Y.; Kwon, G.-R. Implementation of QR Code Recognition Technology Using Smartphone Camera for Indoor Positioning. *Energies* 2021, 14(10), 2759; <https://doi.org/10.3390/en14102759>

41. Hung, Hsuan.-Yu., Chuang, Ying.-Ji., Lin, Ching.-Yuan. Enhancing Refuge Space Safety: Tape Application to Reduce Door Leakage during Fires. *Advances in Civil Engineering* 2024, <https://doi.org/10.1155/2024/2064541>
42. Kuo, J.-Y.; Song, X.T.; Chen, C.-H.; Patel, C.D. Fostering design thinking in transdisciplinary engineering education. *Advances in Transdisciplinary Engineering* 2021, 16, 63-70; <https://ebooks.iospress.nl/doi/10.3233/ATDE210083>
43. Semahat Merve TOP. The effect of domed and hip roof coverings on mosque design in case of fire. *Journal of Engineering Research* 2023, 2307-1877; <https://doi.org/10.1016/j.jer.2023.08.011>
44. Gelfert, S. Body Part Detection in Smoky Environments with Thermal Camera Using Deep Learning. *International Conference on Control, Automation and Systems* 2022 November, pp. 1508–1514; <https://doi.org/10.23919/ICCAS55662.2022.10003742>
45. Radianti, J. Experience from indoor fire search and rescue game design for technology testing. *Advances in Intelligent Systems and Computing* 2019, 795, pp. 253–265; [https://doi.org/10.1007/978-3-319-94619-1\\_25](https://doi.org/10.1007/978-3-319-94619-1_25)
46. Cope, J., Arias, M., Williams, D., Bahm, C., Ngwazini, V. Firefighters' Strategies for Processing Spatial Information During Emergency Rescue Searches. *Lecture Notes in Computer Science (including subseries Lecture Notes in Artificial Intelligence and Lecture Notes in Bioinformatics)* 2019, 11420 LNCS, pp 699–705; [https://doi.org/10.1007/978-3-030-15742-5\\_66](https://doi.org/10.1007/978-3-030-15742-5_66)

**Disclaimer/Publisher's Note:** The statements, opinions and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of MDPI and/or the editor(s). MDPI and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions or products referred to in the content.