

Article

On a Long Term Strategy for the Success of Nuclear Power

Bruno Merk ^{1,2,3,*}, Dzianis Litskevich ^{1,2}, Karl R. Whittle ¹, Mark Bankhead ², Richard Taylor ² and Daniel Mathers ²

¹ School of Engineering, University of Liverpool, Liverpool L69 3GH, UK; d.litskevich@liverpool.ac.uk (D.L.); krw72@liverpool.ac.uk (K.R.W.)

² National Nuclear Laboratory, Chadwick House, Warrington WA3 6AE, UK; mark.bankhead@nnl.co.uk (M.B.); richard.taylor-4@manchester.ac.uk (R.T.); daniel.p.mathers@nnl.co.uk (D.M.)

³ Helmholtz-Zentrum Dresden–Rossendorf (HZDR), Bautzner Landstraße 400, Dresden 01328, Germany

* Correspondence: b.merk@liverpool.ac.uk; Tel.: +44 151 794 5370

Abstract: The current generation of nuclear reactors are evolutionary in design, mostly based on the technology originally designed to power submarines, and dominated by Light Water Reactors. The aims of the GenIV consortium are driven by sustainability, safety and reliability, economics, and proliferation resistance. The aims are extended here to encompass the ultimate and universal vision for strategic development of energy production, the ‘perpetuum mobile’ – at least as close as possible. We propose to rethink nuclear reactor design with the mission to develop a system which uses no fresh resources and produces no fresh waste during operation as well as generates power safe and reliably in economic way. The results of the innovative simulations presented here demonstrate that, from a theoretical perspective, it is feasible to fulfil the mission through the reuse of spent nuclear fuel from currently operating reactors as the fuel for a new reactor. The produced waste is less burdensome than current spent nuclear fuel which is used as feed to the system. However, safety, reliability and operational economics will need to be demonstrated to create the basis for the long term success of nuclear reactors as a major carbon free, sustainable, and applied highly reliable energy source.

Keywords: nuclear; reactor; spent fuel; P&T; innovation strategy; molten salt reactor

1. Introduction

Strategic development is the key to the success of industrial innovation in the long term. The final outcome differs very often significantly from the objectives given at begin of the development, since external drivers like political, economic or technical boundary conditions change with time. Already in the 1960s, Everett Rogers described the development of innovation through S-curves and formulated this effect in the theory of diffusion of innovations [1]. Rogers’ argues that the application of a technology to a market and the penetration phases from low to high follow an S-curve which is characterized by innovators and early adopters in the first phases and laggards joining the development at the end.

However, Fredmund Malik extended this thinking calling it a “Symphony of S-curves: Seeing the Future Clearly” in his book on strategy development [2] to motivate the people to leave the track of purely evolutionary development when it is indicated by changed boundary conditions. He argues that evolutionary development slows down significantly when the market is saturated. The development speed can only be kept in this phase when a disruption in development appears which creates a new technology entering in to a new phase of rapid development. In this case strategic development enters into a new s-curve. In a first step this concept will be used to derive a deeper understanding of the idea of strategic development of industrial innovations applying an excursion to a day-to-day issue. In a second step the concept is applied to analyze the current development of nuclear reactor systems. The historic boundary conditions are reviewed against the current boundary

conditions and the pace of development. The updated boundary conditions will be used to define a reactor system which is as close as possible to the requirements for a wide spread future electric energy production using nuclear power. This is a major request to create the basis for the long term success of nuclear reactors to act as a major contributor for the production of reliable carbon free, sustainable electric energy. Finally, theoretical thinking is complemented with a reactor physical simulation demonstrating the feasibility of the proposed solution from physical point of view.

Excursion: "The lawn mower problem"

The beginning of the lawn mower problem goes back to 1830 when the first lawn mower was developed/invented [3]. This date marks the change from cutting grass by hand to using an automated system. Over the subsequent 200 years diverse solutions have been developed and optimized leading to a saturated market with strong competition and a wide variety of specific solutions. All developments are characteristic for the initial development curve with the aim making the work easier, see Figure 1. We have more or less approached the end of this curve with the characteristic very low development speed. The most recent development of robot lawn mowers mark the change from the first, black to the second S-curve (red) new, more sophisticated objectives and changed technical as well as legal boundary conditions.

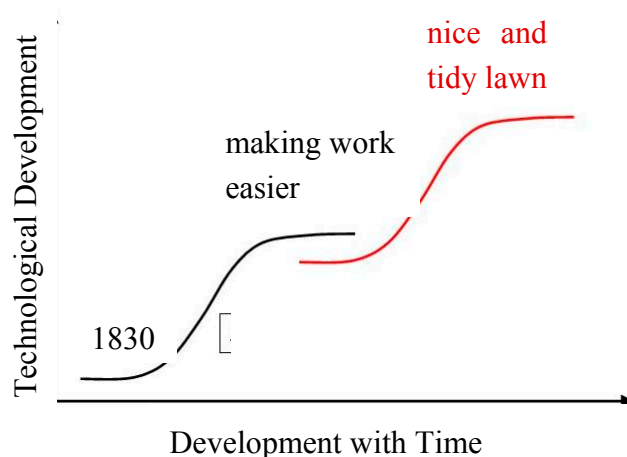


Figure 1: The lawn mower development in S-curves

From strategic development point of view, the objective of the first S-curve 'make the work easier' is not the today's vision anymore. It has changed to 'I want a nice tidy garden lawn, ideally without spending any work and money'. The robot is the first step into the red curve – reducing hand work. However, there could appear other solutions like genetic manipulated, or even artificial grass, or the very traditional solution to give the work to a gardener (in 1830 this could have been slaves – but this isn't possible due to changed legal boundary conditions). Ideally, the tidy garden lawn should be achieved without cost for energy, equipment, and work time – this we could call the ideal, or 'dream' solution. In strategic development this is called the vision. The best solution could come as close as possible to the vision, even if we know it will never be possible to fulfil the vision completely.

In the development of nuclear reactors there has followed an evolutionary track of both the technical solution and the question the technology is trying to address. Thus we propose to address the future strategic development of nuclear reactors by moving to a new, more advanced s-curve to be able to define a new vision which is addressing the changed boundary conditions.

2. The Development of Nuclear Reactor Technologies

The development of nuclear reactors started in war times in 1942, with development of Chicago Pile 1, the world's first nuclear reactor, built by Nobel Prize winner Enrico Fermi [4]. During the first years of development, the purpose of a nuclear reactor was based around three objectives:

1. Demonstration of a continuing chain reaction and its potential application
2. Generation of material for military purposes and/or commercial/medical applications
3. Energy generation from the chain reaction, either as electricity, most desirable, or heat

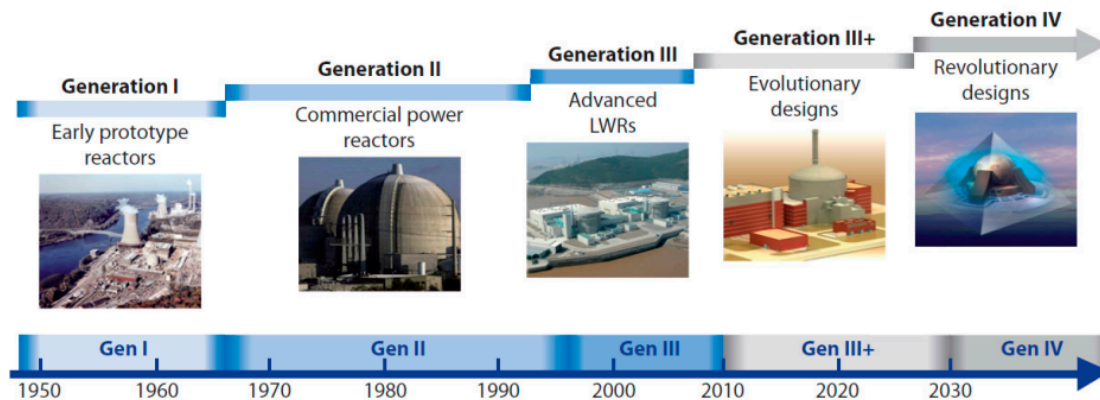


Figure 2: Generations of nuclear power: Time ranges correspond to the design and the first deployments of different generations of reactors [5]

The main focus of reactors today is the generation of energy, i.e. objective 3. However, even objective 3 has undergone a partial change given by the request for a solution for the energy trilemma. The request is developing the energy technologies toward the objectives Energy security, Energy equity (accessibility and affordability), Environmental sustainability [6]. The safe use of the chain reaction has been extensively proven and the production of medical isotopes is secured using more specialised technologies. After the following theoretical discussion about the historic and the possible future technological development and the change of the vision, we will describe a highly innovative reactor system which has the potential for a disruptive innovation in nuclear energy production. This will be followed by the demonstration of the neutron physical feasibility of a reactor with significantly improved sustainability indices.

“In the course of developing nuclear weapons the Soviet Union and the West had acquired a range of new technologies and scientists realised that the tremendous heat produced in the process could be tapped either for direct use or for generating electricity [7].” This quote characterizes the origin of nuclear power production, heat and the use of technologies to transform the heat to electricity has been seen as a by-product created when fulfilling objective 2 (producing material for military purposes). Besides this, the development was driven by the request for a compact long-lasting power source for submarines under Admiral Rickover in his function as Director of the Naval Reactors Branch [8]. The first nuclear reactor for electricity production was EBR-1 a Sodium-Potassium cooled fast reactor in the US, a system which is ideal for the production of plutonium. A major step for the civil nuclear energy development was the “Atoms for Peace” program [9] linked with the name of the US President Eisenhower and the foundation of the IAEA. The first nuclear reactor producing a significant amount of electricity was the Russian AM-1 reactor which was water-cooled and graphite-moderated, once more an ideal configuration for plutonium production. In Russian, it was followed by a lead-bismuth reactor for the navy and a program for the development of sodium cooled fast reactors which offer long cycle times due to breeding of plutonium. In parallel development of the pressurised water reactor (PWR) has been driven by the US navy leading to the USS Nautilus and later to the stationary Shippingport reactor with an initial output of 60 MWe built in 1957 in the search of a robust and easy to operate system. An alternative design based on the use

of molten salt as coolant, innovatively designed to power air travel, was built in 1954, which in turn led to the molten salt reactor experiment at Oak Ridge National Laboratory in 1965 [7].

In 1956 the first commercial reactor, the gas-cooled MAGNOX reactor at Calder Hall, started operating [7]. One of the aspects of the MAGNOX design was the output of weapon grade plutonium, which in turn provided a secondary income for the operators, due to the government buying back the formed plutonium. The reprocessing in the UK was developed around this need. "In their early years (1963–72) the UK's civil Magnox reactors produced significant amounts of weapons-grade plutonium... British Nuclear Fuels Ltd ... admitted that they called the weapons-grade plutonium "military" irrespective of origin" [10]. The Pu has been given to the United States in exchange for fissile material for UK military requirements [11]. The follow up system, the AGR would have been attractive for high quality Pu production, too. However, due to the already changed demand the reactors have never been operated in an optimized way for plutonium production, but heavily for electricity production.

Comparable design principles like for the MAGNOX system, graphite moderation and natural uranium as fuel, with online refuelling characterize the RBMK reactors "derived from a design principally for plutonium production and was intended and used in Russia for both plutonium and power production." [12]

The described first generation of reactors development has continued leading to further generations, mainly of commercial light water power reactors, see Figure 2. The current generation of reactors are the Generation III and III+, once more evolutionary designs. The market is currently almost completely dominated by LWRs.

Today, the military application is less attractive to most countries. It is even turned around to the demand of proliferation resistance for nuclear systems. It is politically desirable for most of the world's nations to maintain obligations under strategic nuclear disarmament treaties and focus on the peaceful development of nuclear power supplying safe and sustainable low carbon energy. Following this desire the next generation of nuclear reactors currently under development are following the goals outlined by the Generation IV International Forum (GIF), see Figure 3.

The given GenIV goals build the bridge between the current S-curve and the future one to support a new vision. The current light water reactors are still essentially based on technology used to power nuclear submarines, even if they have undergone an evolution via Generation II to Generation III/III+ reactors. The reactors are to be seen as the current ideal. The GenIV programme is the foreseen next stage of reactor design applying 'new, innovative' concepts for nuclear power generation. Such concepts could lead to a reactor that can continually breed, and burn its own fuel, i.e. become a perpetual reactor with significantly lower demand for fresh fuel like current light water reactors. Due to the wide operational experience of more than 400 reactor operation years, the sodium cooled fast reactor technology seems to be the one closest to application [13].

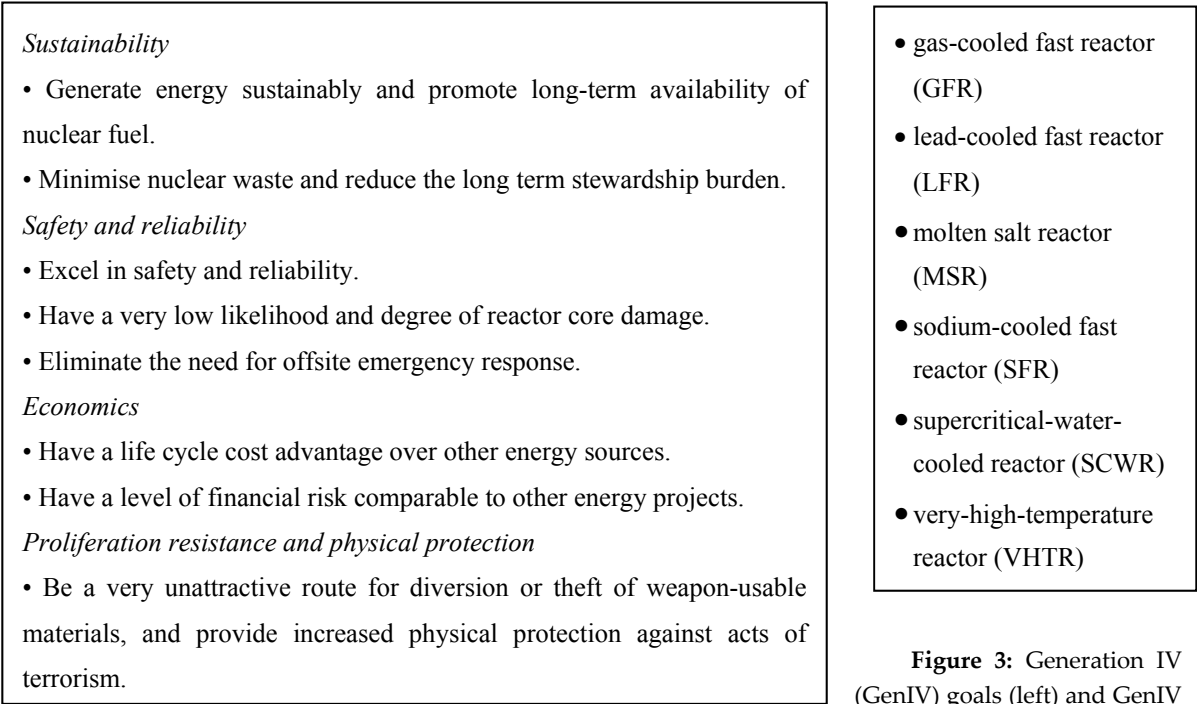


Figure 3: Generation IV (GenIV) goals (left) and GenIV systems (right) [5]

However, seen from the historic point of view given above, almost all systems are based on the very early developments of nuclear reactors with objectives formed by completely different boundary conditions and requests as we have it today – producing nuclear materials and powering submarines versus wide spread, sustainable, low carbon power production by nuclear reactors. Some important decisions on the way have been made on the historic requests to develop the ideal system for plutonium production. A perfect example is the decision between the molten salt breeder reactor and the sodium cooled fast reactor [14]. A sodium cooled reactor with solid fuel is advantageous for the production of high quality plutonium but will it be advantageous for the wide spread sustainable power production, too?

Applying the future request of wide spread sustainable power production defined by the ‘energy trilemma’, the upcoming next level S-curve should lead to the ultimate, universal vision for energy production (independent of the observed ‘power plant’ system). This vision is much more broad and advanced than the development goals of the first reactors and even more advanced and broad than the GenIV goals. This ultimate, universal vision can be given with one simple, old phrase – ‘perpetuum mobile’. Fredmund Malik characterizes the function of the vision from the view of strategy development and strategic development point of view in the following way: “A mission is definitely necessary [for the strategy development], and I will get to that shortly. It often follows from a very broad and far-reaching idea which could be called a vision or a dream. That dream, however, has to be transformed into a viable mission: this is the only way to distinguish useful from useless visions.” [2]

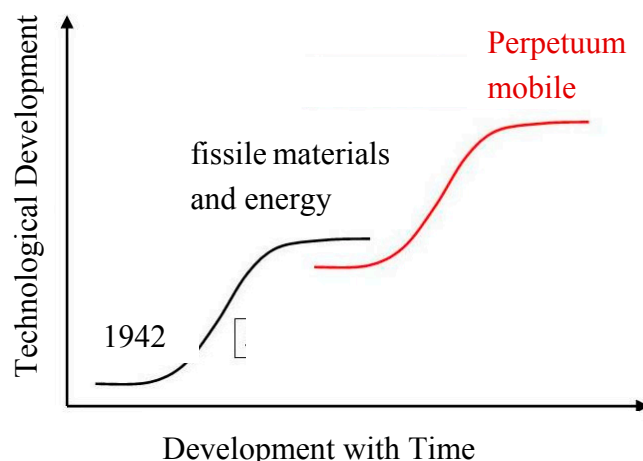


Figure 4: The nuclear reactor development in S-curves

It is a clear consensus, amongst physicists and engineers, there is the first law of thermodynamics that prevents a perpetuum mobile from operating – thus it is a dream. However, it provides a clear vision and a far-reaching goal that has to drive research and innovation. The key words for the vision are:

- No resources requested
- No waste produced
- Highly economic, reliable, safe and secure

In the next step of strategic development, the transformation of the vision to the viable mission has to be given. The mission derived from the given vision would be, to develop a reactor that can breed and burn its own fuel, for significant period of time and solve the waste problem in addition. This can be seen as the viable mission which brings us as close as possible to the vision as essential basis for a successful wide spread application of nuclear reactors. Transforming the vision to the mission means transferring the idea of the ‘perpetuum mobile’ to real nuclear reactor operation. This will determine the major requests for a long term success of nuclear reactors to become a major reliable, low carbon, and sustainable energy source. The mission should be fulfilling the requests to form the basis for the successful future of nuclear energy production to become nuclear a worldwide recognized and applied technology. The vision of the ‘perpetuum mobile’ could be translated to the viable mission following ideal postulates for a possible really operable nuclear reactor.

Obviously, a reactor can’t be operated without resources but it would be a smart mission to better use already existing resources which are currently characterized as waste. A reactor could be designed which doesn’t require fresh resources, i.e. it can be operated with spent nuclear fuel (SNF) from light water reactors which exists in vast amounts, see below. This kind of reactor design should not produce additional waste, i.e. the waste should closely match the SNF which is used to fuel the reactor, but a significantly increased amount of energy would be produced out of this already existing resource.

The design should also make misuse of the plutonium as unattractive as possible, i.e. reduce the likelihood of further nefarious use of plutonium. This could be achieved through many routes, but at least one should be incorporated in the reactor design. The reactor or in a more global view the whole nuclear system has to be designed in a way to be at least as economic as current technologies (nuclear as well as non-nuclear). Additionally, the system has to be highly reliable and secure to operate and remain a safe technology

The sustainability of long term operation on spent nuclear fuel defined above has to be solved within the core physics of the reactor, as well as the inclusion of a Pu vector preventing any misuse

of the Pu. Such a system can only be achieved once the system can provide enough neutrons for a self-sustained operation on the basis of SNF used, directly impacting the choice of the Pu vector.

The following feasibility study is based on a molten salt fast reactor configuration which will need further optimisation to realise all the requested goals. The potential advantageous safety behaviour and the excellent operational flexibility have already been extensively discussed [15, 16, 17] for molten salt fast reactors. The challenges in the implementation of molten salt reactors have already been described in several projects [18, 19]. A detailed list of R&D challenges is given in a final paragraph.

3. Results

3.1 Initial Core

The initial core configuration for the simulation is based on the starting configuration with 65% mol LiF, 28.4% mol SNF, and 6.6%mol TRU, translating to 62 tons of SNF with 15 tons of TRU which accumulates to 74 tons of heavy metal (HM), with the blanket filled with pure LiF salt. Such a configuration leads to a start-up core with an averaged Δk_{eff} of 0 over the first burnup cycle of 5 GWd/tHM.

3.2 Simulation over Lifetime

For the simulation over longer term variable TRU feeding is used to keep the Δk_{eff} in the range of ± 400 pcm, Figure 5. In the initial phase, at least until the first tip $\sim 0.75\%$ of the initial loading is fed in every calculation cycle. In the later stage between the two tips the feeding is reduced to $\sim 0.25\%$. Over the whole TRU feeding period ~ 3.6 tons of TRU are fed into the system within nearly 20 years. Additionally, a constant amount of SNF is fed into the system to keep the U-238 level almost constant. After reaching a balanced system, the TRU feed is not needed anymore. The system becomes self-sustainable after ~ 18.5 years, from this point only SNF is fed into the system. Over the evaluated operational period of 60 years 68.3 tons of SNF are fed into the system, accounting for the TRU feed, too, about 69 tons of heavy metal are fed.

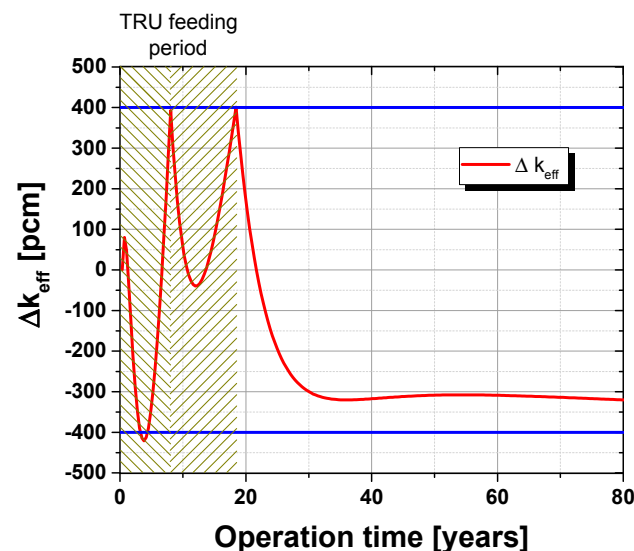


Figure 5: Change of the deviation of the averaged effective multiplication factor Δk_{eff} over a simulated operational period of 80 years within the iteration band of ± 400 pcm

3.3 Isotopic Contents

Throughout the observed period, the atomic number density of U-283 remains almost constant (within 0.6%), with the U-283 content in the core rising slowly during the first ~ 20 years and reducing

over the remainder of the operational period. This small change arises from the TRU feeding which changes the breeding balance slightly. Once there is no TRU feed anymore, slightly more U-238 is consumed by capture reactions leading to the breeding of fresh plutonium.

The atomic number density of the most important fissile isotope Pu-239 increases during the first part of the TRU feeding period, as shown in Figure 8. Once the second stage of reduced TRU feed is reached, the Pu-239 content remains fairly constant, with the Pu-239 content decreasing to an asymptotic value once TRU feeding is stopped. However, the Pu-240 content in the core increases to an asymptotic value almost twice the initial value, whereas the Pu-241 content drops during TRU feeding below the initial amount produced within the LWR, even after this amount has already been reduced to half simulating the long term storage of SNF. Both Pu-242, and Pu-238 content increases during TRU feeding, with both values decreasing during operation.

Isotopic analysis of the Pu compositions at the end of the model operation shows dramatic changes, when compared to the initial TRU feed, see Table 1. The share of LWR fissile Pu isotopes decreases from the already low content of TRU in the high burnup LWR fuel. The primary cause is significant build-up of Pu-240, see Figure 6, with the observed decrease of Pu-241 and 242, which is itself typical for the operation of a nuclear reactor with a fast neutron spectrum, where the accumulation of higher isotopes is strongly reduced compared to LWR with thermal spectrum.

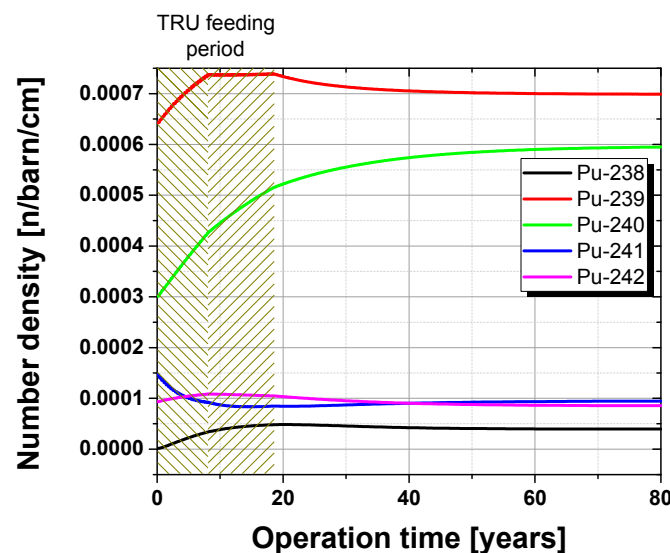


Figure 6: Number density of the different Pu isotope particles in the fuel salt over the observed operational period

Table 1: The plutonium vector appearing in the reactor after long term operation compared to the Pu vector of the TRU used for loading

	Unload	Load
Pu-238	2.6%	3.1%
Pu-239	46.1%	52.5%
Pu-240	39.4%	24.6%
Pu-241	6.3%	12.2%
Pu-242	5.6%	7.7%
Pu _{fiss}	52.4%	64.7%

4. Discussion

The results presented here demonstrate that a molten salt reactor with fast neutron spectrum such as that proposed in the EVOL project could be operated using pure spent nuclear fuel (SNF) from light water reactors. However, some plutonium or TRU fissile material would have to be added for the initial start-up, and during transformation phase, see Figure 5. In this period, the fuel composition from the LWR has to be transformed into fuel compatible with fast reactor operation. Once this transition has occurred, solely SNF without adding any further fissile material is sufficient to keep the reactor within the iteration band of keff. The timescale for such transformation requires further optimization based on the core size, the initial material configuration, the feeding strategy, and the quality of the SNF used. The salt clean-up system has to be enhanced compared to the EVOL benchmark. In the simulation here the 18m³ of molten salt is cleaned within two cycles, corresponding to a time ~250 days.

The initial core configuration, as outlined above, 65% mol LiF, ~28.5% mol SNF, and ~6.5% TRU, translates to 62 tons SNF and 15 tons TRU which in turn accumulate to 74 tons of HM while the blanket is filled with pure LiF salt. A comparison with data of the original EVOL benchmark configuration core: 77.5%mol LiF and 22.5%mol HM (~16% Th and ~6.5% TRU), blanket: 77.5%mol LiF and 22.5%mol Th indicates a clear increase of the actinide content. The full EVOL reactor (core and blanket) contains ~62 tons of HM compared to 74 tons of HM in the SNF core.

Over the TRU feeding period ~3.6 tons of TRU are fed into the system, whereas in the evaluated operational period of 60 years 68.3 tons of SNF are fed into the system. Therefore, ~ 69 tons of heavy metal are fed, during 60 years. A quick calculation value for burnt HM leads to 66 tons, with a burning rate of 42 kg/TWh which is characteristic for a fertile free system where nothing leaves the reactor [16]. The comparison of both values in conjunction with the change in U-238 content over the lifetime shows a slight increase in the content of major HM isotopes, confirming the quality of the very complicated and innovative simulation result.

A further parameter is to design an innovative nuclear reactor, which suppresses the misuse of plutonium as such the plutonium should be unattractive even if separated. A response to this can be seen in Table 1. In the proposed reactor system plutonium low in Pu-239 but high in Pu-240 is created, coupled with the Pu staying within the reactor until it undergoes fission. This was already highlighted in 1978 by Engel et al, as one of the most attractive features of liquid fuelled reactors. Once the plutonium, or other fissile material, is put into a molten salt reactor system it is not necessary to separate the material, in order to keep the fission process going [20]. Another important feature of such a system provides no possibility for inserting pure or almost pure fertile material for breeding – all fuel components will be mixed immediately. To create such a possibility would require a significant change in the reactor design, e.g. the core vessel. The short term insertion and irradiation of fresh fertile material, which could lead to the production and separation of plutonium by interested reactor operators or countries is almost impossible.

Reactor operation based on SNF will lead to a significantly reduced fuel cycle (see Figure 7), when compared to current nuclear reactor operation scheme and the planned operational schemes for most of the proposed GenIV systems. No new, fresh resources are required and thus no mining which itself causes significant toxicity, “Clearly, mining is the only contributor with more than 99% of the potential impact both for the eco and the human toxicity”[21]. The reduced fuel cycle requirement and complexity lead to a strong reduction of the environmental impact from nuclear energy, since impact arising from the front end of the fuel cycle will diminish, coupled with the amounts discharged at the back end also being reduced. In the current fuel cycle tremendous amounts of material are moved. For uranium to be inserted into a French 1 GWe LWR, with a U content of 0.1% by weight 120 000 to 150 000 tons material has to move to produce the required 16 to 18 tons of enriched material to operate the reactor for one year. In contrast, in the proposed SNF operated reactor less than one ton of SNF is required to operate a 1GWe reactor for one year.

The arrangement of the molten salt reactor typically has co-location of reactor, salt clean-up (reprocessing), and fuel production without further transport, thus there appears no ‘Plutonium economy’ like the current requirement for a closed fuel cycle which is based on the separation of

actinides. No risky handover of Pu at the different stages is required. No separated fresh fertile material appears since all fuel components are immediately.

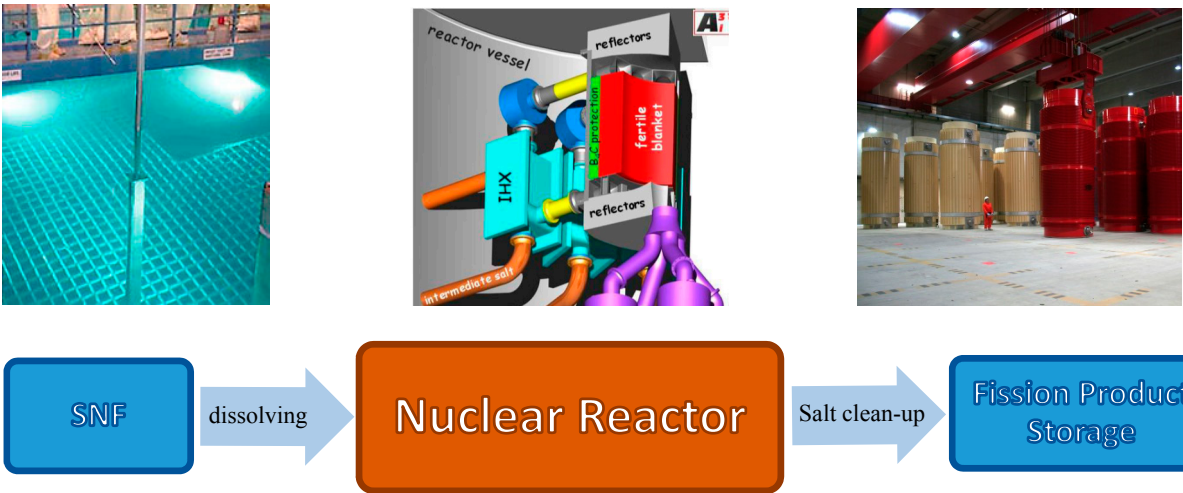


Figure 7: The reduced fuel cycle like it would be given using MSFR fed with SNF Pictures: left http://www.wikiwand.com/en/Spent_fuel_pool, credit DOE License: Public domain, middle: EVOL benchmark configuration, right: Gorleben storage hall, Origin: GNS Gesellschaft für Nuklear-Service mbH

A comparison to classical closed fuel cycle for fast reactors, which would be required to achieve a comparable fuel/uranium usage, is shown in Figure 8. Already components are required as input. Due to the solid nature of such fuel separate steps are required, such as the fuel production, the storage time sufficient to cool the fuel until it can be reprocessed more easily, and the reprocessing. The separation of fissile material opens possibilities for misuse, whereas the solid fuel structure opens the way to insert pure fertile material for a short irradiation to produce weapon grade materials.

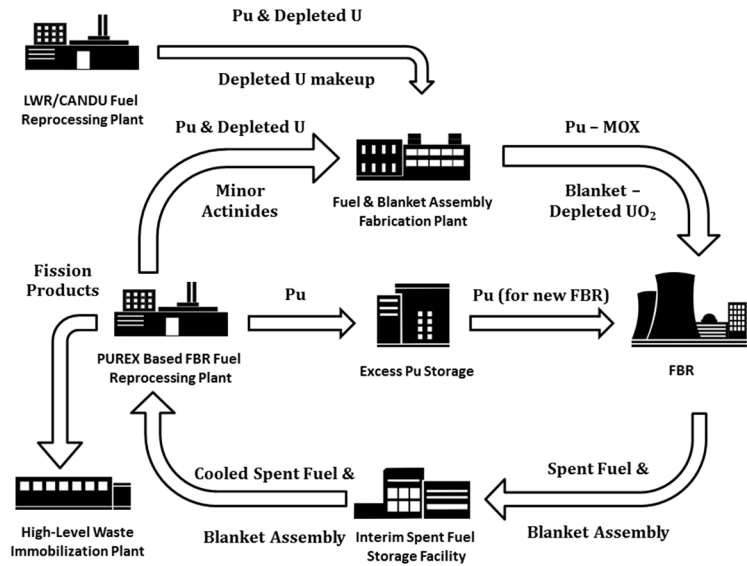


Figure 8: The classical fuel cycle like it would be given using a sodium cooled fast reactor with solid fuel for the incineration of SNF

An almost similar fuel cycle will be required for the more advanced BREST concept of a LFR, such as that under construction in Russia. However, even the significantly more advanced processes,

use pyro reprocessing and co-location of the fuel cycle facility like foreseen for this project [22] and suffers from the above described limitations given by the use of solid fuel.

The penultimate design parameter is a nuclear reactor which doesn't produce additional waste. Operating a reactor on SNF, the waste mass will be almost identical to SNF which is introduced into the reactor. The activity of SNF over time is indicated in Figure 9. However, the mass of waste stays the same, but ~20 times more energy is produced, thus the activity of the fission products is expected to be ~20 higher (see Figure 9, red line with spheres). Consequently, besides the energy produced all requirements of waste management driving the development of Partitioning & Transmutation (P&T) would be fulfilled [16, 19] – only fission products would remain in the waste stream while all transuranic isotopes would stay in the reactor, and in turn be burnt. Hence, only the short term activity of the nuclear waste will increase when compared to the original SNF, whilst the long term activity will decrease due to the absence of TRUs in the waste. The real gain occurs however, when the result from a reactor operating on SNF is compared to the production of the same amount of energy with conventional LWRs (black line with halved squares).

However, a strategy for the handling and storage of the separated fission products from the clean-up system has to be developed. In addition to this, a strategy for the capturing and handling of volatile fission products, evaporating from the salt during reactor operation is required. Both challenges are well known in standard molten salt reactor development, with significant work already completed [18, 23, 24]. The molten salt reactor network will work in parallel designing molten salt power reactors.

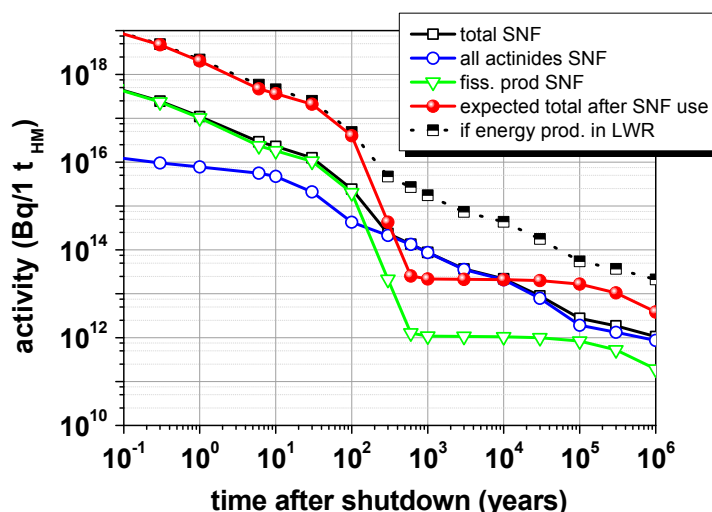


Figure 9: Activity per ton of SNF over time

The final requirement, i.e. the reactor being both safe and financeable, with limited financial risk in both development and construction, needs to be demonstrated, challenging engineers. The design should be seen as an integrated challenge for many disciplines. It could form the first test bed applying the concept of the Integrated Nuclear Digital Environment (INDE) [25]. However, before starting such development work, and to assure that the system is working in the final design, it is essential to prove the reactor functionality regarding the operability on SNF and confirm this at each important development decision – just the ideal request for the application of INDE.

Not an unlimited energy source!

The amount of fuel unloaded from a LWR per year has changed with time, with the increase in target burnup in LWR fuel. In 1988 the unloading amount was ~27 tonnes per year for a 1 GWe LWR [26], whereas 25 years later the reported unloading mass had decreased to an annual discharge of spent fuel from a 1 GWe LWR of 19 to 20 tons at a typical burn-up of 50 GWd/tHM [27].

Depending on the discharge burnup of the LWR SNF, a MSFR utilising LWR SNF could operate almost 20 years with SNF from one year of LWR operation. However, the initial loading of the reactor

would require ~62 tons of SNF, with the addition of 15 tons of separated Pu, from ~ 1500 tons of SNF (reprocessing 100 tons of SNF gives ~1 ton of Pu) in order to start the machine. However, there is a significant inventory of separated Pu and HEU available worldwide, with the global inventory of highly enriched uranium (HEU) estimated to be 1370 ± 125 tonnes, and separated plutonium of 504 ± 10 tonnes, of which ~ 270 tonnes is available for civilian usage. [28]

Combining all figures, operation of a single reactor requires less than 20 tons of seed material (TRU, Pu, or high enriched uranium depending on the quality of the seed) and ~130 tons of SNF. The amount of SNF for the initial core and 60 years of operation is produced within a LWR in less than 7 years, whilst the seed could possibly be taken from the stockpiles of PU and HEU, which would then be reduced. Based on initial judgement, the amount of seed material to start up a reactor is slightly higher than for a sodium cooled fast reactor although the operational amount of seed material required is likely to be lower in the iMAGINE concept described here. It is recognised that further work would be required to understand the number of iMAGINE reactors that could be installed in a given time, fuel/seed requirements, energy output and the implications for storage and disposal of material.

With more than 320 000 tons of spent fuel in storage expected by 2020 [29], and the expectation that ~130 tons are enough for 60 years of operation for a 3 GWth reactor or ~1.4 GWe reactor, there is enough material for ~2500 reactors. If this is coupled with the expected continued use of LWRs there is plenty of energy available.

4.1 Challenges for R&D

In order for such a design to be realised, and more importantly manufactured and operated several multi-disciplinary, integrative scientific and technological challenges have to be solved, which are outlined below:

Engineering:

- Optimisation of burning used LWR fuel, i.e. demonstration of principles with validation
- Optimisation of reactor design, i.e. better than EVOL
 - Fully understanding the fluid dynamics under both normal and accidental conditions
 - Componentry for molten salt system including in service inspection and repair
- Development of materials or engineering solutions capable of operating under such extreme conditions, e.g. high temperature, significant radiation damage, corrosive environment

Chemistry and Thermodynamics:

- Optimisation of salt purification, i.e. removal of fission products from within the liquid phase
- Design, implementation and capture of volatile fission products, helping to keep the liquid phase pure
- Preparing the fuel – choosing the optimal method for converting used LWR fuel in to a form sufficient for use within the reactor
- Appreciation of the chemical thermodynamics, and limitations in using molten salts with high levels of actinide loading

Safety:

- Develop the safety methodology and implementation protocols for such a novel liquid reactor design
- Assurance in safety of such a co-located site, i.e. both reactor and reprocessing
-

Others:

- Economic viability, ensuring the reactor is economically viable and competitive with current technology
- Ensure the public acceptance of such a new technology, without which the reactor is unviable
- Development, verification, and validation of an integrated computer simulation environment incorporating reactor physics, salt chemistry, process engineering, thermodynamics, and material behaviour

Besides the above challenges there are remain other hurdles to overcome, as a consequence a step by step approach is foreseen gaining operational experience, such that further developments can be made. Starting in a manner similar to the development of previous reactors, a small low power experimental machine should be initiated, which would lead on improved implementable designs. Such a machine has to be planned, built, and financed [16]. However, there is experience on other practical challenges available from the EVOL project, there are already proposals made and published on solving the very high neutron fluences on safety related structures [30].

5. Materials and Methods¹*5.1 Reference Configuration*

The calculations are based on the core dimensions and boundary conditions given in the EVOL benchmark definition (see Figure 10), and focus on a reference MSFR of 3000 MWth using a fast neutron spectrum. The reactor core is a single cylinder with flowing fuel salt within [31], the dimensions shown in Figure 10. The whole core system is composed of four volumes, an active core, an upper extraction area, a lower injection area, and outside the core where the heat exchanger and pumps are. The active core is surrounded by a blanket ring, and a protection ring, both made from absorbing material, with both components having the function of protecting the pumps and heat exchanger from the high neutron flux arising within the active core.

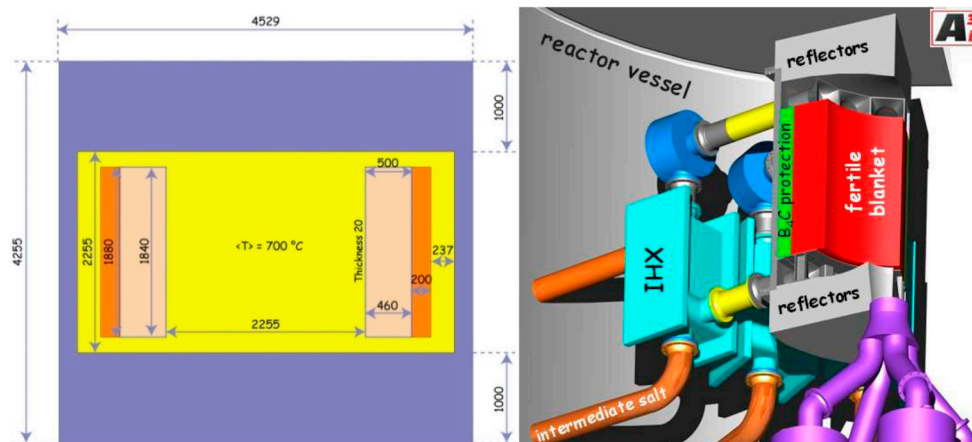


Figure 10: (Right): Simplified scheme of the MSFR system including the core, blanket and heat exchangers (IHX) – (Left): Benchmark definition [31].

The spent nuclear fuel composition, used in this analysis, is based on material and geometry of the “OECD/NEA AND U.S. NRC PWR MOX/VO₂ CORE TRANSIENT BENCHMARK” [32]. The uranium oxide fuel assembly, with 4.5% enrichment in U-235, has been calculated to a maximum

¹ The raw data of the calculations and the used PYTHON script are available under <http://datacat.liverpool.ac.uk/id/eprint/151>

burnup of 50 GWd/tHM using HELIOS 2.1 to approximate the model material configuration. To simulate storage time leading to Pu-241 decay, the Pu-241 content has been halved and turned to Am-241, equivalent to a postulated storage of 14 years. Besides this change no further adaption for storage has been introduced, which can be considered a conservative assumption from a neutronic point of view. For the initial addition of fissile material for reactor start-up the TRU isotopic vector given in Table 2 is used, and follows the definition of the EVOL benchmark.

Table 2: Used transuranium (TRU) isotopic vector – EVOL benchmark data [31]

Np 237	6.30%
Pu 238	2.70%
Pu 239	45.90%
Pu 240	21.50%
Pu 241	10.70%
Pu 242	6.70%
Am 241	3.40%
Am 243	1.90%
Cm 244	0.80%
Cm 245	0.10%

The salt configuration is also based on the EVOL benchmark, and consists of LiF with mainly UF₄ (calculated as SNFF₄ as approximation). However, in contrast to the EVOL benchmark, the share of SNF has to be determined, to allow for sufficient breeding of fissile material keeping the reactor critical for long term operation without further feeding of fissile material. The blanket region is filled with pure LiF₄. The overall fuel salt volume is 18 m³ within the core and 7.7 m³ within the blanket. The salt clean up system has been defined in the EVOL benchmark with a clean-up time of ~450 days for the full amount of 18 m³ fuel salt. This value has to be adapted, thus provides an additional degree of freedom for the optimization of the breeding.

5.2 Modelling and Calculation Tool

For the model evaluations, the HELIOS 2.1 licensing grade code system is used with the internal 177 group library [33]. The HELIOS code is a 2D spectral code with wide unstructured mesh capabilities and a transport solver, based on the collision probability method [34]. The benchmark configuration is transferred to a volume corrected 2D HELIOS model (see Figure 11). The leakage in the third dimension has been fixed based on 3D calculations within the EVOL benchmark exercises, while the leakage in radial direction is directly modelled. Additionally, the model has been adapted to improve the representation of the 16 heat exchanger pipes instead of the smeared treatment in the benchmark configuration.

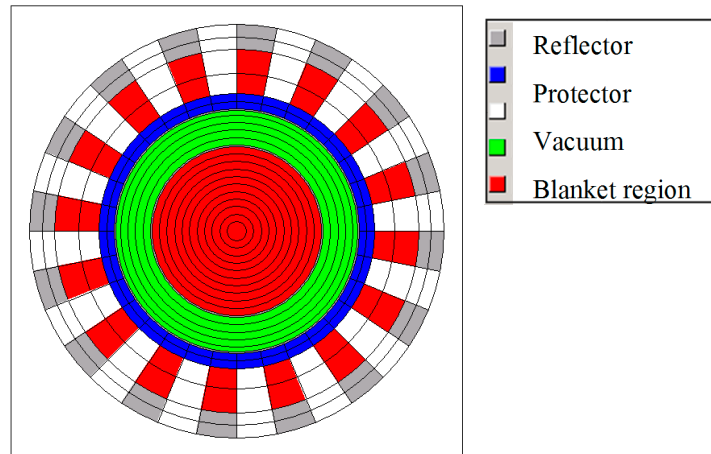


Figure 11: Volume corrected 2D HELIOS model of the molten salt reactor.

The HELIOS code is an industrial standard software which performs the neutron transport calculation, the burn up calculation, and if requested the cross section. Originally, as HELIOS was written for the simulation of solid fuel assemblies, i.e. as used for the determination of a SNF configuration. The possibility of online refuelling and online salt clean-up is not foreseen. To deal with these special features of molten salt reactors a PYTHON script has been developed, based on the features of the HELIOS package. All information, which is constant during the whole reactor operation, is stored in a so-called expert input, while the changing material configuration is given in the user input, which is written new in every cycle using the PYTHON script. Within each cycle 5 burnup steps are calculated in HELIOS to the target burnup of 5000 MWd/tHM. Both inputs are merged in the pre-processor code AURORA, which creates the updated input for the HELIOS, determining neutron flux distribution and burnup of material. The results are finally evaluated for each cycle in the post-processor ZENITH, where it is decided which isotopes will be fed back into the next user input, created with the help of the PYTHON script (see Figure 12). Theoretically, it is possible to simulate a molten salt reactor precisely by using small time steps in this calculation loop. However, in a real MSR two different time scales for salt clean-up can be observed, due to the different extraction methods for fission products. These are helium bubbling for gaseous and volatile fission products with a comparably short operation cycle (minutes), and online salt clean-up for dissolved fission products with a significantly longer operation cycle. To simulate these different time scales a full removal of gaseous and volatile fission products takes place after each 5000 MWd/tHM cycle, but only a partial removal of dissolved fission products is established at the end of cycle. The lower efficiency in the separation of lanthanides is considered by a 20% lower reduction than for the other dissolved fission products. The throughput of the 18 m³ salt is an optimization parameter, which needs to be determined. However, what is most likely is that throughput through the salt cleanup system will have to be increased when compared to the EVOL benchmark, due to the fission products which are inserted with the SNF.

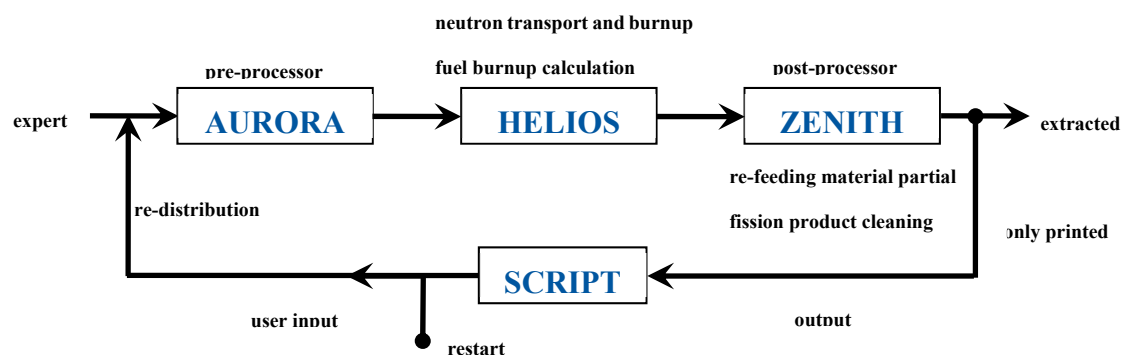


Figure 12: Description of the calculation cycle for the simulation of a MSR.

Due to the characteristics of HELIOS, some approximations have to be accepted, for example, there is no fuel salt movement, thus an undesired burnup distribution arises during the calculation cycle, and the materials are only re-distributed when a new user input is defined via the script. As HELIOS was designed for use with LWR reactors, a LWR spectrum is used for the within group weighting of the 177 group master libraries. However, comparisons to SERPENT on the isotope accumulation during the burnup in a fast reactor configuration using different HELIOS libraries have shown an acceptable agreement for major isotopes [35]. Additionally, different versions of the HELIOS 1 code have been used in the EVOL benchmark calculations for MSFRs [36] and in the benchmark calculations in the ESNII+ project for SFR [37]. In both benchmarks the results were comparable to the other codes, with no major systematic discrepancies observed. A significant improvement has been observed for the use of HELIOS 2 with the cross section libraries based on the most advanced ENDF/B VII library system, and the approximations and use of the HELIOS code package seems to be adequate for the level required for this kind of long term feasibility study. The major uncertainties are predominantly given by the current preliminary design which is far from optimised, with a more detailed design required for the next phase. Such design uncertainties are expected to impact significantly more to the uncertainties than the approximations made within the modelling and the applied code. In general the calculations are performed to demonstrate the feasibility of such operation of a critical reactor on the basis of spent LWR fuel with high burnup.

6. Conclusions

Invention and innovation in nuclear reactor development can be described with the concept of developments in s-curves. The identified key points which should drive invention and innovation are the changed boundary conditions, and the evolvable objectives. These new objectives ideally coincide with the ultimate, universal vision for energy production characterized by minimal use of resources and production of waste, while being economically affordable and safe, secure and reliable in operation.

Following these objectives, a new innovative proposal has been shown, whose operation is based on utilising spent nuclear fuel (SNF) from light water reactors (LWRs) as the main fuel, fulfilling the goals of sustainability in innovative electric energy production. A proof of the feasibility is provided based on a reactor neutronics point of view which provides a solution to the major challenge, establishing a breeding process which generates sufficient fissile material from the inserted SNF. For the initiation of the system a support of fissile material in the initial core and during a transition phase is required. Optimization of the design should be performed defining an ideal initial composition, and the required efficiency of the salt purification system, leading to a further objective of minimising the time required for the transition from a system fed with fissile material and SNF to a pure SNF feed.

The result of such a design would be a system which does neither require new resources nor produce additional waste, providing an option of a sustainable future nuclear system. In addition to providing the desired sustainability, the partitioning & transmutation requirements for such an innovative waste management strategy would be fulfilled in this system as an advantageous side effect. In addition, it provides enhanced resistance against misuse of Pu arising from a high Pu-240 content, with a very limited possibility for short time insertion fertile material, coupled with Pu remaining in the system without further separations. The sustainability of such a system is supported by the significantly reduced environmental impact of the fuel cycle, which is reduced to 3 steps, i.e. dissolving the SNF, reactor operation, storage of fission products. Thus today's front end of the fuel cycle consisting of mining, conversion, and enrichment would no longer be required, eliminating a major source of toxicity arising from the mining/extraction process.

The use of SNF from LWR as reactor fuel would additionally open a vast energy resource of almost 2500 reactors, each 1.4 GWe operating for 60 years based on the SNF masses postulated for 2020. Thus this design would provide a significant, but not infinite, amount of energy.

The design requirement of such an innovative system would be safe and financeable with limited financial risk in both development and construction, is a challenge which should ideally be

tackled by an international consortium following the proposal of the integrated nuclear data environment [25]. The ideal consortium would consist of all countries with an interest in solving their SNF problem. The development of such a sustainable and innovative nuclear reactor is a major challenge across engineering, but with a substantial impact on the future of the worldwide energy production.

Author Contributions: BM: designed the work, provided calculations, evaluations, wrote and co-ordinated the manuscript; DL: provided calculations, evaluations and scripts; KRW: supported writing the manuscript and contributed to the discussion; MB: co-designed the work, supported writing the manuscript and contributed to the discussion; RJT: motivated the work, supported writing the manuscript and contributed to the discussion; DM: supported writing the manuscript and contributed to the discussion

Conflicts of Interest: "The authors declare no conflict of interest."

References

1. EM Rogers: Diffusion of Innovations, 5th Edition Paperback, 11/2003, free press, New York
2. F Malik: Strategy – Navigating the Complexity of the World, Campus Verlag, Frankfurt/New York, 2013
3. A history of the World: The world's first lawnmower, available: <http://www.bbc.co.uk/ahistoryoftheworld/objects/NI2ZjBwpTcqYdtpXFnlzUQ>, accessed 06/04/2016
4. Achievements: Reactors Designed by Argonne National Laboratory, available: <http://www.ne.anl.gov/About/reactors/early-reactors.shtml>, accessed 06/04/2016
5. Technology Roadmap Update for Generation IV Nuclear Energy Systems, January 2014, available: <https://www.gen-4.org/gif/upload/docs/application/pdf/2014-03/gif-tru2014.pdf>, accessed 06/04/2016
6. World Energy Council: Energy Trilemma Index, available: <https://trilemma.worldenergy.org/>, accessed 05/04/2017
7. Outline History of Nuclear Energy, (Updated March 2014) , available: <http://www.world-nuclear.org/information-library/current-and-future-generation/outline-history-of-nuclear-energy.aspx>, accessed 07/04/2016
8. Hyman G. Rickover, available: <http://www.globalsecurity.org/military/agency/navy/rickover.htm>, accessed 05/04/2017
9. E Roehlich (2013) 60 Years of "Atoms for Peace", available: <https://www.iaea.org/newscenter/news/60-years-atoms-peace>, accessed 21/06/2016
10. Barnham KWJ, Hart D, Nelson J, Stevens RA (2000) Did civil reactors supply plutonium for weapons?, *Nature* **407**, 833-834, doi:10.1038/35038256
11. Barnham KWJ, Hart D, Nelson J, Stevens RA (1985) Production and destination of British civil plutonium, *Nature* **317**, 213–217
12. RBMK Reactors, available: <http://www.world-nuclear.org/information-library/nuclear-fuel-cycle/nuclear-power-reactors/appendices/rbm-reactors.aspx>, accessed 15/06/2016
13. Merk B, Stanculescu A, Chellapandi P, Hill R (2015) Progress in reliability of fast reactor operation and new trends to increased inherent safety, *Applied Energy* **147**, 1 June 2015, Pages 104–116
14. MacPherson HG (1985) The Molten Salt Reactor Adventure. *Nucl. Sci. and Eng.*, **90**, 374-380.

15. Merk B, Rohde U, Glivici-Cotruta V, Litskevich D, Scholl S (2014) On the Molten Salt Fast Reactor for Applying an Idealized Transmutation Scenario for the Nuclear Phase Out", *PLoS ONE* **9**(4): e92776. doi: 10.1371/journal.pone.0092776 (2014). PMID: 24690768
16. B Merk, D Litskevich (2015) "Transmutation of All German Transuranium under Nuclear Phase Out Conditions – Is This Feasible from Neutronic Point of View?", *PLOS ONE*, DOI: 10.1371/journal.pone.0145652
17. B. Merk, D. Litskevich: "On the Burning of Plutonium Originating from Light Water Reactor Use in a Fast Molten Salt Reactor—A Neutron Physical Study", *Energies* 2015, **8**, 12557–12572; doi:10.3390/en81112328
18. Evaluation and Viability of Liquid Fuel Fast Reactor System EVOL, DELIVERABLE D2.1, Design parameters definition for most stable salt flux, rev 3 30/04/2012
19. acatech (Ed.): Partitioning and Transmutation of Nuclear Waste. Opportunities and Risks in Research and Application (acatech POSITION PAPER), Munich 2014.
20. J. R. Engel W. R. Grimes W. A. Rhoades J. F. Dearing: "Molten-Salt Reactors for Efficient Nuclear Fuel Utilization Without Plutonium Separation", ORNL/TM-6413, August 1978, available: <http://web.ornl.gov/info/reports/1978/3445603227167.pdf>; accessed July 15th, 2015
21. Poinssot et al. (2014) Assessment of the environmental footprint of nuclear energy systems. Comparison between closed and open fuel cycles, *Energy* **69**, 199-211
22. E.O. Adamov, V.A. Pershukov (2016) PROJECT «PRORYV» (Breakthrough), VII International Forum ATOMEXPO, May 30th, Moscow
23. Ingatiev V, et al. (2012) Progress in Development of MOSART Concept with Th Support. ICAPP'12, Chicago, USA June 24-28.
24. <http://samofar.eu/>
25. Patterson EA, Taylor RJ, Bankhead M (2016) A framework for an integrated nuclear digital environment, *Progress in Nuclear Energy*, **87**:97-103.
26. Charles MADIC (1988) FROM THE REACTOR TO WASTE DISPOSAL : THE BACK-END OF THE NUCLEAR FUEL CYCLE, BIOLOGICAL ASSESSMENT OF OCCUPATIONAL EXPOSURE TO ACTINIDES, Versailles (France) -1988, available: http://www.iaea.org/inis/collection/NCLCollectionStore/_Public/20/005/20005325.pdf?r=1, accessed 18/04/2016
27. H. Feiveson, Z. Mian, MV Rama, F von Hippel, ed. (2011) Spent Fuel from Nuclear Power Reactors – An Overview of a new Study in the International Panel on Fissile Materials, Draft for discussion June 2011, available: <http://fissilematerials.org/library/ipfm-spent-fuel-overview-june-2011.pdf>, accessed 18/04/2016
28. Fissile material stocks, International Panel on Fissile Materials, , available: <http://fissilematerials.org/>, accessed 18/04/2016
29. Costing of Spent Nuclear Fuel Storage, IAEA Nuclear Energy Series Technical Reports No. NF-T-3.5, IAEA 2009, available: <https://www.iaea.org/sites/default/files/costingfuel0909.pdf>, accessed 30/08/2016
30. Merk B, Konheiser J (2014) Shielding Studies on an Advanced Molten Salt Fast Reactor Design. *Annals of Nuclear Energy* **64**, 441–448.
31. MOLTEN SALT FAST REACTOR, Reference configuration – revised version, 08.10.2011
32. Tomasz Kozłowski and Thomas J. Downar: "OECD/NEA AND U.S. NRC PWR MOX/UO₂ CORE TRANSIENT BENCHMARK", OECD NEA, Final Spec.,2003, http://www.nea.fr/science/wprs/MOX-UOX-transients/benchmark_documents/specifications/mox_bench_spec.pdf
33. HELIOS-2 Methods (Version 2.1), SSP-11/452 Rev 1, December 16, 2011

34. Villarino EA, Stammler RJJ, Ferri A. and Casal JJ (1992) HELIOS: angularly dependent collision probabilities Nuclear Science and Engineering **112**.
35. Rachamin R, Wemple C, Fridman E (2013) Neutronic analysis of SFR core with HELIOS-2, Serpent, and DYN3D codes, ANE,55, <http://dx.doi.org/10.1016/j.anucene.2012.11.030>
36. Brovchenko M (2015) Neutronic Benchmark of the Molten Salt Fast Reactor in the frame of the EVOL and MARS Collaborative Projects, submitted to ANE
37. Mikityuk K (2015) "Core Safety" (ESNII+ WP6,) European Nuclear Gen II, III, IV Days 17-18-19 March 2015, Brussels, Belgium



© 2017 by the authors. Licensee *Preprints*, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons by Attribution (CC-BY) license (<http://creativecommons.org/licenses/by/4.0/>).