

Article

Convective to Absolute Instability Transition in a Horizontal Porous Channel with Open Upper Boundary

Antonio Barletta* and Michele Celli

Department of Industrial Engineering, Alma Mater Studiorum Università di Bologna, Viale Risorgimento 2, 40136 Bologna, Italy; e-mail: antonio.barletta@unibo.it, michele.celli3@unibo.it

Abstract: A linear stability analysis of the parallel uniform flow in a horizontal channel with open upper boundary is carried out. The lower boundary is considered as an impermeable isothermal wall, while the open upper boundary is subject to a uniform heat flux and it is exposed to an external horizontal fluid stream driving the flow. An eigenvalue problem is obtained for the two-dimensional transverse modes of perturbation. The study of the analytical dispersion relation leads to the conditions for the onset of convective instability as well as to the determination of the parametric threshold for the transition to absolute instability. The results are generalised to the case of three-dimensional perturbations.

Keywords: Porous medium; Rayleigh number; Absolute instability.

1. Introduction

Cellular convection patterns may develop in an underlying horizontal flow under appropriate thermal boundary conditions. The classic setup for the thermal instability of a horizontal fluid flow is heating from below, and the well-known type of instability is Rayleigh-Bénard [1]. Such a situation can happen in a channel fluid flow or in the filtration of a fluid within a porous channel. Both cases are widely documented in the literature [1,2]. A major issue is the possibility to observe the emergence of cellular patterns superposed to the base horizontal flow in an actual laboratory experiment. Indeed, a perturbation of the base flow may be amplified in time or be damped. In the latter case, the actually observed behaviour in the experiment is a stable response from the system, and the absence of any permanent cellular pattern superposed to the base flow. This effectively stable response may happen even if specific Fourier modes of perturbation grow in time and, hence, it may be observed in a supercritical regime [1]. This argument is the background for the so-called absolute/convective stability dichotomy [3]. Starting from studies of plasma physics, the concept of absolute instability has been extended to general fluid dynamics and to convection heat transfer. The traditional formalism for the study of the transition from convective to absolute instability relies strongly on the pioneering studies in the area of plasma physics. The traditional recipe for approaching this study is the double Fourier-Laplace transform of the perturbations and the Briggs-Bers method to establish the relevant pinching points in the complex wavenumber plane [4–7].

In a recent paper [8], the topic of absolute/convective instability has been reconsidered by relying on a treatment of the perturbation dynamics based on the simple Fourier transform, instead of the double Fourier-Laplace transform, and on the steepest-descent approximation for the large-time behaviour of Fourier integrals. The proposed method has been illustrated starting from a toy model based on Burgers' equation, previously discussed also in Brevdo and Bridges [9], and then applying the analysis to the horizontal flow in a porous channel with impermeable isothermal boundaries.

The aim of this contribution is to further develop the methodology presented by Barletta and Alves [8], by analysing the transition from convective to absolute instability in a horizontal porous channel with open upper boundary. This analysis is an opportunity to present more details on the steps to be followed for the evaluation of the threshold values of absolute instability at different values of the Péclet number, associated with the base horizontal flow.

Among the main results of the analysis developed in this paper, we mention the detailed illustration of the choice of the appropriate saddle points for the evaluation of the threshold Rayleigh number for the onset of absolute instability, carried out in a couple of examples. Another important conclusion regards the identity of results for the transition to absolute instability, obtained with a simple two-dimensional analysis, and with a general three-dimensional analysis.

2. Darcy's Flow in a Horizontal Channel

We consider a fluid saturated porous channel with height H and infinite horizontal width in the streamwise direction. On the other hand, the spanwise width is assumed to be very small, with suitable adiabatic impermeable boundaries confining laterally the fluid flow. Thus, one can reasonably carry out the whole analysis with a two-dimensional formulation. Cartesian coordinates (x, y) are chosen so that $x \in \mathbb{R}$ is the streamwise horizontal coordinate, and $y \in [0, H]$ is the vertical, upward oriented, coordinate. Symbols \mathbb{N} , \mathbb{R} and \mathbb{C} denote the sets of natural, real and complex numbers, respectively.

On assuming an isotropic homogeneous medium, as well as the validity of the Boussinesq approximation and of Darcy's law, the governing equations can be written as

$$\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} = 0, \quad (1a)$$

$$\frac{\mu}{K} u = -\frac{\partial p}{\partial x}, \quad (1b)$$

$$\frac{\mu}{K} v = -\frac{\partial p}{\partial y} + \rho g \beta (T - T_0), \quad (1c)$$

$$\sigma \frac{\partial T}{\partial t} + u \frac{\partial T}{\partial x} + v \frac{\partial T}{\partial y} = \alpha \left(\frac{\partial^2 T}{\partial x^2} + \frac{\partial^2 T}{\partial y^2} \right). \quad (1d)$$

Equation (1a) is the local mass balance equation, Eqs. (1b) and (1c) are the local momentum balance equations along the x and y directions, Eq. (1d) is the local energy balance equation. Here, t is time, (u, v) is the velocity, while p and T are the pressure and temperature; μ , ρ and β are the dynamic viscosity, density and coefficient of thermal expansion of the fluid. The dimensionless property σ is the ratio between the volumetric heat capacity of the saturated porous medium and that of the fluid. Finally, g is the modulus of the gravitational acceleration, T_0 is the reference temperature, K is the permeability, and α is the average thermal diffusivity of the saturated porous medium.

The lower boundary is impermeable and isothermal, while the upper boundary is an isoflux free boundary exposed to an external fluid stream in the x direction. The boundary conditions can then be formulated as

$$\begin{cases} y = 0 : & v = 0; \quad T = T_0, \\ y = H : & u = u_0; \quad -\chi \frac{\partial T}{\partial y} = q_0, \end{cases} \quad (2)$$

where u_0 is the uniform imposed horizontal velocity, χ is the average thermal conductivity of the saturated porous medium, and $q_0 > 0$ is the uniform heat flux outgoing from the upper boundary. We mention that a similar combination of boundary conditions (it was indeed the special case $u_0 = 0$) is an instance reported in Table 6.1 of Nield and Bejan [2].

2.1. Parallel Flow Regime

There exists a steady parallel flow solution of Eqs. (1) and (2), given by

$$u = u_0, \quad v = 0, \quad T = T_0 - \frac{q_0}{\chi} y, \quad \frac{\partial p}{\partial x} = -\frac{\mu}{K} u_0, \quad \frac{\partial p}{\partial y} = -\frac{\rho g \beta q_0}{\chi} y. \quad (3)$$

The heat transfer regime described by Eq. (3) is one of purely vertical conduction. This steady flow may develop an unstable behaviour when the heat flux q_0 becomes sufficiently high.

2.2. Small Amplitude Perturbations

Perturbations (U, V, θ, P) acting on the parallel flow solution given by Eq. (3) satisfy governing equations that can be inferred from Eq. (1). Here, (U, V, θ, P) denote the velocity, temperature and pressure perturbations. Nonlinear contributions are dropped by assuming that the amplitude of the perturbations is small. These governing equations can be written in a dimensionless form as

$$\frac{\partial U}{\partial x} + \frac{\partial V}{\partial y} = 0, \quad (4a)$$

$$U = -\frac{\partial P}{\partial x}, \quad (4b)$$

$$V = -\frac{\partial P}{\partial y} + Ra \theta, \quad (4c)$$

$$\frac{\partial \theta}{\partial t} + Pe \frac{\partial \theta}{\partial x} - V = \frac{\partial^2 \theta}{\partial x^2} + \frac{\partial^2 \theta}{\partial y^2}. \quad (4d)$$

Dimensionless equations (4) have been obtained by means of the scaling

$$(x, y) \frac{1}{H} \rightarrow (x, y), \quad t \frac{\alpha}{H^2 \sigma} \rightarrow t, \quad (U, V) \frac{H}{\alpha} \rightarrow (U, V), \quad \theta \frac{\chi}{q_0 H} \rightarrow \theta, \quad P \frac{K}{\mu \alpha} \rightarrow P, \quad (5)$$

while (Pe, Ra) are the Péclet and Rayleigh numbers, respectively, defined as

$$Pe = \frac{u_0 H}{\alpha}, \quad Ra = \frac{\rho g \beta q_0 K H^2}{\mu \alpha \chi}. \quad (6)$$

The dimensionless boundary conditions for (U, V, θ, P) are written as

$$\begin{cases} y = 0 : & V = 0; \quad \theta = 0, \\ y = 1 : & U = 0; \quad \frac{\partial \theta}{\partial y} = 0. \end{cases} \quad (7)$$

We can introduce a streamfunction ψ such that

$$U = \frac{\partial \psi}{\partial y}, \quad V = -\frac{\partial \psi}{\partial x}. \quad (8)$$

Then, Eqs. (4) can be collapsed into a pair of partial differential equations involving only the unknowns (ψ, θ) , namely

$$\frac{\partial^2 \psi}{\partial x^2} + \frac{\partial^2 \psi}{\partial y^2} + Ra \frac{\partial \theta}{\partial x} = 0, \quad (9a)$$

$$\frac{\partial^2 \theta}{\partial x^2} + \frac{\partial^2 \theta}{\partial y^2} - \frac{\partial \theta}{\partial t} - Pe \frac{\partial \theta}{\partial x} - \frac{\partial \psi}{\partial x} = 0. \quad (9b)$$

The boundary conditions (7) can be rewritten as

$$\begin{cases} y = 0 : & \psi = 0; \quad \theta = 0, \\ y = 1 : & \frac{\partial \psi}{\partial y} = 0; \quad \frac{\partial \theta}{\partial y} = 0. \end{cases} \quad (10)$$

3. Stability Analysis

The basic mathematical tool for carrying out the stability analysis is the Fourier transform. We define the Fourier transforms of (ψ, θ) as

$$\hat{\psi}(k, y, t) = \frac{1}{\sqrt{2\pi}} \int_{-\infty}^{\infty} e^{-ikx} \psi(x, y, t) dx, \quad \hat{\theta}(k, y, t) = \frac{1}{\sqrt{2\pi}} \int_{-\infty}^{\infty} e^{-ikx} \theta(x, y, t) dx. \quad (11)$$

The perturbations (ψ, θ) , that is the anti-transforms of $(\hat{\psi}, \hat{\theta})$, can thus be expressed through the inversion rule,

$$\psi(x, y, t) = \frac{1}{\sqrt{2\pi}} \int_{-\infty}^{\infty} e^{ikx} \hat{\psi}(k, y, t) dk, \quad \theta(x, y, t) = \frac{1}{\sqrt{2\pi}} \int_{-\infty}^{\infty} e^{ikx} \hat{\theta}(k, y, t) dk. \quad (12)$$

The boundary conditions (10) are satisfied by expressing $(\hat{\psi}, \hat{\theta})$ as Fourier series with respect to the y coordinate

$$\hat{\psi}(k, y, t) = \sum_{n=1}^{\infty} \tilde{\psi}_{n,k}(t) \sin(\gamma_n y), \quad \hat{\theta}(k, y, t) = \sum_{n=1}^{\infty} \tilde{\theta}_{n,k}(t) \sin(\gamma_n y), \quad (13)$$

where

$$\gamma_n = \left(n - \frac{1}{2}\right) \pi. \quad (14)$$

Substitution of Eq. (13) into Eq. (12) yields

$$\begin{aligned} \psi(x, y, t) &= \frac{1}{\sqrt{2\pi}} \sum_{n=1}^{\infty} \sin(\gamma_n y) \int_{-\infty}^{\infty} e^{ikx} \tilde{\psi}_{n,k}(t) dk, \\ \theta(x, y, t) &= \frac{1}{\sqrt{2\pi}} \sum_{n=1}^{\infty} \sin(\gamma_n y) \int_{-\infty}^{\infty} e^{ikx} \tilde{\theta}_{n,k}(t) dk. \end{aligned} \quad (15)$$

Definition 1. The parallel flow given by Eq. (3) is *convectively unstable* if there exist $n \in \mathbb{N}$ and $k \in \mathbb{R}$ such that

$$\lim_{t \rightarrow \infty} |\tilde{\psi}_{n,k}(t)| = \infty, \quad \lim_{t \rightarrow \infty} |\tilde{\theta}_{n,k}(t)| = \infty.$$

Definition 2. The parallel flow given by Eq. (3) is *absolutely unstable* if, for every $x \in \mathbb{R}$, there exists $n \in \mathbb{N}$ such that

$$\lim_{t \rightarrow \infty} \left| \int_{-\infty}^{\infty} e^{ikx} \tilde{\psi}_{n,k}(t) dk \right| = \infty, \quad \lim_{t \rightarrow \infty} \left| \int_{-\infty}^{\infty} e^{ikx} \tilde{\theta}_{n,k}(t) dk \right| = \infty.$$

The condition expressed by Definition 2 cannot be satisfied if the condition expressed by Definition 1 is not satisfied. On the other hand, the condition expressed by Definition 1 does not ensure that the condition expressed by Definition 2 is satisfied. Thus, we can conclude that the criterion for absolutely unstable flow is more restrictive than that for convectively unstable flow.

The physics behind the definitions of convective and absolute instability can be described as follows. The unstable behaviour of a given steady flow can be tested by checking the time evolution of the Fourier modes of perturbations superposed to the flow. These Fourier modes are in fact monochromatic waves travelling in the direction of the flow. Hence, even if the amplitude of a given monochromatic wave grows exponentially in time, this unbounded time-growth may be

concealed to an observer monitoring the disturbance behaviour at a given position x . In fact, the actual disturbance is the linear combination of infinitely many different monochromatic waves with all possible wavenumbers, and any single wave travels along the flow direction with a different phase velocity. Then, the point is: “When does the actual disturbance display an unbounded growth in time at a given position x ”? In order to answer this question, we must determine not only when each single Fourier mode is or is not growing in time, but when the Fourier integral expressing the actual disturbance does grow in time. The existence of at least a monochromatic wave, *viz.* a Fourier mode, whose amplitude grows in time is the condition of convective instability. Absolute instability occurs when the actual disturbance, *viz.* the Fourier integral, grows unboundedly in time.

By Fourier transforming Eqs. (9), one obtains

$$(\gamma_n^2 + k^2)\tilde{\psi}_{n,k} - ikRa\tilde{\theta}_{n,k} = 0, \quad (16a)$$

$$(\gamma_n^2 + k^2)\tilde{\theta}_{n,k} + \frac{d\tilde{\theta}_{n,k}}{dt} + ikPe\tilde{\theta}_{n,k} + ik\tilde{\psi}_{n,k} = 0. \quad (16b)$$

The solution of Eqs. (16) can be obtained by expressing

$$\tilde{\psi}_{n,k}(t) = \tilde{\psi}_{n,k}(0)e^{\lambda_{n,k}t}, \quad \tilde{\theta}_{n,k}(t) = -i\frac{\gamma_n^2 + k^2}{kRa}\tilde{\psi}_{n,k}(0)e^{\lambda_{n,k}t}, \quad (17)$$

where $\lambda_{n,k}$ is determined from the *dispersion relation*,

$$\gamma_n^2 + k^2 + \lambda_{n,k} + ikPe - \frac{k^2Ra}{\gamma_n^2 + k^2} = 0. \quad (18)$$

The dispersion relation is the basis for developing both the analysis of convective instability and that of absolute instability.

3.1. Convective Instability

An immediate consequence of Eq. (18) is the equality $\Im(\lambda_{n,k}) = -kPe$, whose physical meaning is that all Fourier modes are travelling in the x direction with a dimensionless phase velocity $-\Im(\lambda_{n,k})/k = Pe$, namely a dimensionless phase velocity equal to that of the uniform parallel horizontal flow.

On account of Eq. (17), Definition 1 implies that convective instability happens when $\Re(\lambda_{n,k})$ is positive. Hence, Eq. (18) allows one to formulate the condition for convective instability in terms of the inequality,

$$Ra > \frac{(\gamma_n^2 + k^2)^2}{k^2}. \quad (19)$$

If $n = 1$, we detect the lowest threshold value of Ra for convective instability, namely the *neutral stability* condition,

$$Ra = \frac{(\pi^2 + 4k^2)^2}{16k^2}. \quad (20)$$

Equation (19) defines an upward concave curve in the parametric plane (k, Ra) whose point of minimum Ra defines the critical values (k_c, Ra_c) ,

$$k_c = \frac{\pi}{2}, \quad Ra_c = \pi^2. \quad (21)$$

Equation (21) is in agreement with the data reported in Table 6.1 of Nield and Bejan [2]. It implies that no linear instability, namely no instability triggered by small-amplitude perturbations, is possible when $Ra < \pi^2$.

3.2. Absolute Instability

The study of absolute instability is more complicated as, on account of Definition 2 and of Eq. (17), we need to test the large- t behaviour of the integrals

$$\mathcal{I}_n(x, t) = \int_{-\infty}^{\infty} e^{ikx} \tilde{\psi}_{n,k}(0) e^{\lambda_{n,k}t} dk, \quad \mathcal{J}_n(x, t) = -\frac{i}{Ra} \int_{-\infty}^{\infty} e^{ikx} \frac{\gamma_n^2 + k^2}{k} \tilde{\psi}_{n,k}(0) e^{\lambda_{n,k}t} dk. \quad (22)$$

The large- t behaviour of such integrals can be established by invoking the *steepest descent approximation* [10,11]. The basis for this approximation is the following theorem.

Theorem 1. Let us consider a function $F(t)$ given by

$$F(t) = \left| \int_{-\infty}^{\infty} \phi(k) e^{\lambda(k)t} dk \right|,$$

where $\phi(k)$ and $\lambda(k)$ are complex-valued functions of k . An approximation of $F(t)$ at large- t can be expressed as

$$F(t) \approx \frac{2}{p} \Gamma\left(\frac{1}{p}\right) |\phi(k_0)| \left(\frac{p!}{|\lambda^{(p)}(k_0)| t} \right)^{\frac{1}{p}} e^{\Re(\lambda(k_0))t}.$$

Here, $k_0 \in \mathbb{C}$ is a saddle point of $\lambda(k)$, namely a point such that the first derivative $\lambda'(k_0)$ is zero; $p \in \mathbb{N}$ is such that all m -th order derivatives $\lambda^{(m)}(k_0)$ are zero for $m < p$; Γ is Euler's gamma function.

The approximation is allowed if:

1. there exists a unique saddle point of $\lambda(k)$, namely $k_0 \in \mathbb{C}$;
2. there exists a path \mathcal{C} in the complex k plane that crosses k_0 along a line of steepest descent of $\Re(\lambda(k))$;
3. the region of the complex plane between path \mathcal{C} and the real axis, namely the line $\Im(k) = 0$, does not contain any singularity or branch cut of $\lambda(k)$ (see Fig. 1).

A proof of Theorem 1 can be found in many textbooks in applied mathematics, such as Bender and Orszag [10], or Ablowitz and Fokas [11], as well as in the recent paper by Barletta and Alves [8]. We point out that, in the neighbourhood of the saddle point k_0 , a line of steepest descent of $\Re(\lambda(k))$ is one where $\Im(\lambda(k))$ remains constant [8,10,11].

When function $\lambda(k)$ admits more than one saddle point, then the steepest descent approximation involves the sum of the contributions of different saddle points. In this case, there will be a leading contribution which comes from the term, or terms, with the highest value of $\Re(\lambda(k_0))$.

On account of Theorem 1, the time dependence in the asymptotic expression of $F(t)$ is given by the factor

$$\frac{e^{\Re(\lambda(k_0))t}}{t^{1/p}}.$$

Hence, if $\Re(\lambda(k_0)) > 0$, we have

$$\lim_{t \rightarrow \infty} |F(t)| = \infty,$$

while, if $\Re(\lambda(k_0)) \leq 0$, we have

$$\lim_{t \rightarrow \infty} |F(t)| = 0.$$

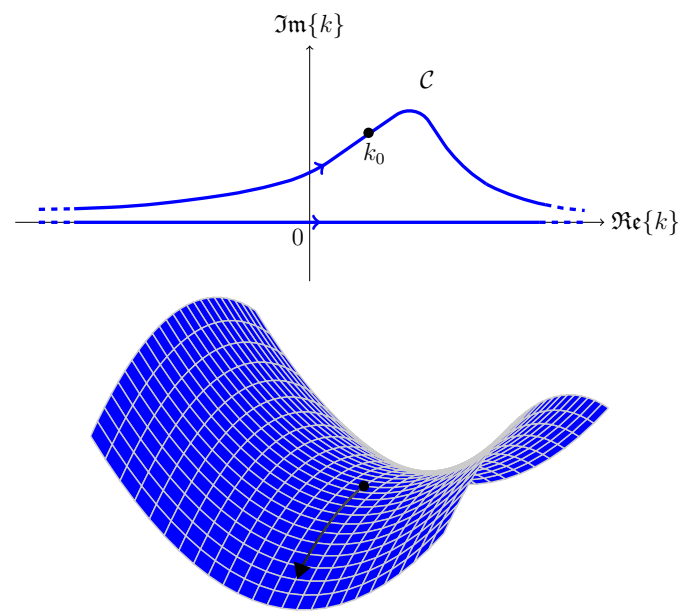


Figure 1. A sketch of the saddle point k_0 and of the line of steepest descent.

If we apply Theorem 1 to detect the large- t asymptotic behaviour of functions $\mathcal{I}_n(x, t)$ and $\mathcal{J}_n(x, t)$ defined by Eq. (22), we immediately conclude that function $\lambda(k)$ is identified with the coefficient $\lambda_{n,k}$ and, on account of Eq. (18), it is given by

$$\lambda(k) = \frac{k^2 Ra}{\gamma_n^2 + k^2} - \gamma_n^2 - k^2 - ikPe. \quad (23)$$

We note that, for every $n \in \mathbb{N}$ and for every (Pe, Ra) , $\lambda(k)$ is meromorphic with two simple poles at $k = \pm i\gamma_n$.

We are now ready to establish a criterion for detecting the onset of absolute instability, according to Definition 2 and Theorem 1:

- We find the saddle points $k_0 \in \mathbb{C}$ by employing Eq. (23) and by solving the algebraic equation $\lambda'(k_0) = 0$.
- We check that the requirements stated in the thesis of Theorem 1 are satisfied by k_0 .
- We determine the threshold condition between an unbounded time growth of $|\mathcal{I}_n(x, t)|$ and $|\mathcal{J}_n(x, t)|$ and an exponential decay to zero, expressed by the algebraic equation $\Re(\lambda(k_0)) = 0$.

Since $\lambda(k)$ is complex-valued, equation $\lambda'(k) = 0$ is in fact a pair of algebraic equations relative to the real and to the imaginary parts, respectively

$$\frac{2Ra k_r \gamma_n^2 [2k_i^2 (\gamma_n^2 - k_r^2) - 3k_i^4 + (k_r^2 + \gamma_n^2)^2]}{[2k_i^2 (k_r^2 - \gamma_n^2) + k_i^4 + (k_r^2 + \gamma_n^2)^2]^2} - 2k_r = 0, \quad (24a)$$

$$\frac{2Ra k_i \gamma_n^2 [k_i^4 - 2k_i^2 (k_r^2 + \gamma_n^2) - 2k_r^2 \gamma_n^2 - 3k_r^4 + \gamma_n^4]}{[2k_i^2 (k_r^2 - \gamma_n^2) + k_i^4 + (k_r^2 + \gamma_n^2)^2]^2} - 2k_i - Pe = 0, \quad (24b)$$

where we used the shorthand $k_r = \Re(k)$ and $k_i = \Im(k)$. For fixed (n, Pe, Ra) , Eqs. (24) contain two unknowns, (k_r, k_i) . Thus, solving these equations yields the saddle points k_0 . If, on the other hand, one aims to determine the saddle points and the corresponding value of Ra , for prescribed (n, Pe) ,

then one has to solve Eqs. (24) together with the algebraic equation $\Re(\lambda(k_0)) = 0$. The latter can be written as

$$\frac{Ra \left[\gamma_n^2 (k_r^2 - k_i^2) + (k_i^2 + k_r^2)^2 \right]}{2k_i^2 (k_r^2 - \gamma_n^2) + k_i^4 + (k_r^2 + \gamma_n^2)^2} + k_i (k_i + Pe) - k_r^2 - \gamma_n^2 = 0. \quad (25)$$

Equations (24) and (25) are the basis for a first screening of the saddle points k_0 . In fact, we can exclude those k_0 that yield a negative Ra or a positive $Ra < Ra_c$. These saddle points are not good candidates to the evaluation of the threshold $Ra = Ra_a$ of absolute instability. Among the remaining roots of Eqs. (24) and (25) one has to select the saddle point, or the saddle points, k_0 , such that the corresponding $Ra \geq Ra_c$, given by Eq. (25), is at its smallest and satisfies the requirements specified in the thesis of Theorem 1. By requiring that Ra is at its smallest, we allow one to identify the least threshold to absolute instability, which is the physically meaningful one.

In particular, among the requirements specified in Theorem 1, one has to test whether there exists a path \mathcal{C} in the complex k plane that crosses the saddle point(s) along a direction of steepest descent, and such that the region of the plane between \mathcal{C} and the real axis, $\Im(k) = 0$, does not contain any pole of $\lambda(k)$. For the sake of brevity, this requirement is called *analyticity requirement*.

Example 1. Let us test the whole procedure in the case $Pe = 10$. We first set $n = 1$ and determine all the solutions of Eqs. (24) and (25). We obtain in fact six solutions,

$$\begin{aligned} (k_0 = -i5.45252, Ra = 25), \quad (k_0 = i0.452525, Ra = 25), \\ (k_0 = \pm 1.62238 - i1.34154, Ra = 22.9882), \\ (k_0 = \pm 1.06797 + i1.69304, Ra = -18.6997). \end{aligned}$$

The last pair of solutions is excluded because Ra is negative. The first four solutions are acceptable because they satisfy the condition $Ra > Ra_c = \pi^2$. Among them, we select the pair of solutions with the smallest Ra , namely

$$(k_0 = \pm 1.62238 - i1.34154, Ra = 22.9882).$$

We have to check if one can draw a path \mathcal{C} in the k plane that satisfies the analyticity requirement. This requirement can be tested by drawing the contour plots of $\Re(\lambda(k))$ and $\Im(\lambda(k))$ in the k plane, for $Pe = 10$, $n = 1$ and $Ra = 22.9882$. This allows a straightforward visualisation of the saddle points $k_0 = \pm 1.62238 - i1.34154$. Figure 2 reveals that the analyticity requirement is satisfied. The saddle points $k_0 = \pm 1.62238 - i1.34154$ are evidenced as red points, while the yellow points are the poles $k = \pm i\pi/2$. The qualitative line \mathcal{C} shows that it is possible satisfying the analyticity requirement, as this line can be continuously deformed to the real k axis without crossing any poles of $\lambda(k)$. Thus, we conclude that $k_0 = \pm 1.62238 - i1.34154$ are the relevant saddle points for the assessment of the onset of absolute instability, and that the threshold for absolute instability with $Pe = 10$ is $Ra_a = 22.9882$. A further note is for the qualitative sketch of path \mathcal{C} . Having drawn the contours of $\Im(\lambda(k))$, it is very easy to detect the directions of steepest descent of $\Re(\lambda(k))$. In fact, these directions are locally coincident with the contour line of $\Im(\lambda(k))$ which crosses the saddle point and connects the contour $\Re(\lambda(k)) = 0$ to the neighbouring contours with $\Re(\lambda(k)) < 0$ [8,10,11]. The extent to which path \mathcal{C} overlaps the contours $\Im(\lambda(k)) = \pm 20.1460$, which cross the saddle points, can be expanded arbitrarily, thus matching the approximation defined by Theorem 1.

One may wonder whether inclusion of modes with $n = 2$ or higher may yield saddle points k_0 corresponding to values of Ra lower than $Ra_a = 22.9882$. In fact, if we solve Eqs. (24) and (25) with $Pe = 10$ and $n = 2$, we get

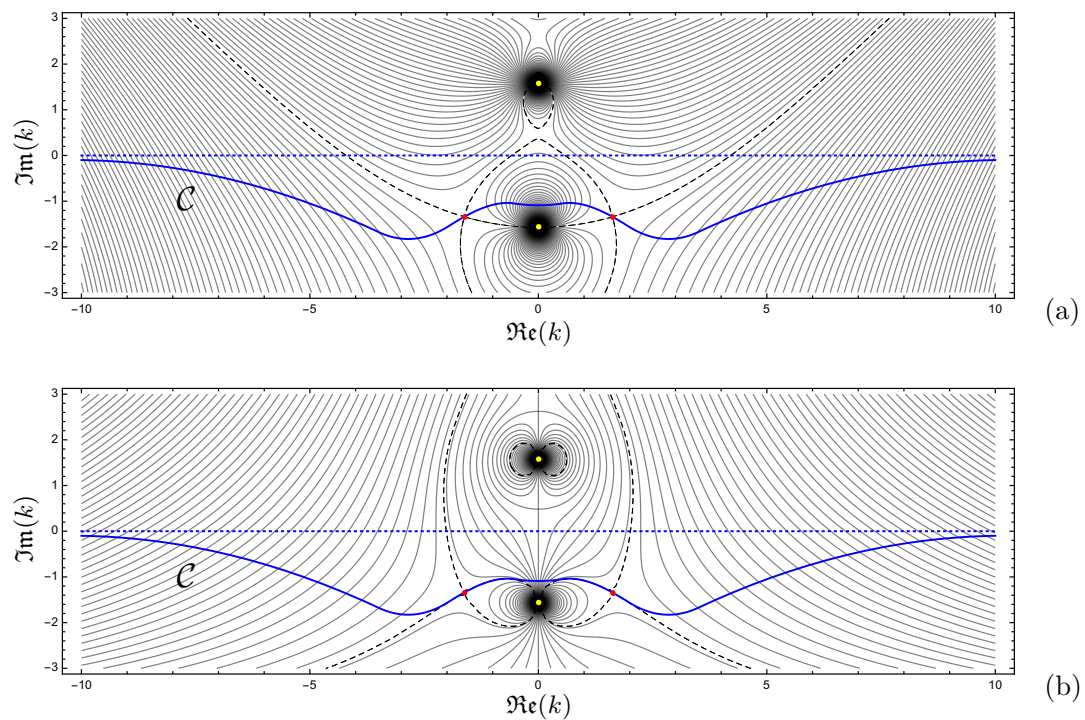


Figure 2. Threshold of absolute instability, $Ra = Ra_a = 22.9882$, with $Pe = 10$, $n = 1$: (a) contours of $\Re(\lambda(k))$ in the complex k plane; (b) contours of $\Im(\lambda(k))$ in the complex k plane. The red dots denote the saddle points $k_0 = \pm 1.62238 - i1.34154$; the yellow dots denote the singularities $k = \pm i\pi/2$; the black dashed contours are relative to $\lambda(k) = \lambda(k_0) = \pm 20.1460$; the blue solid line is a possible path \mathcal{C} that crosses the saddle points along a direction of steepest descent; the dotted blue line is the real axis, $\Im(k) = 0$.

$$\begin{aligned} (k_0 = -i7.83447, Ra = 25), & \quad (k_0 = i2.83447, Ra = 25), \\ (k_0 = \pm 5.01806 - i2.11957, Ra = 109.652), \\ (k_0 = \pm 2.48149 + i5.06623, Ra = -52.9224). \end{aligned}$$

We don't find any new candidates for the evaluation of Ra_a , as all these solutions yield values of Ra which are either negative or larger than $Ra_a = 22.9882$. The same happens with $n = 3$, namely

$$\begin{aligned} (k_0 = -i10.7423, Ra = 25), & \quad (k_0 = i5.74227, Ra = 25), \\ (k_0 = \pm 8.13514 - i2.31293, Ra = 269.753), \\ (k_0 = \pm 3.51591 + i8.36075, Ra = -85.7761). \end{aligned}$$

The conclusion is that modes with $n = 1$ are sufficient to assess the correct value of Ra_a .

Example 2. Things go much in the same manner if one considers $Pe = 50$. By setting $n = 1$, we get the solutions of Eqs. (24) and (25),

$$\begin{aligned} (k_0 = -i25.0983, Ra = 625), & \quad (k_0 = i0.0983095, Ra = 625), \\ (k_0 = \pm 1.37471 - i1.60524, Ra = 101.785), \\ (k_0 = \pm 1.25027 + i1.65825, Ra = -98.0906). \end{aligned}$$

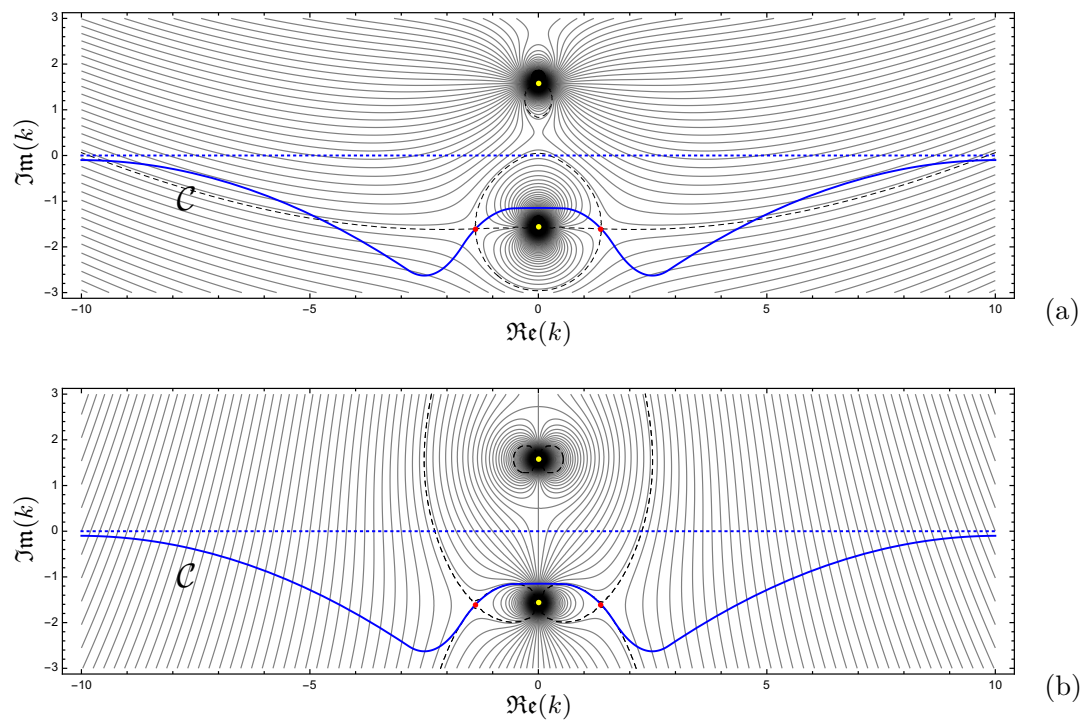


Figure 3. Threshold of absolute instability, $Ra = Ra_a = 101.785$, with $Pe = 50$, $n = 1$: (a) contours of $\Re(\lambda(k))$ in the complex k plane; (b) contours of $\Im(\lambda(k))$ in the complex k plane. The red dots denote the saddle points $k_0 = \pm 1.37471 - i1.60524$; the yellow dots denote the singularities $k = \pm i\pi/2$; the black dashed contours are relative to $\lambda(k) = \lambda(k_0) = \pm i113.262$; the blue solid line is a possible path \mathcal{C} that crosses the saddle points along a direction of steepest descent; the dotted blue line is the real axis, $\Im(k) = 0$.

By the same reasoning employed in Example 1, we select the pair of solutions

$$(k_0 = \pm 1.37471 - i1.60524, Ra = 101.785).$$

Indeed, the saddle points $k_0 = \pm 1.37471 - i1.60524$ satisfy the analyticity requirement and they can be used for the steepest descent approximation. This is readily inferred by inspecting Fig. 3. We don't catch any serious qualitative difference between Figs. 2 and 3. We mention that, once again, no role in assessing the threshold of absolute instability is played by modes with $n = 2$ or higher. Thus, the conclusion is that the threshold of absolute instability, for $Pe = 50$, is $Ra_a = 101.785$.

4. Results

Examples 1 and 2 discussed in the preceding section lead us to the conclusion that the analysis of the transition from convective to absolute instability can be based on the solutions of the system of algebraic equations (24) and (25).

Among the possible saddle points, we mention those with $\Re(k) = 0$. These points are obtained for $Ra = Pe^2/4$ with $Pe \neq 0$, and they are given by

$$k_0 = -\frac{i}{4} \left(Pe \pm \sqrt{16\gamma_n^2 + Pe^2} \right). \quad (26)$$

These saddle points are such that $\lambda(k_0) = 0$ and thus they are, a priori, to be considered among the candidates for the evaluation of the threshold to absolute instability, $Ra = Ra_a$. In fact, they appeared

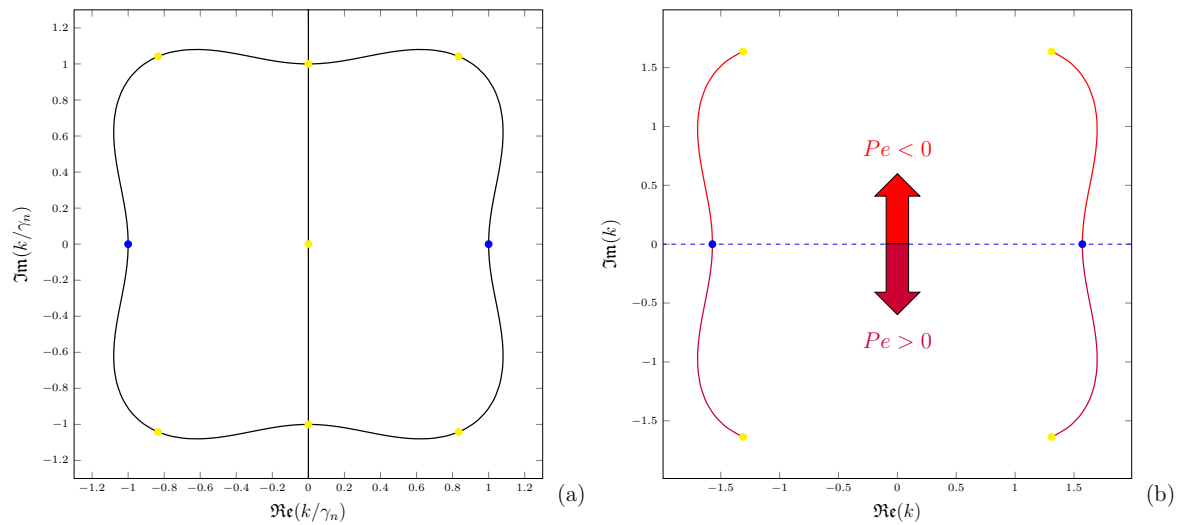


Figure 4. (a) Curve in the complex k/γ_n plane representing all possible saddle points of $\lambda(k)$, with $\Re(\lambda(k)) = 0$, for all real values of (Ra, Pe) , and for all natural numbers n . Yellow dots denote exclusions from the set of saddle points, while blue dots denote the saddle points with $Pe = 0$. (b) Curve in the complex k plane including all saddle points employed to evaluate Ra_a with either $Pe > 0$ (lower plane) or $Pe < 0$ (upper plane). The dashed blue line denotes the real axis, with blue dots denoting the case $Pe = 0$, and yellow dots denoting the limiting cases $Pe \rightarrow \pm\infty$.

among the solutions discussed in Examples 1 and 2, with $Ra = 25$ and 625, respectively. However, in both these examples, the saddle points expressed by Eq. (26) did not contribute to the evaluation of Ra_a . This conclusion is easily generalised by exploring other positive values of Pe . We will further discuss these special saddle points later on.

Another remarkable class of saddle points is encountered in the special case $Pe = 0$. In this case, the solutions of $\lambda'(k) = 0$ are five,

$$\begin{aligned} k_0 &= 0 & \implies & \lambda(k_0) = -\gamma_n^2, \\ k_0 &= \pm i\sqrt{\gamma_n\sqrt{Ra} + \gamma_n^2} & \implies & \lambda(k_0) = Ra + 2\gamma_n\sqrt{Ra}, \\ k_0 &= \pm\sqrt{\gamma_n\sqrt{Ra} - \gamma_n^2} & \implies & \lambda(k_0) = Ra - 2\gamma_n\sqrt{Ra}. \end{aligned} \quad (27)$$

In order to determine the threshold of absolute instability, only the last line of Eq. (27) deserves attention, as the first and second lines express saddle points k_0 such that $\lambda(k_0)$ is real and either negative or positive, for every $Ra > 0$. Thus, only the last line is relevant to determine the threshold of absolute instability, that is the value of Ra such that $\Re(\lambda(k)) = 0$. By imposing the latter condition, one easily determines $Ra = 4\gamma_n^2$ which, in turn, means $k_0 = \pm\gamma_n$. This result immediately leads us to the conclusion that, when $Pe = 0$, we have

$$Ra_a = Ra_c = \pi^2. \quad (28)$$

Equation (28) means that, in the absence of a steady horizontal flow in the channel ($Pe = 0$), the onset of convective instability means also the onset of absolute instability, and this happens when $Ra \geq \pi^2$. This conclusion is completely obvious by relying on the physical meaning of the convective/absolute instability dichotomy.

The set \mathcal{S} of all saddle points of $\lambda(k)$ which satisfy the condition $\Re(\lambda(k)) = 0$, for every (n, Ra, Pe) , includes the whole imaginary axis, $\Re(k) = 0$, with the exclusion of the origin and of the singularities $k = \pm i\gamma_n$. The imaginary axis, in fact, includes all saddle points defined by Eq. (26)

Table 1. Threshold values of Ra for the onset of absolute instability with increasing values of Pe . The relevant saddle points k_0 for the evaluation of Ra_a are reported.

Pe	k_0	Ra_a
0	$\pm\pi/2$	π^2
5	$\pm 1.69649 - i0.94650$	14.4509
10	$\pm 1.62238 - i1.34154$	22.9882
15	$\pm 1.53303 - i1.47783$	32.4868
20	$\pm 1.47785 - i1.53301$	42.2506
25	$\pm 1.44337 - i1.56088$	52.1103
30	$\pm 1.42029 - i1.57729$	62.0136
35	$\pm 1.40388 - i1.58799$	71.9402
40	$\pm 1.39166 - i1.59548$	81.8806
45	$\pm 1.38222 - i1.60101$	91.8298
50	$\pm 1.37471 - i1.60524$	101.7851
55	$\pm 1.36861 - i1.60858$	111.7446
60	$\pm 1.36355 - i1.61129$	121.7072
65	$\pm 1.35928 - i1.61352$	131.6722
70	$\pm 1.35565 - i1.61539$	141.6391
75	$\pm 1.35250 - i1.61699$	151.6074
80	$\pm 1.34976 - i1.61836$	161.5768
85	$\pm 1.34735 - i1.61955$	171.5472
90	$\pm 1.34521 - i1.62060$	181.5183
95	$\pm 1.34330 - i1.62153$	191.4901
100	$\pm 1.34159 - i1.62236$	201.4625
$+\infty$	$\pm 1.30970 - i1.63663$	$+\infty$

for all $Pe > 0$ and $Ra = Pe^2/4$. Moreover, \mathcal{S} is dense over closed curves in the complex k plane, defined implicitly by the polar equation,

$$r^6 + r^4 \cos(4\varphi) - r^2 = 1, \quad r > 0, \quad \varphi \in [0, 2\pi], \quad (29)$$

where $k/\gamma_n = r e^{i\varphi}$. A convenient visualization of the set \mathcal{S} is displayed in Fig. 4(a). The closed curve defined by Eq. (29), represented in this figure, includes all saddle points in \mathcal{S} , with six exclusions denoted by yellow dots. These points are given by $k = \pm i\gamma_n$, where $\lambda(k)$ is singular, and by

$$\frac{k}{\gamma_n} = \pm \frac{1}{4} \sqrt{\sqrt{17} + 7} \pm \frac{i}{4} \sqrt{3\sqrt{17} + 5}. \quad (30)$$

The points defined by Eq. (30) do not belong to \mathcal{S} because they do not satisfy the saddle point condition, $\lambda'(k) = 0$, for any real values of (Ra, Pe) . The blue dots in Fig. 4(a) denote special elements of \mathcal{S} , namely the saddle points corresponding to $Pe = 0$ and $Ra = 4\gamma_n^2$, that is $k_0 = \pm\gamma_n$. Figure 4(b) displays red curves joining all saddle points employed for the evaluation of Ra_a at different Péclet numbers. The saddle points lying in the upper half of the k plane correspond to $Pe < 0$, while those in the lower plane are for $Pe > 0$. Up to this point, we just considered positive values of Pe . Indeed, there is a perfect symmetry between the cases $Pe < 0$ and $Pe > 0$, because whether the parallel flow is in the positive or negative x direction obviously cannot change the threshold of absolute instability. This means that, for a given $|Pe|$, the value of Ra_a is uniquely determined. The symmetry under a change of sign of Pe is completely evident from Eq. (23). In fact, a change of sign of Pe is compensated by a change of sign of k , and this explains why the saddle points for $Pe < 0$ and $Pe > 0$ lie in two different halves of the k plane. Thus, in the following, we will always assume $Pe \geq 0$.

The same procedure described in Examples 1 and 2, with reference to $Pe = 10$ and 50, can be extended to any $Pe > 0$. This allows one to evaluate the threshold for the onset of absolute instability, Ra_a , for every given Pe . A list of values of Ra_a and of the corresponding saddle points k_0 are given in Table 1, with increasing values of Pe . By extrapolating the data to the limit $Pe \rightarrow \infty$, one registers an

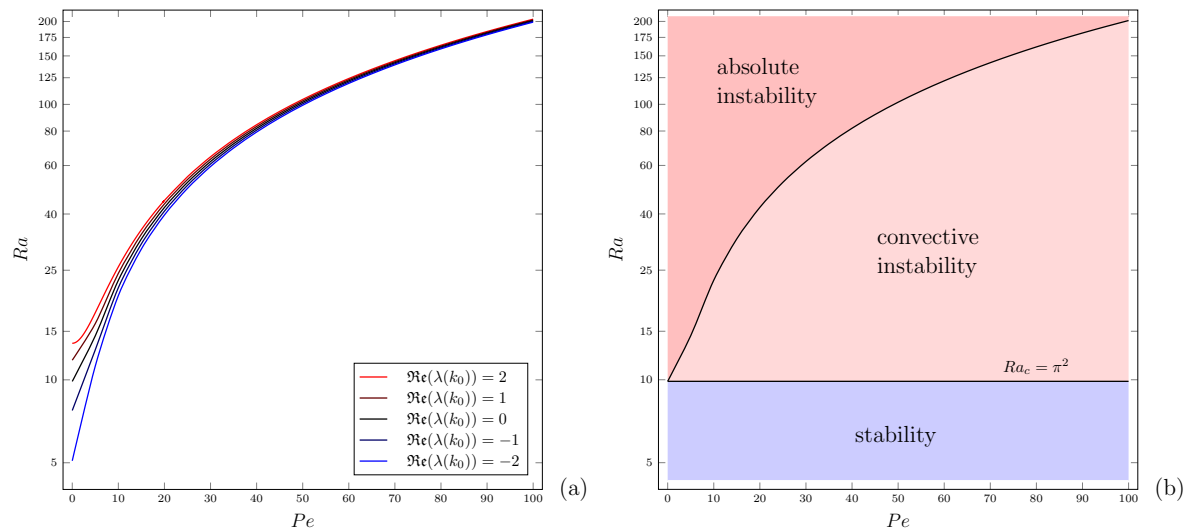


Figure 5. (a) Transition to absolute instability: values of Ra versus Pe obtained for the saddle points k_0 with increasing values of $\Re(\lambda(k_0))$, from negative to positive. The black line yields the threshold of absolute instability, namely $\Re(\lambda(k_0)) = 0$. (b) Map of the regions in the parametric plane (Pe, Ra) relative to stability, convective instability, and absolute instability.

unbounded, approximately linear, growth of Ra_a with Pe . The saddle points k_0 , with either a positive or a negative real part, change weakly when Pe is very large. In fact, these k_0 tend to finite limits when $Pe \rightarrow +\infty$, given by two of the four exclusions defined by Eq. (30), with $n = 1$, namely

$$k_0 = \frac{\pi}{8} \left(\pm \sqrt{\sqrt{17} + 7} - i \sqrt{3\sqrt{17} + 5} \right) \cong \pm 1.30970 - i 1.63663. \quad (31)$$

In the asymptotic regime where Pe is very large, Table 1 suggests that Ra_a tends to become a linear function of Pe . The slope of this function, *viz.* $\zeta_a = Ra_a / Pe$, can be easily determined from Eq. (23). In fact, if we write $Ra = \zeta Pe$ and we assume $Pe \gg 1$, then Eq. (23) can be approximated as

$$\frac{\lambda(k)}{Pe} \cong \frac{k^2 \zeta}{\gamma_n^2 + k^2} - ik. \quad (32)$$

The threshold value of absolute instability, ζ_a , can be obtained by solving the saddle point condition, $\lambda'(k) = 0$, with the constraint $\Re(\lambda(k)) = 0$. We infer that the pertinent saddle points are those given by Eq. (31), and that the value of ζ_a is

$$\zeta_a = \frac{Ra_a}{Pe} = \frac{\pi}{16} \sqrt{51\sqrt{17} - 107} = 1.99542. \quad (33)$$

Figure 5 illustrates the transition from convective to absolute instability. In particular, Fig. 5(a) shows the threshold of absolute instability Ra_a versus Pe (black line). The lines with $\Re(\lambda(k_0)) < 0$ describe perturbations exponentially decaying in time. These lines lie below the threshold of absolute instability, and hence they correspond to $Ra < Ra_a$. The reverse happens when $\Re(\lambda(k_0)) > 0$, namely when the disturbance exponentially grows in time. In this case, the condition of absolute instability is satisfied and $Ra > Ra_a$. Figure 5(a) also shows that, as Pe increases, the transition from negative to positive values of $\Re(\lambda(k_0))$ becomes very steep, meaning that the change from $\Re(\lambda(k_0)) = -2$ to $\Re(\lambda(k_0)) = 2$ takes place, for a given Pe , over a narrow interval of Ra . Figure 5(b) displays the regions of stability, $Ra < Ra_c$, convective instability, $Ra_c < Ra < Ra_a$, and absolute instability, $Ra > Ra_a$. This figure provides a clear indication of the increasing width of the convective instability region as Pe increases, a feature quite evident also from the data reported in Table 1.

A final comment is devoted to the class of saddle points defined by Eq. (26) with $Ra = Pe^2/4$ and $Pe \neq 0$. There exists, in fact, a small interval where $2\pi < Pe < 9.32915$. In this interval, $Pe^2/4$ is larger than $Ra_c = \pi^2$ and lower than the threshold Ra_a drawn in Fig. 5. One may question if we have mistaken the evaluation of the threshold value of Ra in this interval of Pe . The answer is no, and the reason is as follows. For every Péclet number such that $2\pi < Pe < 9.32915$ and for $n = 1$, there are two saddle points corresponding to $Ra = Pe^2/4$. Both of them lie on the imaginary k axis: one is between the two singularities $k = \pm i\pi/2$, while the other is below $k = -i\pi/2$. Trying to draw a path \mathcal{C} , locally of steepest descent, that crosses both these saddle points is not possible without trapping the singularity $k = -i\pi/2$ within the region of space between \mathcal{C} and the real k axis. This feature precludes the application of the analyticity requirement prescribed by Theorem 1 or, stated differently, the saddle points defined by Eq. (26) do not alter the evaluation of Ra_a as reported in Fig. 5. We refer the reader to Juniper et al. [12] for other examples where saddle points are to be excluded for violations of the analyticity requirement.

5. A Matter of Scaling

The analysis carried out so far is relative to a porous channel with an open upper boundary subjected to a uniform heat flux. A much more classic setup is one where both the lower and the upper boundaries are impermeable and isothermal. This setup is so classic that there is a name to denote it: the Horton-Rogers-Lapwood problem, also abbreviated with HRL problem. The different boundary conditions considered in the HRL problem do not have any significant influence on the basic stationary flow across the channel. On the other hand, a sensible change emerges when expressing the Fourier modes of the perturbations, Eqs. (12)–(14). In fact, having an impermeable upper boundary with a uniform temperature implies that both $\hat{\psi}$ and $\hat{\theta}$ are zero at $y = 1$, so that Eq. (14) is to be replaced by $\gamma_n = n\pi$. This is the consequence of Neumann boundary conditions for $\hat{\psi}$ and $\hat{\theta}$ having been replaced by Dirichlet boundary conditions. If we limit our discussion to the $n = 1$ modes, the only modes important for both the onset of convective and absolute instability, then we can reach a neat conclusion. With Dirichlet boundary conditions at $y = 1$ we will have $n = 1$ contour lines of $\hat{\psi}$ with a sequence of rotating and counter-rotating cells, while Neumann boundary conditions have the effect that these cells are cut in the middle by the boundary $y = 1$: full cells in the former case and half cells in the latter. Mathematically, the cells are exactly the same as they result from a product of sine functions in x and y . Therefore, it is not strange that the dispersion relation is exactly the same as in the HRL problem, and that the neutral stability condition (20) matches that for the HRL problem provided that k and Ra are suitably scaled. Since the onset of convective instability comes about with half-cells, then the neutrally stable k for the HRL problem must be the double of that employed in Eq. (20). Since Eq. (6) shows that Ra is proportional to H^2 , then doubling the channel thickness, to include the whole cells, implies that Ra is turned into $4Ra$. Thus, Eq. (21) immediately provides the critical values of k and Ra for the HRL problem,

$$k_c = \pi, \quad Ra_c = 4\pi^2. \quad (34)$$

How does this scaling argument affect the data about the transition to absolute instability? We expect that we must multiply by 4 the numerical data of Ra_a obtained in section 4 to obtain those for the HRL problem. However, one must be careful with the value of Pe . In fact, if Ra is proportional to H^2 , Pe is proportional to H as one may check on inspecting Eq. (6). Thus, moving from our open boundary problem to the HRL problem, that is moving from the half cells to the full cells, or doubling the value of H , means multiplying the values of Pe by a factor 2. To conclude, we can formulate the scaling as follows:

$$Ra_{a,\text{HRL}}(Pe) = 4 Ra_a(Pe/2), \quad (35)$$

where we denoted with $Ra_a(Pe)$ the threshold of absolute instability for our open boundary problem (data reported in Table 1), and with $Ra_{a,HRL}(Pe)$ the threshold relative to the HRL problem.

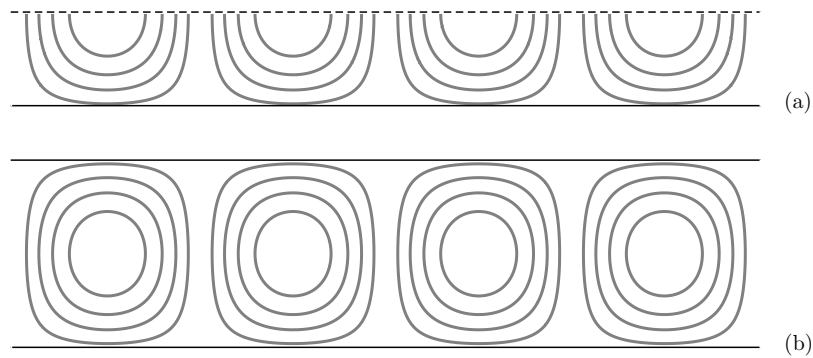


Figure 6. Scaled convection streamlines of the perturbations for: (a) the open upper boundary problem; (b) the HRL problem.

Table 2. Check of the scaling law (35): data of Ra_a for the HRL problem.

Pe	$Ra_{a,HRL}^*$	$Ra_{a,HRL}^\dagger$
10	57.8036	57.8036
20	91.9528	91.9528
50	208.441	208.441
100	407.140	407.140

* Data evaluated from Table 1 and Eq. (35)

† Ref. [8]

That the scaling law (35) actually works can be easily checked by comparing the data obtained from Table 1, by applying Eq. (35), with those reported in Barletta and Alves [8]. This comparison is done in Table 2, for a few sample values of Pe . The agreement is complete within six significant figures.

6. Going Three-Dimensional

A question arises about the behaviour of the flow when the assumption of a very small spanwise width, L , is relaxed. In this case, a value of L comparable with H or larger implies a significant functional dependence on z of the velocity, pressure and temperature fields. One may envisage a lateral confinement along the spanwise z direction with adiabatic impermeable sidewalls. The basic solution (3) still holds, except that one must also specify that the z component of velocity is zero and, as a consequence, also the z component of the pressure gradient is zero. The analysis of small-amplitude perturbations is to be carried out on three-dimensional grounds. Hence, a streamfunction formulation is out of the question, while a pressure formulation is possible,

$$\frac{\partial^2 P}{\partial x^2} + \frac{\partial^2 P}{\partial y^2} + \frac{\partial^2 P}{\partial z^2} - Ra \frac{\partial \theta}{\partial y} = 0, \quad (36a)$$

$$\frac{\partial \theta}{\partial t} + Pe \frac{\partial \theta}{\partial x} + \frac{\partial P}{\partial y} - Ra \theta = \frac{\partial^2 \theta}{\partial x^2} + \frac{\partial^2 \theta}{\partial y^2} + \frac{\partial^2 \theta}{\partial z^2}. \quad (36b)$$

Here, the dimensionless coordinate z is defined coherently with (x, y) , by adopting the same scale H . We have $z \in [0, \tau]$, where $\tau = L/H$. Instead of Eq. (10), the boundary conditions are now written as

$$\begin{cases} y = 0 : & \frac{\partial P}{\partial y} = 0; \quad \theta = 0, \\ y = 1 : & P = 0; \quad \frac{\partial \theta}{\partial y} = 0, \\ z = 0, \tau : & \frac{\partial P}{\partial z} = 0; \quad \frac{\partial \theta}{\partial z} = 0. \end{cases} \quad (37)$$

We now introduce the Fourier transforms,

$$\hat{P}(k, y, z, t) = \frac{1}{\sqrt{2\pi}} \int_{-\infty}^{\infty} e^{-ikx} P(x, y, z, t) dx, \quad \hat{\theta}(k, y, z, t) = \frac{1}{\sqrt{2\pi}} \int_{-\infty}^{\infty} e^{-ikx} \theta(x, y, z, t) dx, \quad (38)$$

with the inverse transforms given by

$$P(x, y, z, t) = \frac{1}{\sqrt{2\pi}} \int_{-\infty}^{\infty} e^{ikx} \hat{P}(k, y, z, t) dk, \quad \theta(x, y, z, t) = \frac{1}{\sqrt{2\pi}} \int_{-\infty}^{\infty} e^{ikx} \hat{\theta}(k, y, z, t) dk. \quad (39)$$

We can now separate the dependence on y and z , in analogy with Eq. (13),

$$\begin{aligned} \hat{P}(k, y, z, t) &= \sum_{n=1}^{\infty} \sum_{l=1}^{\infty} \tilde{P}_{n,l,k}(t) \cos(\gamma_n y) \cos(\eta_l z), \\ \hat{\theta}(k, y, z, t) &= \sum_{n=1}^{\infty} \sum_{l=1}^{\infty} \tilde{\theta}_{n,l,k}(t) \sin(\gamma_n y) \cos(\eta_l z), \end{aligned} \quad (40)$$

where γ_n is still given by Eq. (14), while $\eta_l = (l-1)\pi/\tau$. Definitions 1 and 2 are easily generalised to

Definition 3. The parallel flow given by Eq. (3) is *convectively unstable* if there exist $(n, l) \in \mathbb{N}^2$ and $k \in \mathbb{R}$ such that

$$\lim_{t \rightarrow \infty} |\tilde{P}_{n,l,k}(t)| = \infty, \quad \lim_{t \rightarrow \infty} |\tilde{\theta}_{n,l,k}(t)| = \infty.$$

Definition 4. The parallel flow given by Eq. (3) is *absolutely unstable* if, for every $x \in \mathbb{R}$, there exists $(n, l) \in \mathbb{N}^2$ such that

$$\lim_{t \rightarrow \infty} \left| \int_{-\infty}^{\infty} e^{ikx} \tilde{P}_{n,l,k}(t) dk \right| = \infty, \quad \lim_{t \rightarrow \infty} \left| \int_{-\infty}^{\infty} e^{ikx} \tilde{\theta}_{n,l,k}(t) dk \right| = \infty.$$

By applying the Fourier transform to Eqs. (36), one obtains

$$(\gamma_n^2 + \eta_l^2 + k^2) \tilde{P}_{n,l,k} + \gamma_n Ra \tilde{\theta}_{n,l,k} = 0, \quad (41a)$$

$$(\gamma_n^2 + \eta_l^2 + k^2) \tilde{\theta}_{n,l,k} + \frac{d\tilde{\theta}_{n,l,k}}{dt} + ikPe \tilde{\theta}_{n,l,k} - \gamma_n \tilde{P}_{n,l,k} - Ra \tilde{\theta}_{n,l,k} = 0. \quad (41b)$$

Equations (41) can be solved by writing

$$\tilde{P}_{n,l,k}(t) = \tilde{P}_{n,l,k}(0) e^{\lambda_{n,l,k} t}, \quad \tilde{\theta}_{n,l,k}(t) = -\frac{\gamma_n^2 + \eta_l^2 + k^2}{\gamma_n Ra} \tilde{P}_{n,l,k}(0) e^{\lambda_{n,l,k} t}, \quad (42)$$

with the dispersion relation now given by

$$\gamma_n^2 + \eta_l^2 + k^2 + \lambda_{n,l,k} + ikPe - \frac{(\eta_l^2 + k^2)Ra}{\gamma_n^2 + \eta_l^2 + k^2} = 0. \quad (43)$$

The condition for the onset of convective instability is formulated by setting $\Im(\lambda_{n,l,k}) = -kPe$ and $\Re(\lambda_{n,l,k}) > 0$, so that Eq. (43) yields

$$Ra > \frac{(\gamma_n^2 + \eta_l^2 + k^2)^2}{\eta_l^2 + k^2}. \quad (44)$$

The lowest value of Ra leading to convective instability is obtained with $n = 1$,

$$Ra = \frac{(\pi^2 + 4\eta_l^2 + 4k^2)^2}{16(\eta_l^2 + k^2)}, \quad (45)$$

which replaces the neutral stability condition (20). By minimising Ra , one obtains the critical value $Ra_c = \pi^2$ when

$$\eta_l^2 + k^2 = \frac{\pi^2}{4}. \quad (46)$$

There are several solutions of Eq. (46), depending on the value of the aspect ratio τ . For instance, if $\tau < 2$, there is just one possible solution: $l = 1$ with $k = \pi/2$. This means that, with $\tau < 2$, the onset of convective instability happens when z -independent Fourier modes are activated, namely modes having $l = 1$ and $k = \pi/2$, in agreement with the two-dimensional analysis, Eq. (21). Things get more and more complicated when $\tau \geq 2$. If $2 \leq \tau < 4$, then two Fourier modes become convectively unstable when Ra exceeds the critical value $Ra_c = \pi^2$. One is the z -independent mode ($l = 1, k = \pi/2$) and the other one is

$$\left(l = 2, k = \pi \sqrt{\frac{1}{4} - \frac{1}{\tau^2}} \right).$$

The $l = 2$ mode is three-dimensional, that is, z -dependent. Further three-dimensional Fourier modes become convectively unstable at the critical condition $Ra_c = \pi^2$, if $\tau \geq 4$.

The three-dimensional analysis of the transition to absolute instability is not to be based on Eq. (23), but on its generalisation implied by Eq. (43), namely

$$\lambda(k) = \frac{(\eta_l^2 + k^2)Ra}{\gamma_n^2 + \eta_l^2 + k^2} - \gamma_n^2 - \eta_l^2 - k^2 - ikPe. \quad (47)$$

By relying on Definition 4, the transition to absolute instability has just the same features described with the two-dimensional analysis if the Fourier integrals calculated with $l = 1$ become time-growing at Rayleigh numbers lower than those for the integrals calculated with $l > 1$. If this is the case, the transition to absolute instability happens with purely two-dimensional modes, and the analysis carried out in the preceding sections does not need to be modified. In order to illustrate how things go when modes with $l > 1$ are included in the analysis, we will reconsider the cases examined in Examples 1 and 2.

Example 3. We assume $Pe = 10$ and $n = 1$, since $n > 1$ modes do not contribute to the two-dimensional analysis. By considering either $l = 1$ and a finite τ , or $l > 1$ and $\tau \rightarrow \infty$, we have $\eta_l = 0$. In this case, the saddle points of $\lambda(k)$ such that $\Re(\lambda(k)) = 0$ are just the same as those gathered in the two-dimensional analysis, namely

$$\begin{aligned}
&(k_0 = -i5.45252, Ra = 25), \quad (k_0 = i0.452525, Ra = 25), \\
&(k_0 = \pm 1.62238 - i1.34154, Ra = 22.9882), \\
&(k_0 = \pm 1.06797 + i1.69304, Ra = -18.6997),
\end{aligned}$$

with $(k_0 = \pm 1.62238 - i1.34154, Ra = 22.9882)$ yielding the lowest Ra greater or equal than $Ra_c = \pi^2$, and thus leading to the result $Ra_a = 22.9882$.

If we now consider three-dimensional modes with $l = 2$, our solutions will depend on τ .

If we set $\tau = 0.2$ then the saddle points of $\lambda(k)$ such that $\Re(\lambda(k)) = 0$ are

$$\begin{aligned}
&(k_0 = -i16.4479, Ra = 128.308), \quad (k_0 = -i14.9127, Ra = 193.774), \\
&(k_0 = -i5.06942, Ra = 277.264), \\
&(k_0 = \pm 0.544764 + i15.7934, Ra = -157.957),
\end{aligned}$$

not providing any candidate for the evaluation of Ra_a .

If we set $\tau = 0.4$ then the saddle points of $\lambda(k)$ such that $\Re(\lambda(k)) = 0$ are

$$\begin{aligned}
&(k_0 = -i9.10248, Ra = 63.8929), \quad (k_0 = \pm 0.689276 + i8.02783, Ra = -80.3907), \\
&(k_0 = \pm 0.972718 - i5.82986, Ra = 96.1403).
\end{aligned}$$

The conclusion is just the same as for $\tau = 0.2$. If we now trace the behaviour of the saddle points by gradually increasing τ up to 50, we obtain that there is no saddle point yielding a value of Ra larger than π^2 , but lower than 22.9882. Interestingly enough, we note that with $\tau = 50$ our saddle points are

$$\begin{aligned}
&(k_0 = -i5.45267, Ra = 25.0033), \quad (k_0 = i0.446806, Ra = 25.4971), \\
&(k_0 = i0.00814689, Ra = 1521.56), \\
&(k_0 = \pm 1.62210 - i1.34251, Ra = 22.9964), \\
&(k_0 = \pm 1.06771 + i1.69414, Ra = -18.7093).
\end{aligned}$$

These saddle points are not much different from those obtained with the two-dimensional analysis, namely with either $l = 1$ or $l > 1$ and $\tau \rightarrow \infty$. We note that there is one extra saddle point with a very large Rayleigh number. This point disappears when the limit $\tau \rightarrow \infty$ is taken.

The conclusion to be drawn by inspecting the behaviour of the saddle points with $l = 2$ and gradually increasing τ is that the evaluation of the threshold value of Ra for the transition to absolute instability coincides with that relative to the two-dimensional analysis, namely $Ra_a = 22.9882$. No difference is made if one considers $l = 3$ or larger. In fact, due to the definition of $\eta_l = (l - 1)\pi/\tau$, modes with $l > 2$ and a given τ yield the same η_l , and hence the same saddle points, as modes with $l = 2$ and a suitably smaller τ .

Example 4. A behaviour much similar to that described in Example 3 is observed for $Pe = 50$. By setting $n = 1$ and $l = 1$, the saddle points for the two-dimensional analysis are (see also Example 2),

$$\begin{aligned}
&(k_0 = -i25.0983, Ra = 625), \quad (k_0 = i0.0983095, Ra = 625), \\
&(k_0 = \pm 1.37471 - i1.60524, Ra = 101.785), \\
&(k_0 = \pm 1.25027 + i1.65825, Ra = -98.0906).
\end{aligned}$$

From these saddle points, the conclusion drawn in Example 2 is that the threshold for absolute instability is $Ra_a = 101.785$. If three-dimensional modes with $l = 2$ are now included in our analysis, we can keep track of the saddle points obtained by starting with $\tau = 0.2$ and gradually increasing τ up to 50. We do not find any saddle points of $\lambda(k)$ such that $\Re(\lambda(k)) = 0$ whose corresponding

value of Ra is both larger than $Ra_c = \pi^2$ and lower than $Ra_a = 101.785$. In particular, for $\tau = 50$ we obtain

$$\begin{aligned}(k_0 &= -i25.0983, Ra = 625.004), \\ (k_0 &= \pm 1.37445 - i1.60632, Ra = 101.829), \\ (k_0 &= \pm 1.25001 + i1.65935, Ra = -98.1361).\end{aligned}$$

A set of saddle points not much different from those obtained with the two-dimensional analysis. We note that the second saddle point with a value of Ra around 625 appears only for larger values of τ . However, we know that this solution does not influence the evaluation of Ra_a .

Exactly as in Example 3, we can conclude that the three-dimensional analysis does not modify in any way our evaluation of $Ra_a = 101.785$.

The features of the three-dimensional analysis, described in Examples 3 and 4, can be easily generalised to other Péclet numbers. The general rule is that the three-dimensional analysis does not change the threshold values of absolute instability, Ra_a , evaluated through a purely two-dimensional analysis.

Obviously, a remarkable situation is $Pe = 0$, already discussed within the two-dimensional analysis. In this case, the solutions of $\lambda'(k) = 0$ are five,

$$\begin{aligned}k_0 = 0 &\implies \lambda(k_0) = \eta_l^2 \left(\frac{Ra}{\gamma_n^2 + \eta_l^2} - 1 \right) - \gamma_n^2, \\ k_0 = \pm i \sqrt{\gamma_n \sqrt{Ra} + \gamma_n^2 + \eta_l^2} &\implies \lambda(k_0) = Ra + 2\gamma_n \sqrt{Ra}, \\ k_0 = \pm \sqrt{\gamma_n \sqrt{Ra} - \gamma_n^2 - \eta_l^2} &\implies \lambda(k_0) = Ra - 2\gamma_n \sqrt{Ra}.\end{aligned}\tag{48}$$

The second line of Eq. (48) can be skipped as it never gives rise to a vanishing $\Re(\lambda(k_0))$. For every n , both the first and the third line of Eq. (48) yield $\Re(\lambda(k_0)) = 0$ for $Ra = 4\gamma_n^2$, provided that τ is an integer multiple of 2 and l is suitably chosen. For other values of τ , the lowest value of Ra leading to $\Re(\lambda(k_0)) = 0$ is given by the third line of Eq. (48). Thus, whatever is the value of τ , the threshold of absolute instability is $Ra_a = Ra_c = \pi^2$. This means that, also for $Pe=0$, the three-dimensional analysis leads exactly to the same results obtained by the two-dimensional analysis. Just the same behaviour was reported, with reference to a similar flow regime, by Delache et al. [13].

7. Concluding Remarks

The analysis of convective and absolute instability has been carried out for the stationary flow in a porous horizontal channel. The lower boundary of the channel has been considered as impermeable and isothermal, while the upper boundary has been modelled as open to an external tangential flow and uniformly cooled. The setup is one of heating from below, so that the kind of instability is Rayleigh-Bénard. The concepts of convective and absolute instability have been reviewed and the detailed procedure to assess the conditions for both types of instability has been described.

The analysis of instability has been initially formulated by a two-dimensional scheme, in order to keep the mathematical difficulties at their lowest. Then, the study has been extended to three-dimensional perturbations thus assessing the validity of the two-dimensional formulation.

The main results of the analysis performed in this paper are the following:

- The concepts of convective and absolute instability can be rigorously defined by applying the Fourier transform method to solve the perturbation equations. The Fourier transformed variable is the coordinate along the streamwise direction.
- The assessment of convective instability just deals with the time-growth, or time-decay, of the Fourier transformed perturbations. The study of the absolute instability, on the other hand, is focussed on the large-time behaviour of the perturbations themselves.

- The need to track the large-time behaviour of the perturbations, mathematically of the inverse Fourier transforms, leads to the central role played by the steepest-descent approximation.
- The two-dimensional analysis of convective instability does not yield a condition of convective instability different from that obtained with a three-dimensional analysis. The only difference is in the modes leading to the critical value of the Rayleigh number for the onset of convective instability, Ra_c . The number of unstable Fourier modes at $Ra = Ra_c$ gradually increases as the spanwise-to-vertical aspect ratio of the channel cross-section, τ , increases.
- The onset of absolute instability occurs at a Rayleigh number $Ra_a \geq Ra_c$, where the equality $Ra_a = Ra_c$ holds if and only if the Péclet number, Pe , is zero. The threshold of absolute instability, Ra_a , is a monotonic increasing function of Pe . When $Pe \gg 1$, Ra_a becomes approximately a linear function of Pe .
- For a given Pe , the threshold value of absolute instability, Ra_a , obtained by a two-dimensional analysis coincides with that obtained by a three-dimensional analysis.
- A suitable scaling of the parameters turned out to map the study carried out in this paper to the analogous study of the Horton-Rogers-Lapwood problem, not only for the results of the convective instability study, but also for the analysis of the transition to absolute instability.

References

1. Drazin, P.G.; Reid, W.H. *Hydrodynamic Stability*, 2 ed.; Cambridge University Press: New York, NY, 2004.
2. Nield, D.A.; Bejan, A. *Convection in Porous Media*, 5th ed.; Springer: New York, 2017.
3. Brevdo, L.; Bridges, T.J. Local and global instabilities of spatially developing flows: cautionary examples. *Proceedings of the Royal Society of London A: Mathematical, Physical and Engineering Sciences* **1997**, *453*, 1345–1364.
4. Huerre, P.; Monkewitz, P.A. Absolute and convective instabilities in free shear layers. *Journal of Fluid Mechanics* **1985**, *159*, 151–168.
5. Brevdo, L. Convectively unstable wave packets in the Blasius boundary layer. *ZAMM-Journal of Applied Mathematics and Mechanics/Zeitschrift für Angewandte Mathematik und Mechanik* **1995**, *75*, 423–436.
6. Lingwood, R.J. On the application of the Briggs' and steepest-descent methods to a boundary-layer flow. *Studies in Applied Mathematics* **1997**, *98*, 213–254.
7. Suslov, S.A. Numerical aspects of searching convective/absolute instability transition. *Journal of Computational Physics* **2006**, *212*, 188–217.
8. Barletta, A.; Alves, L.S.de B. Absolute instability: A toy model and an application to the Rayleigh–Bénard problem with horizontal flow in porous media. *International Journal of Heat and Mass Transfer* **2017**, *104*, 438–455.
9. Brevdo, L.; Bridges, T.J. Absolute and convective instabilities of spatially periodic flows. *Philosophical Transactions of the Royal Society of London A: Mathematical, Physical and Engineering Sciences* **1996**, *354*, 1027–1064.
10. Bender, C.M.; Orszag, S.A. *Advanced Mathematical Methods for Scientists and Engineers I*; Springer: New York, 1999.
11. Ablowitz, M.J.; Fokas, A.S. *Complex Variables: Introduction and Applications*; Cambridge University Press: Cambridge, UK, 2003.
12. Juniper, M.P.; Hanifi, A.; Theofilis, V. Modal stability theory. *Applied Mechanics Reviews* **2014**, *66*, 024804.
13. Delache, A.; Ouarzazi, M.N.; Combarnous, M. Spatio-temporal stability analysis of mixed convection flows in porous media heated from below: Comparison with experiments. *International Journal of Heat and Mass Transfer* **2007**, *50*, 1485–1499.