

Article

Multispectral Pansharpening with Radiative Transfer-Based Detail-Injection Modeling for Preserving Changes in Vegetation Cover

Andrea Garzelli ¹ , Bruno Aiazzi ², Luciano Alparone ³, Simone Lolli ⁴, and Gemine Vivone ^{5*}

¹ Department of Information Engineering and Mathematics, University of Siena, Siena, Italy; andrea.garzelli@unisi.it

² Institute of Applied Physics Nello Carrara, IFAC-CNR, Sesto Fiorentino (FI), Italy; b.aiazzi@ifac.cnr.it

³ Department of Information Engineering, University of Florence, Florence, Italy; luciano.alparone@unifi.it

⁴ Institute of Methodologies for Environmental Analysis, CNR-IMAA, Tito Scalo (PZ), Italy AND NASA-JCET, Greenbelt, 20771, MD, USA; simone.lolli@imaa.cnr.it, slolli@umb.edu

⁵ Department of Information Engineering, Electrical Engineering And Applied Mathematics, University of Salerno, Fisciano (SA), Italy; gvivone@unisa.it

* Correspondence: andrea.garzelli@unisi.it; Tel.: +39-0577-235879

Abstract: Whenever vegetated areas are monitored over time, phenological changes in land cover should be decoupled from changes in acquisition conditions, like atmospheric components, sun and satellite heights, and imaging instrument. This especially holds when the multispectral (MS) bands are sharpened for spatial resolution enhancement by means of a panchromatic (Pan) image of higher resolution, a process referred to as pansharpening. In this paper, we provide evidence that pansharpening of visible/near-infrared (VNIR) bands takes advantage from a correction of the path radiance term introduced by the atmosphere, during the fusion process. This holds whenever the fusion mechanism emulates the radiative transfer model ruling the acquisition of the Earth's surface from space, that is, for methods exploiting a multiplicative, or contrast-based, injection model of spatial details extracted from the panchromatic (Pan) image into the interpolated multispectral (MS) bands. The path radiance should be estimated and subtracted from each band before the product by Pan is accomplished. Both empirical and model-based estimation techniques of MS path radiances are compared within the framework of optimized algorithms. Simulations carried out on two GeoEye-1 observations of the same agricultural landscape at different dates highlight that the de-hazing of MS before fusion is beneficial for an accurate detection of seasonal changes in the scene, as measured by the normalized differential vegetation index (NDVI).

Keywords: Atmospheric path-radiance; change analysis; detail injection modeling; haze; data fusion; normalized differential vegetation index (NDVI); pan-sharpening; radiative transfer; vegetation.

1. Introduction

The term panchromatic sharpening or *pansharpening* denotes the process by which the geometric resolution of a multi-band image is increased by means of a single-band panchromatic observation of the same scene having greater spatial resolution. Pansharpening techniques take advantage of the complementary spatial and spectral resolutions of multi-/hyper-spectral (MS/HS) and panchromatic (Pan) images to synthesize a unique fusion product that exhibits as many spectral bands as the MS/HS image, each with same spatial resolution as the Pan image [1]. It is important, however, to highlight that pansharpening cannot increase the spatial resolution of the spectral information of the original data, but is simply a means to represent such an information at a finer spatial scale, more suitable for visual or automated analysis tasks [2].

Recent achievements in MS pansharpening mostly exploit concepts of superresolution [3]. Despite the formal mathematical elegance of some approaches, all such methods exhibit very subtle increments

in performance (decrements, in some cases) over the state-of-the-art, obtained at an exorbitant computational cost of massive constrained numerical minimizations, with plenty of adjustable parameters. Superresolution-based, or more generally optimization based variational methods, either model-based [4] or not [5], are unconceivable for practical applications requiring routine fusion of tens of Mpixels of data, for which traditional approaches are pursued [2]. Especially, their performance is crucial, being subordinated to a proper optimization of its running parameters on a local basis, e.g., on small blocks partially overlapped to avoid discontinuities in fusion effects. What was believed would become the third generation of pansharpening methods, is still far to come.

Conversely, the current second generation of pansharpening methods, which approximately started twenty years ago and was established ten years later [6], features methods all following the same flowchart. After the MS bands have been superimposed, that is, interpolated and co-registered, to the Pan image, the spatial details of each pixel is extracted from the latter and added to the MS bands according to a certain injection model. The detail extraction step can follow the *spectral* approach, originally known as component substitution (CS), or the *spatial* approach, which may rely on multiresolution analysis (MRA) [7], but not necessarily on a linear shift-invariant filtering, e.g., on morphological filtering [8]. The Pan image is preliminarily histogram-matched, that is, radiometrically transformed by constant gain and offset in such a way that its lowpass version, having the same spatial frequency content as the MS bands, exhibits mean and variance equal to those of the spectral component that shall be replaced, e.g., the intensity component, for CS methods, or the MS band that shall be sharpened for MRA methods [9,10].

The injection model rules the combination of the lowpass MS image with the spatial detail extracted from Pan. Such a model is stated between each of the co-registered MS bands and the lowpass version of the Pan image. A wide variety of injection models has been proposed in the literature [11–13]. However, the most popular ones are:

- i) the projection model, which may be derived from the Gram-Schmidt (GS) orthogonalization procedure, representing the basis of the GS spectral sharpening [14] and of the context-based decision (CBD) [15];
- ii) the multiplicative or contrast-based model, which is the basis of such techniques as high-pass modulation (HPM) [16], Brovey transform (BT) [17], synthetic variable ratio (SVR) [18], UNB pansharp [19], smoothing filter-based intensity modulation (SFIM) [20] and spectral distortion minimizing (SDM) injection model [21,22].

Unlike the projection model, which may be either global, as for GS, or local [23], as for CBD, the contrast-based model is inherently local, or context-adaptive [24], because the injection gain changes at each pixel [25].

Although considerations on atmospheric effects were already present in SVR [18] and unspecified empirical adjustments in the baseline of UNB pansharp [19], the paper that introduced SFIM [20] firstly gave an interpretation of the multiplicative injection model in terms of the radiative transfer model ruling the acquisition of an MS image from a real-world scene [26]: a low spatial-resolution spectral reflectance, preliminarily estimated from the MS bands and the lowpass filtered Pan image, is sharpened through multiplication by a high spatial-resolution solar irradiance, represented by the high-resolution Pan image.

Currently, very few authors [27–30] have explicitly considered the path radiance of the MS band, which is an undesired energy scattered by different atmospheric constituents that reaches the aperture of the instrument without being reflected by the Earth's surface. Such an atmospheric path-radiance, which appears as a *haze* in an RGB true-color visualization, should be estimated and subtracted from each band before modulation and possibly re-inserted later, to get an unbiased sharpened image. The pansharpened bands are left *de-hazed* in all cases, in which spectral reflectance or analogous products are calculated.

Calculation of path-radiances may follow image-based approaches or rely on models of the atmosphere and its constituents, as well as on knowledge of acquisition parameters, such as actual

Sun-Earth distance, sun height angle and observation angle of the satellite platform. Image-based atmospheric corrections [31,32] are a series of statistical methods based on some general assumptions and empirical criteria. The goal is that of estimating the atmospheric effects on acquisition without requiring acquisition parameters or making assumptions on atmospheric constituents.

In this paper, after deriving the haze-corrected versions of contrast-based spectral (CS) and spatial (MRA) pansharpening methods, starting from physical considerations of radiative transfer, several methods for estimating the path radiances of individual bands are reviewed. Image-based and model-based estimates of path-radiances are correlated. To this purpose, the Fu-Liou-Gu (FLG) radiative transfer model [33] has been considered. Model-enforced empirical image-based haze estimation criteria attain the fusion performance of the theoretical model and of an exhaustive search for the unknown path-radiance values, performed at a degraded spatial scale [34]. Experiments carried out on a couple of GeoEye-1 images of the same agricultural landscape at different dates highlight that the de-hazing of MS is beneficial for an accurate detection of seasonal changes in the scene, as measured by the normalized differential vegetation index (NDVI), from pansharpened imagery. It is proven that the calculation of NDVI is unaffected by fusion, provided that the multiplicative model with haze correction is employed. In fact, since NDVI is a purely spectral index, any sharpness of its map introduced by fusion is unlikely and artificial. Ultimately, the proposed NDVI-preserving pansharpening method, besides featuring excellent fusion scores [34], exhibits an extremely fast algorithm and may be thus recommended for agricultural applications, especially detection of vegetation cover changes.

2. Spectral and spatial pansharpening methods

The math notation used in the following is explained here. Vectors are indicated in bold lowercase (e.g., \mathbf{x}) with the i th element indicated as x_i . Two- and three-dimensional arrays are expressed in bold uppercase (e.g., \mathbf{X}). An MS image $\mathbf{M} = \{\mathbf{M}_k\}_{k=1,\dots,N}$ is a three dimensional array composed by N bands indexed by the subscript $k = 1, \dots, N$; hence, \mathbf{M}_k denotes the k th band of \mathbf{M} . The Pan image is a 2-D array and will be indicated as \mathbf{P} ; its version histogram-matched, e.g., to the intensity component $\hat{\mathbf{I}}_L$, as $\check{\mathbf{P}}_L$. Also, $\tilde{\mathbf{M}}_k$ and $\hat{\mathbf{M}}_k$ indicate interpolated and sharpened MS bands, respectively. Unlike conventional matrix product and ratio, such operations are intended as product and ratio of terms of same positions within the array.

2.1. Spectral or component-substitution methods

The class of CS, or spectral, methods is based on the projection of the MS image into another vector space, by assuming that the forward transformation splits the spatial structure and the spectral diversity into separate components.

Under the hypothesis of substitution of a single component that is a linear combination of the input bands, the fusion process can be obtained without the explicit calculation of the forward and backward transformations, but through a proper injection scheme [1], thereby leading to the fast implementations of CS methods, whose general formulation is:

$$\hat{\mathbf{M}}_k = \tilde{\mathbf{M}}_k + \mathbf{G}_k \cdot (\check{\mathbf{P}}_L - \mathbf{I}_L), \quad k = 1, \dots, N \quad (1)$$

in which k is the band index, $\mathbf{G} = [\mathbf{G}_1, \dots, \mathbf{G}_k, \dots, \mathbf{G}_N]$ the 3-D array of *injection gains*, which in principle may be one per pixel per band, while the intensity, \mathbf{I}_L , is defined as

$$\mathbf{I}_L = \sum_{i=1}^N w_i \cdot \tilde{\mathbf{M}}_i \quad (2)$$

in which the weight vector $\mathbf{w} = [w_1, \dots, w_i, \dots, w_N]$ is the 1-D array of spectral weights, corresponding to the first row of the forward transformation matrix. The term $\check{\mathbf{P}}_{\mathbf{I}_L}$ is \mathbf{P} histogram-matched to \mathbf{I}_L

$$\check{\mathbf{P}}_{\mathbf{I}_L} \triangleq (\mathbf{P} - \mu_{\mathbf{P}}) \cdot \frac{\sigma_{\mathbf{I}_L}}{\sigma_{\mathbf{P}_L}} + \mu_{\mathbf{I}_L} \quad (3)$$

in which μ and σ denote mean and square root of variance, respectively, and \mathbf{P}_L is a lowpass version of \mathbf{P} having the same spatial frequency content as \mathbf{I} [9,35].

In GS spectral sharpening, the fusion process is described by (1), with the injection gains are spatially uniform for each band, and thus denoted as $\{g_k\}_{k=1, \dots, N}$. They are given by [14]:

$$g_k = \frac{\text{cov}(\tilde{\mathbf{M}}_k, \mathbf{I}_L)}{\text{var}(\mathbf{I}_L)} \quad k = 1, \dots, N \quad (4)$$

in which $\text{cov}(\mathbf{X}, \mathbf{Y})$ indicates the covariance between \mathbf{X} and \mathbf{Y} , and $\text{var}(\mathbf{X})$ is the variance of \mathbf{X} . In [14] a multivariate linear regression is exploited to model the relationship between the lowpass-filtered Pan, \mathbf{P}_L , and the interpolated MS bands:

$$\mathbf{P}_L = \hat{w}_0 + \sum_{i=1}^N \hat{w}_i \cdot \tilde{\mathbf{M}}_i + \epsilon \triangleq \hat{\mathbf{I}}_L + \epsilon \quad (5)$$

in which $\hat{\mathbf{I}}_L$ is the optimal intensity component and ϵ the least squares (LS) space-varying residue. The set of space-constant optimal weights $\{\hat{w}_k\}_{k=0, \dots, N}$ is calculated as the *minimum MSE* (MMSE) solution of (5). A figure of merit of the matching achieved by (5) is given by the coefficient of determination, R^2 , defined as

$$R^2 \triangleq 1 - \frac{\sigma_{\epsilon}^2}{\sigma_{\mathbf{P}_L}^2} \quad (6)$$

in which σ_{ϵ}^2 and $\sigma_{\mathbf{P}_L}^2$ denote the variance of the (zero-mean) LS residue, ϵ , and of the lowpass filtered Pan image. Histogram-matching of Pan to the MMSE intensity component, $\hat{\mathbf{I}}_L$, should take into account that $\mu_{\mathbf{P}} = \mu_{\mathbf{P}_L} = \mu_{\hat{\mathbf{I}}_L}$, from (5). Thus, from the definition of CD (6)

$$\check{\mathbf{P}}_{\hat{\mathbf{I}}_L} = (\mathbf{P} - \mu_{\mathbf{P}}) \cdot R + \mu_{\mathbf{P}}. \quad (7)$$

Also methods different from GS, based on adaptive MMSE estimation of the component that shall be substituted together with the detail-injection gains, have been proposed [36,37].

The multiplicative or *contrast-based* injection model is a special case of (1), in which space-varying injection gains, \mathbf{G} , are defined such that

$$\mathbf{G}_k = \frac{\tilde{\mathbf{M}}_k}{\mathbf{I}_L}, \quad k = 1, \dots, N. \quad (8)$$

The resulting pansharpening method is described by

$$\hat{\mathbf{M}}_k = \tilde{\mathbf{M}}_k + \frac{\tilde{\mathbf{M}}_k}{\mathbf{I}_L} \cdot (\check{\mathbf{P}}_{\mathbf{I}_L} - \mathbf{I}_L) = \tilde{\mathbf{M}}_k \cdot \frac{\check{\mathbf{P}}_{\mathbf{I}_L}}{\mathbf{I}_L}, \quad k = 1, \dots, N \quad (9)$$

which, in the case of spectral weights all equal to $1/N$, is the widely known BT pansharpening method [17]. An evolution of BT is SVR [18], in which the parameters $\{w_k\}$ are obtained through a supervised regression analysis carried out on five simulated classes, with a known atmospheric model. After construction of \mathbf{I}_L , a linear histogram matching is performed to force the Pan image to match the mean and variance of \mathbf{I}_L , in order to eliminate atmospheric and illumination differences. An evolution of SVR is the baseline of UNB pansharp [19], which exploits an unsupervised multivariate regression of original Pan to interpolated MS bands to yield the set of $\{w_k\}$. Histogram matching is performed

analogously to SVR. Thus, BT, SVR and UNB pansharp fit the model (1) with the choice of injection gains (8).

2.2. Spatial or multiresolution-analysis methods

The *spatial* approach relies on the injection of high-pass spatial details of Pan into the resampled MS bands [7,38].

The most general MRA-based fusion may be stated as:

$$\hat{\mathbf{M}}_k = \tilde{\mathbf{M}}_k + \mathbf{G}_k \cdot \left(\check{\mathbf{P}}^{(k)} - \check{\mathbf{P}}_L^{(k)} \right), \quad k = 1, \dots, N. \quad (10)$$

in which the Pan image is preliminarily histogram-matched to the interpolated k th MS band [9,20]

$$\check{\mathbf{P}}^{(k)} \triangleq \check{\mathbf{P}}_{\tilde{\mathbf{M}}_k} = (\mathbf{P} - \mu_{\mathbf{P}}) \cdot \frac{\sigma_{\tilde{\mathbf{M}}_k}}{\sigma_{\mathbf{P}_L}} + \mu_{\tilde{\mathbf{M}}_k} \quad (11)$$

and $\check{\mathbf{P}}_L^{(k)}$ the lowpass-filtered version of $\check{\mathbf{P}}^{(k)}$. It is noteworthy that according to either of (3) and (11), histogram matching of \mathbf{P} always implies the calculation of its lowpass version \mathbf{P}_L .

According to (10) the different approaches and methods belonging to this class are uniquely characterized by the lowpass filter employed for obtaining the image \mathbf{P}_L and by the set of space-varying injection gains, either spatially uniform, $\{g_k\}_{k=1,\dots,N}$ or space-varying, $\{\mathbf{G}_k\}_{k=1,\dots,N}$.

The contrast-based version of MRA pansharping is

$$\hat{\mathbf{M}}_k = \tilde{\mathbf{M}}_k + \frac{\tilde{\mathbf{M}}_k}{\check{\mathbf{P}}_L^{(k)}} \cdot \left(\check{\mathbf{P}}^{(k)} - \check{\mathbf{P}}_L^{(k)} \right) = \tilde{\mathbf{M}}_k \cdot \frac{\check{\mathbf{P}}^{(k)}}{\check{\mathbf{P}}_L^{(k)}}, \quad k = 1, \dots, N. \quad (12)$$

It is noteworthy that, unlike what happens for (9), (12) does not preserve the spectral angle of $\tilde{\mathbf{M}}_k$, because the multiplicative sharpening term depends on k .

Eq. (12) accommodates HPM [16], SFIM [20] and SDM [22], which differ from one another by the lowpass filter used to achieve \mathbf{P}_L .

In some cases, the spectral transformation of CS methods is cascaded with MRA to extract the spatial details that are injected. The resulting methods are called hybrid methods. According to a recent study [7], they behave as either spectral or spatial, depending on whether the detail extracted is $\check{\mathbf{P}}_{\mathbf{I}_L} - \mathbf{I}_L$ or $\check{\mathbf{P}}^{(k)} - \check{\mathbf{P}}_L^{(k)}$. The most popular hybrid method with multiplicative injection model is the additive wavelet luminance proportional (AWLP) [15,39], which has been recently improved [9] by changing its histogram matching from (3) to (11).

3. A review of the radiative transfer model

The radiative transfer model [26] relates the at-sensor spectral radiance to the surface reflectance, top-of-atmosphere (TOA) solar irradiance, upward and downward atmospheric transmittances and upward scattered radiance, a.k.a. path radiance:

$$L(\lambda) = \frac{\rho(\lambda) \cdot \tau_u(\lambda) \cdot (E_s(\lambda) \cdot \cos(\theta_s) \cdot \tau_d(\lambda) + E_d(\lambda))}{d_{ES}^2 \cdot \pi} + L_P(\lambda) \quad (13)$$

in which

- λ : wave length of the electromagnetic radiation [μm]
- $L(\lambda)$: at-sensor spectral radiance [$W \cdot m^{-2} \cdot sr^{-1} \cdot \mu m^{-1}$]
- $\rho(\lambda)$: surface reflectance [unitless]
- $\tau_u(\lambda)$: upward transmittance of atmosphere [unitless]
- $E_s(\lambda)$: mean TOA solar irradiance [$W \cdot m^{-2} \cdot \mu m^{-1}$]
- θ_s : solar zenith angle [degrees]

- $\tau_d(\lambda)$: downward transmittance of atmosphere [unitless]
- $E_d(\lambda)$: diffuse irradiance at the surface [$W \cdot m^{-2} \cdot \mu m^{-1}$]
- d_{ES} : Earth-Sun distance [astronomical units]
- $L_P(\lambda)$: upward scattered radiance at TOA [$W \cdot m^{-2} \cdot sr^{-1} \cdot \mu m^{-1}$]

The upward transmittance $\tau_u(\lambda)$ depends on the satellite zenith angle, or observation angle θ_o , same as the downward transmittance $\tau_d(\lambda)$ depends on the solar zenith angle, θ_s . Both transmittances roughly decrease with the cosines of the respective angles, as the angles increase [26].

Estimation of surface spectral signature or reflectance requires a preliminary correction of the offset (path radiance) of the k th spectral band, $L_P(k)$, corresponding to a certain wavelength interval, and then rescaling by the product of the atmospheric upward transmittance, $\tau_u(k)$, and by the total solar irradiance measured in the k th spectral interval of the instrument. The latter equals the sum of the solar, i.e. *direct*, and *diffuse* irradiances at the Earth's surface:

$$E_T(k) \triangleq \frac{(E_S(k) \cdot \cos(\theta_s) \cdot \tau_d(k) + E_d(k))}{d_{ES}^2}, \quad k = 1, \dots, N \quad (14)$$

The reflectance, under the assumption of Lambertian surface, may be written as

$$\rho(k) = \frac{(L(k) - L_P(k)) \cdot \pi}{\tau_u(k) \cdot E_T(k)}, \quad k = 1, \dots, N \quad (15)$$

in which $\rho(k)/\pi$ is the average of a Lambertian bidirectional reflectance distribution function (BRDF), with maximum $\rho(k)$.

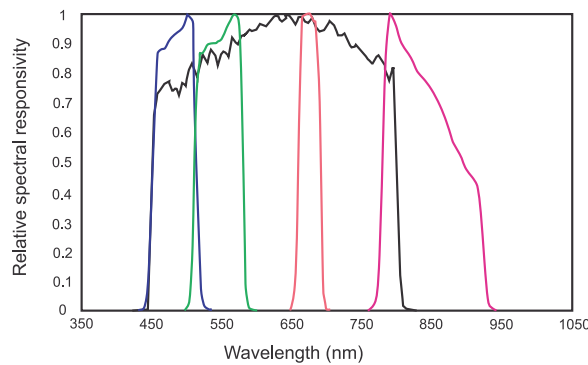


Figure 1. Spectral responsivity functions of GeoEye-1 (4-bands MS + Pan). Notice that the bandwidth of Pan encompasses part of the wavelengths of the rightmost NIR band and the red edge around 730 nm.

All quantities in (13) that are functions of the wavelength are integrated over the relative spectral responsivity function of the k th spectral channels of the instrument to yield the corresponding quantity measured by the k th spectral band of the instrument. Fig. 1 shows the spectral responsivity functions for a typical MS scanner having blue, green, red, near infra-red (NIR), and Pan channels.

Remote sensing optical data, specifically MS and Pan, are generally distributed in spectral radiance format, that is, radiance normalized to the width of spectral interval of the imaging instrument. The advantage of the spectral radiance format over the radiance format is that the former exhibits dynamic ranges of levels that are practically equal for both the narrow bands and the broadband Pan, the latter does not, the radiance of one pixel of Pan being approximately equal to the sum of the radiances of the underlying MS bands. In order to distribute fixed-point data (11/12 bits per pixel per band), more compact and practical than floating-point data, the spectral radiance values are rescaled to completely fill the 2048 or 4096 digital numbers (DN) of the representation. In some cases a negative offset is introduced to force the minimum radiance value in the zero DN. The reciprocal of the scaling factors

and the negative of the offsets of the various bands are placed in the header as metadata and are used to restore exact spectral radiance values from the DNs. In many cases the offsets are set equal to zero, for all bands including Pan. In this case, path radiances can be directly estimated from DNs by using image-based methods.

In applications concerning different acquisition dates, e.g., change detection [40] and multitemporal pansharpening [41], corrections for sun elevation and atmospheric effects, both reductive and diffusive, should be performed according to (15). A typical case is calculation of the normalized differential vegetation index (NDVI) from multispectral images. If **NIR** and **R** denote the spectral band covering the NIR and red wavelengths, respectively, NDVI is defined as

$$\text{NDVI} \triangleq \frac{\text{NIR} - \text{R}}{\text{NIR} + \text{R}} \quad (16)$$

such a definition holds for spectral reflectance data. If the available data are in spectral radiance format (15), the first correction is subtraction of path-radiance from the measured spectral radiance values, or *de-hazing*. The subsequent correction for the total irradiance and upward transmittance is less crucial, given the fractional nature of NDVI and the fact that spectrally adjacent bands will have similar irradiances and transmittances.

MS pansharpening, which produces a sharp MS image having the same format as the original MS image [9], generally does not require any kind of atmospheric corrections, unless a multiplicative detail-injection model is adopted [18,20]. In this case, the haze-corrected pansharpening is capable of thoroughly preserving the NDVI map of the original MS data, as it will be proven in Sect. 4.

4. Contrast-Based Fusion with Haze Removal

In this section, path radiance correction is introduced in (9) and (12) in order to produce estimates of low spatial resolution spectral reflectance, which is the key to contrast-based pansharpening. To this purpose, both the MS and Pan bands must be preliminarily *de-hazed*. While the haze of narrow spectral bands can be calculated through either model-based or image-based techniques [32], calculation of the haze of a broad band is less immediate, because phenomena typical of narrow wavelength intervals, e.g., scattering and absorption, are spread over a large interval and thus less easily quantifiable. A viable solution consists of inferring the haze of Pan by means of the haze values of individual narrow bands that have been previously calculated. From (5), since the path radiance is assumed to be spatially uniform within a scene of moderate size and the LS residue, ϵ , exhibits minimum mean square error (MSE) and hence zero mean, the path radiances of $\hat{\mathbf{I}}_L$, of \mathbf{P}_L and, trivially, of \mathbf{P} , are identical. The former can be easily calculated from the set of MMSE spectral weights, \hat{w}_k , and the set of estimated path radiances, $L_P(k)$,

$$L_P(\mathbf{P}) = L_P(\mathbf{P}_L) = L_P(\hat{\mathbf{I}}_L) = \hat{w}_0 + \sum_k \hat{w}_k \cdot L_P(k). \quad (17)$$

After de-hazing of all the bands, including Pan, histogram-matching is to be accomplished from *de-hazed* data. It is noteworthy that the goal of histogram-matching is different for CS and MRA fusion. In the former case: a) the mean of Pan is forced to be identical to the mean of the intensity component, in order to avoid injecting spatial details having nonzero mean; b) the standard deviation of \mathbf{P}_L is forced to be identical to that of \mathbf{I}_L , to avoid over-/under-enhancement. For MRA fusion, equalization of the mean of Pan to that of $\hat{\mathbf{M}}_k$ was introduced in [20] to perform an implicit adjustment of haze between MS and Pan. In the present case, in which such an adjustment is explicitly performed, only equalization of the MS-to-Pan gains should be accomplished.

Upon these premises, from the general model of contrast-based CS fusion (9), the atmospheric model inversion (15) and the path radiances of the broad bands (17), the haze-corrected version is given by

$$\hat{\mathbf{M}}_k = (\tilde{\mathbf{M}}_k - L_P(k)) \cdot \left(\frac{\mathbf{P} - L_P(\hat{\mathbf{I}}_L)}{\hat{\mathbf{I}}_L - L_P(\hat{\mathbf{I}}_L)} \right) + L_P(k), \quad k = 1, \dots, N. \quad (18)$$

With simple manipulations, (18) can be written as an addition of spatial details driven by a space-varying multiplicative gain that is proportional to the k th *de-hazed* band:

$$\hat{\mathbf{M}}_k = \tilde{\mathbf{M}}_k + \left(\frac{\tilde{\mathbf{M}}_k - L_P(k)}{\hat{\mathbf{I}}_L - L_P(\hat{\mathbf{I}}_L)} \right) \cdot (\mathbf{P} - \hat{\mathbf{I}}_L), \quad k = 1, \dots, N. \quad (19)$$

Starting from the general model of contrast-based MRA fusion (12), the haze-corrected version is given by

$$\hat{\mathbf{M}}_k = (\tilde{\mathbf{M}}_k - L_P(k)) \cdot \left(\frac{\mathbf{P} - L_P(\hat{\mathbf{I}}_L)}{\mathbf{P}_L - L_P(\hat{\mathbf{I}}_L)} \right) + L_P(k), \quad k = 1, \dots, N. \quad (20)$$

Note that in (20) the histogram-matching gain factors of Pan (11), $\sigma_{\tilde{\mathbf{M}}_k} / \sigma_{\mathbf{P}_L}$, do not explicitly appear because they cancel each other in the ratio. Analogously to (19), the *additive* version of (20) can be stated as

$$\hat{\mathbf{M}}_k = \tilde{\mathbf{M}}_k + \left(\frac{\tilde{\mathbf{M}}_k - L_P(k)}{\mathbf{P}_L - L_P(\hat{\mathbf{I}}_L)} \right) \cdot (\mathbf{P} - \mathbf{P}_L), \quad k = 1, \dots, N. \quad (21)$$

Eqs. (18) and (20) may be easily explained by watching (15), in which the radiative transfer model is inverted to yield the spectral reflectance product. Accordingly, the reflectance is given by the spectral radiance diminished by the path-radiance (offset) divided by a gain that is the product of the upward atmospheric transmittance by the total solar irradiance. Each pixel of $\tilde{\mathbf{M}}_k$ is a sample of spectral radiance. The offset is $L_P(k)$ and is assumed to be constant over the scene. Each pixel either of the *de-hazed* MMSE intensity or of the *de-hazed* low-resolution Pan image histogram-matched to the interpolated k th MS band, measures the solar irradiance as reported at the aperture of the instrument, that is, the denominator of (15). In this way, upward atmospheric transmittance and solar irradiance are eliminated [18,20]. Once a map of low spatial resolution spectral reflectance is obtained, it is sharpened by multiplying its pixels by a high spatial resolution irradiance, that is, either Pan histogram-matched to the MMSE intensity or Pan histogram-matched to the *de-hazed* k th interpolated MS band.

As an example of the accurate spectral preservation of the haze-corrected pansharpening, let us calculate NDVI from the pansharpened red and NIR bands. Denote with $\tilde{\mathbf{R}}$ and $\tilde{\mathbf{NIR}}$ the interpolated red and NIR bands and with $\hat{\mathbf{R}}$ and $\hat{\mathbf{NIR}}$ their pansharpened versions. Then, (16) written for *de-hazed* pansharpened spectral radiance values, e.g., MRA (20), yields:

$$\begin{aligned} \text{NDVI} &= \frac{(\hat{\mathbf{NIR}} - L_P(\tilde{\mathbf{NIR}})) - (\hat{\mathbf{R}} - L_P(\tilde{\mathbf{R}}))}{(\hat{\mathbf{NIR}} - L_P(\tilde{\mathbf{NIR}})) + (\hat{\mathbf{R}} - L_P(\tilde{\mathbf{R}}))} \\ &= \frac{(\tilde{\mathbf{NIR}} - L_P(\tilde{\mathbf{NIR}})) \cdot \left(\frac{\mathbf{P} - L_P(\hat{\mathbf{I}}_L)}{\mathbf{P}_L - L_P(\hat{\mathbf{I}}_L)} \right) - (\tilde{\mathbf{R}} - L_P(\tilde{\mathbf{R}})) \cdot \left(\frac{\mathbf{P} - L_P(\hat{\mathbf{I}}_L)}{\mathbf{P}_L - L_P(\hat{\mathbf{I}}_L)} \right)}{(\tilde{\mathbf{NIR}} - L_P(\tilde{\mathbf{NIR}})) \cdot \left(\frac{\mathbf{P} - L_P(\hat{\mathbf{I}}_L)}{\mathbf{P}_L - L_P(\hat{\mathbf{I}}_L)} \right) + (\tilde{\mathbf{R}} - L_P(\tilde{\mathbf{R}})) \cdot \left(\frac{\mathbf{P} - L_P(\hat{\mathbf{I}}_L)}{\mathbf{P}_L - L_P(\hat{\mathbf{I}}_L)} \right)} \\ &= \frac{(\tilde{\mathbf{NIR}} - L_P(\tilde{\mathbf{NIR}})) - (\tilde{\mathbf{R}} - L_P(\tilde{\mathbf{R}}))}{(\tilde{\mathbf{NIR}} - L_P(\tilde{\mathbf{NIR}})) + (\tilde{\mathbf{R}} - L_P(\tilde{\mathbf{R}}))}. \end{aligned} \quad (22)$$

The proof is analogous for CS pansharpening (18). Thus, contrast-based pansharpening, either CS or MRA, with haze correction is capable of thoroughly preserving the NDVI of the original (interpolated) MS data. This is not surprising because NDVI depends on the reflectance and a correct pansharpening cannot increase the spatial resolution of the original reflectance, but simply enhances the geometrical information of the scene without increasing the associated *color* information. On the contrary, Eq. (22) suggests that if the contrast-based fusion model is not haze-corrected or, worse, if the red and NIR bands are not properly *de-hazed* before calculating the NDVI, an unlikely high-frequency spatial pattern will appear in the NDVI map calculated from pansharpened data.



Figure 2. 2048×2048 details of the GeoEye-1 Pan images acquired on (a): 27 May 2010; (b): 13 July 2010.

5. Experimental Results

5.1. Methods

Path-radiance correction (PRC) has been considered for two optimized contrast-based methods, one relying on CS; another on MRA [9]. The two methods with path-radiance correction are labeled as CSw/PRC (19), MRAw/PRC (21). The two versions without path-radiance correction, CSw/oPRC and MRAw/oPRC, are given by (9) with MMSE intensity (5) and by (12), respectively. All spatial filters are separable Gaussian with amplitude at Nyquist equal to 0.25 [7]. To allow for homogeneous comparisons, interpolation of MS data to yield $\tilde{\mathbf{M}}_k$ is performed in two steps by means of the 23-taps filter described in [42], which is suitable for 1:2 interpolation. The method labeled as Exp denotes plain interpolation without injection of details.

5.2. Data set

Two GeoEye-1 observations of the same scene have been acquired on the area of Collazzone, a small town in Central Italy, on different dates of the same year, that is, on May 27, 2010 and July 13, 2010. The spatial sampling interval (SSI) is 2 m for MS (Blue, Green, Red, and NIR bands) and 0.5 m for Pan, respectively. The DN's of the 11-bit fixed-point representation are proportional to spectral radiances through a set of floating-point calibration gains (metadata). All offsets are equal to zero. The area investigated in the following is approximately 1 Km² (2048 × 2048 Pan and 512 × 512 MS). All the images have been orthonormalized by using a digital terrain model (DTM) available at a 10-m resolution for all spatial coordinates. In particular, the second data set (slave) has been coregistered on the first one (master). The lack of a digital surface model (DSM) including also buildings and man-made structures in general is not crucial for the analysis of vegetation, because residual mis-registrations (Pan-to-MS and date-to-date) are confined in the urban area.

Figure 2 shows 2048 × 2048 close-ups of the panchromatic images acquired on May (Fig. 2(a)) and July (Fig. 2(b)). Figure 3 shows the 512 × 512 MS images, resampled to the Pan scale, for the two dates, both in true (3-2-1) and false (4-3-2) color compositions.



Figure 3. 512×512 details of the original GeoEye-1 MS images acquired on (a),(c): 27 May 2010; (b),(d): 13 July 2010. (a),(b): 3-2-1 true color display; (c),(d): 4-3-2 false color composite display.

5.3. Assessments

Quality evaluations have been carried out at the full spatial scale (0.50 m for GeoEye-1 products) equal to that of the original Pan. The check at full scale foresees separate measurement of spectral consistency, which may be defined according to Wald's protocol [43], and spatial consistency, which may be defined according to either QNR [44] and Khan's [45] protocols. Spectral consistency is the one's complement of the normalized spectral distortion that is defined as D_λ according to the QNR protocol or $D_\lambda^{(K)}$ according to Khan's protocol. Analogously, spatial consistency is defined as the one's complement of the normalized spatial distortion, either D_S or $D_S^{(K)}$, respectively. The spectral consistency of Khan's protocol strictly implements the guideline of Wald's consistency property. However, the spatial consistency of Khan's protocol is artificial and sometimes inconsistent. The

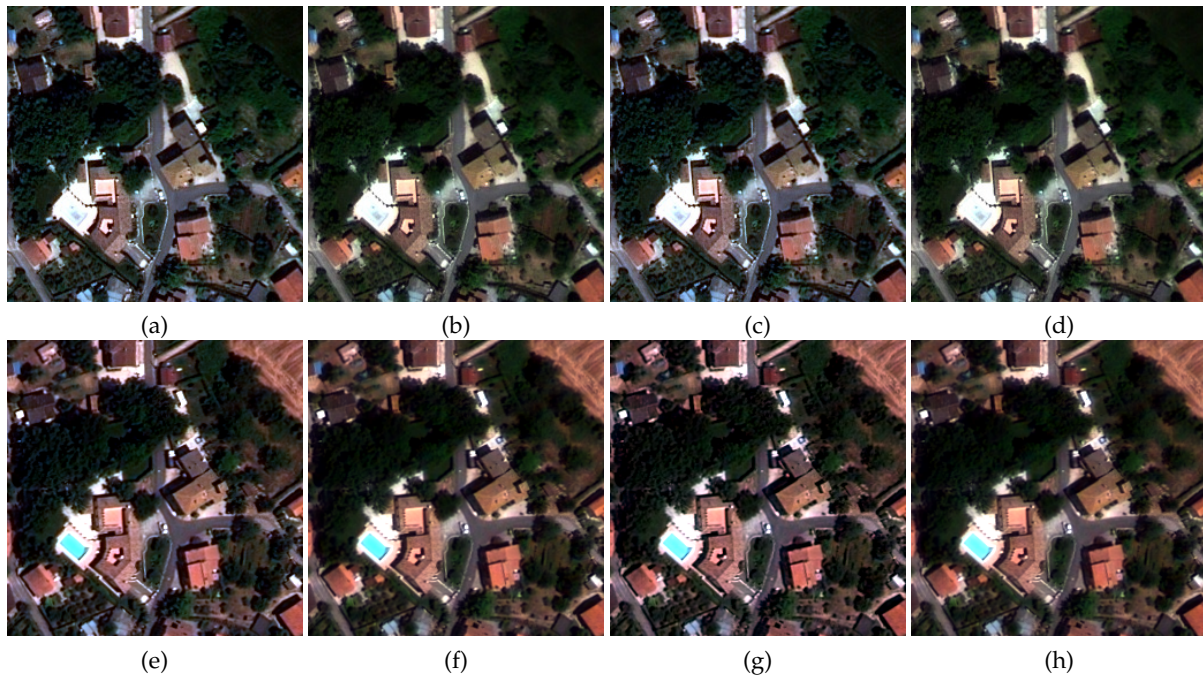


Figure 4. True-color compositions of 256×256 fragments of the GeoEye-1 pansharpened images acquired (a)-(d): on 27 May 2010; (e)-(h): on 13 July 2010. (a),(e): OBT; (b),(f): OBT with haze correction; (c),(g): MRA; (d),(h): MRA with haze correction.

crossed coupling of the QNR and Khan's protocols is preferable, and a global index, referred to as hybrid QNR (HQNR), was recently introduced and validated [46]

$$\text{HQNR} \triangleq (1 - D_{\lambda}^{(K)}) \cdot (1 - D_S). \quad (23)$$

5.4. Estimation of Path Radiances

The haze-corrected versions of CS (19) and MRA (21) require one value of path radiance estimated for each band. In principle, also image-based methods are feasible because band offset metadata in the file header are all identically zero. In this case the path-radiance values estimated for each band will not be expressed in physical units, but as DN's. Conversion to spectral radiance units, typically $[W \cdot m^{-2} \cdot sr^{-1} \cdot \mu m^{-1}]$ or $[mW \cdot cm^{-2} \cdot sr^{-1} \cdot \mu m^{-1}]$ requires subsequent multiplication by the calibration gain metadata.

The path radiance is arguably a fraction of the minimum of spectral radiance attained over the scene. If the scene is large enough and hence statistically consistent, setting the actual minimum equal to the 1-percentile of the histogram ensures robustness to noise (fluctuations of the dark signal around its average; outliers originated by pattern-gain correction of the instrument). The rationale is that the minimum attained over a certain spectral band generally depends on the spatial scale of representation, whereas the path radiance does not, at least for a wide range of metric or sub-metric scales. Invariance to scales between 2 m, 8 m is attained with p-tile values between 0.5 and 1. Below 0.5 the invariance is weak; above one, the invariance is almost perfect. Thus, the path radiance of the B band, which is usually approximated by the minimum over the scene [31], may be approximated by the 1-ptile.

Once the path-radiance of the blue channel, $L_P(B)$, is known, the intercept of the G-to-(B- $L_P(B)$) scatterplot yields an estimate of $L_P(G)$; analogously for the R channel, $L_P(R)$ may be estimated from the R-to-(G - $L_P(G)$) scatterplot. This empirical/statistical approach holds for the visible bands [32]. For calculating the path radiance of NIR, which is practically uncorrelated with the visible bands [47] in the presence of vegetation, the scatterplot method may fail, unless its calculation, either supervised

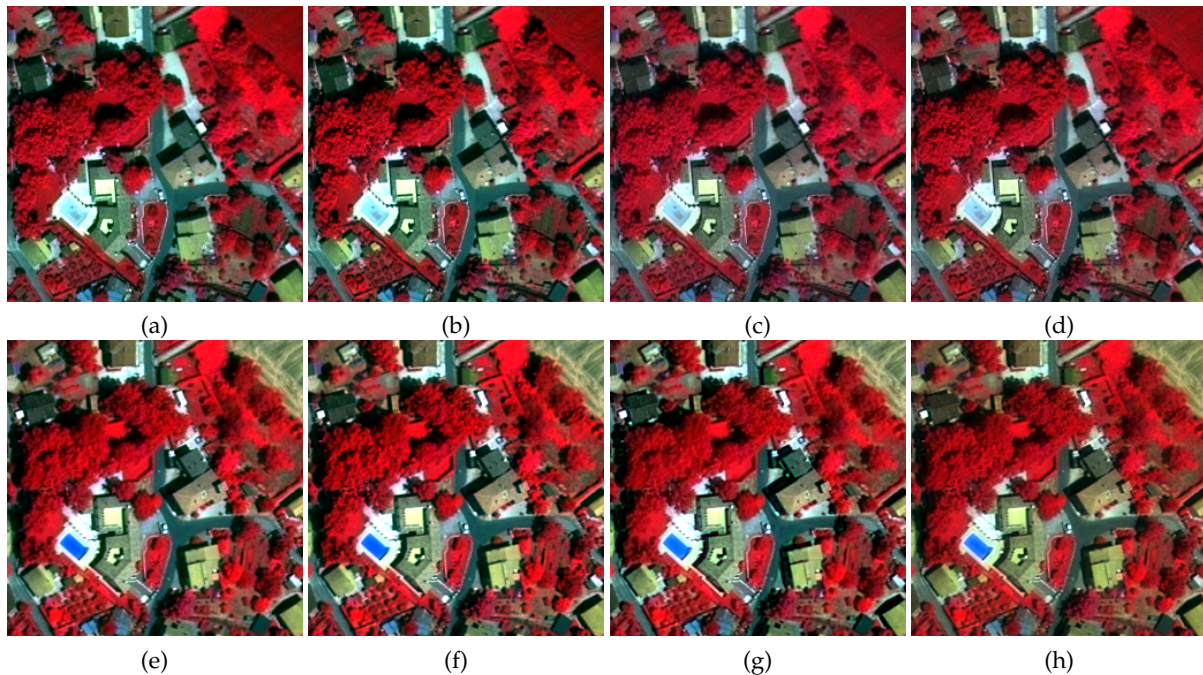


Figure 5. False-color compositions (4-3-2 as R-G-B) of 256×256 fragments of the GeoEye-1 pansharpened images acquired (a)-(d): on 27 May 2010; (e)-(h): on 13 July 2010. (a),(e): OBT; (b),(f): OBT with haze correction; (c),(g): MRA; (d),(h): MRA with haze correction.

or unsupervised, e.g. NDVI-enforced, is performed on non-vegetated areas. Otherwise, a reasonable physical approximation is that the L_p of NIR is set equal to zero.

Also a modeling of the atmosphere was considered. In this case the DNs must be preliminarily calibrated by means of the gain metadata. The Fu-Liou-Gu (FLG) radiative transfer model [33] requires acquisition year, month, day, local time, longitude, latitude, and possibly type of landscape for setting aerosols [48,49] (advected [50,51] or local) both in the boundary layer [52,53] or upper troposphere. The content of water vapor may be inferred from the presence of cirrus clouds in the visible bands [54]. Such a model directly yields values of path radiance in predefined bands, roughly corresponding to those of MS scanners, like Landsat 8 OLI. With small adjustments to fit the R and NIR bands of GeoEye-1, it was found that the modeled path radiance is well approximated by 95% of the 1-ptile of B, 65% of the 1-ptile of G, 45% of the 1-ptile of R and 5% of the 1-ptile of NIR. Path-radiance values are correlated to one another because the scattered radiance is inversely proportional to the fourth power of the wavelength.

The results reported in Sect. 5.5 are the best attainable varying with the estimated path radiances. An exhaustive search at steps of one DN was performed for each dataset: the optimal path radiances are those that optimize with-reference fusion scores, in average, at the degraded spatial scale, i.e., when the ground truth is available as reference. With FLG-modeled path radiances and model-enforced image-based path-radiances, the performance is about 0.1 % lower than that achieved with the exhaustive search. Therefore, i) the radiative transfer model actually rules the performance of contrast-based MS pansharpening; ii) the accuracy of path radiance estimation is not crucial, at least for clear atmospheres.

5.5. Fusion Simulations

The GeoEye-1 pansharpened images at 0.5 m scale are portrayed in Figs. 4 and 5, for true- and false-color displays. What immediately stands out is that the synthesis of vegetated areas is much more realistic and accurate for the haze-corrected methods. This is mostly noticeable in true-color display,

whose bands are more largely affected by haze than those of false color. Without correction, the texture of the canopies, which appears in Pan, being originated from the red-edge and NIR wavelengths, but would be much less noticeable in the bands covering the visible spectrum, is transplanted in the fusion products and originates an unlikely over-enhancement, accompanied by a blueish texture. In fact, the blue band exhibits the largest path radiance over the visible spectrum. The visual quality of non-vegetated areas is generally good for all methods. While the difference between corrected and non-corrected methods stands out, especially in the true-color display, the difference between the CS and MRA approaches, both with or without correction, is imperceivable.

Table 1. Full-scale spectral/spatial distortion indexes and cumulative scores for the May acquisition.

	D_λ	$D_\lambda^{(K)}$	D_S	$D_S^{(K)}$	QNR	QNR ^(K)	HQNR
EXP	0.0000	0.0376	0.1160	0.0535	0.8840	0.9109	0.8507
CSw/oPRC	0.1033	0.0600	0.1471	0.0140	0.7648	0.9268	0.8017
CSw/PRC	0.0507	0.0467	0.0674	0.0209	0.8853	0.9334	0.8890
MRAw/oPRC	0.1043	0.0445	0.1514	0.0126	0.7601	0.9434	0.8109
MRAw/PRC	0.0523	0.0379	0.0666	0.0212	0.8846	0.9418	0.8981

Table 1 reports the scores achieved by the two CS and MRA contrast-based methods, with and without path-radiance correction. The interpolated low-resolution MS is included in the comparison as Exp. The benefits of the path-radiance correction are evaluated in term of decrement in both spectral and spatial distortions, as measured according to the QNR [44] (D_λ , D_S) and Khan's [45] ($D_\lambda^{(K)}$, $D_S^{(K)}$) protocols. For the QNR protocol, both distortion are approximately halved thanks to the haze corrected injection. For Khan's protocol, the spectral distortions benefits by 20-25% from the correction, while the spatial distortion almost doubles in size with the correction. Since both in visual assessments and in with-reference measurement at degraded scale [34] the spectral and spatial quality improvements are balanced, there is the suspect that the spatial distortion of Khan's protocol is inconsistent in some cases. A match with visual quality suggests that the spatial distortion of QNR and Khan's spectral distortion should be coupled together to yield a global quality index (23). The QNR and Khan's quality indexes are reported together with HQNR in the last three columns of Table 1. QNR detects a high improvement of the corrected versions, both CS and MRA, over the uncorrected ones. Unfortunately, the unfused image (Exp) exhibits a quality almost identical to those of the corrected CS and MRA, while the uncorrected versions are fare worse. The global index of Khan's protocol is extremely flat, almost insensitive to the haze-correction detail injection. However, the unfused image is somewhat poorer than all the fused images, and this is reasonable. The mixed index HQNR detects significant improvements of the corrected versions and places the quality of the unfused image Exp quite in the middle of corrected and uncorrected CS/MRA. This result is consistent with the tests at degraded scale carried out in [34].

Eventually, NDVI has been calculated from pansharpened images and found to be identical to NDVI calculated from original interpolated MS bands, as otherwise proven in (22). Figure 6(a) shows the NDVI maps of the May and July observations. While the area of the town is moderately affected by changes in the vegetation cover, the surrounding agricultural area is greatly changed after the cutting of crops. Woods and trees in general are less interested by seasonal changes. This behavior is highlighted by the seasonal difference of NDVI shown in Figure 6(b), in which changes of July over May and vice-versa are reported. The conclusion is that pansharpening cannot improve the spatial resolution of NDVI, which a pure spectral information, but can impair the fidelity of the NDVI map calculated from original data. The proposed haze-corrected contrast-based detail injection model is a viable solution that thoroughly preserves the spectral information of the original MS data.

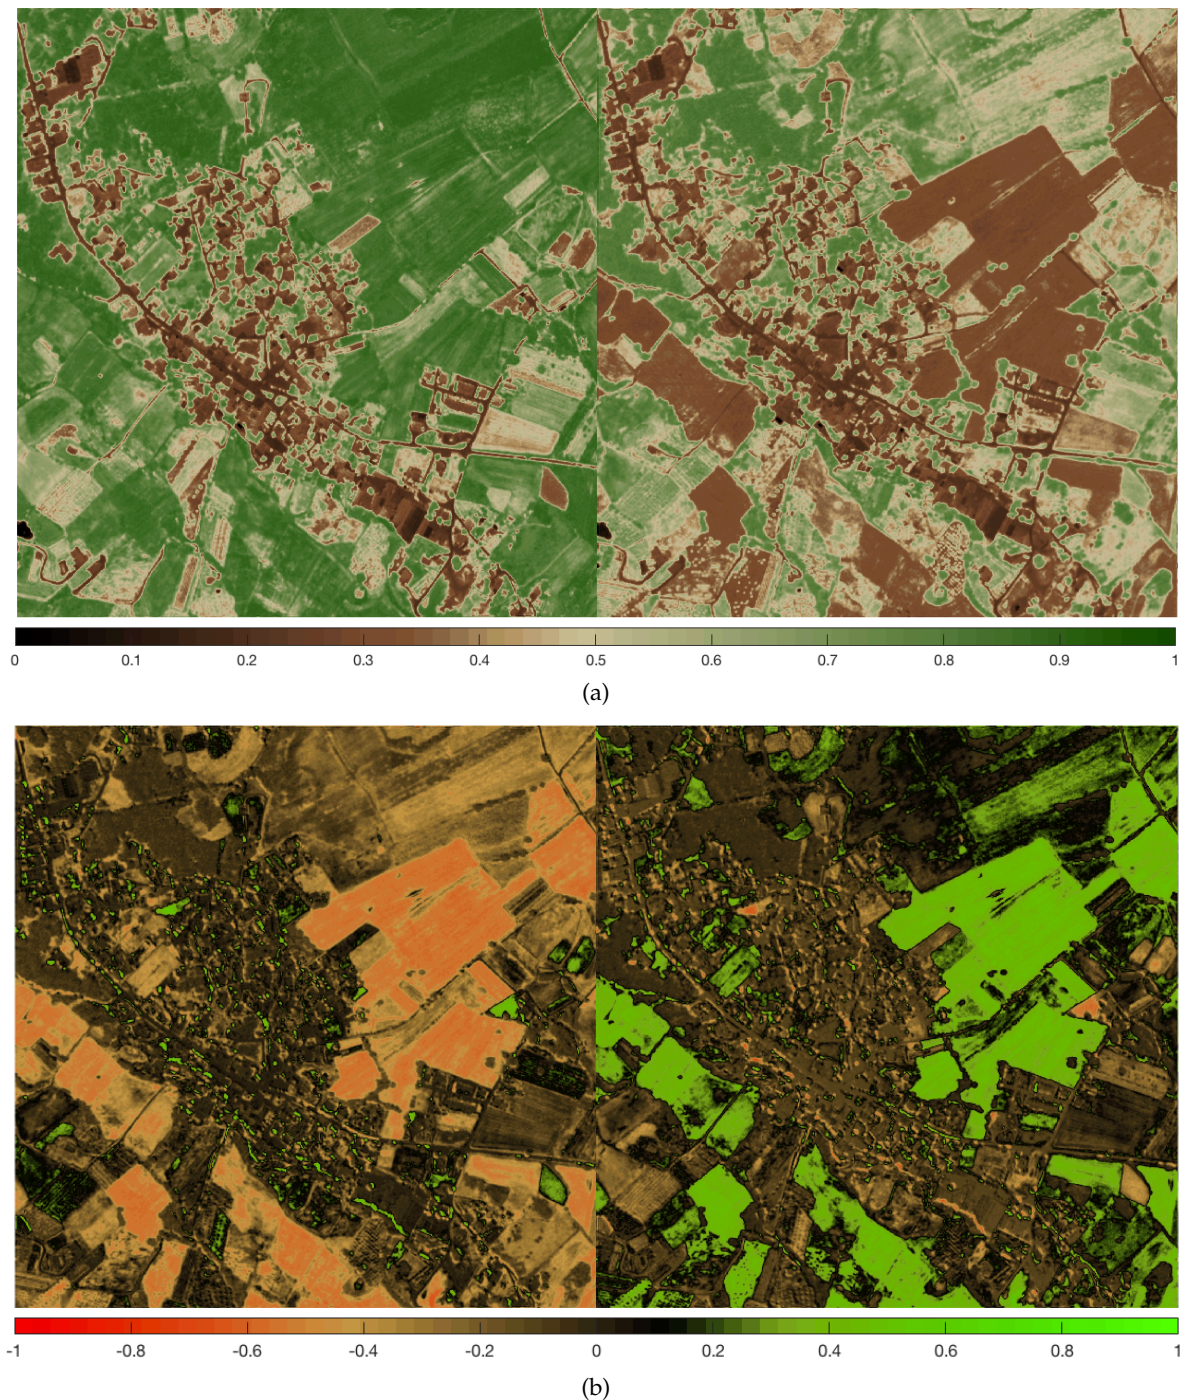


Figure 6. Normalized Differential Vegetation Index (NDVI) of pansharpened images on 27 May 2010 and 13 July 2010. (a): NDVI of pansharpened image acquired on (left) May and (right) July; (b): Map of differences in NDVI values: (left) July-to-May; (right) May-to-July.

6. Conclusions

In this study, we pointed out that the step of MS path-radiance estimation and correction is the key to attain improved performance from traditional pansharpening methods based on spatial modulation. Whenever the bandwidth of Pan encompasses the MS bands, an optimized intensity component can be achieved through multivariate regression of lowpass-filtered Pan to MS and optimal injection of spatial details can be achieved through *haze* removal. The path radiance of each band, $L_p(k)$, is estimated,

subtracted before the spatial modulation and reinserted after fusion. The empirical trick of setting the path radiance of the k th band equal to a fraction of the 1-percentile of its histogram is consistent to a model based path-radiance estimation and to an exhaustive search of the set of $L_P(k)$ that maximizes fusion performance at a degraded spatial scale. Both visual and numerical assessments highlight improvements, especially noticeable in true-color display of vegetated areas. The explanation is that the haze correction, most relevant in the blue band, prevents textures of tree canopies, collected by the broadband Pan in the NIR wavelengths, from being injected in the visible bands, thereby originating an unlikely overenhancement marred by a blueish texture. As a further result of this study, it is proven that the haze-corrected multiplicative method, either CS or MRA, indentically preserves the NDVI, or any other normalized differential index, of the original MS data. The procedure may need minor adjustments, e.g. for WorldView-2 data, in which the outermost bands are not encompassed by Pan.

References

1. Alparone, L.; Aiazzi, B.; Baronti, S.; Garzelli, A. *Remote Sensing Image Fusion*; CRC Press: Boca Raton, FL, USA, 2015.
2. Zhang, H.K.; Huang, B. A New Look at Image Fusion Methods from a Bayesian Perspective. *Remote Sens.* **2015**, *7*, 6828–6861.
3. Garzelli, A. A Review of Image Fusion Algorithms Based on the Super-Resolution Paradigm. *Remote Sens.* **2016**, *8*, 1–20.
4. Aly, H.A.; Sharma, G. A Regularized Model-Based Optimization Framework for Pan-Sharpener. *IEEE Trans. Image Process.* **2014**, *23*, 2596–2608.
5. Masi, G.; Cozzolino, D.; Verdoliva, L.; Scarpa, G. Pansharpening by Convolutional Neural Networks. *Remote Sens.* **2016**, *8*, 1–22.
6. Vivone, G.; Alparone, L.; Chanussot, J.; Dalla Mura, M.; Garzelli, A.; Restaino, R.; Licciardi, G.; Wald, L. A Critical Comparison Among Pansharpening Algorithms. *IEEE Trans. Geosci. Remote Sens.* **2015**, *53*, 2565–2586.
7. Alparone, L.; Aiazzi, B.; Baronti, S.; Garzelli, A. Spatial Methods for Multispectral Pansharpening: Multiresolution Analysis Demystified. *IEEE Trans. Geosci. Remote Sens.* **2016**, *54*, 2563–2576.
8. Restaino, R.; Vivone, G.; Dalla Mura, M.; Chanussot, J. Fusion of Multispectral and Panchromatic Images Based on Morphological Operators. *IEEE Trans. Image Process.* **2016**, *25*, 2882–2895.
9. Alparone, L.; Garzelli, A.; Vivone, G. Intersensor Statistical Matching for Pansharpening: Theoretical Issues and Practical Solutions. *IEEE Trans. Geosci. Remote Sens.* **2017**, *55*, 4682–4695.
10. Vivone, G.; Restaino, R.; Chanussot, J. A Regression-Based High-Pass Modulation Pansharpening Approach. *IEEE Trans. Geosci. Remote Sens.* **2018**, *56*, 984–996.
11. Garzelli, A.; Nencini, F. Interband structure modeling for pan-sharpening of very high resolution multispectral images. *Inform. Fusion* **2005**, *6*, 213–224.
12. Garzelli, A.; Nencini, F. Fusion of Panchromatic and Multispectral Images by Genetic Algorithms. *Proc. IGARSS*, 2006, pp. 3810–3813.
13. Garzelli, A.; Nencini, F. Panchromatic sharpening of remote sensing images using a multiscale Kalman filter. *Pattern Recognition* **2007**, *40*, 3568–3577.
14. Aiazzi, B.; Baronti, S.; Selva, M. Improving component substitution pansharpening through multivariate regression of MS+Pan data. *IEEE Trans. Geosci. Remote Sens.* **2007**, *45*, 3230–3239.
15. Alparone, L.; Wald, L.; Chanussot, J.; Thomas, C.; Gamba, P.; Bruce, L.M. Comparison of pansharpening algorithms: Outcome of the 2006 GRS-S data fusion contest. *IEEE Trans. Geosci. Remote Sens.* **2007**, *45*, 3012–3021.
16. Schowengerdt, R.A. *Remote Sensing: Models and Methods for Image Processing*, 2nd ed.; Academic Press: Orlando, FL, USA, 1997.
17. Gillespie, A.R.; Kahle, A.B.; Walker, R.E. Color enhancement of highly correlated images-II. Channel ratio and “Chromaticity” Transform techniques. *Remote Sens. Environ.* **1987**, *22*, 343–365.
18. Munechika, C.K.; Warnick, J.S.; Salvaggio, C.; Schott, J.R. Resolution enhancement of multispectral image data to improve classification accuracy. *Photogramm. Eng. Remote Sens.* **1993**, *59*, 67–72.

19. Zhang, Y. A new merging methods and its spectral and spatial effects. *Int. J. Remote Sens.* **1999**, *20*, 2003–2014.
20. Liu, J.G. Smoothing filter based intensity modulation: A spectral preserve image fusion technique for improving spatial details. *Int. J. Remote Sens.* **2000**, *21*, 3461–3472.
21. Aiazzi, B.; Alparone, L.; Baronti, S.; Garzelli, A.; Selva, M. An MTF-based spectral distortion minimizing model for pan-sharpening of very high resolution multispectral images of urban areas. *Proc. 2nd GRSS/ISPRS Joint Workshop Remote Sens. Data Fusion URBAN Areas*, 2003, pp. 90–94.
22. Alparone, L.; Aiazzi, B.; Baronti, S.; Garzelli, A. Sharpening of very high resolution images with spectral distortion minimization. *Proc. IEEE IGARSS*, 2003, pp. 458–460.
23. Aiazzi, B.; Baronti, S.; Lotti, F.; Selva, M. A comparison between global and context-adaptive pansharpening of multispectral images. *IEEE Geosci. Remote Sens. Lett.* **2009**, *6*, 302–306.
24. Restaino, R.; Dalla Mura, M.; Vivone, G.; Chanussot, J. Context-adaptive Pansharpening Based on Image Segmentation. *IEEE Trans. Geosci. Remote Sens.* **2017**, *55*, 753–766.
25. Vivone, G.; Restaino, R.; Dalla Mura, M.; Licciardi, G.; Chanussot, J. Contrast and Error-based Fusion Schemes for Multispectral Image Pansharpening. *IEEE Geosci. Remote Sens. Lett.* **2014**, *11*, 930–934.
26. Pacifici, F.; Longbotham, N.; Emery, W.J. The Importance of Physical Quantities for the Analysis of Multitemporal and Multiangular Optical Very High Spatial Resolution Images. *IEEE Trans. Geosci. Remote Sens.* **2014**, *52*, 6241–6256.
27. Jing, L.; Cheng, Q. Two improvement schemes of PAN modulation fusion methods for spectral distortion minimization. *Int. J. Remote Sens.* **2009**, *30*, 2119–2131.
28. Jing, L.; Cheng, Q. An image fusion method taking into account phenological analogies and haze. *Int. J. Remote Sens.* **2011**, *32*, 1675–1694.
29. Jing, L.; Cheng, Q. Spectral change directions of multispectral subpixels in image fusion. *Int. J. Remote Sens.* **2011**, *32*, 1695–1711.
30. Li, H.; Jing, L. Improvement of a Pansharpening Method Taking Into Account Haze. *IEEE J. Sel. Top. Appl. Earth Observ. Remote Sens.* **2017**, *10*, 5039–5055.
31. Chavez Jr., P.S. An Improved Dark-Object Subtraction Technique for Atmospheric Scattering Correction of Multispectral Data. *Remote Sens. Environ.* **1988**, *24*, 459–479.
32. Chavez Jr., P.S. Image-Based Atmospheric Corrections—Revisited and Improved. *Photogramm. Eng. Remote Sens.* **1996**, *62*, 1025–1036.
33. Fu, Q.; Liou, K.N. On the correlated k-distribution method for radiative transfer in nonhomogeneous atmospheres. *J. Atmos. Sci.* **1992**, *49*, 2139–2156.
34. Lolli, S.; Alparone, L.; Garzelli, A.; Vivone, G. Haze Correction for Contrast-Based Multispectral Pansharpening. *IEEE Geosci. Remote Sens. Lett.* **2017**, *14*, 2255–2259.
35. Xie, B.; Zhang, H.K.; Huang, B. Revealing Implicit Assumptions of the Component Substitution Pansharpening Methods. *Remote Sens.* **2017**, *9*, 1–15.
36. Garzelli, A.; Nencini, F.; Capobianco, L. Optimal MMSE Pan sharpening of very high resolution multispectral images. *IEEE Trans. Geosci. Remote Sens.* **2008**, *46*, 228–236.
37. Garzelli, A. Pansharpening of Multispectral Images Based on Nonlocal Parameter Optimization. *IEEE Trans. Geosci. Remote Sens.* **2015**, *53*, 2096–2107.
38. Aiazzi, B.; Alparone, L.; Argenti, F.; Baronti, S. Wavelet and pyramid techniques for multisensor data fusion: a performance comparison varying with scale ratios. *Image Signal Process. Remote Sens. V*; Serpico, S.B., Ed., 1998, Vol. 3871, *Proc. SPIE*, pp. 251–262.
39. Otazu, X.; González-Audicana, M.; Fors, O.; Núñez, J. Introduction of sensor spectral response into image fusion methods. Application to wavelet-based methods. *IEEE Trans. Geosci. Remote Sens.* **2005**, *43*, 2376–2385.
40. Bovolo, F.; Bruzzone, L.; Capobianco, L.; Garzelli, A.; Marchesi, S.; Nencini, F. Analysis of the Effects of Pansharpening in Change Detection on VHR Images. *IEEE Geosci. Remote Sens. Lett.* **2010**, *7*, 53–57.
41. Aiazzi, B.; Alparone, L.; Baronti, S.; Carlà, R.; Garzelli, A.; Santurri, L. Sensitivity of Pansharpening Methods to Temporal and Instrumental Changes Between Multispectral and Panchromatic Data Sets. *IEEE Trans. Geosci. Remote Sens.* **2017**, *55*, 308–319.
42. Aiazzi, B.; Baronti, S.; Selva, M.; Alparone, L. Bi-cubic interpolation for shift-free pan-sharpening. *ISPRS J. Photogramm. Remote Sens.* **2013**, *86*, 65–76.

43. Palsson, F.; Sveinsson, J.R.; Ulfarsson, M.O. A New Pansharpening Algorithm Based on Total Variation. *IEEE Geosci. Remote Sens. Lett.* **2014**, *11*, 318–322.
44. Alparone, L.; Aiazzi, B.; Baronti, S.; Garzelli, A.; Nencini, F.; Selva, M. Multispectral and panchromatic data fusion assessment without reference. *Photogramm. Eng. Remote Sens.* **2008**, *74*, 193–200.
45. Khan, M.M.; Alparone, L.; Chanussot, J. Pansharpening quality assessment using the modulation transfer functions of instruments. *IEEE Trans. Geosci. Remote Sens.* **2009**, *47*, 3880–3891.
46. Aiazzi, B.; Alparone, L.; Baronti, S.; Carlà, R.; Garzelli, A.; Santurri, L. Full scale assessment of pansharpening methods and data products. *Image Signal Process. Remote Sens.* XX; Bruzzone, L., Ed., 2014, Vol. 9244, *Proc. SPIE*, pp. 924402–1–924402–12.
47. Aiazzi, B.; Alparone, L.; Barducci, A.; Baronti, S.; Pippi, I. Estimating noise and information of multispectral imagery. *Optical Engin.* **2002**, *41*, 656–668.
48. Pani, S.; Wang, S.H.; Lin, N.H.; Tsay, S.C.; Lolli, S.; Chuang, M.T.; Lee, C.T.; Chantara, S.; Yu, J.Y. Assessment of aerosol optical property and radiative effect for the layer decoupling cases over the northern South China Sea during the 7-SEAS/Dongsha Experiment. *J. Geophys Res.-Atmos.* **2016**, *121*, 4894–4906.
49. Tosca, M.; Campbell, J.; Garay, M.; Lolli, S.; Seidel, F.; Marquis, J.; Kalashnikova, O. Attributing accelerated summertime warming in the southeast United States to recent reductions in aerosol burden: Indications from Vertically-resolved observations. *Remote Sens.* **2017**, *9*. doi:10.3390/rs9070674.
50. Lolli, S.; Delaval, A.; Loth, C.; Garnier, A.; Flamant, P. 0.355-micrometer direct detection wind lidar under testing during a field campaign in consideration of ESA's ADM-Aeolus mission. *Atmos. Meas. Tech.* **2013**, *6*, 3349–3358.
51. Campbell, J.; Ge, C.; Wang, J.; Welton, E.; Bucholtz, A.; Hyer, E.; Reid, E.; Chew, B.; Liew, S.C.; Salinas, S.; Lolli, S.; Kaku, K.; Lynch, P.; Mahmud, M.; Mohamad, M.; Holben, B. Applying advanced ground-based remote sensing in the Southeast Asian maritime continent to characterize regional proficiencies in smoke transport modeling. *J. Appl. Meteorol. Climatol.* **2016**, *55*, 3–22.
52. Haeffelin, M.; Angelini, F.; Morille, Y.; Martucci, G.; Frey, S.; Gobbi, G.; Lolli, S.; O'Dowd, C.; Sauvage, L.; Xueref-Rémy, I.; Wastine, B.; Feist, D. Evaluation of mixing-height retrievals from automatic profiling lidars and ceilometers in view of future integrated networks in Europe. *Bound.-Layer Meteor.* **2012**, *143*, 49–75.
53. Milroy, C.; Martucci, G.; Lolli, S.; Loaec, S.; Sauvage, L.; Xueref-Remy, I.; Lavrič, J.; Ciais, P.; Feist, D.; Biavati, G.; O'Dowd, C. An assessment of pseudo-operational ground-based light detection and ranging sensors to determine the boundary-layer structure in the coastal atmosphere. *Adv. Meteorol.* **2012**, 2012.
54. Campbell, J.; Lolli, S.; Lewis, J.; Gu, Y.; Welton, E. Daytime cirrus cloud top-of-the-atmosphere radiative forcing properties at a midlatitude site and their global consequences. *J. Appl. Meteorol. Climatol.* **2016**, *55*, 1667–1679.