

Article

A Copula-Based Bayesian Network for Modeling Compound Flood Hazard from Riverine and Coastal Interactions at the Catchment Scale: An Application to the Houston Ship Channel, Texas

Anais Couasnon ^{1,2,*}, Antonia Sebastian ² and Oswaldo Morales-Nápoles ²

¹ Institute for Environmental Studies, Faculty of Science, Vrije Universiteit Amsterdam, De Boelelaan 1087, 1081 HV, Amsterdam, The Netherlands

² Faculty of Civil Engineering and Geosciences, Delft University of Technology, Stevinweg 1, 2628 CN, Delft, The Netherlands

* Correspondence: anais.couasnon@vu.nl

Abstract: Traditional flood hazard analyses often rely on univariate probability distributions; however, in many coastal catchments, flooding is the result of complex hydrodynamic interactions between multiple drivers. For example, synoptic meteorological conditions can produce considerable rainfall-runoff, while also generating wind-driven elevated sea levels. When these drivers interact in space and time, they can exacerbate flood impacts; this phenomenon is known as compound flooding. In this paper, we build a Bayesian Network based on Gaussian copulas to generate the equivalent of 500 years of daily stochastic boundary conditions for a coastal watershed in Southeast Texas. In doing so, we overcome many of the limitations of conventional univariate approaches and are able to probabilistically represent compound floods caused by riverine and coastal interactions. We calculate the resulting water levels using a 1D steady-state hydraulic model and find that flood stages in the catchment are strongly affected by backwater effects from tributary inflows and downstream water levels. By comparing with a bathtub modeling approach, we show that simplifying the multivariate dependence between flood drivers can lead to an underestimation of flood impacts, highlighting that accounting for multivariate dependence is critical for the accurate representation of flood risk in coastal catchments prone to compound events.

Keywords: flood risk; copula; compound events; multivariate; storm surge; spatial dependence; Bayesian Network.

1. Introduction

Coasts are high risk areas of the world, being both exposed to multiple hazard types and gathering high asset values and critical infrastructure [1]. They experience different sources of flooding driven by the interaction of oceanographic, hydrological, geological and meteorological processes [2]. It was estimated that in 2000, about 10% of the global population (625 million people) lived in the area below 10 m of elevation with a direct connection to the sea [3]. Port cities, more specifically, are flood risk hotspots by fostering high socio-economic developments. Hallegatte et al. [4] estimated more than an eight-fold increase in global economic average annual flood losses for major coastal port cities (from US\$6 billion in 2005 to US\$52 billion by 2050) due to rapid socio-economic changes alone suggesting that the risk of compound flooding, especially in those areas will grow over time. In order to ensure high protection levels, detailed flood probability estimates are therefore critically needed.

Modeling flood hazard in coastal catchments is a complex undertaking. Synoptic meteorological conditions can bring considerable rainfall that unevenly increases tributary flows and cause anomalously high coastal water levels. For example, Atlantic cyclones have been well documented as causing high surge levels and heavy precipitation [5–10]. The importance of this interaction in determining the flood level and magnitude in coastal catchments is dependent on the storm and the catchment properties [11]. Large catchments typically exhibit a lag of several days between high sea levels and high river levels such that the flood events may not interact. For example, the Rhine delta experiences on average a lag of about six days between high sea levels at the coast and high-water level at Lobith in the Netherlands [12]. In contrast, smaller catchments have a much shorter time of concentration and therefore respond quickly to extreme precipitation. If co-occurring with a coastal storm surge event, the high river discharges are obstructed by the anomalously high sea level which may exacerbate the flood stage in the coastal catchment. The joint occurrence of both riverine and coastal floods leading to an extreme impact, here the flood level, is referred to as compound flooding [13–15].

Despite increasing scientific recognition of compound flooding [13], regulatory flood hazard maps seldom systematically include riverine and coastal interactions [16]. One typical approach (used in the US) is to consider these two processes separately and merge the independently obtained coastal and riverine flood hazard maps [16,17]. In doing so, the dependence between these two flood processes is neglected, providing a simplified representation of the flood extent and thereby the flood hazard characterization. Continental to global scale coastal or riverine studies often model flooding due to one flood driver only [18–23]. River discharge and storm surge interactions are highly dependent on the geometry of the cross-sections and the slope of the river bed, and generate nonlinear responses in the flood extent and amplitude along the river [24]. Several local studies have highlighted the importance of modeling compound flooding to better characterize flood hazard in coastal catchments [25–28]. For example, Kumbier et al. [26] found that neglecting river discharge when modeling the June 2016 storm event in the Shoalhaven Estuary (Australia) underestimated the flood extent by 30%. As they only focused on one event, these modeling scenarios do not allow further analysis on the impact of compound flood for flood hazard analysis.

To better capture the behavior of compound events, previous researchers have focused on the statistical dependence between river and coastal floods since it is inherently linked with the joint probability analysis [29–31]. The strength of the statistical dependence between flood hazards is usually quantified by means of proxy variables [32,33]. Zheng et al. [34] pointed out that even a weak dependence between flood drivers can have significant implications for estimating the flood hazard. Ward et al. [35] used non-parametric correlation coefficients and copula structures to quantify the statistical dependence between coastal and river floods. Salvadori et al. [36] developed a theoretical framework to quantify multivariate return periods from copulas according to predefined hazard scenarios (for a developed and extensive summary, see also [37]). This framework was also applied by Moftakhari et al. [38] to characterize compound flooding caused by the interactions between river flows and sea level rise. However, while these probability and dependence assessments of compound extremes are valuable, they do not provide a direct guidance on the expected impacts within the catchment. Moreover, flood drivers of different levels which are not themselves extreme, may combine to create an extreme impact [13,39].

In order to model compound flood events at the catchment scale, multiple boundary conditions are needed such that a univariate or bivariate analysis alone may not be sufficient to characterize the flood hazard. A traditional univariate method consists of compartmenting the river network into single river reaches and modeling flooding at the latter spatial extent [40]. This becomes problematic when integrating results at the catchment scale since river reaches are physically connected [41,42]. The discharge downstream of a confluence results from the contribution of its upstream tributaries. A given downstream river discharge may be obtained by a large combination of upstream river flows which, when modeled, result in different flood extents. The spatial dependence of discharge between tributaries clearly becomes important to identify possible combinations. Consequently, in

order to derive the flood extent and its associated annual exceedance probability, a realistic spatial dependence structure between tributaries is needed [40,43].

Few studies have quantified the flood hazard while including multiple flood drivers. Those that have, analyzed results at point locations within the catchment rather than showing results for the whole river segment. For example, Lamb et al. [44] represented the joint multivariate distribution with a multivariate statistical model based on conditional exceedance. Once the statistical model is built, they were able to simulate large series of synthetic events and compute the damage at selected locations, using discharge-damage curves. Bevacqua et al. [27] used pair copula constructions and a multiple regression model to predict the water level at one selected location along a coastal river reach. They showed that neglecting the dependence between discharge and sea-level underestimated the flood hazard. However, to the best of our knowledge, this has not been studied for the whole river section in a probabilistic manner.

This paper introduces an alternative method to model and assess the impact of compound flooding from riverine and coastal interactions at the catchment scale while accounting for spatial dependence between river tributaries. A Bayesian Network (BN) is constructed and used to simulate a set of synthetic joint boundary conditions needed to model water levels in a coastal catchment vulnerable to compound flooding. Unlike conventional univariate models, this model integrates the spatial dependence between river tributaries as well as the dependence between river and coastal interactions to generate a set of possible boundary conditions. The simulated events are used to force a 1-D hydraulic model to generate a large number of modeled water levels along the whole river reach and to estimate the return frequency of extreme water levels at every location within the hydraulic model domain, allowing for an impact-based analysis of compound flooding.

As a case study, the framework is applied to the Buffalo Bayou catchment in Southeast Texas. The catchment drains much of the City of Houston – the fourth largest city in the United States (U.S.) – and encompasses the Port of Houston and the navigational head of the Houston Ship Channel. In 2016, the Port of Houston ranked first in the U.S. in terms of foreign waterborne tonnage, and was estimated to have generated an economic impact of more than \$265 billion USD in Texas alone [45]. It is also home to the second largest petrochemical complex in the world (1st in the U.S.). The region is prone to both heavy rainfall events and storm surge, as demonstrated during recent flood events including Hurricane Ike (2008) and Hurricane Harvey (2017), and previous researchers have warned that flooding of the Port of Houston during extreme events could lead to billions of dollars in economic impact to the national and global economies [46–48]. In the next section, we provide a theoretical background of BNs and present the framework applied for the selected catchment. This is followed by the results, a discussion of the benefits and limitations of the method, suggestions for future research, and conclusion.

2. Materials and Methods

Figure 1 provides an overview of the framework applied in this paper. The BN was constructed based on daily observations of discharges in the coastal catchment and storm surge at the coast (box A in Figure 1). The BN model (box B) was extensively sampled to extract the equivalent of 500 years of daily joint realizations of discharges and storm surge (box C). After translating the storm surge at the coast to the mouth of the catchment and the tributary discharges to the main river reach (boxes D&E), we used these boundary conditions to force a 1D steady state hydraulic model (box F). The modeled water surface profiles were analyzed and estimates of large return periods – up to a 500-year – were calculated and compared against empirical observations. We then tested the influence of spurious boundary conditions relationships on the delineation of the 100-year flood stage to better understand the importance of the multivariate statistical dependence on the water levels in the river reach.

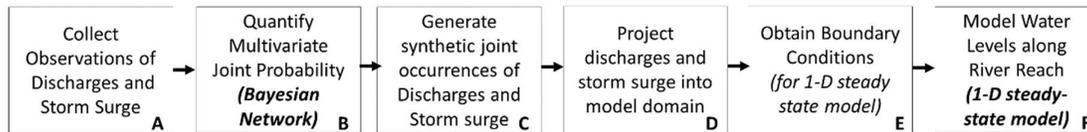


Figure 1: Schematic workflow for generating stochastic water surface profiles in a coastal catchment.

The following sections provide an overview of the theoretical background for the probabilistic model, the Bayesian Network (BN). The variables used to construct the BN in this study are described, followed by an explanation of the methods and assumptions used in the hydraulic modeling.

2.1. Bayesian Networks

Bayesian Networks (BNs) are probabilistic graphical models which explicitly include dependence between multiple random variables. Random variables are represented by nodes, and connected by arcs forming a directed acyclic graph. The direction given to the arcs establish, in some cases, the causality structure and, in general, conditional independence statements between variables [49–52]. This structure determines which nodes are identified as parents of a given node, i.e. the predecessors, or as children, i.e. the successors. Variables can be discrete or continuous and the expression of the (conditional) dependency is quantified by conditional probability functions. In this research we will use the class of BNs described in Hanea et al. [53,54]. The joint distribution for BNs may be written as:

$$f_{X_1, X_2, \dots, X_n}(x_1, x_2, \dots, x_n) = \prod_{i=1}^n f_{X_i | \text{Pa}(X_i)}(x_i | X_{\text{Pa}(X_i)}) \quad (1)$$

where $\text{Pa}(X_i)$ is the set of parents of node X_i with $i = 1, \dots, n$. For nodes without parents, $\text{Pa}(X_i) = \emptyset$ and $f_{X_i | \text{Pa}(X_i)} = f_{X_i}$.

When only continuous variables are present in the model, the nodes representing the continuous random variables are usually constructed with their empirical distribution function and the dependence structure between each pair of nodes is modeled using copulas. The use of copulas provides an efficient way to represent the joint probability and thus the dependence structure [55]. Copula functions separate an underlying multivariate distribution function from their one-dimensional marginal distributions. This enables a high flexibility in the representation of the multivariate dependence structure [27,55–58]. For the bivariate case, the cumulative distribution function, $F_{XY}(x, y)$ is defined as:

$$F_{XY}(x, y) = C(F_X(x), F_Y(y)) = C(u, v) \quad (2)$$

where $F_X(x)$ and $F_Y(y)$ are the marginal distributions of the random variables X and Y . C is the copula function and u and v are uniform variates on the unit square $\mathbb{I} = [0, 1]^2$. We refer to [59–61] for more theoretical details.

In the class of BNs used in this research, the multivariate dependence structure is parametrized with the empirical Spearman's (conditional) rank correlation coefficient r between parent-child pairs and modeled using Gaussian copulas. The rank correlation coefficient is equivalent to the Pearson's product moment correlation, ρ , applied to the ranks of the individual variables, such that:

$$r(X_i, X_j) = \rho(F_{X_i}(x_i), F_{X_j}(x_j)) \quad (3)$$

where F_{X_i} and F_{X_j} are the cumulative distribution functions, or uniform ranks, of random variables X_i and X_j . Equation 3 is used to determine the parameter of the bivariate Gaussian copula, C_ρ :

$$C_\rho(u, v) = \Phi_\rho(\Phi^{-1}(u), \Phi^{-1}(v)) \quad (4)$$

where Φ^{-1} is the inverse of the univariate standard normal distribution, and Φ_ρ is the bivariate Gaussian cumulative distribution function. While the use of the Gaussian copula provides a computationally efficient formulation [53], it also restricts the representation of the dependence. Goodness-of-fits tests based on Cramér-von-Mises statistic and semi-correlation tests between alternative copulas, as described in Genest et al. [62] and Joe [57], can be applied as diagnosis tools in order to validate the Gaussian copula assumption. A description of these tests is given in Appendix A4 and applied to the BN developed for this study.

It is beyond the scope of this paper to provide a complete overview of BNs. For more details on the class of BNs used in this paper, the reader is referred to Hanea et al. [53] and references therein. For our purpose, it is sufficient to say that, loosely, the BN to be used attaches: 1) either an empirical or parametric cumulative distribution function to the nodes representing random variables, 2) a non-unique assignment of (conditional) rank correlations to the arcs of the BN, and 3) a multivariate Gaussian copula that represents the dependence structure of the data and conditional independence structure dictated by the graph of the BN.

This class of Bayesian Networks have been successfully applied to various flood risk applications for different flood generating processes, namely in order to characterize extreme river discharge [63], to model expected riverine flood damages [50], and to estimate tropical cyclone parameters [5]. We extend their application further to generate stochastic boundary conditions which include compound flooding from riverine and coastal interactions and model their impact in a coastal catchment in Southeast Texas.

2.2. Data Collection

The location and characteristics of the Buffalo Bayou catchment make it prone to the co-occurrence of riverine and coastal floods. It is a small catchment (~2000 km²) with poorly draining clayey and sandy loam soils which trigger large volumes of rainfall-runoff. It is exposed to intense rainfall events from local convective storms, large scale frontal systems, and torrential rainfall brought by tropical cyclones. Historical records of flood events reported as major by the Federal Emergency Management Agency (FEMA) for the county indicate a relatively equal importance of these different flood sources [17]. The response of the catchment to extreme rainfall has been further exacerbated by rapid development which has occurred over the century [64], leading to faster runoff rates and larger flood volumes [65,66].

This study focuses on characterizing water surface elevations along the downstream reach of Buffalo Bayou which flows through downtown Houston and the Port of Houston before joining the San Jacinto River, see Figure 2a. The catchment drains into Galveston Bay (Figure 2b), a shallow semi-enclosed estuary connected to the Gulf of Mexico via Bolivar Roads (Figure 2c). Buffalo Bayou upstream of the Port of Houston has a constant bed slope, approximately 0.55 m/km. Within the Port of Houston, the channel has the near-uniform bed slope of 0.12m/km due to regular dredging to ensure sufficient ship clearance up to 14 m. Seven tributaries feed into the main stem of Buffalo Bayou before it reaches the Lynchburg Landing (LL) site.

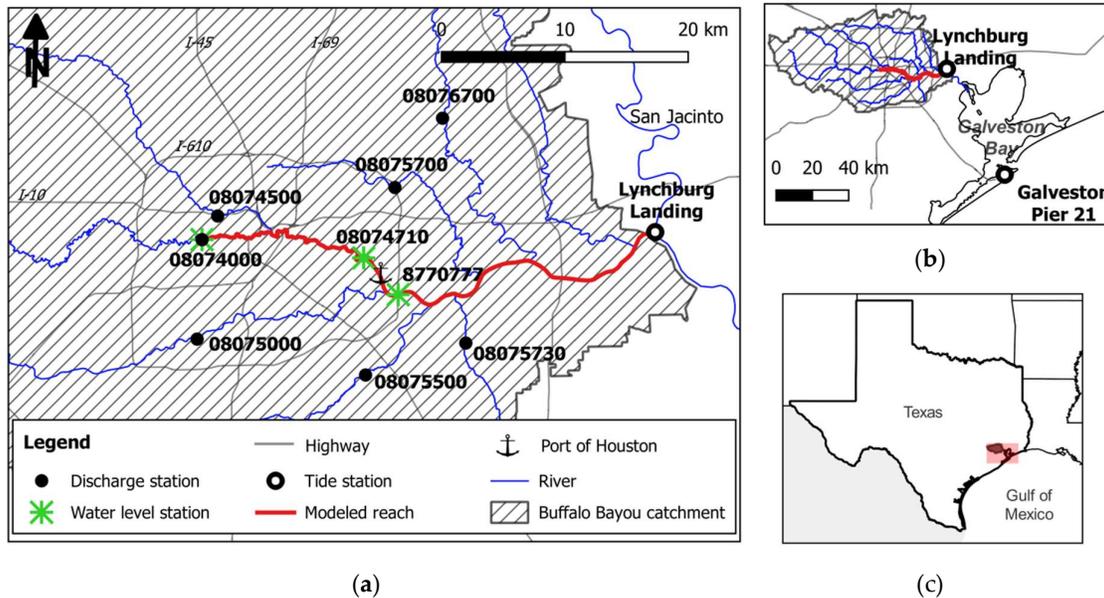


Figure 2: Location of the case study area, the Buffalo Bayou catchment (a) which drains into the Galveston Bay (b) and connected to the Gulf of Mexico (c). The discharge stations (filled circles in black) and the tide station (empty circles) Galveston Pier 21 are used to construct the BN and model water surface elevations along the main stem of the Buffalo Bayou catchment (red line). Water level stations (green) were used for the validation of the modeled extreme water levels.

Discharge: Mean daily discharges were collected from the U.S. Geological Survey website (<https://waterdata.usgs.gov/nwis/>), see Figure 2a for the location of the stations. The available period of data varied significantly per station, with records starting between 1936 and 1971. A change-point analysis applied to the data series indicated a change in mean often located between 1970 and 1980, a possible sign of anthropogenic influences on the hydrological response of the catchment [67,68] (see Figure A1 in Appendix). Therefore, we selected data from January 1, 1980 onwards to represent the current developed state of the catchment and assumed stationary conditions between 1980 and 2016. Of the seven stations, four stations had a very high temporal coverage for this period (>97%) and three had a limited to poor coverage (9-43%).

Storm surge: Hourly water levels and astronomical tide projections were obtained from the National Oceanic and Atmospheric Administration (NOAA) website (<https://tidesandcurrents.noaa.gov>) for the LL and Galveston Pier 21 (GP21) tide stations, see Figure 2a and 2b. The LL tide station has a limited record length, about 11 years worth of data scattered between 1995 and 2014, compared to 113 years from 1904 to 2016 at GP21. At both stations, hourly non-tidal residuals were calculated by subtracting the measured water level from the predicted astronomical tide. The maximum hourly non-tidal residuals in a day is set to be the daily non-tidal residual, what is referred to the storm surge in this study. Data for GP21 was further corrected for mean sea level rise using a linear regression of the hourly non-tidal residuals of the whole record length, 1904-2016. This was not possible for the LL tide station, so we assumed stationarity of the available data.

2.3. The Bayesian Network model

The BN for the case study area was quantified based on the empirical marginal distributions of the daily discharges in the catchment (seven nodes) and the daily storm surge at GP21 (one node). A clear advantage of this choice is that it highlights that the statistical dependence calculated between the variables has a physical meaning. However, in the case of strong serial dependence within the time series, this may lead to an incorrect quantification of the joint exceedance probability and

therefore an underestimation of the flood hazard. Visual observations of the time series of the input variables showed that both coastal and river flood events are short-lived, from 1 to 2 days. To complement our visual findings, we investigate the presence of serial correlation based on the methodology presented in [69] and [70]. The results are presented in Appendix A3. In almost all cases except for two variables, the empirical autocorrelation functions drops very rapidly below 0.1, indicating only a weak serial dependence. Therefore, we expect this effect to be of limited influence here and acknowledge that this choice may lead to conservative estimates of flood levels.

We used the Uninet software package (<http://www.lighttwist.net/wp/uninet>) to test various BN structures and extract the rank correlation matrix of the final model which is shown in Figure 3. Two discharge variables with a limited temporal coverage were inserted as user-defined random variables to maximize the number of joint observations from all nodes. This is further described in section A5.1 in Appendix. The BN was first constructed as a saturated graph and iteratively simplified by removing arcs with absolute conditional rank correlation lower than 0.3 (not shown here). All the arcs with the parent node 'Surge GP21' were kept to explicitly include the coastal and riverine interactions.

The assumption of the Gaussian copula to model the bivariate dependence structure was investigated by applying the Cramér-von-Mises [62] and semi-correlation tests [57] against two alternative structures, the Gumbel and Clayton copula. Together, these copulas include a wide range of dependence observed in environmental data and test for the presence of tail dependence, of importance when estimating extreme joint probabilities (see also equation A.3 in Appendix and following discussion) [27,36,71,72]. The tests show that the Gaussian copula is an acceptable model for the dependence between the discharge and storm surge variables but cannot capture the upper tail dependence measured between the discharge variables. The detailed description of the tests and additional results are included in sections A4.2 and A4.3 of the supplementary material. Since the simplification of the dependence structure is inherent to the probabilistic model selected, we consider this choice as an additional source of uncertainty in the modeled water levels and perform a simple sensitivity analysis presented in the results section to document this error.

For the BN inference, we adopted a parametric representation of the marginal distribution since extreme values were of importance for this study. The BN inference was implemented with MATLAB [73] following a similar procedure described and developed by Hanea et al. [53] except for the inverse transformation of the uniform variables which relied on parametric marginal distributions presented next.

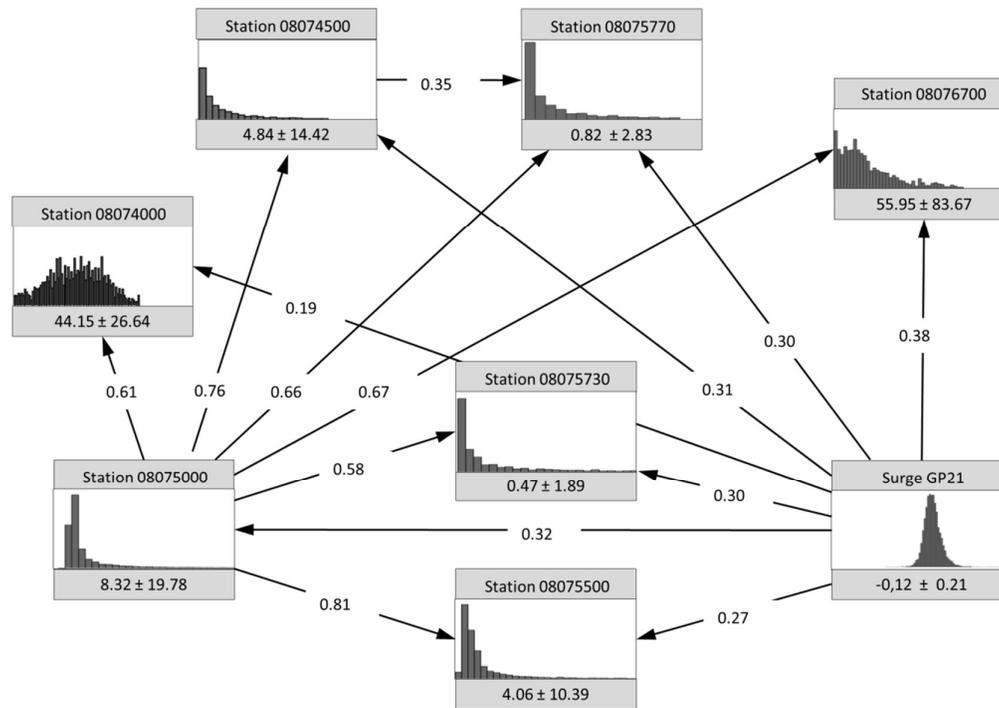


Figure 3: The Bayesian Network model for the Buffalo Bayou catchment. The boxes represent the nodes and the arrows the arcs. The values of the (conditional) rank correlation coefficient is shown on each arc. The histogram in the node shows the empirical probability distribution function for each variable and the values below represent the mean and standard deviation, respectively. Units are in m^3s^{-1} for discharge and in m for the storm surge.

For the mean daily discharges, the marginal distributions were fitted with a parametrized distribution, the generalized extreme value (GEV) distribution, also referred as the Fisher-Tippet distribution, whose cumulative distribution is:

$$F_Q = \exp \left\{ - \left(1 + k \left(\frac{x - \mu}{\sigma} \right)^{\frac{-1}{k}} \right) \right\} \quad (5)$$

where x is a quantile of the discharge variable X , μ is the location parameter, σ the scale parameter and k is the shape parameter with $k \neq 0$. We chose to specifically fit the upper tail of the data to put the emphasis on moderate to extreme discharge daily events and therefore used a truncated maximum-likelihood method to derive the distribution parameters (see Table A1 in the Appendix). The validation of the discharge return periods was not possible since local riverine flood hazard studies compute estimates using on a regional regression equation between extreme discharge and drainage area, a methodology fundamentally different than the one used in this study [17].

For the storm surge, the marginal distributions were fitted with a Gaussian mixture model with $c = 2$ components [74,75]:

$$f_S = \sum_1^c w_j \Phi(\cdot | \mu_j, \sigma_j) \quad (6)$$

where f_S is the density probability function of the maximum hourly residual in a day, $\Phi(\cdot | \mu_j, \sigma_j)$ is the normal density with mean μ_j and standard deviation σ_j and w_j is the mixing coefficient of each component such that $\sum_j w_j = 1$ and $w_j > 0$. The distribution parameters are shown in

Table A1 of the Appendix. The 100-year water level was compared to the extreme value analysis performed by NOAA [76] and was found to be 2.84 m-NAVD88, slightly lower than their estimate of 3.09 m-NAVD88 and well within 95% confidence interval, from 1.30 to 4.50m-NAVD88. This validation was not possible for the LL station since no return period estimates are mentioned for this station.

2.4. 1D Hydraulic Model

Longitudinal water profiles along the selected reach of Buffalo Bayou were obtained by solving the steady-state one-dimensional (1D) shallow water equations [77] with the standard step method [78]. While this is a clear simplification of flood processes, water levels in the catchment are currently derived under similar assumptions to create the FEMA flood insurance rate maps (FIRMs) [17,25]. The spatial discretization was obtained from surveyed cross-sections [79] at approximately every kilometer and the water surface elevations were calculated every 100 m, here forth referred to as river calculation points. The contributions from the tributaries were added as point sources along the river reach. Because the discharge stations do not cover the whole drainage area, values were corrected based on an area-weighted average and lateral inflow was neglected. The downstream boundary condition at the LL site, i.e. the total water level, was reconstructed by adding the storm surge to the mean high tide level. The storm surge at LL was predicted based on the storm surge obtained for GP21 using a linear regression (eq. A.1 in the supplementary material).

The model showed a very good agreement with the 50-, 100-, 200- and 500-year return period riverine flood levels from the validated HEC-RAS model for Buffalo Bayou used to produce the aforementioned flood insurance maps ($R^2 > 0.98$) [79]. Moreover, the model was also validated for Tropical Storm Frances (September 11, 1998) and Tropical Storm Allison (June 6 and June 9, 2001) and showed a reasonable performance, considering that water level observations from tropical cyclone events often have high uncertainty [80]. Results and figures from the runs are shown in section A4.2 and A4.3 in the supplementary material.

3. Results

The BN model was sampled 182,500 times, equivalent to 500 years of daily observations, to generate possible realizations of daily discharge and storm surge from the multivariate joint distribution and model the resulting water surface elevations along the selected river reach. At each of the river calculation points, we extracted the 90th, 95th, 99th and 99.99th percentile of the daily water level distribution, as shown in Figure 4. These percentiles are exceeded on average about 36, 18, 4 days per year and once every 28 years, respectively. The maximum water surface elevation (red line in Figure 4) represents the highest water level obtained at each river calculation point, or the 500-year return period water level. Similarly, the minimum water surface elevation (blue line) indicates the lowest daily water surface elevation at each river calculation point. The model reproduces a wide range of conditions from extremely low to normal and extremely high water surface elevations.

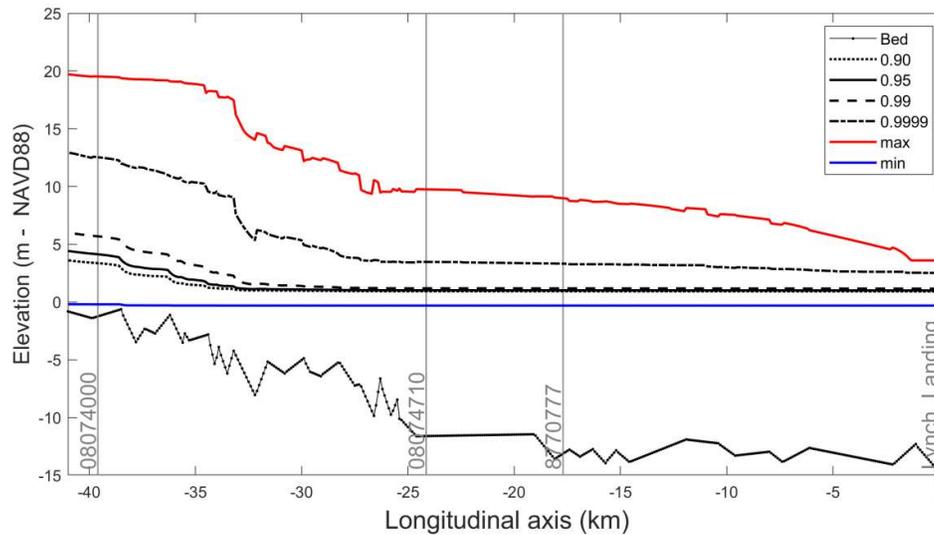


Figure 4: Maximum (red), minimum (blue) water surface elevations and percentiles (90th, 95th, 99th and 99.99th) of daily water levels at each river calculation point obtained by inferring the BN 182,500 times and modeling the resulting water surface profile.

We note that there is a nonlinear response in the propagation of the backwater effects on the water surface elevations along the river reach. The imposed water level at the Lynchburg Landing site controls the water surface elevations in the downstream section, from approximately 0 to -25 km. As the bed slope steepens in the upstream section and the geometry of the river become more complex, the water surface elevations are determined by the backwater effects of the incoming tributary discharges along the river and the imposed downstream water level. As a result, there is a significant variation in the differences across all modeled scenarios between these two sections. The range in modeled water levels is indicated by the difference between the minimum and maximum water surface elevation profiles. Upstream, this difference is about 20 m whereas downstream the difference is about 5 m. This shows that the magnitude of the backwater effects from the riverine and coastal interactions is influenced by the river characteristics which in turns determines the dominant flood drivers in the modeled water surface elevations.

We further focus on extreme water levels and characterize flood hazard at any location in the model domain by constructing annual exceedance probability curve from the modeled daily water surface elevations. We define the modeled 'annual maxima' of the water surface elevations by randomly separating the modeled water levels at each river calculation point into 500 bins of 365 days and extracting the maximum of each bin. By doing so, we assume the extreme modeled daily water surface elevations in the series to be independent from each other, which may lead to an overestimation of the flood level for a given annual exceedance probability. We compare our results at three locations along the river where observed annual maxima of water levels are present. Two stations, 8770777 and 08074710, are located close to each other in the Port of Houston, while the third station, 08074000, is located upstream. The exact location of the stations is indicated in Figures 1 and 4. A GEV distribution is fitted to both the observed and modeled annual maxima data series.

Figure 5 shows the annual exceedance probability curves obtained from the model at the three locations where observations of annual maxima water levels are present. In general, the model is in good agreement with the empirical return periods except for station 8770777 (Figure 5a). When comparing Figure 5a and 5b, the model indicates a similar extreme value behavior while this is not the case for the empirical annual exceedance curves. This difference in extreme value behavior can be attributed to the large difference in record length between both stations, seven years and 30 years. Because the model framework outputs similar data series length, this contrast is absent and a positive shape parameter is calculated at both locations, which is also consistent with the modeled

hydraulic behavior. Compared with the observed extreme water levels, the model slightly underestimates extreme water surface elevations in the downstream reach (Figure 5b) and overestimates in the upstream reach, especially for the lower return periods (Figure 5c). In all cases, the annual exceedance probabilities of water levels are well within the 95% confidence interval of the empirical distribution parameters, except in the high-frequency region for station 08074000 (Figure 5c).

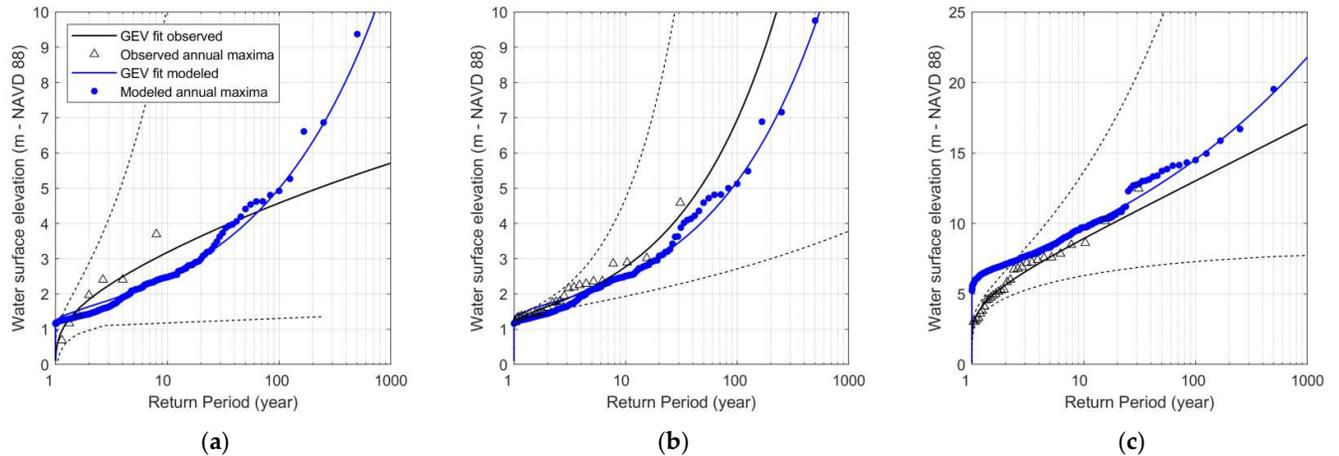


Figure 5: Comparison of the annual exceedance probability distributions from observed and modeled annual maxima at stations 8770777 (a), 08074710 (b) and 08074000 (c). The dashed lines indicate the fit of the 95% confidence interval from the GEV distribution parameters. The stations are presented from downstream to upstream along the Buffalo Bayou river, with stations 877077 and 08074710 located in the Port of Houston, see also Figure 1 and 4 for their exact location.

To investigate the importance of the statistical dependence on the water levels in the river reach, we forced the hydraulic model with other joint boundary conditions derived independent of the BN model and compared them with the 100-year return period for each river calculation point obtained from the model framework. We selected two contrasting options often applied in large global flood hazard models, which we refer to as Case A and Case B:

- Case A: the 100-year marginal return period for each discharge variable and the storm surge variable is calculated and modeled. This represents the (untrue) assumption of full dependence.
- Case B: the boundary conditions of the model are set to the marginal 100-year return period for the storm surge downstream and the distribution mean for the upstream boundary conditions. This represents the (untrue) assumption of physical 'independence' between the storm surge and the discharge. Such approach is comparable to a bathtub approach [81], even though in the latter method discharges are usually completely neglected and not modeled.

As seen in Figure 6, water surface elevations for Case A are slightly higher than the 100-year return period obtained from the modeled outputs, with no difference at the Lynchburg Landing site and a 1 m difference within the rest of the river reach. The Goodness-of-Fit tests presented in Appendix A4.2 indicated that, in the case of upper tail dependence, the statistical dependence can be better characterized by the use of a Gumbel copula structure, especially for the discharge variables. Accounting for these dependence relationships would result in the 100-year water level return period to be in between the curves obtained from the current model framework and Case A. We therefore estimate the effect of not accounting for upper tail dependence to be less than 1 m for the 100-year return period level.

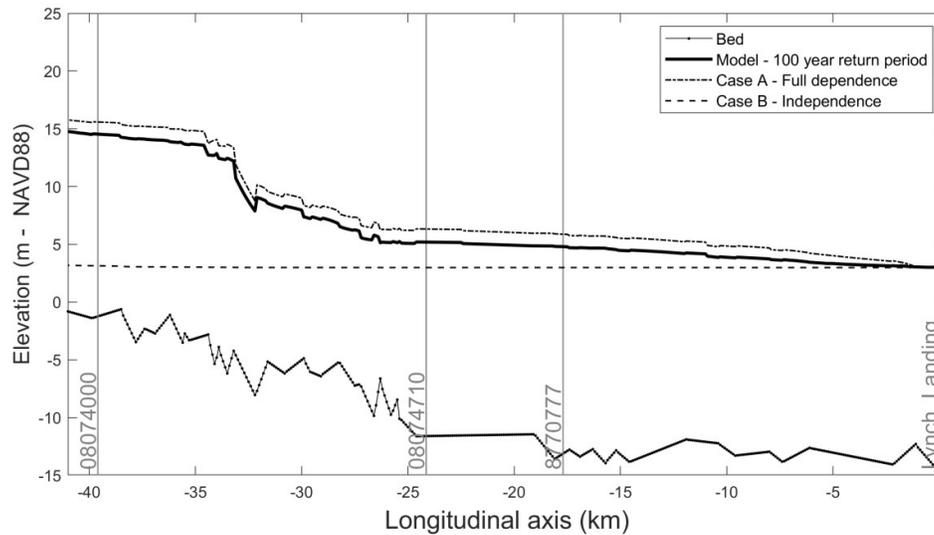


Figure 6: Sensitivity of the multivariate dependence assumptions. The 100-year water level obtained from the current model framework is shown in blue. Case A and B represent full dependence and 'independence' of the boundary conditions, respectively.

In contrast to Case A, Case B's assumption leads to much higher differences in the model outputs. While we again observe no difference in water surface elevations at the Lynchburg Landing site, the difference increases moving upstream along the river and reaches a maximum difference of 12 m at the upstream end of the river reach. This result clearly highlights that neglecting discharge interactions can result in large underestimates of flood stage and, therefore, potential flood risks, especially upstream in the river reach.

4. Discussion

In this study, we used observations of mean daily discharge, daily storm surge, and their statistical dependence to generate stochastic joint occurrences of boundary conditions and model water surface elevations resulting from their interactions. Unlike previous studies, our model framework provides a method for characterizing the compound flood hazard along the entire river reach. Yet several limitations inherent to the construction of our model are present and discussed in this section, namely the simplification of the extreme flood events, the uncertainties in the BN generated from the lack of observations and the selection of the Gaussian copula, and the assumption of stationarity in the flood hazard.

First, while the current model framework can capture a wide range of hydraulic conditions of relevance when studying compound events, it does not include the effect of flood duration on water surface elevations. The characteristics of both the riverine and coastal flood waves, such as volume and duration, determines when and where they will interact within the catchment. The analysis in Appendix A3 confirmed that most flood events in the case study area tend to be short-lived. Yet, long flood events spanning multiple days have been observed in the catchment, such as Hurricane Harvey in August 2017. The tropical cyclone stalled over Texas generating extreme coastal water surface elevations and precipitation lasting for several days which impeded runoff from the system [82], causing critical road cutoffs, the release of toxic materials, and more than 70 fatalities [83,84]. Therefore, it is important to consider the temporal aspect of flood not only to correctly determine the flood hazard but also to properly model their impact in flood risk assessments.

Second, the lack of observations for three discharge variables (station 08074000, 08076700 and 08075500) and for the storm surge at the Lynchburg Landing site introduces uncertainties in the quantification of their marginal distribution and of their statistical dependence with other variables in the BN, which propagate through the model framework. For example, we expect uncertainties in

the water surface elevation imposed at the downstream boundary of the hydraulic model domain to strongly influence extreme water levels in the downstream reach. While this study can be improved by using complementary data at these stations, this typically requires dedicated and extensive studies to properly capture complex coastal and hydrological processes [65,85,86] and is left for future studies.

Third, we restricted the multivariate dependence representation by relying on the Gaussian copula in the BN. However, the goodness-of-fit tests applied in this study pointed that alternative copulas would represent better the dependence structure, especially for the pairs of discharge variables which showed upper tail dependence (see section A5.2 in the supplementary material). To account for this error, we estimated that the difference in water level along the river reach was less than 1 meter. In future work, a comparison of the current BN model with a probabilistic model allowing for a higher flexibility in the selection of the dependence structure, such as Vine copula constructions [27], will help refine this result and better quantify the importance of the statistical dependence structure on the exceedance probability of high water levels due to compound flooding.

Finally, future flood hazards will be exacerbated by changes in environmental conditions and anthropogenic factors. Several recent publications have highlighted the possibility that climate change has increased precipitation in the study area [82,87]. Projected trends in urbanization for the United States also indicate a steady growth in urban land cover [88], which is expected to increase runoff peaks and volumes [89]. As a result, current estimates of flood hazard may become rapidly outdated [38]. This study provides a static characterization of the flood hazard, but future studies should use a modified framework and include such dynamics. This could be done, for example, by imposing a non-stationary parametric correlation coefficient [32,90] or by artificially shifting the marginal distribution [91,92].

5. Conclusions

In this paper, we presented a first attempt to characterize flood hazard in a coastal catchment prone to compound flooding from riverine and coastal interactions using a BN based on Gaussian copulas. We constructed and inferred the BN based on daily values of discharges and storm surge, and propagated the joint occurrences of discharges and storm surge to a hydraulic model in order to obtain the water level along Buffalo Bayou, in Southeast Texas. While uncertainties are introduced due to the selection of the Gaussian copula, the simplification in the hydraulic modeling and the limited data available for some variables, complex coastal and riverine interactions could be captured from the multivariate joint probability to characterize compound flood hazard along the whole model domain.

Because the BN is based on the statistical dependence, it provides a holistic procedure to stochastically derive joint boundary conditions while accounting for multivariate and spatial dependencies. The model framework generates daily water surface elevations resulting from various combinations of riverine and coastal conditions, including both moderate and extreme realizations, which is necessary for comprehensively analyzing the potential impacts of compound flood events. Moreover, the analysis of the modeled water levels underlined the importance of considering backwater effects due to high downstream water levels and tributary discharges. We also highlighted the effect of different spurious dependence assumptions between flood drivers on the modeled water level. We conclude that such differences can lead to an over- or underestimation of the annual exceedance probabilities when compared against measured dependence. Future work will focus on the characterization of flood hazard in diverse coastal catchments to better understand the propagation of flood drivers and their impact in estuarine region in combination with other non-stationary drivers, such as relative sea-level rise and land cover changes.

Supplementary Materials: Figure S1: Available records of mean daily discharge for the stations of interests; Figure S2: Autocorrelation function (ACF) at the stations of interests. The name of the subplot indicated for which node the data was used in the Bayesian Network model. The 95% confidence bounds are indicated with dashed black lines; Figure S3: Scatter plot of the water levels obtained from the simplified hydraulic model applied in this study versus the results from HEC-RAS for the 10-year (blue), 50-year (red), 100-year (green),

500-year (black) return period as derived by FEMA and HCFCD; Figure S4: Comparison of the hydraulic model used in this study with the results from HEC-RAS for riverine boundary conditions for the 10-year (a), 50-year (b), 100-year (c), 500-year (d) return period as derived by FEMA and HCFCD; Figure S5: Comparison of the maximum water levels observed for Tropical Storm Allison and Frances with the results from the 1-D hydraulic model; Figure S6: Selected examples of semi-correlation for *discharge – surge* (a) and *discharge - discharge* (b) pair variables; Table S1: GEV distribution parameters for the discharge distributions; Table S2: Gaussian mixture distribution parameters obtained for the storm surge distributions; Table S3: Goodness-of-Fit tests results: semi-correlation and Cramér-von-Mises (CM_n) statistic for all variables used in the BN except for station 08076700 and 08074000. Lowest CM_n values relevant semi-correlations are bolded.

Author Contributions: Conceptualization, A.C., A.S and O.M.N.; Methodology, A.C., A.S and O.M.N.; Validation, A.C.; Writing-Review & Editing, A.C., A.S and O.M.N.; Visualization, A.C.

Funding: A.C. was supported by the Netherlands Organisation for Scientific Research (NWO) in the form of a VIDI grant (grant no. 016.161.324). A.S. was supported by the Netherlands America Foundation/Fulbright Fellowship for Water Management and the NSF PIRE Grant no. OISE-1545837.

Acknowledgments: The authors would like to thank H. Winsemius for his comments and suggestions during the writing of this manuscript.

Conflicts of Interest: The authors declare no conflict of interest.

References

1. Kron, W. Coasts: The high-risk areas of the world. *Nat. Hazards* **2013**, *66*, 1363–1382, doi:10.1007/s11069-012-0215-4.
2. Rueda, A.; Camus, P.; Tomás, A.; Vitousek, S.; Méndez, F. J. A multivariate extreme wave and storm surge climate emulator based on weather patterns. *Ocean Model.* **2016**, *104*, 242–251, doi:10.1016/j.ocemod.2016.06.008.
3. Neumann, B.; Vafeidis, A. T.; Zimmermann, J.; Nicholls, R. J. Future coastal population growth and exposure to sea-level rise and coastal flooding - A global assessment. *PLoS One* **2015**, *10*, doi:10.1371/journal.pone.0118571.
4. Hallegatte, S.; Green, C.; Nicholls, R. J.; Corfee-Morlot, J. Future flood losses in major coastal cities. *Nat. Clim. Chang.* **2013**, *3*, 802–806, doi:10.1038/nclimate1979.
5. Sebastian, A.; Dupuits, E. J. C.; Morales-Nápoles, O. Applying a Bayesian network based on Gaussian copulas to model the hydraulic boundary conditions for hurricane flood risk analysis in a coastal watershed. *Coast. Eng.* **2017**, *125*, 42–50, doi:10.1016/j.coastaleng.2017.03.008.
6. Svensson, C.; Jones, D. A. Dependence between sea surge, river flow and precipitation in south and west Britain. *Hydrol. Earth Syst. Sci.* **2004**, *8*, 973–992, doi:10.5194/hess-8-973-2004.
7. Saleh, F.; Ramaswamy, V.; Wang, Y.; Georgas, N.; Blumberg, A.; Pullen, J. A Multi-Scale Ensemble-based Framework for Forecasting Compound Coastal-Riverine Flooding: The Hackensack-Passaic Watershed and Newark Bay. *Adv. Water Resour.* **2017**, doi:10.1016/j.advwatres.2017.10.026.
8. Needham, H. F.; Keim, B. D.; Sathiaraj, D. A review of tropical cyclone-generated storm surges: Global data sources, observations, and impacts. *Rev. Geophys.* **2015**, *53*, 545–591,

doi:10.1002/2014RG000477.

9. Karl, T. R.; Melillo, J. M.; Peterson, T. C. *Global Climate Change Impacts in the United States*; Cambridge University Press, 2009; ISBN 9780521144070.
10. Pielke Jr., R. a.; Gratz, J.; Landsea, C. W.; Collins, D.; Saunders, M. A.; Musulin, R. Normalized Hurricane Damage in the United States: 1900–2005. *Nat. Hazards Rev.* **2008**, *9*, 29–42, doi:10.1061/(ASCE)1527-6988(2008)9:1(29).
11. Zheng, F.; Leonard, M.; Westra, S. Application of the design variable method to estimate coastal flood risk. *J. Flood Risk Manag.* **2015**, n/a-n/a, doi:10.1111/jfr3.12180.
12. Klerk, W. J.; Winsemius, H. C.; van Verseveld, W. J.; Bakker, A. M. R.; Diermanse, F. L. M. The co-occurrence of storm surges and extreme discharges within the Rhine–Meuse Delta. *Environ. Res. Lett.* **2015**, *10*, 035005, doi:10.1088/1748-9326/10/3/035005.
13. Zscheischler, J.; Westra, S.; van den Hurk, B. J. J. M.; Seneviratne, S. I.; Ward, P. J.; Pitman, A.; AghaKouchak, A.; Bresch, D. N.; Leonard, M.; Wahl, T.; Zhang, X. Future climate risk from compound events. *Nat. Clim. Chang.* **2018**, *8*, 469–477, doi:https://doi.org/10.1038/s41558-018-0156-3.
14. IPCC *Managing the Risks of Extreme Events and Disasters to Advance Climate Change Adaptation. A Special Report of Working Groups I and II of the Intergovernmental Panel on Climate Change.*; Field, C. B., Barros, V., Stocker, T. F., Dahe, Q., Dokken, D. J., Ebi, K. L., Mastrandrea, M. D., Mach, K. J., Plattner, G.-K., Allen, S. K., Tignor, M., Midgley, P. M., Eds.; Cambridge University Press.: Cambridge, UK, and New York, NY, USA, 2012; ISBN 978-1-107-60780-4.
15. Wahl, T.; Jain, S.; Bender, J.; Meyers, S. D.; Luther, M. E. Increasing risk of compound flooding from storm surge and rainfall for major US cities - Supplementary. *Nat. Clim. Chang.* **2015**, *5*, 1093–1097, doi:10.1038/nclimate2736.
16. Federal Emergency Management Agency *Guidance for Flood Risk Analysis and Mapping; Combined Coastal and Riverine*; Washington, D.C., 2015;
17. Federal Emergency Management Agency *Flood Insurance Study. Harris County, Texas and Incorporated Areas*; Washington, D.C., 2017; Vol. 1&2;.
18. Ward, P.; Jongman, B.; Salamon, P.; Simpson, A.; Bates, P.; De Groeve, T.; Muis, S.; de Perez, E. C.; Rudari, R.; Trigg, M. A.; Winsemius, H. Usefulness and limitations of global flood risk models. *Nat. Clim. Chang.* **2015**, *5*, 712–715, doi:10.1038/nclimate2742.
19. Muis, S.; Verlaan, M.; Winsemius, H. C.; Aerts, J. C. J. H.; Ward, P. J. A global reanalysis of storm surges and extreme sea levels. *Nat. Commun.* **2016**, *7*, 11969, doi:10.1038/ncomms11969.
20. Cid, A.; Camus, P.; Castanedo, S.; Méndez, F. J.; Medina, R. Global reconstructed daily surge levels from the 20th Century Reanalysis (1871–2010). *Glob. Planet. Change* **2017**, *148*, 9–21, doi:10.1016/j.gloplacha.2016.11.006.

21. Vousdoukas, M. I.; Voukouvalas, E.; Mentaschi, L.; Dottori, F.; Giardino, A.; Bouziotas, D.; Bianchi, A.; Salamon, P.; Feyen, L. Developments in large-scale coastal flood hazard mapping. *Nat. Hazards Earth Syst. Sci.* **2016**, *16*, 1841–1853, doi:10.5194/nhess-16-1841-2016.
22. Winsemius, H. C.; Van Beek, L. P. H.; Jongman, B.; Ward, P. J.; Bouwman, A. A framework for global river flood risk assessments. *Hydrol. Earth Syst. Sci.* **2013**, *17*, 1871–1892, doi:10.5194/hess-17-1871-2013.
23. Ward, P.; Jongman, B.; Weiland, F.; Bouwman, A.; van Beek, R.; Bierkens, M.; Ligetvoet, W.; Winsemius, H. Assessing flood risk at the global scale: Model setup, results, and sensitivity. *Environ. Res. Lett.* **2013**, *8*, 44019, doi:10.1088/1748-9326/8/4/044019.
24. Maskell, J.; Horsburgh, K.; Lewis, M.; Bates, P. Investigating River–Surge Interaction in Idealised Estuaries. *J. Coast. Res.* **2014**, *294*, 248–259, doi:10.2112/JCOASTRES-D-12-00221.1.
25. Ray, T.; Stepinski, E.; Sebastian, A.; Bedient, P. B. Dynamic Modeling of Storm Surge and Inland Flooding in a Texas Coastal Floodplain. *J. Hydraul. Eng.* **2011**, *137*, 1103–1111, doi:10.1061/(ASCE)HY.1943-7900.0000398.
26. Kumbier, K.; Carvalho, R. C.; Vafeidis, A. T.; Woodroffe, C. D. Investigating compound flooding in an estuary using hydrodynamic modelling : A case study from the Shoalhaven River , Australia . **2017**, 1–28.
27. Bevacqua, E.; Maraun, D.; Hobæk Haff, I.; Widmann, M.; Vrac, M. Multivariate statistical modelling of compound events via pair-copula constructions: analysis of floods in Ravenna (Italy). *Hydrol. Earth Syst. Sci.* **2017**, *21*, 2701–2723, doi:10.5194/hess-21-2701-2017.
28. Zheng, F.; Leonard, M.; Westra, S. Efficient joint probability analysis of flood risk. *J. Hydroinformatics* **2015**, *17*, 584, doi:10.2166/hydro.2015.052.
29. Hawkes, P. J.; Gouldby, B. P.; Tawn, J. A.; Owen, M. W. The joint probability of waves and water levels in coastal engineering design. *J. Hydraul. Res.* **2002**, *40*, 241–251, doi:10.1080/00221680209499940.
30. Leonard, M.; Westra, S.; Phatak, A.; Lambert, M.; van den Hurk, B.; McInnes, K.; Risbey, J.; Schuster, S.; Jakob, D.; Stafford-Smith, M. A compound event framework for understanding extreme impacts. *Wiley Interdiscip. Rev. Clim. Chang.* **2014**, *5*, 113–128, doi:10.1002/wcc.252.
31. Zheng, F.; Westra, S.; Leonard, M.; Sisson, S. A. Modeling dependence between extreme rainfall and storm surge to estimate coastal flooding risk. *Water Resour. Res.* **2014**, *50*, 2050–2071, doi:10.1002/2013WR014616.
32. Wahl, T.; Jain, S.; Bender, J.; Meyers, S. D.; Luther, M. E. Increasing risk of compound flooding from storm surge and rainfall for major US cities. *Nat. Clim. Chang.* **2015**, *5*, 1093–1097, doi:10.1038/nclimate2736.
33. Kew, S. F.; Selten, F. M.; Lenderink, G.; Hazeleger, W. The simultaneous occurrence of surge

- and discharge extremes for the Rhine delta. *Nat. Hazards Earth Syst. Sci.* **2013**, *13*, 2017–2029, doi:10.5194/nhess-13-2017-2013.
34. Zheng, F.; Westra, S.; Sisson, S. A. Quantifying the dependence between extreme rainfall and storm surge in the coastal zone. *J. Hydrol.* **2013**, *505*, 172–187, doi:10.1016/j.jhydrol.2013.09.054.
35. Ward, P. J.; Couasnon, A.; Eilander, D.; Haigh, I.; Hendry, A.; Muis, S.; Veldkamp, T. I. E.; Winsemius, H.; Wahl, T. Dependence between high sea-level and high river discharge increases flood hazard in global deltas and estuaries. *Environ. Res. Lett.* **2018**, doi:10.1088/1748-9326/aad400.
36. Salvadori, G.; De Michele, C.; Kottegoda, N. T.; Rosso, R. *Extremes in nature: an approach using copulas*; Springer Science & Business Media, 2007;
37. Salvadori, G.; Durante, F.; De Michele, C.; Bernardi, M.; Petrella, L. A multivariate copula-based framework for dealing with hazard scenarios and failure probabilities. *Water Resour. Res.* **2016**, *52*, 3701–3721, doi:10.1002/2015WR017225.
38. Moftakhari, H. R.; Salvadori, G.; AghaKouchak, A.; Sanders, B. F.; Matthew, R. A. Compounding effects of sea level rise and fluvial flooding. *Proc. Natl. Acad. Sci.* **2017**, *114*, 9785–9790, doi:10.1073/pnas.1620325114.
39. van den Hurk, B.; van Meijgaard, E.; de Valk, P.; van Heeringen, K.-J.; Gooijer, J. Analysis of a compounding surge and precipitation event in the Netherlands. *Environ. Res. Lett.* **2015**, *10*, 035001, doi:10.1088/1748-9326/10/3/035001.
40. Neal, J.; Keef, C.; Bates, P.; Beven, K.; Leedal, D. Probabilistic flood risk mapping including spatial dependence. *Hydrol. Process.* **2013**, *27*, 1349–1363, doi:10.1002/hyp.9572.
41. Keef, C.; Tawn, J. A.; Lamb, R. Estimating the probability of widespread flood events. *Environmetrics* **2013**, *24*, 13–21, doi:10.1002/env.2190.
42. Bender, J.; Wahl, T.; Müller, A.; Jensen, J. A multivariate design framework for river confluences. *Hydrol. Sci. J.* **2016**, *61*, 471–482, doi:10.1080/02626667.2015.1052816.
43. Apel, H.; Thielen, a. H.; Merz, B.; Blöschl, G. Flood risk assessment and associated uncertainty. *Nat. Hazards Earth Syst. Sci.* **2004**, *4*, 295–308, doi:10.5194/nhess-4-295-2004.
44. Lamb, R.; Keef, C.; Tawn, J.; Laeger, S.; Meadowcroft, I.; Surendran, S.; Dunning, P.; Batstone, C. A new method to assess the risk of local and widespread flooding on rivers and coasts. *J. Flood Risk Manag.* **2010**, *3*, 323–336, doi:10.1111/j.1753-318X.2010.01081.x.
45. Port of Houston Authority <http://www.porthouston.com/> [accessed July 2016]. Available online: <http://www.portofhouston.com/>.
46. Davlasheridze, M.; Atoba, K. O.; Brody, S.; Highfield, W.; Merrell, W.; Ebersole, B.; Purdue,

- A.; Gilmer, R. W. Economic impacts of storm surge and the cost-benefit analysis of a coastal spine as the surge mitigation strategy in Houston-Galveston area in the USA. *Mitig. Adapt. Strateg. Glob. Chang.* **2018**, 1–26, doi:10.1007/s11027-018-9814-z.
47. Christian, J.; Fang, Z.; Torres, J.; Deitz, R.; Bedient, P. Modeling the Hydraulic Effectiveness of a Proposed Storm Surge Barrier System for the Houston Ship Channel during Hurricane Events. *Nat. Hazards Rev.* **2015**, *16*, 04014015, doi:10.1061/(ASCE)NH.1527-6996.0000150.
48. Torres, J. M.; Bass, B.; Irza, J. N.; Proft, J.; Sebastian, A.; Dawson, C.; Bedient, P. Modeling the Hydrodynamic Performance of a Conceptual Storm Surge Barrier System for the Galveston Bay Region. *J. Waterw. Port, Coastal, Ocean Eng.* **2017**, *143*, 05017002, doi:10.1061/(ASCE)WW.1943-5460.0000389.
49. Niedermayer, D. An Introduction to Bayesian Networks and Their Contemporary Applications. In *Innovations in Bayesian Networks*; Morgan, M. B., Ed.; Springer Berlin Heidelberg: Berlin, Heidelberg, 1988; pp. 117–130 ISBN 9780080514895.
50. Vogel, K.; Riggelsen, C.; Korup, O.; Scherbaum, F. Bayesian network learning for natural hazard analyses. *Nat. Hazards Earth Syst. Sci.* **2014**, *14*, 2605–2626, doi:10.5194/nhess-14-2605-2014.
51. Weber, P.; Medina-Oliva, G.; Simon, C.; Iung, B. Overview on Bayesian networks applications for dependability, risk analysis and maintenance areas. *Eng. Appl. Artif. Intell.* **2012**, *25*, 671–682, doi:10.1016/j.engappai.2010.06.002.
52. Niedermayer, D. An introduction to Bayesian networks and their contemporary applications. In *Innovations in Bayesian networks*; Springer: Berlin, Heidelberg, 2008; pp. 117–130.
53. Hanea, A.; Morales Napoles, O.; Ababei, D. Non-parametric Bayesian networks: Improving theory and reviewing applications. *Reliab. Eng. Syst. Saf.* **2015**, *144*, 265–284, doi:10.1016/j.res.2015.07.027.
54. Hanea, A. M.; Kurowicka, D.; Cooke, R. M. Hybrid Method for Quantifying and Analyzing Bayesian Belief Nets. *Qual. Reliab. Eng. Int.* **2006**, *22*, 709–729, doi:10.1002/qre.808.
55. Salvadori, G.; De Michele, C. Frequency analysis via copulas: Theoretical aspects and applications to hydrological events. *Water Resour. Res.* **2004**, *40*, 1–17, doi:10.1029/2004WR003133.
56. Genest, C.; Favre, A.-C. Everything You Always Wanted to Know about Copula Modeling but Were Afraid to Ask. *J. Hydrol. Eng.* **2007**, *12*, 347–368, doi:10.1061/(ASCE)1084-0699(2007)12:4(347).
57. Joe, H. *Dependence Modeling with Copulas*; Chapman & Hall/CRC: London, UK, 2015; ISBN 9781466583221.
58. Graler, B.; Van Den Berg, M. J.; Vandenberghe, S.; Petroselli, A.; Grimaldi, S.; De Baets, B.;

- Verhoest, N. E. C. Multivariate return periods in hydrology: A critical and practical review focusing on synthetic design hydrograph estimation. *Hydrol. Earth Syst. Sci.* **2013**, *17*, 1281–1296, doi:10.5194/hess-17-1281-2013.
59. Sklar, A. Fonctions de répartition à n dimensions et leurs marges. *Publ. Inst. Stat. Univ. Paris* **1959**, 229–231.
60. Nelsen, R. B. *An introduction to copulas*; 2nd ed.; Springer: New York, 2006;
61. Joe, H. *Multivariate models and multivariate dependence concepts*; CRC Press, 1997;
62. Genest, C.; Rémillard, B.; Beaudoin, D. Goodness-of-fit tests for copulas: A review and a power study. *Insur. Math. Econ.* **2009**, *44*, 199–213, doi:10.1016/j.insmatheco.2007.10.005.
63. Paprotny, D.; Morales-Nápoles, O. Estimating extreme river discharges in Europe through a Bayesian network. *Hydrol. Earth Syst. Sci.* **2017**, *21*, 2615–2636, doi:10.5194/hess-21-2615-2017.
64. Qian, Z. Without zoning: Urban development and land use controls in Houston. *Cities* **2010**, *27*, 31–41, doi:10.1016/j.cities.2009.11.006.
65. Gori, A.; Blessing, R.; Juan, A.; Brody, S.; Bedient, P. Characterizing urbanization impacts on floodplain through integrated land use, hydrologic, and hydraulic modeling. (under review). *J. Hydrol.* **2018**.
66. Gori, A. Quantifying Impacts of Development on Floodplain Evolution and Projection of Future Flood Hazard: Applications to Harris County, TX, Rice University, 2018.
67. Mallakpour, I.; Villarini, G. The changing nature of flooding across the central United States. *Nat. Clim. Chang.* **2015**, *5*, 250–254, doi:10.1038/nclimate2516.
68. Villarini, G.; Smith, J. A.; Baeck, M. L.; Krajewski, W. F. Examining Flood Frequency Distributions in the Midwest U.S.1. *JAWRA J. Am. Water Resour. Assoc.* **2011**, *47*, 447–463, doi:10.1111/j.1752-1688.2011.00540.x.
69. Serinaldi, F. Can we tell more than we can know? The limits of bivariate drought analyses in the United States. *Stoch. Environ. Res. Risk Assess.* **2015**, *30*, 1691–1704, doi:10.1007/s00477-015-1124-3.
70. Claps, P.; Laio, F. Can continuous streamflow data support flood frequency analysis? An alternative to the partial duration series approach. *Water Resour. Res.* **2003**, *39*, 1–11, doi:10.1029/2002WR001868.
71. Hobaek Haff, I.; Frigessi, A.; Maraun, D. How well do regional climate models simulate the spatial dependence of precipitation? An application of pair-copula constructions. *J. Geophys. Res. D Atmos.* **2015**, *120*, 2624–2646, doi:10.1002/2014JD022748.
72. Serinaldi, F.; Bárdossy, A.; Kilsby, C. G. Upper tail dependence in rainfall extremes: would

- we know it if we saw it? *Stoch. Environ. Res. Risk Assess.* **2015**, *29*, 1211–1233, doi:10.1007/s00477-014-0946-8.
73. Morales-Nápoles, O.; Worm, D.; van den Haak, P.; Hanea, A.; Courage, W.; Miraglia, S. *Reader for course: Introduction to Bayesian Networks*; Delft, 2013;
74. Morales-Nápoles, O.; Steenbergen, R. D. J. M. Large-Scale Hybrid Bayesian Network for Traffic Load Modeling from Weigh-in-Motion System Data. *J. Bridg. Eng.* **2014**, *20*, 1–10, doi:10.1061/(ASCE)BE.1943-5592.0000636.
75. McLachlan, G.; Peel, D. *Finite mixture models*; Wiley Interscience: Hoboken, NJ, 2000;
76. NOAA National Oceanic and Atmospheric Administration. Tides and Currents. Annual Exceedance Probability Curves 8771450 Galveston Pier 21, TX, <https://tidesandcurrents.noaa.gov/est/curves.shtml?stnid=8771450>, [accessed December 2017].
77. Henderson, F. M. *Open Channel Flow*; Prentice-Hall: Upper Saddle River, NJ, 1966; ISBN 0023535105.
78. US Army Corps of Engineers *HEC-RAS River Analysis System. Hydraulic Reference Manual.*; Davis, CA, 2016;
79. Harris County Flood Control District Model and Map Management System. Available online: <http://www.m3models.org/> (accessed on Jul 1, 2016).
80. Landsea, C. W.; Franklin, J. L. Atlantic Hurricane Database Uncertainty and Presentation of a New Database Format. *Mon. Weather Rev.* **2013**, *141*, 3576–3592, doi:10.1175/MWR-D-12-00254.1.
81. Teng, J.; Jakeman, A. J.; Vaze, J.; Croke, B. F. W.; Dutta, D.; Kim, S. Flood inundation modelling: A review of methods, recent advances and uncertainty analysis. *Environ. Model. Softw.* **2017**, *90*, 201–216, doi:10.1016/j.envsoft.2017.01.006.
82. van Oldenborgh, G. J.; van der Wiel, K.; Sebastian, A.; Singh, R.; Arrighi, J.; Otto, F.; Haustein, K.; Li, S.; Vecchi, G.; Cullen, H. Attribution of extreme rainfall from Hurricane Harvey, August 2017. *Environ. Res. Lett.* **2017**, *12*, 124009, doi:10.1088/1748-9326/aa9ef2.
83. Sebastian, A. G.; Lendering, K. T.; Kothuis, B. L. M.; Brand, A. D.; Jonkman, S. N. *Hurricane Harvey Report. A fact-finding effort in the direct aftermath of Hurricane Harvey in the Greater Houston Region*; Delft, 2017;
84. Jonkman, S. N.; Godfroy, M.; Sebastian, A.; Kolen, B. Brief communication: Post-event analysis of loss of life due to hurricane Harvey. **2018**, 1073–1078, doi:10.5194/nhess-2017-436.
85. Sebastian, A.; Proft, J.; Dietrich, J. C.; Du, W.; Bedient, P. B.; Dawson, C. N. Characterizing hurricane storm surge behavior in Galveston Bay using the SWAN+ADCIRC model. *Coast.*

- Eng.* **2014**, *88*, 171–181, doi:10.1016/j.coastaleng.2014.03.002.
86. Dietrich, J. C.; Zijlema, M.; Westerink, J. J.; Holthuijsen, L. H.; Dawson, C.; Luettich, R. A.; Jensen, R. E.; Smith, J. M.; Stelling, G. S.; Stone, G. W. Modeling hurricane waves and storm surge using integrally-coupled, scalable computations. *Coast. Eng.* **2011**, *58*, 45–65, doi:10.1016/j.coastaleng.2010.08.001.
 87. Emanuel, K. Assessing the present and future probability of Hurricane Harvey's rainfall. *Proc. Natl. Acad. Sci.* **2017**, *0*, 201716222, doi:10.1073/pnas.1716222114.
 88. Hamilton, C. M.; Martinuzzi, S.; Plantinga, A. J.; Radeloff, V. C.; Lewis, D. J.; Thogmartin, W. E.; Heglund, P. J.; Pidgeon, A. M. Current and Future Land Use around a Nationwide Protected Area Network. *PLoS One* **2013**, *8*, doi:10.1371/journal.pone.0055737.
 89. Hollis, G. E. The effect of urbanization on floods of different recurrence interval. *Water Resour. Res.* **1975**, *11*, 431–435, doi:10.1029/WR011i003p00431.
 90. Sarhadi, A. Time-varying nonstationary multivariate risk analysis using a dynamic Bayesian copula. *Water Resour. Res.* **2016**, 2327–2349, doi:10.1002/2015WR018525. Received.
 91. Arns, A.; Dangendorf, S.; Jensen, J.; Talke, S.; Bender, J.; Pattiaratchi, C. Sea-level rise induced amplification of coastal protection design heights. *Sci. Rep.* **2017**, *7*, 40171, doi:10.1038/srep40171.
 92. Vitousek, S.; Barnard, P. L.; Fletcher, C. H.; Frazer, N.; Erikson, L.; Storlazzi, C. D. Doubling of coastal flooding frequency within decades due to sea-level rise. *Sci. Rep.* **2017**, *7*, 1399, doi:10.1038/s41598-017-01362-7.