

Article

Energy-Efficient Forest Fire Prediction Model based on Two-Stage Adaptive Duty Cycle Hybrid Asynchronous MAC Protocol

Jin-Gu Kang ¹, Dong-Woo Lim ² and Jin-Woo Jung ^{3,*}

¹ Dept. of Computer Sci. and Eng., Dongguk University, Seoul, Korea; kanggu12@dongguk.edu

² Dept. of Computer Sci. and Eng., Dongguk University, Seoul, Korea; aehddn@gmail.com

³ Dept. of Computer Sci. and Eng., Dongguk University, Seoul, Korea; jwjung@dongguk.edu

* Correspondence: jwjung@dongguk.edu; Tel.: +82-2-2260-3812

Abstract: This paper proposes an adaptive duty cycle hybrid asynchronous MAC (ADX-MAC) protocol for energy-efficient forest fire prediction. The Asynchronous sensor network protocol, X-MAC protocol acquires additional environmental status details from each forest fire monitoring sensor for a given period, and then changes the duty cycle sleep interval to efficiently calculate forest fire occurrence risk according to the environment. Performance was verified experimentally, and the proposed ADX-MAC protocol improved throughput by 19% and was 24% more energy efficient compared to X-MAC protocol. The duty cycle was shortened as forest fires probability increased, ensuring forest fires were detected at faster cycle rate.

Keywords: Forest Fire; Prediction Model; Energy efficient; Sensors; Wireless Sensor Network; X-MAC; Hybrid; Adaptive; Duty cycle; Protocol

PACS: J0101

1. Introduction

Forest fire spread rapidly according to the topography and mountain slope if they cannot evolve at an early stage due to their nature. In particular, forest fires generated during the day are spreader, they cannot evolve and are transferred to deeper mountain area.

Figure 1 shows forest fire occurrence in South Korea. An average of 340,000 people dies every year due to forest fires worldwide [1], and average yearly damage caused by forest fires over the last 10 years was approximately 10 million US Dollar [2]. Destroyed forests, damaged buildings, and human injuries and casualties should all be avoided by forest fires. Forest fire watching administered separately by local governments in South Korea, with human cost approximately 0.5 million US Dollar for each local government [1]. The goal of this paper was to reduce this damage, recovery and maintenance cost without increasing forest fire risk.

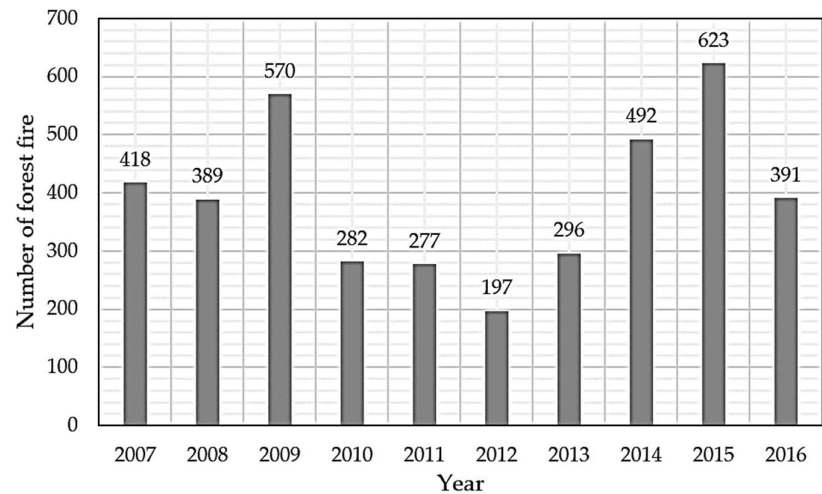


Figure 1. South Korea total yearly forest fires

The one of average forest area in South Korea is about 6 million hectares [2]. When the proposed protocol is applied to a sensor capable of covering a 300 m range, the number of required sensors is about 1000. It does not cover all areas of the forest but is the central area and the passenger path where forest fires can intensify. The areas that are actually in contact with the surface and the summits are very unlikely to develop into forest fire, and the fire is naturally turned off. When the price of one sensor is set at 200 US Dollar, it costs about 2.2 million US Dollar for maintenance costs such as sensor cost and battery replacement. The cost of the sensor using the protocol proposed in this paper is about 1/4 times lower than the existing cost, and the 24-hour surveillance is cost effective. There is an advantage that it is possible. The biggest advantage of being able to watch 24 hours is that you can completely prevent forest fires. In addition, even if the existing labor cost is replaced with a sensor, the maintenance cost of the battery also exists. When sensor is used, energy-efficient is the most considered part.

Synchronous and asynchronous medium access control (MAC) protocols have been proposed to reduce energy consumption, e.g. such as idle energy [3][4], which operates on the basis of a duty cycle. Traffic increases with increasing number of connected devices, but node duty cycles remain unchanged. Consequently, opportunities to send data decrease and throughput decrease as listening interval durations increase. In particular, forest fire sudden and natural escalation means there is small traffic by the initial sensors that very rapidly increases as the fire develops.

Therefore, an adaptive duty cycle hybrid asynchronous MAC (ADX-MAC) protocol based on X-MAC protocol [5] is proposing to implement an energy efficient forest fire prediction system that more efficiently reduces energy consumption during sensor waiting time and speeds up data transmission between nodes.

2. Forest Fire Prediction

The forest fire prediction model [6] is selected by data used, including nationwide forest fire data for 25 years (1991–2015), consisting of 10,560 observations and other details regarding forest fire areas and characteristics. Table 1 summarizes the variables included in the forest fire damage records [1,6,7].

Table 1. Fire damage data from the forest fire prediction model

Field	Description	Example
Year_No	Annual number (starting from 1 every year)	1
Month_No	Annual number (starting from 1 every year)	1
F_Year	Year of occurrence	1991

F_Month	Month of occurrence	1
F_Day	Day of occurrence	13
F_Time	Time of occurrence	13:40
F_Week	Date of occurrence	SUN
E_Year	Year of extinguish	1991
E_Month	Month of extinguish	1
E_Day	Day of extinguish	14
E_Time	Completion time of extinguish	14:55
R_Time	Extinguish time	19:30
Loc_Type	Station 1 (with errors)	Ulsan
G_Offices	Station 2 (with errors)	Ulsan
Loc_SiDo	City (Si), State (Do)	Ulsan
Loc_Gung	Street 1 (Gun, Gu)	Buk
Loc_Dong	Street 2 (Dong)	
Loc_Ri	Street 3 (Lee)	
PNU_Nam	Other addresses	Mt. 79-1
Owner_Ty	Ownership type	
F_Type	Types of forest fires	
F_Cause (11 items)	Cigarette burning, trash incineration, building fire transfer, arson, field incineration, mistake by children, climbing, in operation, <rest>	Construction site, bonfire
D_Area	Damage area	14
D_AreaU	Additional damage area	0
D_AreaT	Total damage area	14
D_Amount	Amount of damage	1260
Temprt	Temperature	2.8
Wind_Dir	Wind direction	NNW
Wind_Sped	Wind speed	6
Humidity	Relative humidity	26
Lapse_Day	Elapsed days since 5 mm or more rainfall	6
R_Amount	Rainfall	1.8
Coord_X	X coordinate for location	416976.8
Coord_Y	Y coordinate for location	229115.2
Address	City (Si), State (Do) (Including special metropolitan city)	Ulsan Metropolitan City, Bukgu

2.1. Prediction Model Weights

The prediction model used the weather and location information relevant to the forest fire occurrence and parameters for human accessibility. It employed spatial kriging to include meteorological information; and distance from dense population to the fire location, number of trails in the lattice, and altitude data to generate accessibility parameters. The available data was modified to correspond to a 5 km grid. The experiment selected logistic regression as the forest fire prediction model and it was reflected in the monthly effect model using variable numbers for refinement. The model achieved 84.8% predicted rate, which was very significant.

Main forest fires contributing factors include temperature, wind speed, humidity, and rainfall. Table 2 shows the correlations for these climate factors according to the forest fire prediction model.

Table 2. Correlation between forest fire frequency and climate factors

Factor	Correlation (w_X)	Test statistic
Temperature (TP)	-0.043	-0.7429
Wind speed (WS)	0.304	5.5086
Humidity (H)	-0.198	-3.4870
Rainfall (R)	-0.105	-1.8226

Correlation between the number of forest fires and temperature (TP) is almost insignificant; whereas wind speed (WS), humidity (H), and rainfall (R) correlations are all significant at the level. Thus, forest fire probability increases when wind speed is high, humidity is low, and rainfall is small. It can estimate forest fire risk in terms of weighted climate factors as

$$f_{\text{risk}}(t) = \left| \frac{\Delta_{WS}(t)}{\Delta_{TP}(t)\Delta_H(t)\Delta_R(t)} \right|, \quad (1)$$

where

$$\Delta_X(t) = \begin{cases} w_X \frac{X(t) - X_{\min}}{X_{\max} - X_{\min}}, & X(t) > X_{\min} \\ 1, & X(t) \leq X_{\min} \end{cases} \quad (2)$$

where X_t is the measured climate factor over time frame t with X_{max} and X_{min} maximum and minimum, respectively, over the period; and w_X is the correlation coefficient from Table 1, i.e., the weight for each factor. Therefore, each Δ_X is a weighted ratio to the uniform average change of all factors.

2.2. Forest Fire Risk Analysis from Test Statistics and Weights

Tables 3 and 4 show climate factors for Gangneung and Surak Mountains in South Korea for January to October, 2017 [27]. Stair function test statistics included 0–5, considering the minimum and maximum for each climate factor in the mountain range. Figure 2 shows the data from Tables 3 and 4 graphically.

Table 3. Forest fire risk analysis for Mt. Gangneung, 2017

Factor	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct
Measured climate factor										
WS (m/s)	3	3.1	2.4	2.8	23	1.9	2	1.6	2.3	1.9
H (%)	43.3	38.2	48.5	44.3	29	61.4	67.9	74.4	61.2	67.2
R (mm)	48.5	3.5	48.4	39.8	0	27.2	238.1	444.1	45.7	114.5
TP (°C)	1.5	3.5	7.1	15.4	17.9	21.2	26.8	24.3	21.3	15.2
Stair function test statistic										
WS (m/s)	0	0	0	0	4	0	0	0	0	0
H (%)	2	3	2	2	4	0	0	0	0	0
R (mm)	4	4	4	4	4	4	2	0	4	3
TP (°C)	0	0	0	0	0	1	2	1	1	0
Forest fire prediction model										

f_{risk}	0	0	0	0.0001	0.5610	0	0.0003	0.0003	0.0001	0.0001
------------	---	---	---	--------	---------------	---	--------	--------	--------	--------

The stair function is to compute each climatic factor as a single graph regardless of the unit dimension, and it is divided into stages according to the numerical value of each climatic factor. WS is more than 5 to 11 m/s, H is 60 to 30 %, R is 400 to 100 mm, and TP is 20 to 35 °C. The figures set for each step show the average degree of climate change in the forest area of South Korea.

Table 4. Risk Analysis of Forest Fire in Mt. Surak, 2017

Factor	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct
Measured climate factor										
WS (m/s)	2.3	2.5	2.4	2.6	2.4	5	2	2.3	2	1.9
H (%)	54.6	53.7	48.1	52.4	52.2	43	77.2	70.8	60.9	56.3
R (mm)	0	0	0	0	0	0	0	0	0	0
TP (°C)	-1.8	-0.2	6.3	13.9	19.5	23.3	26.9	25.9	22.1	16.4
Stair function test statistic										
WS (m/s)	0	0	0	0	0	1	0	0	0	0
H (%)	1	1	2	1	1	2	0	0	0	1
R (mm)	0	0	0	0	0	4	0	0	0	0
TP (°C)	0	0	0	0	0	1	2	2	1	0
Forest fire prediction model										
f_{risk}	0.0006	0.0064	0.0469	0.0670	0.0806	1.102	0.0254	0.0385	0.0377	0.0332

The Mt. Gangneung forest fire, 8 May 2017, had $f_{risk} = 0.5610$, i.e., very high compared to normal values, and the Mt. Surak forest fire, 1 June 2017, had $f_{risk} = 1.102$, i.e., extremely high. Thus, model estimates are reasonable, and hence f_{risk} was adopted as a core parameter for the proposed protocol. However, f_{risk} does not specify a forest fire will occur, but only that the probability of occurrence is high. Figure 2 shows that f_{risk} is most influenced by WS among the climate factors, but there are some factors considered by other climate factors.

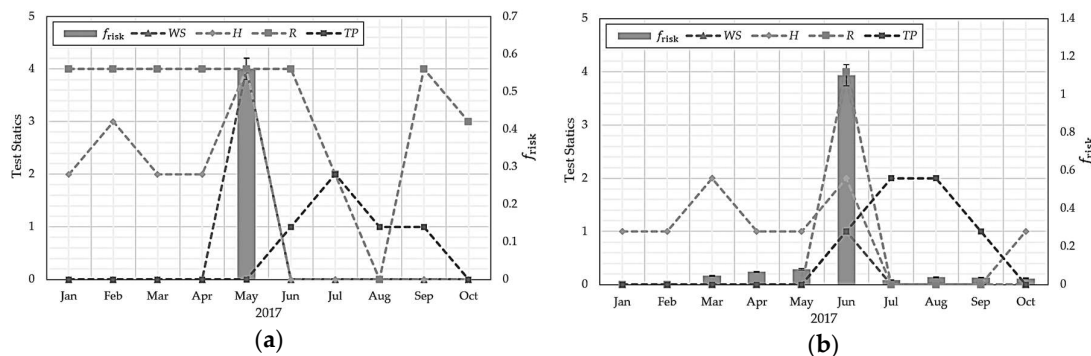


Figure 2. (a) Test statistic variation with duty cycle length for (a) Mt. Gangneung and (b) Mt. Surak

3. Energy Efficient Forest Fire Prediction Protocol

3.1. Duty Cycle Wireless Sensor Networks

Figure 3 shows the asynchronous sensor network protocol, X-MAC protocol [4] that was proposed to solve the Berkley MAC (B-MAC) low power listening preamble overhearing problem [8]. X-MAC uses the basic B-MAC methods, but in contrast to the long B-MAC preamble, it transmits the node address as a short preamble followed by a listening to ensure they will receive it.

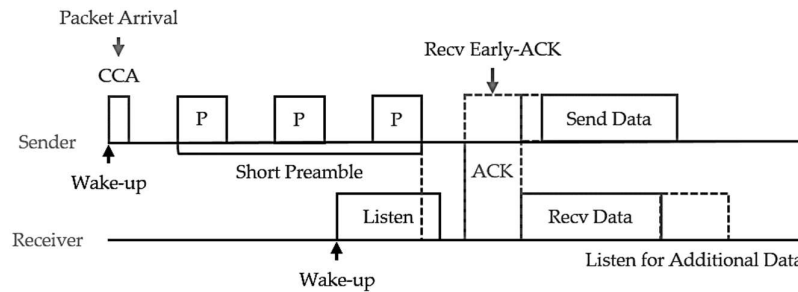


Figure 3. X-MAC protocol

Receiver node receives the preamble containing its own address value and sends an Early-ACK to sender node to inform it of preamble reception. When sender node receives the Early-ACK it stops transmitting the preamble and immediately transmits the data, thereby transferring data between the two nodes. If receiver node does not detect its address in the preamble, it immediately returns to idle mode. Thus, control packet overhead is significantly reduced compared to B-MAC, and returning to idle mode effectively reduces overhearing.

Figure 4 shows the proposed adaptive duty cycle hybrid asynchronous MAC (ADX-MAC) protocol [9].

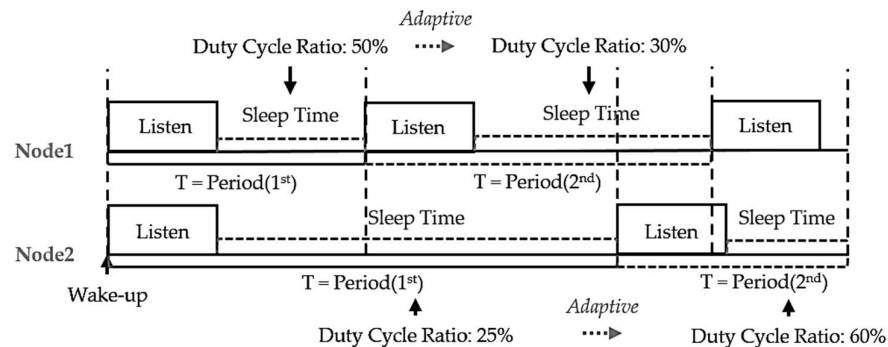


Figure 4. Proposed adaptive duty cycle hybrid asynchronous MAC protocol

Normal X-MAC has constant duty cycle, whereas the proposed ADX-MAC duty cycle, and hence sleep interval, changes according to the current situation. This has a similar effect to contention window (CW) [10] for preventing collision, hence collision probability within a given time (slot) is significantly reduced because the node duty is staggered without Backoff [11], reducing unnecessary delay. For example, when the number of packets in each node's queue is less than the number of packets in the queue, the sleep cycle is increased by decreasing the duty cycle, reducing energy consumption. On the other hand, when the number of packets increases, particularly when the queue maximum is reached, the duty cycle is increased, but as little as possible, shortening the sleep interval, and traffic can be quickly resolved. Adapting the duty cycle to the traffic situation improves energy efficiency compared to throughput by adjusting the unnecessary sleep interval and the time when the node wake-up.

3.2. Proposed Adaptive Duty Cycled Hybrid Asynchronous MAC

The proposed ADX-MAC condition for controlling duty cycle length is the number of packets in the queue and f_{risk} value.

2bytes	1byte	0-20bytes	1byte	Variable	2bytes
Frame Control	Seq. Number	Address	Adjusted Duty-Cycle Len.	Payload	Frame Check Seq.

Figure 5. MAC Header (Data Unit) of ADX-MAC

Figure 5 shows that the proposed ADX-MAC header components are almost identical to the X-MAC. However, when the sender sends data to the receiver and the receiver and sender have a similar cycle, the sender's duty cycle length is included in the header content and may also be included in the Early-ACK or ACK transmission, in contrast to the usual MAC header.

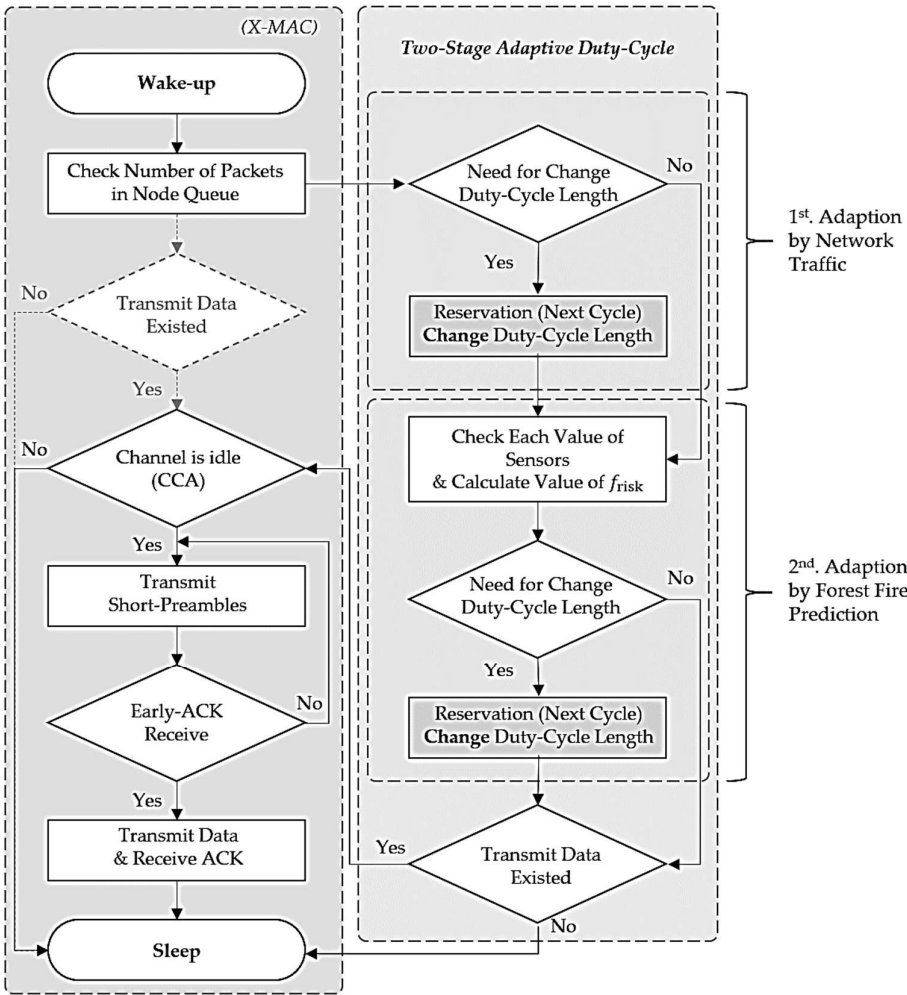


Figure 6. Proposed ADX-MAC algorithm for forest fire

Figure 6 shows the proposed ADX-MAC algorithm. When the sender wakes up, it first checks node queue status if there is data to be sent, and if so operates identically to the X-MAC algorithm, except that X-MAC checks channel status immediately, whereas ADX-MAC first checks duty cycle

length to determine if change (adjust) is required. If duty cycle length needs to change, this is scheduled (reserved) for the next cycle. If no change is required, the process proceeds to the next step.

The ratio of the number of packets in the queue to the total maximum queue length determines the duty cycle length for the queue,

$$Q_{\text{ratio}}(t) = Q(t)/Q_{\text{max}}, \quad (3)$$

where $Q(t)$ is the number of packets queued at current time, t ; and Q_{max} is the maximum number of packets that can be queued.

Then decide whether to change duty cycle length according to f_{risk} . If there is data to send immediately, then any duty cycle change is scheduled for the next cycle. If no change is required the node checks channel status and then transmits the short preamble until it receives Early-ACK. After the data is transmitted the node switches to sleep state.

The increase rate per unit time is

$$f_{\text{incr}}(t) = \begin{cases} f_{\text{risk}}(t)/f_{\text{risk}}(t_0), & f_{\text{risk}}(t_0) \neq 0 \\ 1, & f_{\text{risk}}(t_0) = 0 \\ 0, & t = 0 \end{cases} \quad (4)$$

where t_0 is the previous time unit and t is the current time unit.

This is divided into two stages because forest fires develop extremely quickly, and traffic congestion can occur during one-time unit. Therefore, $Q(t)$ measure channel congestion and f_{risk} predicts and responds quickly to the situation before it occurs, sending emergency data without interruption as the forest fire develops. Thus, combining eqs. (3) and (4), the new adaptive duty cycle is

$$T_{\text{adp}}(t) = \begin{cases} 1 - (f_{\text{incr}}(t) + Q_{\text{ratio}}(t)) + f_{\text{incr}}(t)Q_{\text{ratio}}(t), & f_{\text{incr}}(t) \leq f_{\text{thd}} \\ 1 - (f_{\text{thd}} + Q_{\text{ratio}}(t)) + f_{\text{thd}}Q_{\text{ratio}}(t), & f_{\text{incr}}(t) > f_{\text{thd}} \end{cases} \quad (5)$$

where f_{thd} is an arbitrary threshold to limit f_{incr} . Thus, the applied duty cycle length is

$$T(t) = \begin{cases} T_{\text{adp}}(t)T_0, & T_{\text{adp}}(t)T_0 \geq T_{\text{listen}} \\ T_{\text{listen}}, & T_{\text{adp}}(t)T_0 < T_{\text{listen}} \end{cases} \quad (6)$$

which can grow very large for severe climate factor changes. Although T depends on values obtained from eqs. (3) and (4), T cannot be smaller than the listen time, T_{listen} , if calculated $T < T_{\text{listen}}$, $T \rightarrow T_{\text{listen}}$, and hence duty cycle ratio = 100%.

4. Experimental Results

The first experiment compares the throughput and energy consumption with X-MAC to confirm the performance of the proposed protocol, ADX-MAC. However, the number of nodes in this experiment is limited to 5 to 60. The reason for this is that, since the characteristics of the sensor MAC protocol, the collision rate is close to 99% as long as the CW is not significantly larger than 60 since the performance is significantly lowered. That is, it is the same as the case where all the nodes simultaneously send data during the unit interval in the saturation situation. Therefore, it is possible to confirm the difference in performance between two protocols in real environment even with this experiment alone. The simulator used in this experiment was a proven NS-2 based simulator [12,13].

Verification in the actual forest fire situation is the most accurate, but it is difficult to generate forest fires artificially. The condition of spontaneous ignition is due to the combination of various climatic factors. Of course, social issues are also included. Therefore, in the second experiment for the

forest fire prediction model, each climate factor was measured through the Arduino sensor for a certain unit time. And we confirmed that these measured values matched the duty cycle length properly.

4.1. Comparison with X-MAC

Table 5 shows the simulation environment employed. The simulation assumed the same environment and topography for both models, in particular node distances were the same, packet generation used the constant bit rate method, and the network was always unsaturated.

Table 5. Network topology and simulation environment

Parameter	Value	Parameter	Value
Bandwidth	250 Kbps	Node queue size	10
Sensing range	250 m	Packet (frame) size	50 bytes
Data transmit rate	5 ms	Transmit power	86.2 mW
Wake-up time	15 ms	Idle power	52.2 mW
ACK transmit time	1 ms	Receive power	96.6 mW
SP transmit time	3 ms	Sleep power	0.0183 mW
Initial duty cycle length	100 ms		

Throughput was calculated as

$$THR = \frac{C_{ack} PKT_{size}}{t_{stop} - t_{start}}, \quad (7)$$

where C_{ack} is the number of ACKs received by the sender until the end of the simulation; PKT_{size} is the packet size; and t_{stop} and t_{start} indicate the time the simulation ended and started, respectively.

Energy consumption was calculated as

$$E = \frac{PWR_{use}}{N(t_{stop} - t_{start})} \quad (8)$$

where PWR_{use} is the power used until the end of the simulation, and N is the total number of nodes.

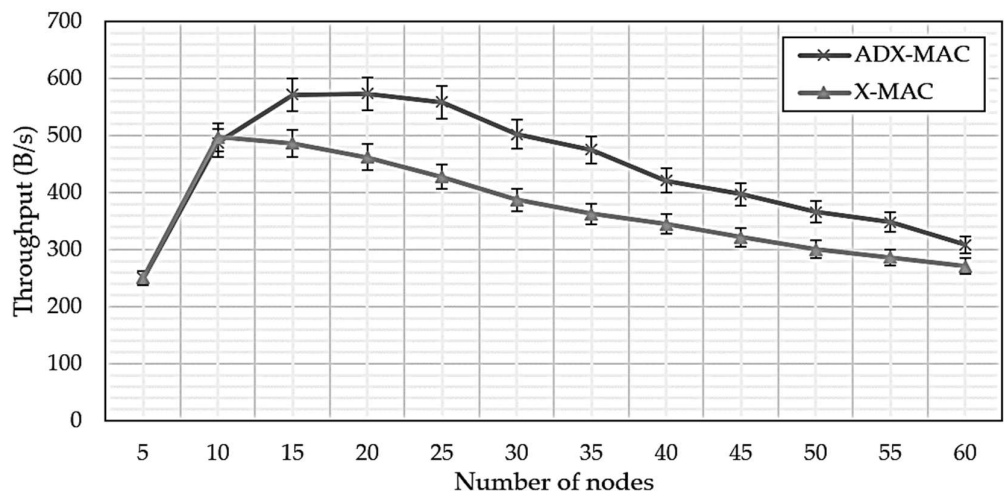


Figure 7. ADX-MAC and X-MAC throughput

In this experiment did not consider f_{risk} , because there was little throughput effect if this was included. Figure 7 compares ADX-MAC and X-MAC throughput. Efficiency is similar up to nodes = 10, but ADX-MAC has average efficiency approximately 24% higher than X-MAC once nodes = 15, and this advantage persists up to quite large networks.

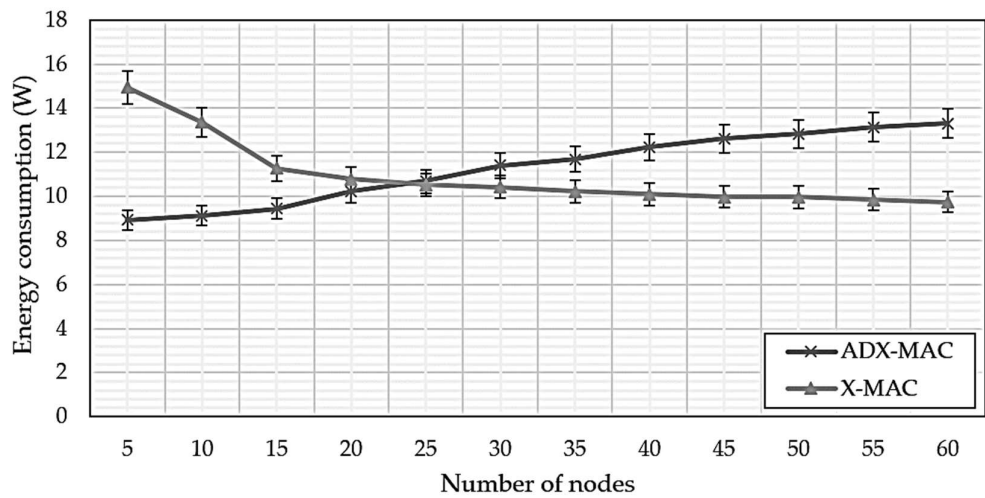


Figure 8. ADX-MAC and X-MAC energy consumption

Figure 8 compares ADX-MAC and X-MAC energy consumption. Average ADX-MAC efficiency was approximately 18% lower than that of X-MAC up to nodes = 25, which then extended to 24% lower. This result is because ADX-MAC performs transmission about 1/4 the rate of X-MAC as the number of nodes increases.

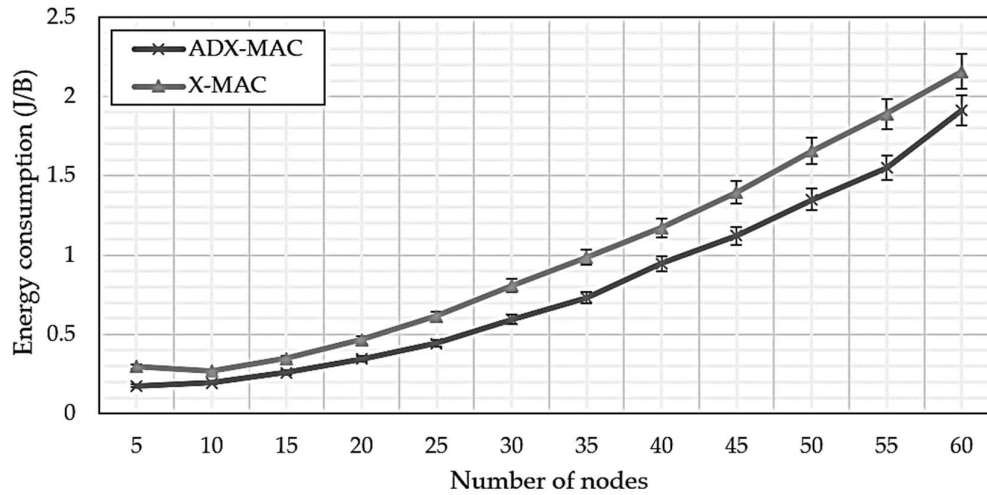


Figure 9. ADX-MAC and X-MAC energy consumption for an individual byte transmitted until the simulation completed


Figure 9 compares ADX-MAC and X-MAC energy consumption per byte, i.e., the average amount of energy consumed to transmit one byte until the simulation ended, calculated as

$$E_{\text{byte}} = \frac{PWR_{\text{use}}}{C_{\text{ack}}PKT_{\text{size}}}. \quad (9)$$

The amount of energy consumed per byte can be said to be always good because the ADX-MAC consumes less than the X-MAC over the number of intervals of all nodes. Although the efficiency of ADX-MAC is about 28% higher than that of X-MAC until the number of nodes is 35, the efficiency drops rapidly after that. However, the average number of nodes is about 17% in the range of 40 to 60. In conclusion, it shows about 24% efficiency in the all number of nodes.

4.2. Adaptive Duty cycle Length due to Climatic Factors

This experiment investigated how T varied with measured climate factor values. Network setup and parameters were the same as in Section 4.1, but this experiment did not consider the state of the queue, similar to the treatment for f_{risk} in Section 4.1.

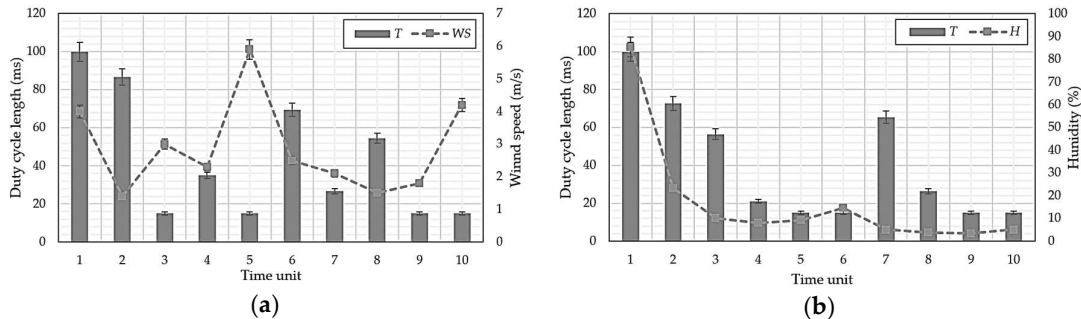

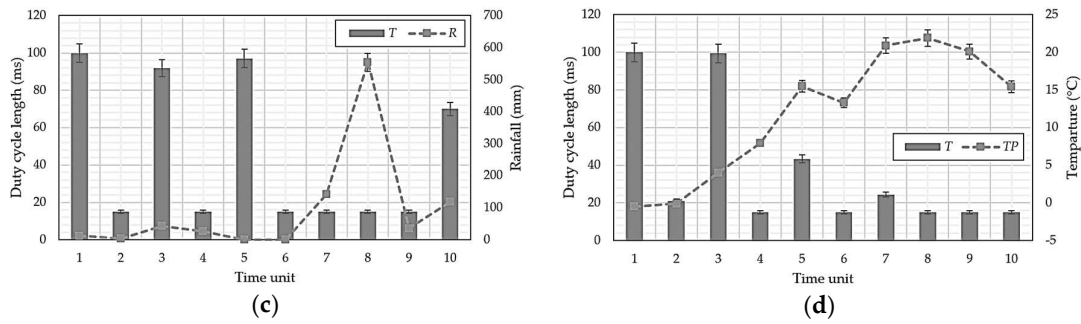


Figure 10. Duty cycle length, T , changes for climate factor changes (a) wind speed, (b) humidity, (c) rainfall, and (d) temperature.

Figure 10 shows the T changes for each climate factor, considering only the factor of interest to be changing, whereas Fig. 11 considers all climatic factors. High f_{risk} derived from the forest fire prediction model means forest fires probability is high, hence T is shortened, and sensing is performed at a shorter cycle per unit time.

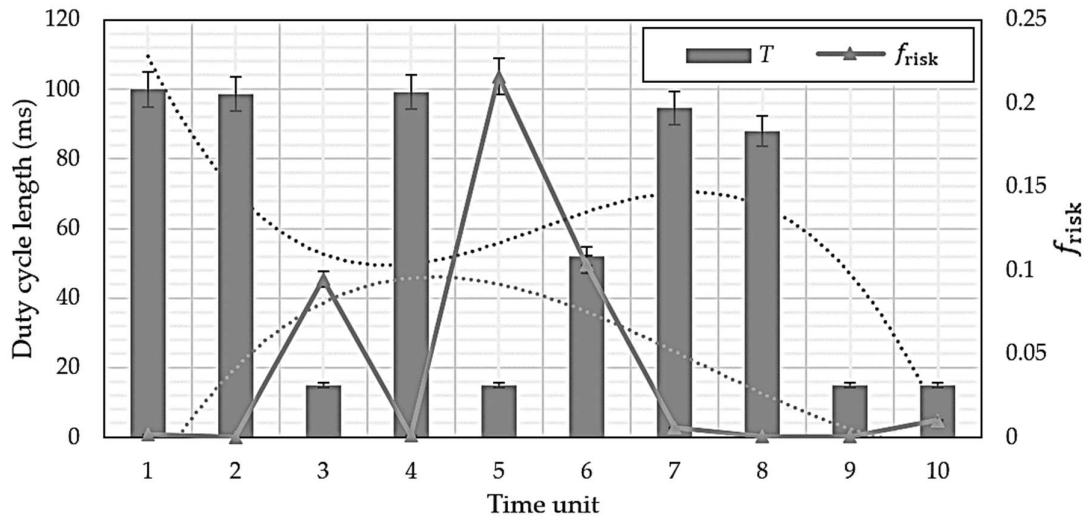


Figure 11. Change in f_{risk} as duty cycle length, T , changes

5. Conclusions

This paper proposed a forest fire prediction method, adaptive duty cycled hybrid X-MAC (ADX-MAC) protocol, based on sensor data to reduce human and economic costs using Wireless Sensor Network (WSN) MAC protocol. The key factors of the proposed method were to adapt duty cycle length through two stages with different factors. The two stages addressed that forest fires occur very quickly and significant sensor data traffic congestion can occur during a single time unit. The first stage factor is f_{risk} , derived from the forest fire prediction model and the second stage factor was the number of packets in the node queue. Thus, ADX-MAC could adjust T considering both the traffic situation and forest fire probability.

The proposed approach was verified experimentally by comparison with X-MAC and confirmed that ADX-MAC average throughput and energy efficiency were approximately 19% and 24% superior to X-MAC, respectively. Duty cycle length changes with f_{risk} were also investigated, and T was shortened as forest fires probability increased, ensuring forest fires could be detected faster.

The proposed ADX-MAC protocol for forest fire detection is suitable for various natural disasters. Even if the forest fires are limited, ADX-MAC sensors could be incorporated into existing infrastructure to significantly reduce economic costs.

Acknowledgments: This research was supported by the Ministry of Science and ICT, Korea, under the National Program for Excellence in Software supervised by the Institute for Information & Communications Technology Promotion (2016-0-00017) and the Basic Science Research Program through the National Research Foundation of Korea funded by the Ministry of Education, Science and Technology (2015R1D1A1A09061368).

Author Contributions: Idea and conceptualization: J.-G. Kang and D.-W. Lim; Methodology: J.-G. Kang and J.-W. Jung; Software: J.-G. Kang; Analysis: J.-G. Kang; Visualization, J.-G. Kang and D.-W. Lim; Project administration: J.-W. Jung.

Conflicts of Interest: The authors declare no conflicts of interest.

References

1. Statistics Korea, <http://kostat.go.kr>, 2017.
2. International Forest Fire Symposium, Korea National Forest Science Institute, 2016.
3. O. Yang, W. B. Heinzelman, "Modeling and Performance Analysis for Duty cycled MAC Protocols with Applications to S-MAC and X-MAC," *IEEE Transactions on Mobile Computing*, VOL. 11, NO. 6, 2012.
4. J.-H. Lee, D.-S. Eom, "A Study of Variable Wakeup Period for Duty Cycled MAC protocol in WSN", *Journal of The Institute of Electronics Engineers of Korea* Vol. 49, NO. 12, December 2012.
5. M. Buettner, G. V. Yee, E. Anderson and R. Han, "X-MAC: A Short Preamble MAC Protocol for Duty cycled Wireless Sensor Networks," *Proc. of the 4th Int. Conf. on Embedded Networked Sensor Systems*, pp. 307-320, 2006.
6. J.-H. Kim, "Forest Fire Prediction Model using weather data," Master Dissertation, in Korea University, 2017.
7. Korea Forest Service, <http://www.forest.go.kr>, 2017.
8. J. Polastre, J. Hill, and D. Culler, "Versatile Low Power Media Access for Wireless Sensor Networks," *Proceeding of the 2nd international conference on Embedded networked sensor systems*, pp. 95-107, 2004.
9. J.-G. Kang, G.-Y. Kim, S.-H. Park, D.-W. Lim, H.-G. Kang and J.-W. Jung, "According to the Traffic Conditions, Duty cycle Ratio is Changed Hybrid X-MAC Protocol in Networks," *Proceeding of ITFE Summer Conference*, pp. 73-74, 2017.
10. C.-E. Weng, C.-Y. Chen, "The Performance Study of Optimal Contention Window for IEEE 802.11 DCF Access Control," *Proceeding of 2012 IEEE 75th Vehicular Technology Conference (VTC Spring)*, 2012.
11. N. Song, B. Kwak, J. Song and L. E. Miller, "Enhancement of IEEE 802.11 Distributed Coordination Function with Exponential Increase Exponential Decrease Backoff Algorithm," *Proceeding of IEEE Vehicular Technology Conference (VTC)*, Vol. 4, pp. 2775-2778, 2003.
12. Network Simulator Manual, <http://www.isi.edu/nsam/ns/index.html>.
13. Kevin fall, Kannan Varadhan, "The ns Manual (formerly ns notes and documentation)," The VINT project, 2003.