

NoiseModelling: An open source GIS based tool to produce environmental noise maps

Erwan Bocher^{1,†,*}, Gwenaél Guillaume^{4,†}, Judicaël Picaut^{3,†}, Gwendall Petit^{2,†} and Nicolas Fortin^{3,†}

¹ CNRS, Lab-STICC, F-56017 Vannes, France

² Université de Bretagne-Sud (UBS), Lab-STICC, F-56017 Vannes, France

³ IFSTTAR, CEREMA, UMRAE, F-44344 Bouguenais, France

⁴ CEREMA, IFSTTAR, UMRAE, F-67035, Strasbourg, France

* Correspondence: erwan.bocher@univ-ubs.fr;

† These authors contributed equally to this work.

Abstract: The urbanisation phenomenon and related cities expansion and transport networks entail preventing the increase of population exposed to environmental pollution. Regarding noise exposure, the Environmental Noise Directive demands on main metropolis to produce noise maps. While based on standard methods, these latter are usually generated by proprietary software and require numerous input data concerning, for example, the buildings, land use, transportation network and traffic. The present work describes an open source implementation of a noise mapping tool fully implemented in a Geographic Information System compliant with the Open Geospatial Consortium standards. This integration makes easier at once the formatting and harvesting of noise model input data, cartographic rendering and output data linkage with population data. An application is given for a French city, which consists in estimating the impact of road traffic-related scenarios in terms of population exposure to noise levels both in relation to a threshold value and level classes.

Keywords: Noise mapping; END directive; GIS; open source; standards, road traffic; population exposure

1. Introduction

Most cities in the world are faced with the same urbanisation phenomenon and, according to a recent report of the United Nations [1], currently gather half of the worldwide population. The urban expansion leads to numerous critical concerns, particularly in terms of population exposure to pollution, whether regarding air and water quality or else noise, owing to their deleterious effects on people and more globally on the environment (*e.g.* on biodiversity).

Considering noise exposure, many works have shown that it can be associated to many adverse health outcomes, such as hearing impairments and tinnitus [2], cardiovascular and metabolic repercussions [3], learning impairment [4], sleep disorders [5], annoyance [6]... As a dramatic consequence, the World Health Organization (WHO) has shown that noise effects on health may be responsible for up to 1.6 million of Disability-Adjusted Life-Years (DALYs), *i.e.* the potential years of life lost due to premature death, in the western Europe [7], mainly due to transportation noise (road, air and rail traffic).

In response to these major health and societal challenges, the European Union has implemented in 2002 the Directive 2002/49/EC [8], relating to the assessment and management of environmental noise. The goal is to define an EU common approach to avoid, prevent or reduce the harmful effects due to exposure to environmental noise. More specifically, this directive aims to determine the environmental noise exposure through noise mapping, to ensure that information on environmental noise and its effects is made available to the public, and lastly, to adopt action plans, based upon noise-mapping results. In

order to quantify the noise exposure, this directive defines three indicators, the L_{day} , L_{evening} and L_{night} , as the mean noise indicators for annoyance during the day, evening and night periods. More concretely, it is the L_{den} indicator (day-evening-night mean noise level, with a specific weighting for each time period) that is mainly used to establish the population exposure, considering a threshold of 55 dB(A) to consider the first health effects of noise on inhabitants. On the basis of all the data acquired through the application of this directive, in 2012, almost 122 million inhabitants were subject to noise levels above the limit of 55 dB(A) (100 million due to road traffic noise), including 14 million at extremely annoying levels [9]. In this context, researches are still needed to reduce noise pollution, whether on road, rail and air traffics, but also from industrial activities (see for example [10–13] for recent studies).

The application of the European directive is based on the production of noise maps. At present, noise maps are obtained using numerical simulations, with software specifically developed for environmental noise mapping, based on acoustic emission models of transportation and industrial noise sources as well as propagation models. These emission and propagation models are derived from national standards, such as DIN 18005 (Germany), NMPB-08 (France [14]) or NORD 2000 (Denmark [15]). At the European level, harmonised standards have also been proposed, such as Harmonoise [16], or more recently the CNOSSOS model [17], which should become the reference model in Europe from December 31, 2018. Other approaches, based on measurement (using fixed sensor networks [18] or participatory measurements with smartphones [19–21]) or social data [22], are beginning to emerge, but will still require coupling with numerical models [23] to be able to test action plans, as required by the European directive. The usual numerical methods will remain the reference approach for a very long time, until the approaches evolve and the standards change. At the present time, improving calculation methods and noise map representation are therefore still very important issues.

Noise mapping based on numerical simulations requires beforehand a huge amount of information concerning the investigated area, based on third-party data or models. Firstly, the generation of the noise emission requires the knowledge of the road network including the speed limits, the signage and the traffic flow on each road section. Secondly, the sound propagation model requires data about the type of buildings, in addition to both the topography and soil landscape. Thirdly, statistical data are needed in terms of population distribution and location of offices and business activities. Because noise prediction models rely on geometric calculations, a fine description and accurate quality of the geometric data (roads, buildings...) are required otherwise it would be impossible to evaluate noise levels [24,25]. Therefore, the manipulation of all this data through Geographic Information System (GIS) seems obvious in order to facilitate the production of noise maps. Indeed, GIS software offers several benefits: input data for noise prediction models can be prepared in the same reference system; redundant geometries and topological errors (e.g. self-intersecting surfaces) can be detected with spatial analysis techniques; population exposure to environmental noise can be displayed using advanced style mapping to identify noise problems at different urban scales... In addition, the evolution of GIS technologies makes it possible to share the results with citizens and decision-makers thanks to the standards and geographical services distributed over the Internet, through Spatial Data Infrastructure (SDI) platforms [26,27]. As Abramic *et al.* [28] pointed out, applying SDI techniques for noise mapping strategies permits also to encode data in a similar manner, thus achieving semantic interoperability between models. In addition, SDI offers a natural way to expose and share data on the web.

This last paragraph clearly shows the potential interest of integrating the production of noise maps directly within a GIS, and not in parallel, as is currently the case by coupling the inputs and outputs of noise mapping software with GIS software. As underlined by King and Rice [29], the philosophy behind the European directive 2002/49/EC, and more generally the context of the European directive INSPIRE [30], motivates the use of open-source GIS [31], instead of black box implementations of comparable commercial software packages.

Thus, the present paper proposes an implementation of a simplified noise mapping approach within a GIS. After a review of existing noise mapping solutions and an analysis of the main scientific and technical barriers (section 2), Section 3 presents the French standard method NMPB 2008 that is considered for the noise calculations, and thus that is implemented (section 4) within the open source GIS platform OrbisGIS¹ in the form of a plugin, named NoiseModelling² (formerly NoiseM@p). A full application of NoiseModelling to the study of urban mobility plan impacts in terms of noise exposure is finally shown (section 5). This application was carried out within the framework of the Eval-PDU project [2008-2012, see e.g. 32,33]. Three scenarios were selected by the project consortium for their potential impacts in several societal, economical and environmental concerns, and are thus investigated in the present paper in terms of noise impacts by means of dedicated methodologies managed entirely through an open source GIS tool.

2. Noise mapping issues

2.1. Existing noise mapping solutions

Nowadays, most of the strategic noise maps over the French territory are produced by means of a standard approach based on the noise computation method NMPB 2008 as detailed in the guide of the S etra [3435]. It constraints to break down the road infrastructure into segments of approximately constant cross-section. The computation of the noise attenuation along a propagation path is detailed in several methods, as for example Harmonoise or Nord2000 [36,37], and addressed by standards such as ISO 9613-2:1996 [38] and NF S31-133 [39] for example in France. In contrast, no recommendation nor peer-reviewed article specifies the geometrical aspects concerning the research of the relevant propagation paths between sources and receivers by ray tracing techniques. Some practical and specialist skills are yet developed by software developing companies as suggested by a few conference papers [40,41].

Otherwise, the use of a Geographic Information System (GIS) software for the purpose of noise mapping appears essential to harvest all required spatial data and to compute exposure indicators. By the way, prior to the establishment of the Directive 2002/49/EC, De Kluijver and Stoter [42] underlined the need in a standardized method in Europe for the purpose of noise forecasting and highlighted the virtues of a GIS integration for data collection, storage and querying. To our knowledge, the first application of a GIS tool for the forecast of environmental noise was established about two decades ago by Reijnen *et al.* [43] who studied the impact of road traffic noise on breeding birds over a large area in Netherlands. Thereafter, few authors experimented the integration of a road traffic noise model into a GIS. Thus, Li *et al.* [44] proposed a GIS based traffic noise system implemented in the commercial GIS software ArcView (renamed latter ArcGIS) including a few extensions and designed for noise prediction in China. Unfortunately, the model was implemented by using a proprietary high-level algorithmic language (AVENUE), which does not allow the portability of the application to other GIS systems. Pamanikabud and Tansatcha [45] developed two traffic noise prediction models based on the UK's standard CoRTN [46] and on the US's standard FHWA [47] that were also integrated in the previously mentioned commercial GIS system with the same programming language, implying the same inconvenience as the preceding development. Similarly, Gulliver *et al.* [48] developed an open-source tool for road traffic noise modelling that is integrated in ArcGIS too. One can also cite the works by Reed *et al.* [49] who

¹ OrbisGIS website: <http://www.orbisgis.org/>.

² NoiseModelling website: <http://noise-planet.org/noisemodelling.html>.

proposed an open-source application, named SPreAD-GIS, dedicated to the modelling of anthropogenic noise propagation in natural ecosystems. The application was implemented in Python as a toolbox in the ArcGIS software, and is based on the System for the Prediction of Acoustic Detectability (SPreAD) developed by the US Forest Service (USFS) and Environmental Protection Agency (EPA). Therefore, no full open-source framework currently exists for the purpose of noise mapping at the territory scale.

Moreover, further improvements are necessary to make large scale noise maps, at an agglomeration scale for instance, within the END framework. One of the first optimizations concerns the ray-tracing calculations between the receiver and the set of contributing sound sources [50], which proves to be more efficient in the case of an equidistant segmentation of the line sources. Besides, for large scale domains, it is necessary to limit the computation area. Since a fixed search radius approach is likely to overlook significant noise sources, Probst (2008) prefers the so-called maximum error approach for which the geometrical paths are first sorted with respect to their length, and the combination of the sources is carried out in increasing order of length. The author also mentions a projection method where straight lines connect the receiver to the outermost edges of all objects between the receiver and the source. It is reported that the method must be restricted to a maximal distance from a source or from a receiver.

Consequently, the prevision and mapping of environmental noise within the framework of the END directive still require some improvements in terms of numerical optimization such as for example the search for propagation paths between the sound sources and the receivers. The integration of both the noise emission and propagation models into a GIS offers many advantages, particularly concerning the management of the input and output data and the linkage with population data. However, some scientific and technical barriers need to be overcome for this purpose.

2.2. Scientific and technical barriers

The main scientific and technical barriers for the purpose of fulfilling at once the European noise and the environmental data-related regulations, *i.e.* the directives 2002/49/EC (END) and 2007/2/EC (INSPIRE) respectively, concern the accessibility to the data, in particular in terms of standards compliancy, interoperability and opening data. In addition, some information are often lacking regarding the physical properties of the various elements that make up the environment. For example, the nature of the land plots are usually badly defined or unknown. Indeed, if a vast amount of data is now available, thanks to open data, its integration into modelling tools remains a long and complex task due to their quality : positional uncertainty, temporal accuracy, covered area, attribute description [51,52]... Recent works and technologies should allow to address this issue in the near future (see reference [53] for example). Likewise, the properties of the building facades, which are currently deduced from another source of information (*e.g.* type or age of the building, location of services), could also be provided through open data portals or community databases as OpenStreetMap. Indeed, there is a general movement toward open data access [54]. For environmental assessment, it induces new challenges as, for example, the necessity to develop data processing techniques to capture, document and collect data coming from various providers. GIS tools are once again well adapted to solve this issue.

Moreover, the calculation of sound levels requires significant computing resources. Nevertheless, the computational burden can be addressed by optimizing the implementation of the computational core, *e.g.* by multithreading the processes and threads as experimented by Probst [41] and by Salomons *et al.* [55]. Besides, the noise annoyance is not only related to sound levels but also to their time variations. Some improvements are thus still required to account for the noise dynamics by integrating more advanced indicators and adapted mapping representations (see reference [56] for example). Lastly, the modelling of traffic-related noise at the urban scale relies on a few simplifications and hypotheses of both the noise emission and propagation phenomena detailed hereinafter.

3. NoiseModelling approach

3.1. Principle and hypotheses

The purpose of the present approach is to produce noise maps at a city or urban agglomeration scale with limited calculation times in order to consider several planning scenarios within reasonable durations. Thus, the proposed method for forecasting the environmental noise at the urban scale and producing noise maps relies on a simplified implementation of the French national method “NMPB 2008”, which consists in two steps: the estimate of traffic noise emission over the transport network [34] (see section 3.2) and the calculation of sound levels over a receivers grid issued from the propagation from these noise sources to each receiver [35] (see section 3.3).

Each implementation component is based on a few hypotheses in comparison to these two latter methodological guides for reducing the computational burden and addressing the lack of input data. Concerning the noise emission, the main simplifications relate to the description of the type and the age of the road pavement, the stopping and starting road sections, the vehicles kinematic, as well as the distribution between traffics of light and heavy vehicles over the various daily time periods, due to the lack of related data. Nevertheless, the majority of the roads in built-up area consists of non draining (*i.e.* non-porous) surfaces, these latter being mostly used for road segments with vehicle speed over 70 or even 90 km/h. Other types of surfaces (*e.g.* rubberized asphalts) are therefore not considered. This missing information in terms of input data also affects the sound propagation modelling since land use data are often defined using another geographical reference frame as other dataset which make difficult to merge them with each other. Thus the ground is considered as perfectly reflecting. Besides, the approximations of the propagation calculations also concern the 2D modelling instead of 3D computations, which implies to locate the sound sources near the ground and the receivers on the same horizontal plane as the sources. Thus the reflected and diffracted fields remain on a same plane parallel to the ground. Therefore, the horizontal diffraction by the vertical edges of the buildings is taken into account (*i.e.* the sound rays propagate around the buildings), whereas the vertical diffraction by the horizontal edges are neglected (*i.e.* the sound rays cannot propagate over the buildings). However, the impact of this latter simplification on the prediction is relatively weak in densely multi-sourced environment as encountered in urban area where the direct and reflected components of the sound field largely predominate over the diffracted component. Since meteorological effects affect ground effects and vertical diffraction which are neglected for the above-mentioned reasons, only homogeneous atmospheric conditions are considered.

3.2. Noise emission

The proposed implementation of the noise emission is based on the methodology detailed in the guide published by the Sétra [34] for road vehicles. The noise generated by tramways is not addressed in this methodological guide. However, this transportation mode is treated in the German directive Schall 03 [57]. Thus the method defined in the guide book of the Sétra [34] is extended in the present work to tramways according to the German directive.

3.2.1. Point sources decomposition

The noise emission depends on the Vehicles Categories (VC), which distinguishes Road Vehicles (RV), gathering Light Vehicles (LV) and Heavy Trucks (HT), and Tramways (TW). The proposed implementation consists in breaking down the line sources (*i.e.* the traffic and railway flows) into a series of N_S point sources S_i ($i=1$ to N_S) as depicted at figure 1.

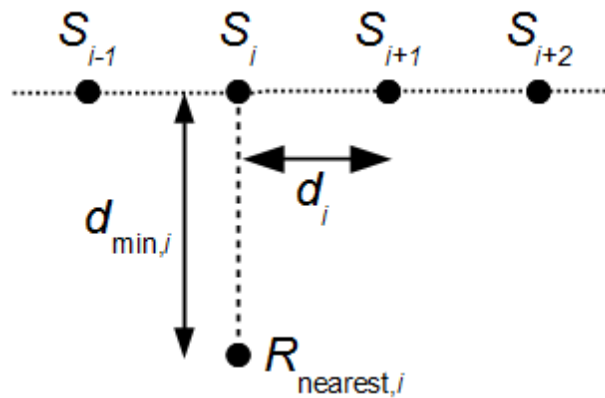


Figure 1. Breakdown of a line source into a series of point sources.

The sound emission level of a point source S_i is determined for a given frequency band j according to the acoustic power level $L_{W/m}$ per metre of a line source, by the formula:

$$L_{W,i}^j = L_{W/m}^j + 10 \log_{10} d_i, \quad (1)$$

where d_i is the distance between two successive sources for the same line source. This distance is selected in such a way as it complies with the rules defined by the reference method [34], namely:

$$d_i \leq 0.5 \times d_{\min,i} \quad (2a)$$

and

$$d_i \leq 20 \text{ m}, \quad (2b)$$

where $d_{\min,i}$ is the orthogonal distance between the point source S_i and the nearest receiver point $R_{\text{nearest},i}$ (see figure 1).

In our approach, the generation of the point sources is based on an equidistant breakdown of line sources. The first point source $S_{i=0}$ matches the entrance of the section, all next point sources being regularly spaced with a distance $d_i = \|S_i S_{i+1}\|$. Depending on the distance to the end of the line source, a last point source $S_{i=N_S}$ may be added. When a new line source starts from the end of the previous line source, the same process is applied. If the last point source of the previous line source coincides with the first point source of the next line source, both noise level contribution are energetically added.

3.2.2. Sound power level calculation

The power level $L_{W/m}^j$ per metre for each point source is calculated as the energetic addition³ (referred to by the symbol \oplus) of each VC contribution, that is:

$$L_{W/m}^j = \oplus \sum_{VC} \left[L_{W/m,VC}^j + 10 \log_{10} Q_{VC} + R_{VC}^j \right]. \quad (3)$$

³ An energetic addition is defined as: $L_A \oplus L_B = 10 \log_{10} (10^{L_A/10} + 10^{L_B/10})$.

The contribution of each VC corresponds thereby to the sum of the spectral distribution of the emission power R_{VC}^j , given per third octave bands in table 1, and of the emission powers per metre of lane $L_{W/m,VC}$ for an unit flow rate, weighted by the average hourly flow rate Q_{VC} .

Table 1. Spectral distribution of the emission power R_{VC}^j (in dB(A)) of an elementary point source for RV (*i.e.* LV and HT) over non-porous surfaces and for TW at third octave bands of central frequencies f_c (in Hz).

f_c	100	125	160	200	250	315	400	500	630
R_{RV}	-27	-26	-24	-21	-19	-16	-14	-11	-11
R_{TW}	-11.3	-11.3	-11.3	-11.3	-11.3	-11.3	-11.3	-11.3	-11.3

f_c	800	1k	1.25k	1.6k	2k	2.5k	3.15k	4k	5k
R_{RV}	-8	-7	-8	-10	-13	-16	-18	-11	-23
R_{TW}	-11.3	-11.3	-11.3	-16.3	-16.3	16.3	-21.3	-21.3	-21.3

Concerning RV, the emission power per metre of lane for an unit flow rate $L_{W/m,RV}^j$ is calculated at frequency j by breaking down the contributions of rolling noise $L_{r,W/m,RV}^j$ and mechanical noise $L_{m,W/m,RV}^j$:

$$L_{W/m,VC}^j = L_{r,W/m,VC}^j \oplus L_{m,W/m,VC}^j. \tag{4}$$

These two contributions depend on both the speed v (in km/h) and pace (*i.e.* steady speed, acceleration) of the vehicle. Correction factors are introduced to take into account the age a (in years) of the road pavement concerning the rolling noise, and the road declivity p (in %) for mechanical noise.

For TW, the noise emission is mainly related to rolling noise which is introduced similarly as the road vehicles implementation, yet by neglecting the accelerating effect. Besides, a correction is applied if an anti-vibration base is present (*e.g.* a floating slab).

The calculation of the rolling noise for all VC (*i.e.* LV, HT and TW) and of the mechanical contribution for RV (*i.e.* LV and HT) are detailed in table 2.

Table 2. Emission powers per metre of lane according to the Vehicle Category (VC): (a) rolling noise components for LV and HT at speed v (between 20 and 130 km/h) with their respective corrections associated with the age a (in years) of the road segment; (b) mechanical noise components for LV and HT at steady speed according to v with their respective corrections according to the declivity p (in %, with Ascent (Asc.) and Descent (Desc) declivities) of the road segment; (c) mechanical noise components at starting section for LV and HT according to the declivity p of the road segment; (d) emission power for tramways (TW) according to the ground type with the corrections associated with the nature of the rail base.

(a) Rolling noise² component for RV at speed v between 20 and 130 km/h.

RV	$L_{r,W/m,RV}$	Correction [dB(A)]	
		$a \leq 2$ years	$2 < a < 10$ years
LV	$55.4 + 20.1 \log_{10}(v/90)$	-2.0	$0.25 \times (a - 10)$
HT	$63.4 + 20.0 \log_{10}(v/80)$	-1.2	$-0.15 \times (a - 10)$

(b) Mechanical noise³ component for LV and HT at steady speed v .

RV	v [km/h]	$L_{m,W/m,RV}$	Correction [dB(A)]		
			$0 \leq p \leq 2$ %	Asc. $2 < p < 6$ %	Desc. $2 < p < 6$ %
LV	20-30	$36.7 - 10.0 \log_{10}(v/90)$	0	0	0
	30-110	$42.4 + 2.0 \log_{10}(v/90)$	0	0	0
	110-130	$40.7 + 21.3 \log_{10}(v/90)$	0	0	0
HT	20-70	$49.6 - 10.0 \log_{10}(v/80)$	0	$2 \times (p - 2)$	$(p - 2)$
	70-100	$50.4 + 3.0 \log_{10}(v/80)$			

(c) Mechanical noise component for LV and HT at starting section.

RV	Declivity p [%]	$L_{m,W/m,RV}$ [dB(A)]
LV	all declivities	51.1
	$0 \leq p \leq 2$	62.4
HT	Asc. $2 < p < 6$	$62.4 + \max[2 \times (p - 4.5), 0]$
	Desc. $2 < p < 6$	62.4

(d) Emission power for TW.

Ground type	$L_{W/m,TW}$	Correction [dB(A)]	
		classic base	absorber base
Rigid	$78.0 + 26.0 \log_{10}(v/40)$	0.0	-2.0
Grassy	$75.0 + 26.0 \log_{10}(v/40)$		

² The rolling noise contribution formulas correspond with the surfacing category R2 in the methodological guide of the S etra [34, tables 2.4, 2.5 and 2.6].

³ The methodological guide considers accelerating and decelerating road sections too [34, tables 2.8, 2.9 and 2.11].

3.3. Noise propagation

The modelling of the noise propagation relies on the methodological guide published by the S  tra [35]. The sound propagation from a point source to a receiver is submitted to various phenomena such as the geometrical spreading due to the expansion of the wavefront and the atmospheric absorption that results from the molecular relaxation effect. The propagation can be modelled by separating the contributions of each phenomenon, which leads to consider the sound field received at a given location as a combination of:

- the direct field, which corresponds to the sound waves propagating directly from the source to the receiver (figure 2(a));
- the diffracted field, related to the diffraction of the sound waves around and over the buildings (figure 2(b));
- and the reflected field, associated with the reflections on the ground and on the buildings facades along the propagation path that can also include absorption by these elements (figures 2(c-d)).

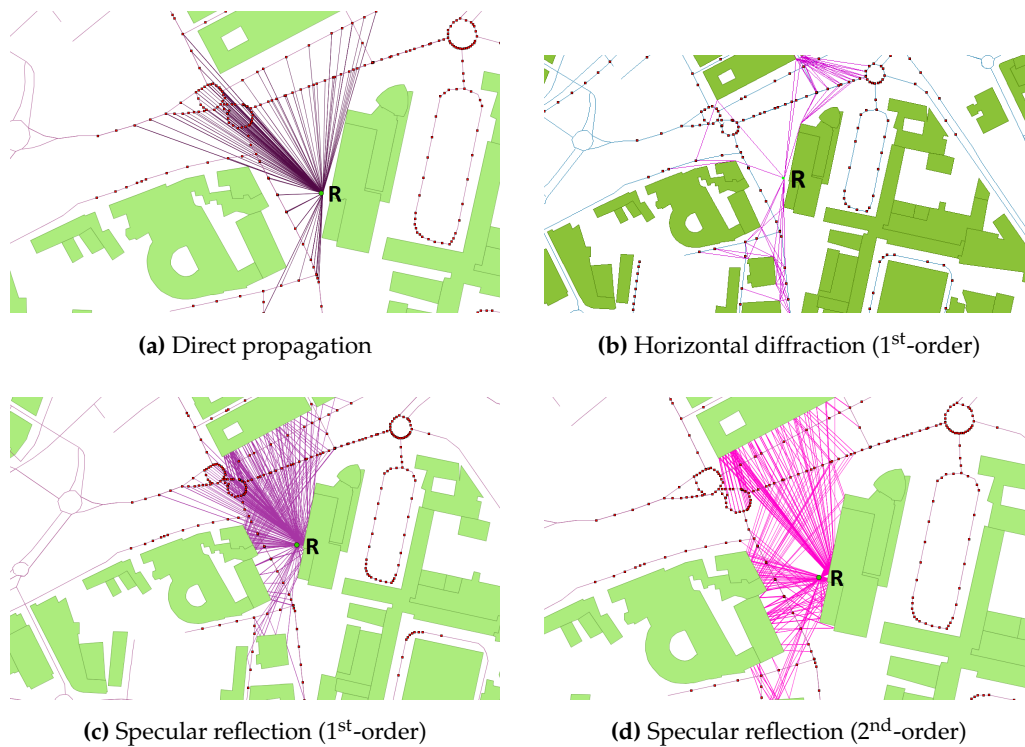


Figure 2. Illustrations of the propagation paths between the point sources (red) and a given receiver point (green) for each contribution to the total sound field: (a) direct path, (b) 1st-order horizontally diffracted path, (c)-(d) 1st and 2nd-order specularly reflected paths.

In the present implementation, the noise propagation is modelled as described in the methodological guide [35]. The sound level $L_{R_k,i}^j$ at a receiver R_k from a point source S_i , characterised by a power level $L_{W,i}^j$ as defined at equation (1) for a given frequency band j , is evaluated from the formula:

$$L_{R_k,i}^j = L_{W,i}^j - A_{\text{div}_{R_k,i}} - A_{\text{atm}_{R_k,i}}^j - A_{\text{dif}_{R_k,i}}^j - A_{\text{grd}_{R_k,i}}^j \quad (5)$$

where the attenuation terms refer to the respective contributions of the geometrical spreading (A_{div}), the atmospheric absorption (A_{atm}), the horizontal diffraction around the vertical edges of obstacles (A_{dif}) and the ground effect (A_{grd}).

The geometrical spreading A_{div} corresponds to the natural attenuation of noise during propagation over a distance d_i which is expressed as:

$$A_{\text{div}_{R_{k,i}}} = 20 \log_{10} (d_i) + 11. \quad (6)$$

The atmospheric absorption A_{atm} is given as a function of the frequency-dependent atmospheric absorption coefficient α_{air} (ISO 9613-1:1993), namely:

$$A_{\text{atm}_{R_{k,i}}}^j = \alpha_{\text{air}} \frac{d_i}{1000}. \quad (7)$$

The horizontal diffraction A_{dif} around the vertical elements (*e.g.* the building edges) depends on the path length difference δ (expressed in m) between the direct and diffracted propagation paths (see figure 2(b)) and is given by the relation:

$$A_{\text{dif}_{R_{k,i}}}^j = \begin{cases} 10 \log_{10} \left(3 + \frac{40}{\lambda} C'' \delta \right) & \text{if } \frac{40}{\lambda} C'' \delta \geq -2, \\ 0 & \text{otherwise,} \end{cases} \quad (8)$$

where λ stands for the wavelength of the center frequency for the considered frequency band and C'' is a coefficient used to consider multiple diffractions ($n_{\text{dif}}^{\text{th}}$ - order) such as:

$$C'' = \begin{cases} 1 & \text{if } n_{\text{dif}} = 1 \text{ (single diffraction),} \\ \frac{1 + (5\lambda/e)^2}{1/3 + (5\lambda/e)^2} & \text{if } n_{\text{dif}} > 1 \text{ (multiple diffraction) and } e > 0.3 \text{ m,} \end{cases} \quad (9)$$

with e the distance between the first and last diffractive edges. The path length difference δ is calculated by means of a “corner to corner” propagation technique with an offset of a few centimetres in relation to the wall⁴.

Both the reflected and diffracted fields on vertical surfaces are modelled by introducing an order of reflection n_{ref} and an order of diffraction n_{dif} respectively, which correspond to the number of reflections and diffractions that are taken into account from the source to the receiver (see figure 2). In addition, one can also limit the number of reflections and diffractions, in the calculation, by considering an extra parameter d_{lim} for the maximal distance between the source and the corresponding vertical surface (see section 4).

The ground effect A_{grd} is also simplified in comparison to the standard methodology detailed in the guide S  tra [35] since the soil nature is often unknown. Thus the grounds are considered as perfectly flat (*i.e.* without a specific topography) and reflecting, with $A_{\text{grd}_{R_{k,i}}} = -3$ dB, which tends to slightly overestimate the overall noise levels.

Besides, the potential specular reflections ($n_{\text{ref}}^{\text{th}}$ - order) from the vertical surfaces (*e.g.* facades, noise barriers, etc., see figures 2(c-d)) are considered by correcting the power level $L_{W,i}^j$ of the sound source in equation (5) according to the absorption coefficient α_{vert} of the considered surfaces, namely:

⁴ The offset is required since the sound ray would be rejected by the algorithm if it collides with a wall.

$$L_{W_{S_i}}^{(n_{\text{ref}})} = L_{W_{S_i}}^{(n_{\text{ref}}-1)} + n_{\text{ref}} \times 10 \log_{10} (1 - \alpha_{\text{vert}}). \quad (10)$$

Each specular reflection is modelled by means of the image receiver method.

3.4. Numerical optimisation

In addition to the simplifications made to the modelling of both the noise emission (section 3.2) and propagation (section 3.3), a few numerical optimisations were designed in order to reduce the computational burden related to the calculation over large computational domains.

3.4.1. Domain subdivision

Owing to the extent of the investigated areas (e.g. a huge agglomeration), a breakdown of the computational domain into subdomains is achieved in order to reduce the memory requirements, as illustrated in figure 3. The computational domain is divided into 2^n subdomains in relation to the global envelope as long as the maximal propagation distance (see Section 3.4.2) remains lower than a ratio equal to 30% of the maximal dimension of a subdomain. Thus, a weak ratio produces few subdomains and requires consequently a huge amount of memory but is more efficient in terms of calculation time. On the contrary, a higher ratio generates a lot of subdomains and therefore necessitates less memory but induces lower computation times. A ratio of 30% is a good compromise that allows to reduce the memory requirements while keeping reasonable calculation time.

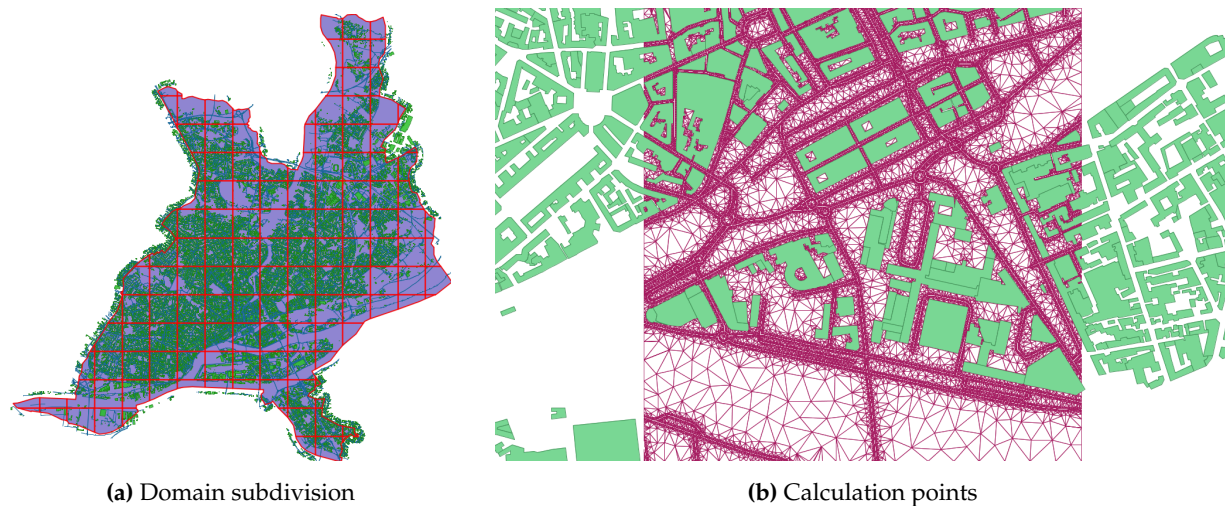


Figure 3. Illustrations of (a) the decomposition of the domain into sub-domains and of (b) the definition of the calculation points on the basis of an adaptive meshing of a sub-domain.

Each subdomain is then meshed with a thin and adaptive triangulation method in order to build the grid of calculation points (i.e. the point receivers). This triangulation process handles the continuity between the subdomains, in order to recompose, at the end of the process, the noise map on the whole domain. In addition, one can also adjust the maximum size of a mesh, and a grid refinement at the vicinity of the traffic lanes, using specific meshing parameters s_{max} and d_{road} respectively (see section 4.2.2).

The subdivision depends on two parameters: the size of the calculation domain (i.e. the area covered by the receivers) and the limit value of source-receiver propagation (parameter d_{max} in section 4.2.2).

The continuity between subdomains is ensured by taking into account the “active” sound sources from adjacent subdomains (figure 4). This subdivision process is only required for large computational domains. Besides, in certain cases, the need in acoustic indicators calculations is limited to a few fixed observation points, which reduces the computation time (no mesh nor building up of subdomains, limitation of the number of receivers).

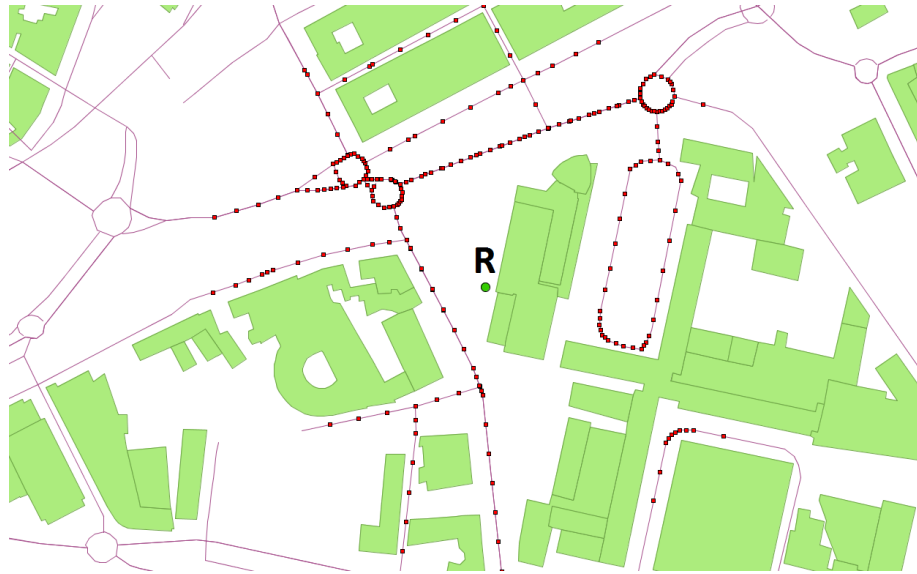


Figure 4. Search of the “active” sound sources (red) for a given receiver point R (green). An “active” sound source may be located in adjacent subdomains.

3.4.2. Point source generation

One of the major original features of the present approach rests upon the construction of the point sources for each calculation point and not for all the receivers points, as depicted at figure 5. This allows to reduce the amount of point sources required at each calculation point, in respect of equations (2). Besides, for the same purpose of limiting the amount of calculations, only sound sources located within a critical radius centred on each calculation point are considered.

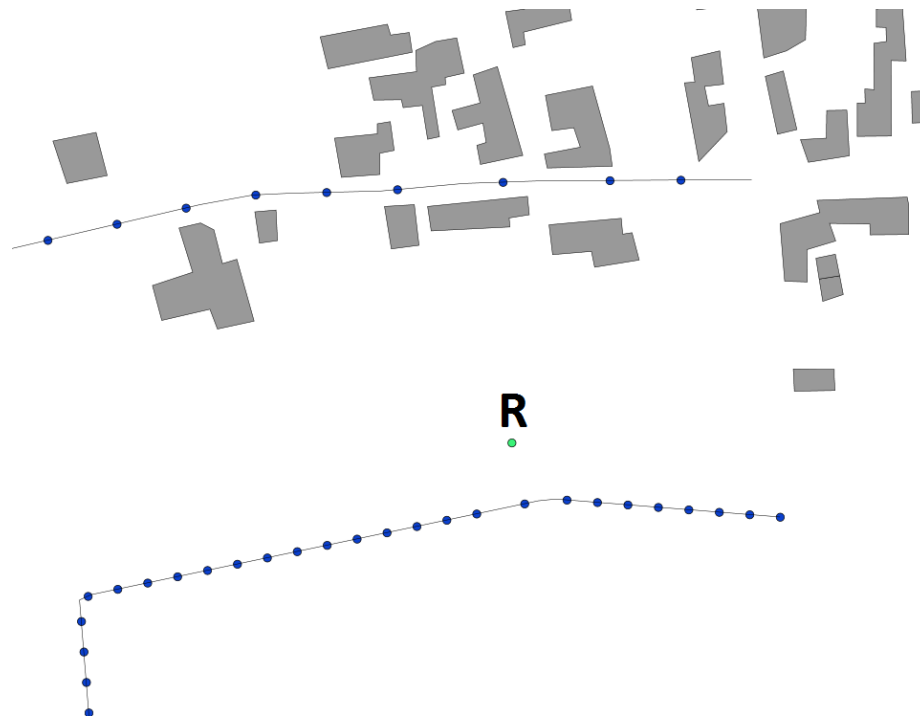


Figure 5. Example of the consideration of the point sources (in blue) for a given receiver R (in green). The discretisation of the line sources depends on the distance from the receiver.

Furthermore, according to the distance between a receiver and a noise source, this latter can lead to a very weak contribution to the sound level at the receiver. It is generally acknowledged that the maximal source-receiver distance must be comprised between 500 m and 1 km. However, the radius around which the sources are taken into account influences the calculation time. In most cases for which a sound source is located at the vicinity of the receiver, the more remote sources will have a minimal impact. A criterion was then designed, which consists in estimating the gain in terms of sound level of a hypothetical source i with a power W_S located at a distance d_{\min} from the receiver.

This criterion is defined by considering a free-field propagation and by neglecting the atmospheric attenuation, that is:

$$10 \log_{10} \left(\frac{W_S}{4\pi d_{\min}^2} + 10^{L_R/10} \right) - L_R < \epsilon, \quad (11)$$

where L_R is the current sound level at receiver R due to all the active sources i with $d_{\min,i} < d_{\max}/6$, where d_{\max} is the maximal source-receiver distance that is allowed for the computation (*i.e.* a calculation parameter; see section 4.2.2). Thus, when this criterion is fulfilled, all the real sources in this new additional active zone are considered and, thus, used to update the sound level L_R at receiver R . An another hypothetical sound source is introduced at a larger distance d_{\min} from the receiver and the criterion is checked again. The process is repeated again until the value of the distance from the receiver d_{\min} reached the maximal source-receiver distance d_{\max} .

In practice, the value of the power level W_S and of the parameter ϵ are fixed at 94 dB(A) and 0.03 dB(A) respectively. The values of the distance d_{\min} is chosen on a given range $[d_{\max}/5, d_{\max}/4, d_{\max}/2, d_{\max}]$. All these parameters seems to give relevant results, but can be modified depending on the urban configuration.

4. Integration within the OrbisGIS platform

4.1. Architecture

The proposed prediction method is implemented in an open source GIS ecosystem. As described in the figure 6, the general framework consists of three main modules, written in JAVA: the NoiseModelling plugin, the H2 database⁵ with its H2GIS extension⁶ [59] and the OrbisGIS platform [60].

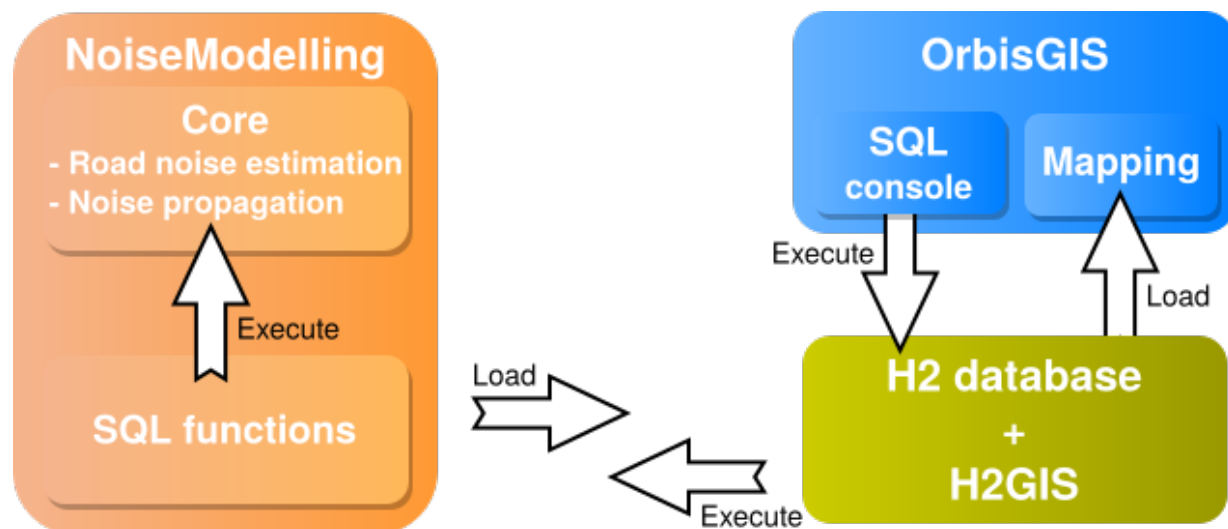


Figure 6. NoiseModelling framework.

NoiseModelling is organized in 2 modules. The NoiseModelling core contains the main algorithms for both the sound levels and noise maps calculations. The first part evaluates the noise emission related to the road and rail traffic, as detailed in section 3.2. The second part computes the noise propagation from each point source to potential receivers, according to the simplified standard-based model described in section 3.3, by taking as inputs:

- a set of sound sources defined by a geometry (lines or points) and an associated emission power in the form of a third octave band spectrum within the frequency range from 100 Hz until 5 kHz;
- an array of buildings as a 2D geometry (polygons), without information requirement concerning neither the buildings height nor the topography;
- a list of parameters such as the order of reflection n_{ref} and the walls absorption α_{vert} (Eq.(10)), the order of diffraction n_{dif} (Eqs.(8)-(9)), or else the maximum distance of propagation d_{max} .

The NoiseModelling SQL functions module exposes the core processes as a set of SQL functions. These functions are implemented on top of the Relational Database Management System (RDMS) H2 and its spatial extension called H2GIS [59], and take thus benefits from optimised spatial functions and indexes. The SQL functions are loaded by the H2GIS database that is used by the OrbisGIS platform to store the data and to perform spatial analysis. The data model that stores and queries the geographic features (geometry and attributes) uses the OGC (Open Geospatial Consortium) simple feature specification

⁵ H2 website: <http://h2database.com/>.

⁶ H2GIS website: <http://www.h2gis.org/>.

[61,62]. The communication between the database and the GIS tools is carried out from Java Database Connectivity (JDBC) API. The JDBC API provides standardized methods to query and to update data in a database. As a consequence, the H2GIS noise SQL functions could be executed in another context *e.g.* with a command line script in Python using Psycopg or in an Extract Transform Tool like Pentaho Kettle that supports JDBC connection⁷.

Inside the OrbisGIS ecosystem, the noise functions are manipulated both from a web service or a Graphical User Interface (GUI). When NoiseModelling is used as a web service, it is integrated as standalone module that communicates with the database and the client (that sends the requests) through OGC standards and JDBC protocol (figure 7). To interact with the web service, the user must use a client application that supports the WPS specification as QGIS⁸ offers. On the GUI side, NoiseModelling is managed from a SQL console that enables to execute SQL requests and to build complex scripts. This console also proposes numerous additional features for helping the user with code formatting or writing for example.

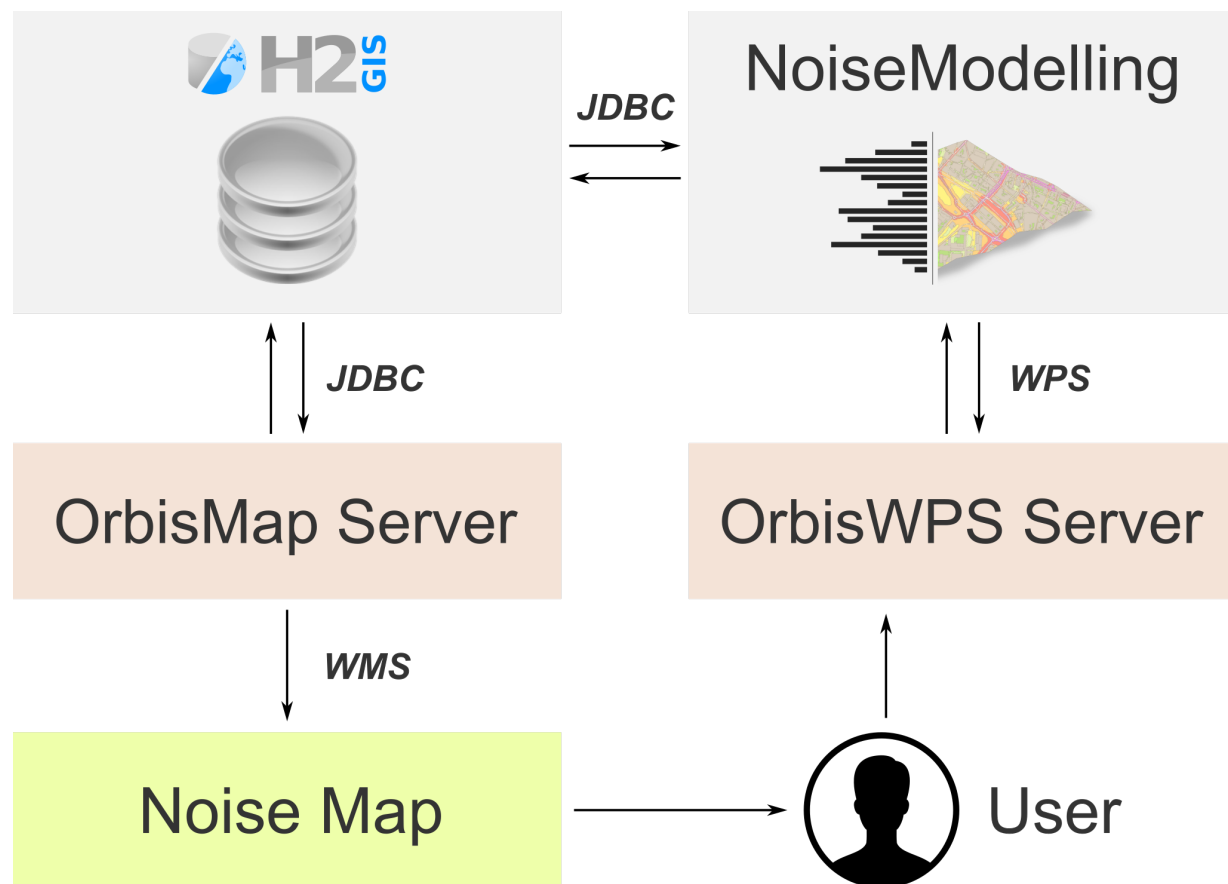


Figure 7. NoiseModelling web service architecture

⁷ The method for connecting H2GIS to Pentaho Kettle is presented here: <https://github.com/orbisgis/h2gis/wiki/4.1-Data-Integration-Pentaho-Kettle>.

⁸ QGIS website: <https://www.qgis.org>.

The GUI of OrbisGIS is based on the same architecture as the web service except that it runs on a local server, invisible to the end-user. The processing chain takes profit of the GIS capabilities in terms of database access⁹, geometrical calculations (H2GIS, OrbisWPS) and map rendering, cartography (OrbisMAP). As the main component of the OrbisGIS ecosystem, H2GIS and its spatial functions allow to handle numerous tasks such as:

- producing a continuous noise map as iso-levels based on the colour code defined in the standard NF S31-130;
- computing the population noise exposure by means of a spatial statistical analysis with external data¹⁰.

4.2. Use of NoiseModelling from the GUI

NoiseModelling is available in OrbisGIS as a set of SQL functions. These functions are encapsulated into SQL scripts and executed from the SQL console GUI illustrated at figure 8.

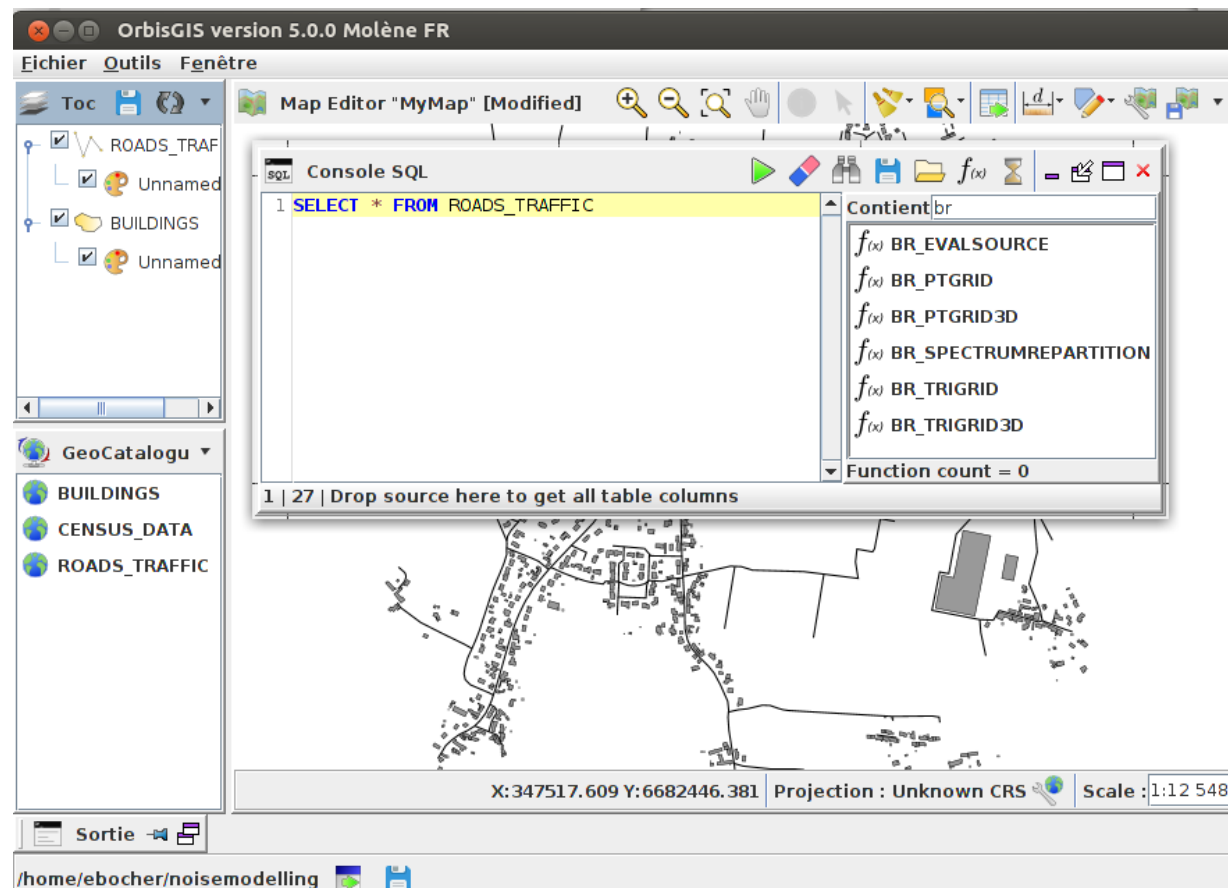


Figure 8. OrbisGIS GUI and its SQL console.

⁹ The database access allows to interact with both the input and output data.

¹⁰ For example, IRIS data from the French National Institute of Statistics and Economic Studies (INSEE - <https://www.insee.fr/en/accueil>) or, at the European scale, GEOSTAT data from the European Statistical Office (Eurostat - <https://ec.europa.eu/eurostat/fr/web/gisco/geodata/reference-data/population-distribution-demography/geostat>).

Figure 9 describes the general data flow processing. Firstly, the data must be loaded from OrbisGIS and, secondly, they are processed by the NoiseModelling functions. Then, the results stored in a H2GIS database are queried by the OrbisGIS tools to create thematic maps (style rendering). At the end, the data and their styling could be shared using geospatial standards (GeoJSON to export raw data, Symbology Encoding format to share map styles).

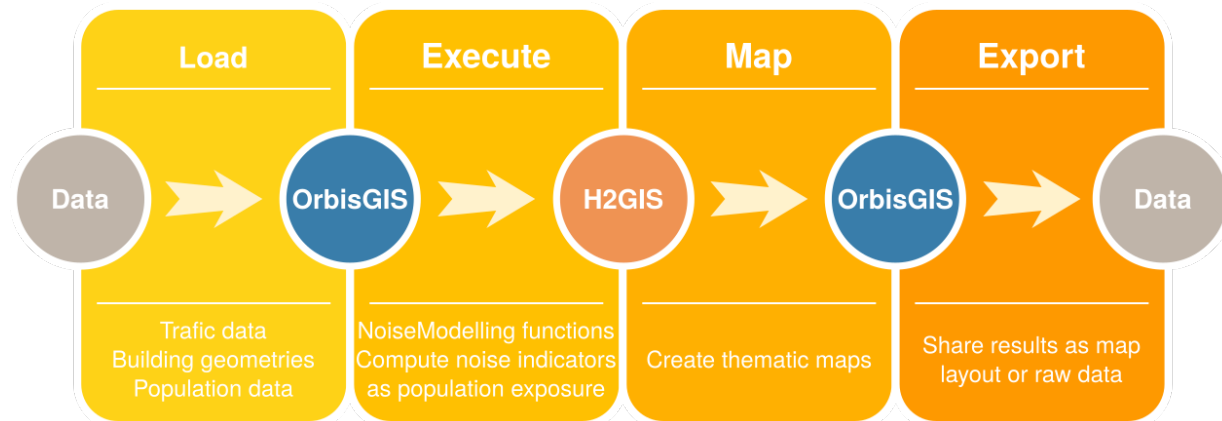


Figure 9. NoiseModelling data flow.

For demonstration purpose, a single approach to both perform a noise map and compute noise exposure is presented hereinafter following three steps:

- Step 1: Compute sound sources from traffic data;
- Step 2: Create the noise map;
- Step 3: Estimate population exposure.

Each step is based on the use of SQL queries and functions that are fully documented in the NoiseModelling documentation¹¹.

4.2.1. Step 1: Compute sound sources from traffic data

To compute the sound sources, a table that represents the road network must be available in the OrbisGIS platform. The table 3 shows the required input values for each geometry of the road network data and for the same reference periods (see section 5.2.1). Note that the geometries must be duplicated to give sound level for each driving direction.

¹¹ NoiseModelling documentation website: <https://github.com/Ifsttar/NoiseModelling/wiki>.

Table 3. Description of the road traffic input values.

Column name	Data type	Description
the_geom	Geometry	Polyline representing a road for a driving direction
lv_speed	Double	Average light vehicle speed
hv_speed	Double	Average heavy vehicle speed
lv_per_hour	Integer	Average number of light vehicles by hour
hv_per_hour	Integer	Average number of heavy vehicles by hour
begin_z	Double	Road start altitude
end_z	Double	Road end altitude
road_length2d	Double	Road length in 2 dimensions

Then the beginning and end-z values are extracted from the road geometry and its 2D length is calculated thanks to the H2GIS spatial function `BR_EvalSource`, by executing the SQL query given by the Script 1 in Appendix A that creates the table `roads_src_global`.

A new table is next produced that contains, for each geometry, a noise emission value expressed in dB(A) for light and heavy vehicles. The spectrum distribution is computed using the `BR_SpectrumRepartition` function that expects 3 parameters:

- a third octave band frequency among the values from 100 to 5000 Hz;
- an integer value, to set the category of the road surface ('0' for porous pavements and '1' for non-porous pavement);
- a noise emission value in dB(A).

Applied on the table `roads_src_global` previously created, the `BR_SpectrumRepartition` function returns the third octave band levels in dB(A) for both vehicle emission spectra as illustrated by the Script 2 in Appendix A. The result is stored in a new table called `roads_src` and used to build a noise map.

4.2.2. Step 2: Create the noise map

The first step of the noise map creation consists in computing the noise propagation on the set of Delaunay triangulation vertices that integrate road and building geometries. This stage is achieved by using the `BR_PtGrid` function which receives 12 input parameters:

- the name of the building table, which contains a geometry column which type is `POLYGON`;
- the name of the table that stores the sound power level expressed in dB(A) for a geometry type `POINT` or `LINestring`;
- the name of the emission level column;
- the maximum propagation distance (d_{\max} , in meter) from the receivers that enables to ignore the sources farther than this distance for each receiver (see section 3.4.2);
- the maximum wall seeking distance (d_{\lim} , in meter), which permits to overlook walls farther than this direct propagation distance between each source and receiver, thus neglecting reflections and diffractions on these walls;
- the road width (in meter), which gives the distance from which the receivers start being created (should be superior than 1 m);
- the receivers densification value (d_{road} , in meter), which creates additional receivers at the corresponding value from the sources (0 to disable);
- the maximum area of a triangle (s_{\max} , in squared meters), which sets the maximum surface for the noise map triangular mesh (a smaller area means more receivers);
- the sound reflection order (n_{ref} , a positive integer), which corresponds to the maximum number of wall reflections between each source and receiver;

- the sound diffraction order (n_{dif} , a positive integer), which defines the maximum number of horizontal diffractions between each source and receiver;
- a wall absorption value (α_{vert} , a real value between 0 and 1).

As depicted in figure 10, the BR_TriGrid function produces a constrained Delaunay triangulation by executing the Script 3 given in Appendix A.

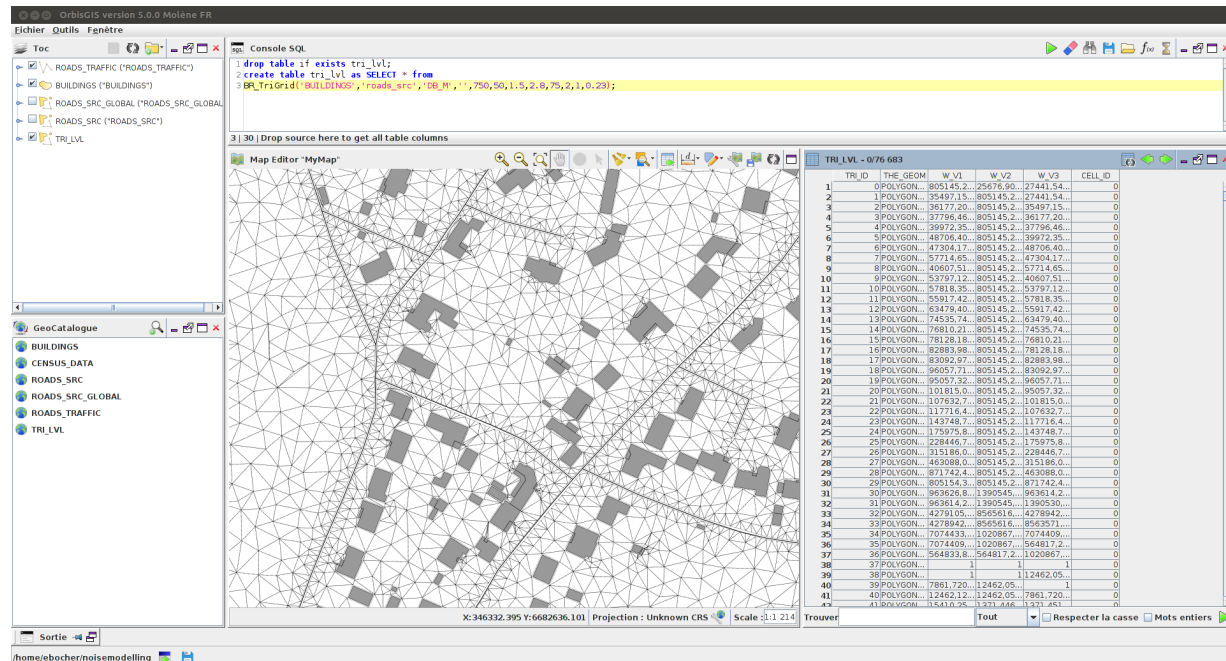


Figure 10. Example of the results of the BR_TriGrid function in the OrbisGIS platform.

In addition to its geometry, each triangle is defined by 5 values stored in a table with the following columns:

- TRI_ID, unique identifier of a mesh (*i.e.* a triangle);
- W_V1, sound energy for the receiver at the first vertex of the mesh;
- W_V2, sound energy for the receiver at the second vertex of the mesh;
- W_V3, sound energy for the receiver at the third vertex of the mesh;
- CELL_ID, unique identifier for a cell if the computational domain is subdivided (default is 0; see section 3.4).

The output triangles are then merged to compute a noise contour map. The process, presented in the SQL Script 4 in Appendix A, takes advantage of the SQL language and of the spatial functions ST_TriangleContouring, ST_Union, ST_Accum and ST_Explode. The figure 11 shows the produced contour noise map for a maximum propagation distance equal to 750 m, a maximum wall seeking distance of 50 m, roads width of 1.5 m, a receivers densification value equal to 2.8 m, a maximum area of triangles of 75 m², a sound reflection order of 2, a sound diffraction order equal to 1 and a wall absorption value equal to 0.23 (concrete vertical surfaces).

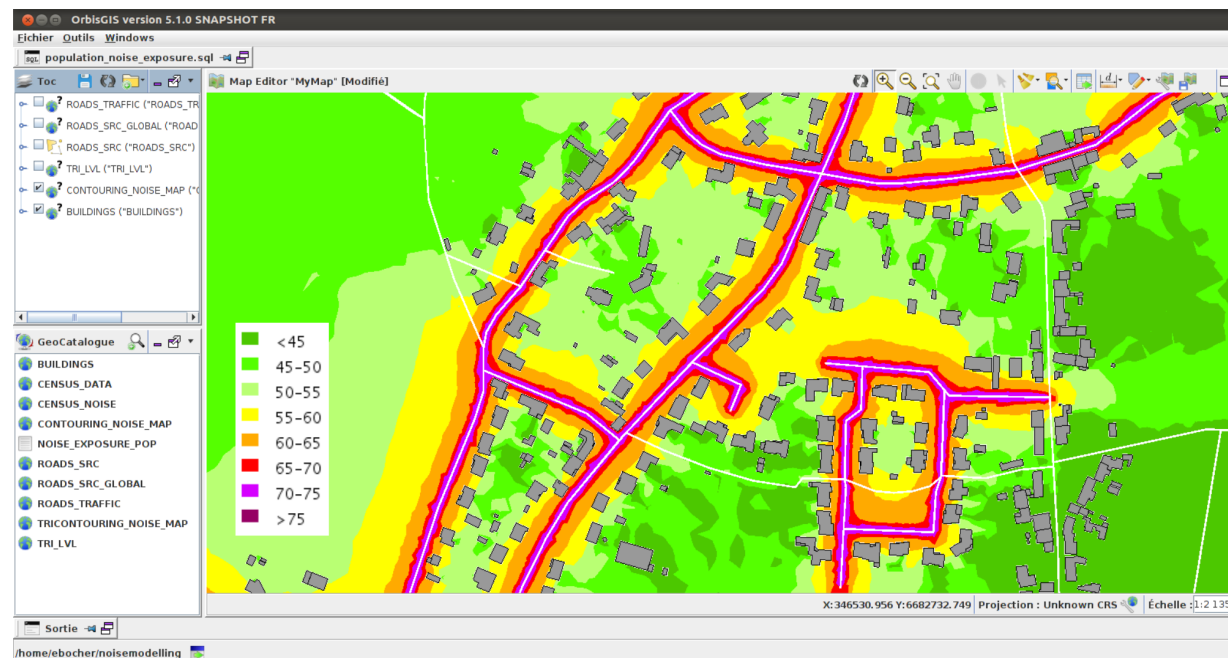


Figure 11. Contour noise map.

4.2.3. Step 3: Estimate population exposure

The population exposure is the most common indicator used to put in perspective a noise map and the distribution of the population. These exposure rates correspond to the number of inhabitants living in dwellings exposed to equivalent noise levels (*i.e.* L_{den}) within standard value ranges. It could be calculated from all noise level categories or from a level exceeding a value, according to the most exposed facade (in this case, receiver points are placed at a distance of 1 m in front of the facade), as recommended in the french methodological guide of CERTU [64]. The spatial analysis functions available in OrbisGIS allow to compute the number of inhabitants for each noise level categories. For example, the SQL Script 5 in Appendix A details the method, using two input tables: the contouring noise map and the location of inhabitants provided by the national institute of statistics and economic studies (INSEE). These data are represented as a population grid dataset, where a cell contains a value of inhabitants.

The distribution of the total of inhabitants per noise level could then be presented in a bar chart or a table and integrated in a external document. All the steps can be automated from the OrbisGIS platform and then exposed as a set of services available from Open Geospatial Consortium standards (WMS layer for data rendering, WPS service for data processing).

5. Application to the study of urban mobility plans

5.1. Urban mobility plans scenarios

The proposed integration of the noise emission and propagation implementations into a GIS can help decision-makers to estimate the impact of urban mobility plans in terms of noise annoyance and population exposure. The present work falls within the framework of the Eval-PDU project which was originated in response to a proposal of *Nantes Métropole* (an urban Metropolitan Community in France) to conduct research concerning the assessment of the environmental impacts of urban mobility plans for the City agglomeration [32].

The Nantes conurbation is served notably by three tramlines, one dedicated bus line and lots of other bus lines, and promotes soft modes of transport with the development of pedestrian streets and walkways, as well as bicycle lanes.

The Eval-PDU project considered not only the noise impact, but also other environmental effects (air pollution, energy) and socio-economic (property values of housings, changes in citizen’s behaviour, etc.). Several scenarios were processed and compared with the situation for the 2008 reference year (T0) in order to estimate changes in citizen’s displacement behaviour, due to variation of energy price, urban sprawling, local and national economic transformations. Regarding noise, only three scenarios leading *a priori* to a meaningful effect in terms of sound levels (*i.e.* T1, T2 and T4) are considered, and are detailed in table 4.

Table 4. Description of the reference situation T0 and of the three studied scenarios (T1, T2 and T4).

Code	Description
T0	Situation for the 2008 reference year
T1	Drop of the automobiles demand by removing 25% of the automobiles trips, which witnesses a loading rates for vehicles up 33%
T2	Increase in the travel demand up 20% (due to a 20%-growth of population or of the mobility)
T4	Doubling of the fuel price

5.2. Input data

5.2.1. Traffic data

The sound emission map is made of a point sources network based on traffic information generated by a road traffic model and furnished by one of the partners of the Eval-PDU project. The traffic model relies on road counts data as well as other input data that determine the distribution of vehicle flows: the transport supply, the territorial socio-economic conditions, household travel surveys [33,65]. This model is able to describe the kinematics of both Light Vehicles and Heavy Trucks over a major road network (5 000 km) with a fine description of the traffic data, and over a secondary road network (15 000 km) with a lower level of representation of the traffic. The territory is modelled into IRIS zones in the study area and into municipalities in the rest of the Department, that correspond with the origin and destination points of the journeys. IRIS is a French acronym of aggregated units for statistical information, and represents a geographic part of a Commune.

However, the reference periods of traffic data ¹², obtained by the traffic model, which are defined by Night Off-peak Hours (NOH), Day Off-peak Hours (DOH), Morning Rush Hours (MRH) and Evening Rush Hours (ERH), differ from the reference periods for the calculation of the acoustic indicators. Indeed, the acoustic reference periods and the related indicators are defined, in France, by the methodology described in [64]: namely the time slot 6am-18pm for the day with the corresponding A-weighted long-term average noise level over one year L_d ; 18pm-22pm for the evening with the related noise level L_e ; and 22pm-6am for the night with the corresponding noise level L_n . The correspondence between both reference periods are summarised in table 5. The three acoustic indicators are then used to calculate the day-evening-night noise indicator L_{den} as recommended by the Directive 2002/49/EC to assess noise

¹² The traffic data includes, for each reference periods, the required values listed in the Table 3.

annoyance, which is calculated for each frequency band j by summing the contributions over the three acoustic time periods¹³, that is:

$$L_{\text{den}}^j = 10 \log_{10} \left[\frac{1}{24} \left(12 \times 10^{\frac{L_d^j}{10}} + 4 \times 10^{\frac{L_e^j+5}{10}} + 8 \times 10^{\frac{L_n^j+10}{10}} \right) \right]. \quad (12)$$

Table 5. Breakdown of “acoustic” reference periods from “traffic” reference periods.

Period	0 am	1 am	2 am	3 am	4 am	5 am	6 am	7 am
Acoustic	night						day	
RV	NOH						DOH	MRH
TW	NOH					NOH	DOH	MRH

Period	8 am	9 am	10 am	11 am	12 pm	1 pm	2 pm	3 pm
Acoustic	day							
RV	MRH	DOH						
TW	MRH	DOH						

Period	4 pm	5 pm	6 pm	7 pm	8 pm	9 pm	10 pm	11 pm
Acoustic	day		evening				night	
RV	DOH	ERH		DOH	NOH			
TW	DOH	ERH		DOH	NOH			

The sound levels are thus calculated for each traffic reference period, that is L_{NOH} , L_{MRH} , L_{DOH} and L_{ERH} , and then reconstructed for the acoustic reference periods for the L_{den}^j calculations.

The calculation of the day equivalent level, which is common for all VC (*i.e.* RV and TW), is thus given by:

$$L_d^j = 10 \log_{10} \left[\frac{1}{12} \left(2 \times 10^{\frac{L_{\text{MRH}}^j}{10}} + 9 \times 10^{\frac{L_{\text{DOH}}^j}{10}} + 1 \times 10^{\frac{L_{\text{ERH}}^j}{10}} \right) \right]. \quad (13)$$

In contrast, the calculations of the evening and night equivalent levels depend on the VC (*i.e.* RV or TW) since the public transports does not work between 1 am and 4 am. This leads to consider two time intervals for TW, namely the time slots [8pm-1am] as NOH_1 and [4am-6am] as NOH_2 . The two acoustic indicators are thus computed for RV by:

$$\begin{cases} L_e^j = 10 \log_{10} \left[\frac{1}{4} \left(2 \times 10^{\frac{L_{\text{NOH}}^j}{10}} + 1 \times 10^{\frac{L_{\text{DOH}}^j}{10}} + 1 \times 10^{\frac{L_{\text{ERH}}^j}{10}} \right) \right], \\ L_n^j = L_{\text{NOH}}^j \end{cases} \quad (14)$$

and for TW by:

¹³ The evening and night time slots are penalised (+5 dB and +10 dB respectively) in order to reflect the increased annoying effect of noise during these periods.

$$\begin{cases} L_e(j) = 10 \log_{10} \left[\frac{1}{4} \left(2 \times 10^{\frac{L_{NOH_1}^j}{10}} + 1 \times 10^{\frac{L_{DOH}^j}{10}} + 1 \times 10^{\frac{L_{ERH}^j}{10}} \right) \right], \\ L_n(j) = 10 \log_{10} \left[\frac{1}{10} \left(5 \times 10^{\frac{L_{NOH_1}^j}{10}} + 2 \times 10^{\frac{L_{NOH_2}^j}{10}} \right) \right]. \end{cases} \quad (15)$$

5.2.2. Other input data

Geographical data The geographical data (topography, buildings, roads) are issued from the BD TOPO® database provided by the National Institute of Geographic and Forestry Information (IGN¹⁴). Note that there is no noise barrier in the study area.

Road pavement Due to the lack of information concerning the nature of road pavements, some simplifications in comparison to the standard method [34] are considered in terms of type and age of the road pavement. Because porous surfaces are mostly used for road segments with vehicle speed over 70 or even 90 km/h, only non-porous pavements are considered, which represent the majority of the roads in built-up area. In addition, the age of pavement is fixed at 10 years, which is, here again, a relevant hypothesis.

Population Statistical population units are given from INSEE databases with Commune boundaries¹⁵.

5.3. Initial verification

A quantitative validation is difficult to implement as it would require to compare the produced noise maps with “reference” noise maps issued from classical tools on the basis of similar input data sets [66]. The relevance of such a comparison is anyway arguable since the “reference” noise maps are often themselves not validated, neither in comparison with measurements, nor with other simulation tools, particularly for built-up areas. Consequently, the main interest of the noise maps produced with the proposed simplified method rests rather upon the relative comparison of some scenarios concerning urban transport plans in order to identify large differences in terms of noise levels (*i.e.* in the order of several decibels).

Nevertheless, a “qualitative” verification is achieved here, which consists in comparing the noise maps generated by the present approach with the ones produced by the agglomeration of *Nantes Métropole* within the framework of the application of the Directive 2002/49/EC for the year 2008, using a commercial software. Thus, the figure 12 shows the day-evening-night equivalent sound levels L_{den} of Nantes city centre obtained with both methods. Using NoiseModelling, The input parameters for the sound propagation calculations (*i.e.* of the BR_TriGrid function) are the following: a maximum propagation distance $d_{max} = 750$ m, a distance in searching for facades $d_{lim} = 50$ m, a roads width of 1.5 m, a receivers densification value $d_{road} = 2.8$ m, a maximum area of triangles $s_{max} = 75$ m², sound reflection and diffraction orders $n_{ref} = 2$ and $n_{dif} = 1$ respectively, and a wall absorption value $\alpha_{vert} = 0.23$ (concrete vertical surfaces). These parameters values were chosen as they ensure a satisfactory compromise between calculation time and results convergence in the present application.

A good agreement appears over most of the busy roads (higher levels in red) and in quiet areas (lower levels in green). However, some non-negligible discrepancies can be noticed of which origin should result from very different input data concerning both the traffic and road networks, what reveals

¹⁴ IGN website: <http://www.ign.fr/>.

¹⁵ INSEE website: <https://www.insee.fr/>.

a high sensitivity to input data sets. In particular, the data issued from the traffic model seem to be too averaged for the secondary road network (identical average value for several roads of the same district), while “real” traffic flows are different. These differences between the two maps must nonetheless be tempered since the “reference” noise map rests upon its own hypotheses and approximations in terms of both modelling and input data.

For information, the calculations performed with NoiseModelling for the production of the noise map presented at figure 12(b) required 4 500 417 receivers, 1 304 158 043 source/receiver pairs, 2 523 809 219 image receivers and 375 715 828 specular reflections¹⁶. Similar verifications were achieved for the 24 towns of the urban Metropolitan Community of Nantes (*Nantes Métropole*) (65 km²).

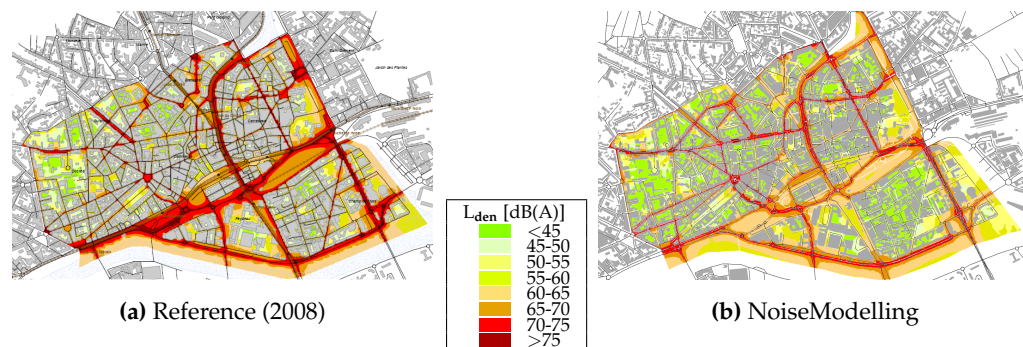


Figure 12. Comparison of the road traffic noise L_{den} maps (a) provided by Nantes Métropole (2008) and (b) produced with the proposed approach for down-town Nantes for a 2nd-order sound reflection ($n_{ref} = 2$), a 1st-order sound diffraction ($n_{dif} = 1$), a critical radius $d_{max} = 750$ m, a distance in searching for façades $d_{lim} = 50$ m, a roads width of 1.5 m, a receivers densification value $d_{road} = 2.8$ m and a wall absorption value $\alpha_{vert} = 0.23$.

Despite the previous comments, the integration of the proposed implementations of noise emission and propagation modelling into a GIS seems relevant to evaluate different scenarios concerning traffic-related modifications. A few examples of such applications are presented in the following section for the urban Metropolitan Community of Nantes.

5.4. Statistical analysis of scenarios in terms of population noise exposure

The evaluation method consists in estimating the population exposure rates for the reference situation (T0) and for the three scenarios described at the section 5.1:

- the sound levels are first computed at 1 m from the façades of buildings, as illustrated at figure 13(a);
- the L_{den} values are then filtered in order to retain the maximal values per building unit (*i.e.* $L_{den,max}$) as presented at figure 13(b);
- the noise levels for each building are then combined with statistical population units into OrbisGIS.

The number of residents in the buildings is estimated firstly by identifying the residential buildings,

¹⁶ One can note that the number of specular reflections is greater than the number of image receivers. This is due to the fact that image receivers are most of the time hidden behind another wall which implies no specular reflection on this wall. Moreover, the number of image receivers is related to the reflection order without collision test.

secondly by collecting the population data, and thirdly by assigning the population data to the habitable surface¹⁷ of buildings [67].

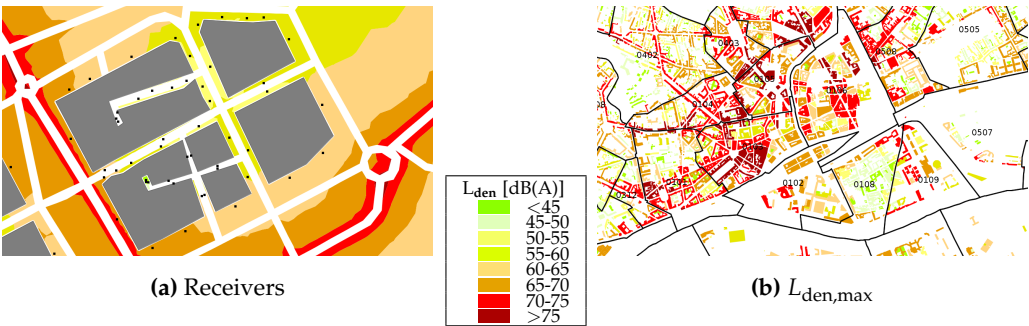


Figure 13. Illustrations of (a) the front facade receivers (black points) and of (b) the cartography of the maximal equivalent sound levels $L_{den,max}$ per buildings for the 2008 reference year situation (T0).

These 3 scenarios are automated within a parametrised geoprocessing script that load, process and build the map, thanks to the spatial SQL functions available in H2GIS and OrbisGIS renderer.

In the following, the analysis rests only upon the results for the City of Nantes, which is a part of *Nantes Métropole*, with an estimated total population of 280 920 inhabitants in 2008. A first clustering is given in table 6 on the basis of the statistical analysis of all scenarios that ranks the number of inhabitants within sound level classes and that informs thus about the percentage of population per noise level range. A minimal impact is globally observed between the different scenarios; the distribution of population changes little compared to the reference situation. Nevertheless, one can notice that a drop of the passenger cars demand (T1) results in a slight decrease in the impacted population with a carry-over effect on value classes below a threshold of 65 dB. Besides, an increase in the global travel demand (T2) up to 20% leads to a rise in the population exposed to sound levels higher than the threshold value of 65 dB(A).

Table 6. Distribution of the inhabitants (Inh.) according to its noise exposure.

L_{den} [dB]	2008 base year		T1		T2		T4	
Pop.	Inh.	%	Inh.	%	Inh.	%	Inh.	%
<50	67 180	23.9	69 628	24.8	66 929	23.8	68 996	24.6
50-55	29 071	10.3	28 764	10.2	27 986	10.0	27 458	9.8
55-60	33 347	11.9	34 636	12.3	33 070	11.8	33 329	11.9
60-65	54 093	19.3	57 052	20.3	51 512	18.3	54 405	19.4
65-70	53 505	19.0	50 807	18.1	55 640	19.8	53 280	19.0
65-75	36 243	12.9	33 254	11.8	38 092	13.5	36 017	12.9
>75	7 478	2.6	6 776	2.4	7 688	2.7	7 431	2.6

¹⁷ The habitable surface corresponds to the product of the floor area multiplied by 0.85 (to take into account the common areas), with the number of storeys. The last parameter is deduced from the building height, assuming a theoretical value of 3 m for one storey.

In order to understand the impact of each scenario, the number of inhabitants exposed to a regulatory threshold overrun of 68 dB(A) for the L_{den} , as set by the French [French Decree no. 2006-361](#), can also be investigated. In this case, the impact of the different scenarios is difficult to observe due to the lack of spatial disparities. A change of geographic scale (to the IRIS scale) is thus required and achieved in order to improve the results readability, which consists in aggregating the number of inhabitants subject to sound levels over the threshold of 68 dB for the corresponding IRIS. In the next analysis, the residential IRIS is used where population generally falls between 1 800 and 5 000. Figure 14 shows that the percentage of inhabitants exposed to noise levels over the limit of acceptability (*i.e.* 68 dB) remains weak between the different scenarios, with extrema of -5 204 (-1.9%, T1) and +2 974 (+1.1%, T2) regarding the number of Nantes residents.

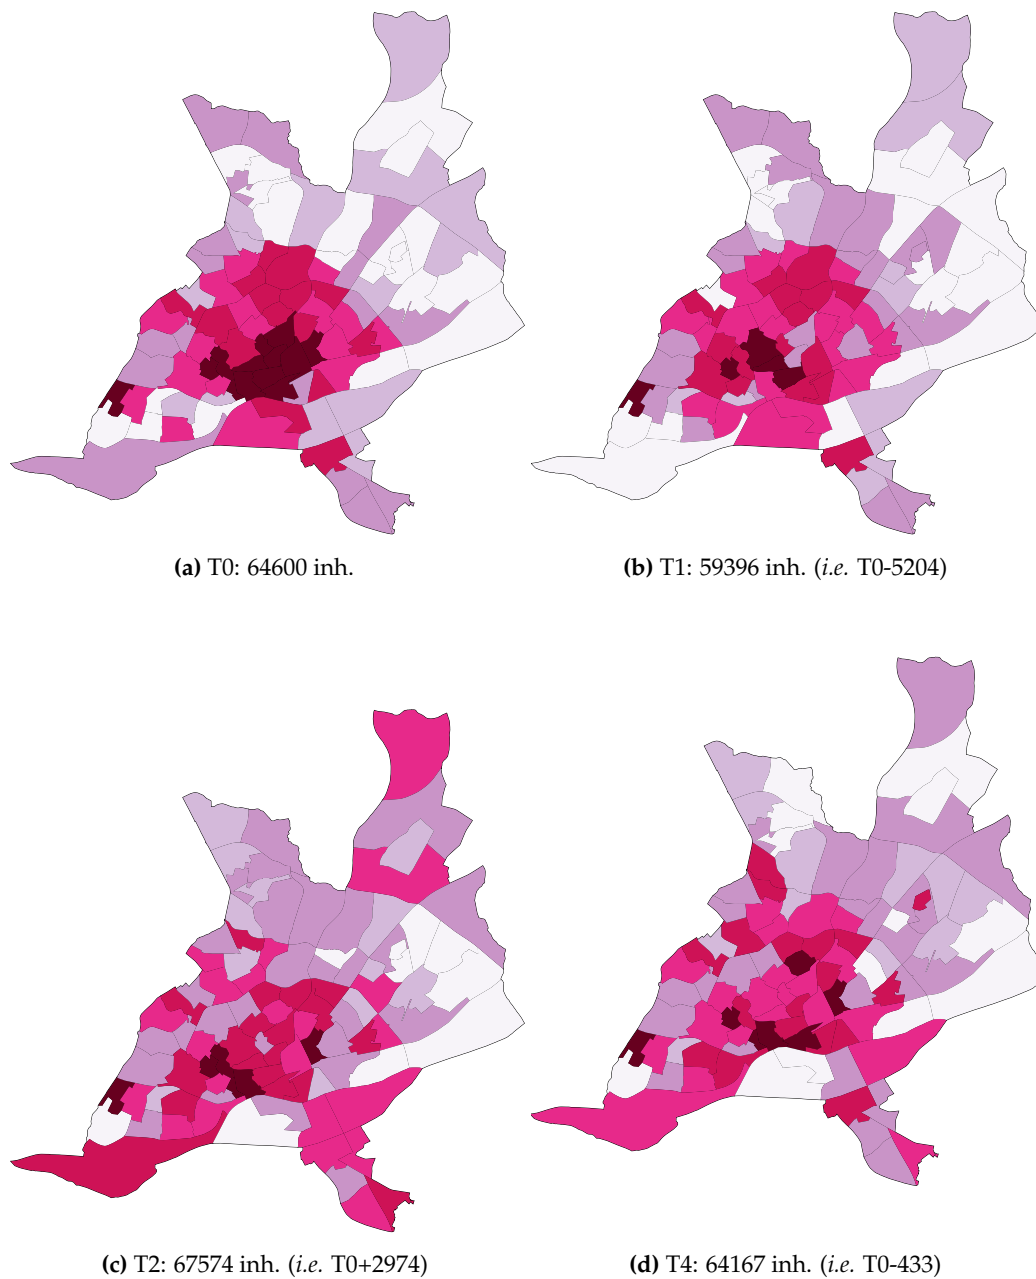


Figure 14. Percentage of inhabitants exposed to noise levels exceeding a threshold value of 68 dB: (a) reference T0 (2008); scenarios (b) T1, (c) T2 and (d) T4.

The 3 scenarios show a decrease of the percentage of inhabitants exposed in the central geographical units. It is an interesting observation in terms of impact on inhabitants because the central IRIS has large populations. The scenario T1 gives most valuable results in terms of spatial variation (−5204 inhabitants). The decrease of the percentage of inhabitants exposed is clear on the outlying IRIS and, even less so, on the city centre. A benefit may be explained by the reducing of the road congestion, especially for the suburban roads and the main transport axes, where the number of vehicles should decline. The scenarios T2 and T4 are less cost-effective. The percentage of exposed inhabitants increases on the outskirts. It must

be pointed out that the results obtained for the scenario T2 were expected as an increasing demand for mobility, and thus a rise in transport volume, which implies inevitably higher noise levels.

A finer analysis at the buildings scale, both regarding noise levels and input traffic data, could allow to better understand the reasons of these geographical differences and to study local effects. Nonetheless, the aim of the present work is mainly to show the ability of the proposed integration of noise emission and propagation models into a GIS for estimating the population noise exposure.

6. Conclusion

A GIS-based open-source framework is developed and detailed for the purpose of mapping and analysing environmental noise exposure at an urban agglomeration scale. The main originality of the proposed framework rests upon the full integration of a simplified noise modelling approach within a GIS software in the form of a service module. Such a spatial data infrastructure stands actually for a very well-suited platform for manipulating and processing large amount of input and output data within an unique and standardized tool.

The proposed methodology is first qualitatively validated by comparing the output noise maps for the agglomeration of Nantes with the ones provided by the City services. A satisfactory agreement is observed even if a few differences are noticed, which are mainly associated with discrepancies between input traffic data used to generate the two noise maps. The present approach is then applied to a case study for the Nantes conurbation, which consists in estimating the impact of traffic-related scenarios on the amount of population exposed to noise ranged into sound levels classes. The spatial analysis of each scenario impact is facilitated by aggregating fine-grained data (*i.e.* at the buildings scale) into city blocks, thanks to the GIS basis of the implemented framework. This approach allows to better identify geographical disparities according to the simulated scenario by evaluating the number of inhabitants exposed to a noise level greater than a standard threshold value (*i.e.* 68 dB in our application). Even if weak variations in terms of population exposure are observed, these changes are localised. A more finner analysis in the identified varying units could allow to better analyse the origins of these changes. The identification of residential buildings is achieved on the basis of the IGN's topographical database that does not take into account business and offices outside the activities areas, what must probably lead to an overestimate of the number of residential buildings and consequently of the impacted population.

Nonetheless, a few developments are still necessary in order to improve the proposed framework. The sound emission is, for now, simplified and neglects the surface type and ageing in the rolling noise contribution, as well as accelerating, decelerating and stopping road sections. In addition, the modelling of railway noise sources that, for now, only deals with the case of tramways must be enlarged on the consideration of trains. Regarding the noise forecasting method, recent developments addresses the consideration of the topography, the ground effects and the vertical diffraction over the horizontal edges of the buildings by extending the implementation from 2D to 3D modelling [69]. It must however be noted that these upgrades would have a little impact on the application presented in this paper.

Finally, another area of development would concern the use of open data. Since a few years, many geographical data sources are indeed made available in open data such as OpenStreetMap (OSM). Updated regularly by voluntary contributors and available on a larger territory with the same data structure, OSM offers potential for generalizing noise map production. In addition, data access conditions (by means of dedicated APIs) are well suited to the evolution of the GIS domain, where tools are controlled remotely via services and communicate with each other using standards. This is the case of NoiseModelling which is developed to be integrated into a remote service. However, before producing noise maps on-demand from open data, several methodological issues will have to be resolved : data quality, data model, architecture...

Acknowledgments: The present work benefited from financial support provided by the French National Research Agency (ANR) within the framework of the Eval-PDU project (2008-2012) under the reference ANR-09-VILL-0007.

Author Contributions: All authors have equally contributed to this work.

Conflicts of Interest: The authors declare no conflict of interest. The founding sponsors had no role in the design of the study; in the collection, analyses, or interpretation of data; in the writing of the manuscript, and in the decision to publish the results.

Appendix A. SQL scripts

Listing 1: Extraction through H2GIS of the beginning and end-z values of a road geometry and calculation of its 2D length.

```
CREATE TABLE roads_src_global
AS SELECT the_geom ,
        BR_EvalSource(lv_speed , hv_speed , lv_per_hour , hv_per_hour ,
        ST_Z(ST_GeometryN(ST_ToMultiPoint(the_geom) ,1)) ,
        ST_Z(ST_GeometryN(ST_ToMultiPoint(the_geom) ,2)) ,
        ST_Length(the_geom)) as db_m
FROM road_traffic_table ;
```

Listing 2: Computation of the noise emission for all third octave bands.

```
CREATE TABLE roads_src AS
SELECT the_geom ,
        BR_SpectrumRepartition(100 ,1 ,db_m) as db_m100 ,
        BR_SpectrumRepartition(125 ,1 ,db_m) as db_m125 ,
        BR_SpectrumRepartition(160 ,1 ,db_m) as db_m160 ,
        BR_SpectrumRepartition(200 ,1 ,db_m) as db_m200 ,
        BR_SpectrumRepartition(250 ,1 ,db_m) as db_m250 ,
        BR_SpectrumRepartition(315 ,1 ,db_m) as db_m315 ,
        BR_SpectrumRepartition(400 ,1 ,db_m) as db_m400 ,
        BR_SpectrumRepartition(500 ,1 ,db_m) as db_m500 ,
        BR_SpectrumRepartition(630 ,1 ,db_m) as db_m630 ,
        BR_SpectrumRepartition(800 ,1 ,db_m) as db_m800 ,
        BR_SpectrumRepartition(1000 ,1 ,db_m) as db_m1000 ,
        BR_SpectrumRepartition(1250 ,1 ,db_m) as db_m1250 ,
        BR_SpectrumRepartition(1600 ,1 ,db_m) as db_m1600 ,
        BR_SpectrumRepartition(2000 ,1 ,db_m) as db_m2000 ,
        BR_SpectrumRepartition(2500 ,1 ,db_m) as db_m2500 ,
        BR_SpectrumRepartition(3150 ,1 ,db_m) as db_m3150 ,
        BR_SpectrumRepartition(4000 ,1 ,db_m) as db_m4000 ,
        BR_SpectrumRepartition(5000 ,1 ,db_m) as db_m5000
FROM roads_src_global
```

Listing 3: Constrained Delaunay triangulation.

```
CREATE TABLE tri_lvl
```

```

AS SELECT *
FROM BR_TriGrid('buildings','roads_src','db_m','','',
750,50,1.5,2.8,75,2,1,0.23);

```

Listing 4: Noise contour map computation.

— *Split the triangles in the table tri_lvl into multiple triangles in order to cover a specified sound level interval. The intervals are stored in the IDISO column and correspond to the classes specified in the standard NF S 31 130 for French noise map.*

```

CREATE TABLE tricontouring_noise_map AS SELECT * FROM
ST_TriangleContouring('tri_lvl','w_v1','w_v2','w_v3',31622, 100000,
316227, 1000000, 3162277, 1e+7, 31622776, 1e+20);

```

— *Merge adjacent triangles with the same IDISO*

```

CREATE TABLE multipolygon_iso
AS SELECT ST_UNION(ST_ACCUM(the_geom)) the_geom, idiso
FROM tricontouring_noise_map GROUP BY IDISO, CELL_ID;

```

— *Explode each polygon to single polygon*

```

CREATE TABLE contouring_noise_map AS SELECT the_geom,idiso
FROM ST_Explode('multipolygon_iso');

```

```

DROP TABLE multipolygon_iso;

```

Listing 5: Computation of the number of inhabitants exposed to noise levels within standard value ranges.

— *Spatial indexes to perform analysis*

```

CREATE SPATIAL INDEX ON census_data(the_geom);

```

```

CREATE SPATIAL INDEX ON contouring_noise_map(the_geom);

```

— *Intersects each population cell by the noise contouring surface*

```

CREATE TABLE census_noise AS SELECT ST_INTERSECTION(a.the_geom, b.the_geom)
AS the_geom, a.inh, ST_AREA(a.the_geom) AS cell_area, b.IDISO
FROM census_data AS A, contouring_noise_map B

```

```

WHERE a.the_geom && b.the_geom AND ST_Intersects(a.the_geom,
b.the_geom);

```

— *Compute the proportion of inhabitants*

```

ALTER TABLE census_noise ADD COLUMN inh_prop FLOAT;

```

```

UPDATE census_noise SET inh_prop= (ST_Area(the_geom)* inh)/cell_area;

```

— *Compute the sum of inhabitants for each noise level*

```

CREATE TABLE noise_exposure_pop AS SELECT IDISO, sum(inh_prop)
AS pop FROM census_noise GROUP BY IDISO;

```

```

ALTER TABLE noise_exposure_pop ADD COLUMN LABEL VARCHAR;

```

```

UPDATE noise_exposure_pop SET LABEL='<_45_dB(A)' WHERE IDISO=0;

```

```

UPDATE noise_exposure_pop SET LABEL='45_-_50_dB(A)' WHERE IDISO=1;

```

```

UPDATE noise_exposure_pop SET LABEL='50_-_55_dB(A)' WHERE IDISO=2;

```

```

UPDATE noise_exposure_pop SET LABEL='55_-_60_dB(A)' WHERE IDISO=3;

```

```

UPDATE noise_exposure_pop SET LABEL='60_-_65_dB(A)' WHERE IDISO=4;

```

```

UPDATE noise_exposure_pop SET LABEL='65_-_70_dB(A)' WHERE IDISO=5;

```

UPDATE noise_exposure_pop **SET** LABEL='70_75_dB(A)' **WHERE** IDISO=6;
UPDATE noise_exposure_pop **SET** LABEL='>75_dB(A)' **WHERE** IDISO=7;

Bibliography

1. United Nations. Our urbanizing world. Population Facts No. 2014/3, Department of Economic and Social Affairs, Population Division, 2014.
2. Śliwińska-Kowalska, M.; Zaborowski, K.; Śliwińska-Kowalska, M.; Zaborowski, K. WHO Environmental Noise Guidelines for the European Region: A Systematic Review on Environmental Noise and Permanent Hearing Loss and Tinnitus. *International Journal of Environmental Research and Public Health* **2017**, *14*, 1139.
3. Van Kempen, E.; Casas, M.; Pershagen, G.; Foraster, M. WHO Environmental Noise Guidelines for the European Region: A Systematic Review on Environmental Noise and Cardiovascular and Metabolic Effects: A Summary. *International Journal of Environmental Research and Public Health* **2018**, *15*, 379.
4. Klatte, M.; Bergström, K.; Lachmann, T. Does noise affect learning? A short review on noise effects on cognitive performance in children. *Frontiers in Psychology* **2013**, *4*.
5. Basner, M.; McGuire, S. WHO Environmental Noise Guidelines for the European Region: A Systematic Review on Environmental Noise and Effects on Sleep. *International Journal of Environmental Research and Public Health* **2018**, *15*, 519.
6. Guski, R.; Schreckenberg, D.; Schuemer, R.; Guski, R.; Schreckenberg, D.; Schuemer, R. WHO Environmental Noise Guidelines for the European Region: A Systematic Review on Environmental Noise and Annoyance. *International Journal of Environmental Research and Public Health* **2017**, *14*, 1539.
7. Fritschi, L.; Brown, A.L.; Kim, R.; Schwela, D.; Kephelopoulous, S. Burden of disease from environmental noise: Quantification of healthy life years lost in Europe. Technical report, WHO Regional Office for Europe, 2011.
8. Directive 2002/49/EC. Directive of the European parliament and of the council of 25 June 2002 relating to the assessment and management of environmental noise, 2002.
9. Report from the Commission to the European Parliament and the Council. On the implementation of the Environmental Noise Directive in accordance with Article 11 of Directive 2002/49/EC, 2017.
10. Bunn, F.; Zannin, P.H.T. Assessment of railway noise in an urban setting. *Applied Acoustics* **2016**, *104*, 16–23.
11. Morel, J.; Marquis-Favre, C.; Gille, L.A. Noise annoyance assessment of various urban road vehicle pass-by noises in isolation and combined with industrial noise: A laboratory study. *Applied Acoustics* **2016**, *101*, 47–57.
12. Ruiz-Padillo, A.; Ruiz, D.P.; Torija, A.J.; Ramos-Ridao, A. Selection of suitable alternatives to reduce the environmental impact of road traffic noise using a fuzzy multi-criteria decision model. *Environmental Impact Assessment Review* **2016**, *61*, 8–18.
13. Gagliardi, P.; Fredianelli, L.; Simonetti, D.; Licitra, G. ADS-B System as a Useful Tool for Testing and Redrawing Noise Management Strategies at Pisa Airport. *Acta Acustica united with Acustica* **2017**, *103*, 543–551.
14. Dutilleul, G.; Defrance, J.; Ecotiere, D.; Gauvreau, B.; Berengier, M.; Besnard, F.; Duc, E.L. NMPB-routes-2008: The revision of the french method for road traffic noise prediction. *Acta Acustica united with Acustica* **2010**, *96*, 452–462. Compendex.
15. Jonasson, H.G.; Storeheier, S. Nord 2000. New nordic prediction method for road traffic noise; 2001.
16. Salomons, E.; van Maercke, D.; Defrance, J.; de Roo, F. The Harmonoise Sound Propagation Model. *Acta Acustica united with Acustica* **2011**, *97*, 62–74.
17. Kephelopoulous, S.; Paviotti, M.; Anfosso-Lédée, F. Common Noise Assessment Methods in Europe (CNOSSOS-EU) - EU Science Hub - European Commission; Number Report EUR 25379 EN in Reference Report by the Joint Research Centre of the European Commission, Publications Office of the European Union: Luxembourg, 2012.
18. Bellucci, P.; Peruzzi, L.; Zambon, G. LIFE DYNAMAP project: The case study of Rome. *Applied Acoustics* **2017**, *117*, Part B, 193–206.

19. Kanjo, E. NoiseSPY: A Real-Time Mobile Phone Platform for Urban Noise Monitoring and Mapping. *Mobile Networks and Applications* **2010**, *15*, 562–574.
20. D'Hondt, E.; Stevens, M.; Jacobs, A. Participatory noise mapping works! An evaluation of participatory sensing as an alternative to standard techniques for environmental monitoring. *Pervasive and Mobile Computing* **2013**, *9*, 681–694.
21. Guillaume, G.; Can, A.; Petit, G.; Fortin, N.; Palominos, S.; Gauvreau, B.; Bocher, E.; Picaut, J. Noise mapping based on participative measurements. *Noise Mapping* **2016**, *3*, 17p.
22. Aiello, L.M.; Schifanella, R.; Quercia, D.; Aletta, F. Chatty maps: constructing sound maps of urban areas from social media data. *Royal Society Open Science* **2016**, *3*, 150690.
23. Ventura, R.; Mallet, V.; Issarny, V. Assimilation of mobile phone measurements for noise mapping of a neighborhood. *The Journal of the Acoustical Society of America* **2018**, *144*, 1279–1292.
24. Farcaş, F.; Sivertun, Å. Road Traffic Noise: GIS Tools for Noise Mapping And A Case Study for Skåne Region. ISPRS Workshop on quality, scale and analysis aspects of city models, 2009, Vol. XXXVIII-2/W11, *International Society for Photogrammetry and Remote Sensing*, p. 10p.
25. Yalcindag, N.; Ece, M.; v, M.; Licitra, G.; Ascari, E. Effects of quality of data and their sources in the strategic noise mapping process. *Proceedings of the 23rd International Congress on Sound and Vibration: From Ancient to Modern Acoustics*, 2016; ICSV 2016, p. 8p.
26. Maguire, D.; Longley, P. The emergence of geoportals and their role in spatial data infrastructures. *Computers, Environment and Urban Systems* **2005**, *29*, 3–14.
27. Nedovic-Budic, Z.; Crompvoets, J.; Georgiadou, Y. *Spatial data infrastructures in context: north and south*; CRC Press: Boca Raton, 2011.
28. Abramic, A.; Kotsev, A.; Cetl, V.; Kephelopoulos, S.; Paviotti, M. A Spatial Data Infrastructure for Environmental Noise Data in Europe. *International Journal of Environmental Research and Public Health* **2017**, *14*.
29. King, E.; Rice, H. The development of a practical framework for strategic noise mapping. *Applied Acoustics* **2009**, *70*, 1116–1127.
30. Directive 2007/2/EC. Directive of the European Parliament and of the Council of 14 March 2007 establishing an Infrastructure for Spatial Information in the European Community (INSPIRE), 2007.
31. Steiniger, S.; Bocher, E. An overview on current free and open source desktop GIS developments. *International Journal of Geographical Information Science* **2009**, *23*, 1345–1370.
32. Mestayer, P.; Abidi, A.; André, M.; Bocher, E.; Bougnol, J.; Bourges, B.; Brécard, D.; Broc, J.; Bulteau, J.; Chiron, M.; Fadet, P.; Faburel, G.; Fialaire, J.; Fortin, N.; Freneau, A.; Fritsch, B.; Gourlot, N.; Herbez, P.; Joumard, R.; Leduc, T.; Le Pen, Y.; Lépicier, V.; Leveaux, S.; Orfeuill, J.; Penven, F.; Petit, G.; Picaut, J.; Rebours, A. Urban mobility plan environmental impacts assessment: a methodology including socio-economic consequences - The Eval-PDU project. *Proceedings of the 10th Urban Environment Symposium, Urban Futures for a Sustainable World*, 2010; p. 11p.
33. Mestayer, P.; Bourges, B.; Fouillé, L.; Bougnol, J.; Bocher, E.; Schmidt, T.; Picaut, J. Évaluation environnementale du PDU nantais 2000-2010 à partir des simulations numériques des scénarios alternatifs du programme Eval-PDU. *Rech. Transp. Secur.* **2015**, *2015*, 97–120.
34. Sétra. *Road noise prediction-1: Calculating sound emissions from road traffic*; Sétra, 2009.
35. Sétra. *Road noise prediction-2: Noise propagation computation method including meteorological effects (NMPB 2008)*; Sétra, 2009.
36. Jónsson, G.; Jacobsen, F. A Comparison of Two Engineering Models for Outdoor Sound Propagation: Harmonoise and Nord2000. *Acta Acustica united with Acustica* **2008**, *94*, 282–289.
37. Defrance, J.; Salomons, E.; Noordhoek, I.; Heimann, D.; Plovsing, B.; Watts, G.; Jonasson, H.; Zhang, X.; Premat, E.; Schmich, I.; Aballea, F.; Baulac, M.; de Roo, F. Outdoor Sound Propagation Reference Model Developed in the European Harmonoise Project. *Acta Acustica united with Acustica* **2007**, *93*, 213–227.
38. ISO 9613-2:1996. *Acoustics-Attenuation of sound during propagation outdoors-Part 2: General method of calculation*; International Organization for Standardization, 1996.

39. NF S31-133. *Acoustique-Bruit dans l'environnement-Calcul de niveaux sonores (Acoustics-Environmental noise-Calculation of sound levels)*; AFNOR Association Française de Normalisation (French national organization for standardization), ICS: 17.140.30, 2011.
40. Probst, W. Methods for the Calculation of Sound Propagation. Proceedings of the 34th German Annual Conference on Acoustics; , 2008; DAGA, p. 5p.
41. Probst, W. Multithreading, parallel computing and 64-bit mapping software – advanced techniques for large scale noise mapping. Proceedings of the 34th German Annual Conference on Acoustics; , 2008; DAGA, p. 2p.
42. De Kluijver, H.; Stoter, J. Noise mapping and GIS: optimising quality and efficiency of noise effect studies. *Computers, Environment and Urban Systems* **2003**, *27*, 85–102.
43. Reijnen, R.; Foppen, R.; Veenbaas, G. Disturbance by traffic of breeding birds: evaluation of the effect and considerations in planning and managing road corridors. *Biodiversity & Conservation* **1997**, *6*, 567–581.
44. Li, B.; Tao, S.; Dawson, R.; Cao, J.; Lam, K. A [GIS] based road traffic noise prediction model. *Applied Acoustics* **2002**, *63*, 679–691.
45. Pamanikabud, P.; Tansatcha, M. Geographical information system for traffic noise analysis and forecasting with the appearance of barriers. *Environmental Modelling & Software* **2003**, *18*, 959–973. Integrating Environmental Modelling and GI-Technology.
46. Department of Transport. *Calculation of Road Traffic Noise (CoRTN)*. Her Majesty's Stationery Office (HMSO), London, UK, 1988.
47. Federal Highway Administration. *Highway Traffic Noise Analysis and Abatement Policy and Guidance (FHWA)*. US Department of Transport, Washington DC, USA, 1995.
48. Gulliver, J.; Morley, D.; Vienneau, D.; Fabbri, F.; Bell, M.; Goodman, P.; Beevers, S.; Dajnak, D.; Kelly, F.; Fecht, D. Development of an open-source road traffic noise model for exposure assessment. *Environmental Modelling & Software* **2015**, *74*, 183–193.
49. Reed, S.; Boggs, J.; Mann, J. A GIS tool for modeling anthropogenic noise propagation in natural ecosystems. *Environmental Modelling & Software* **2012**, *37*, 1–5.
50. Dreher, M.; Dutilleul, G.; Junker, F. Optimized 3D ray tracing algorithm for environmental acoustic studies. Proceedings of Acoustics 2012; , 2012; pp. 1537–1542.
51. Montgomery, G.; Schuch, H. GIS Data Quality. In *GIS Data Conversion Handbook*; John Wiley & Sons, Inc.: Hoboken, NJ, USA, 2007; pp. 131–146.
52. Veregin, H. Data quality parameters. *Geographical Information Systems* **1999**, *1*, 177–189.
53. Biswas, S.; Lohani, B. Extraction of Spatial Parameters from Classified LIDAR Data and Aerial Photograph for Sound Modeling. *ISPRS Annals of Photogrammetry, Remote Sensing and Spatial Information Sciences* **2012**, *I-4*, 59–64.
54. Singleton, A.; Spielman, S.; Brunsdon, C. Establishing a framework for Open Geographic Information science. *International Journal of Geographical Information Science* **2016**, *30*, 1507–1521.
55. Salomons, E.; Zhou, H.; Lohman, W. Fast traffic noise mapping of cities using the Graphics Processing Unit of a personal computer. Proceedings of the 43rd International Congress and Exposition on Noise Control Engineering; , 2014; Internoise, pp. 420–429.
56. Can, A.; Van Renterghem, T.; Botteldooren, D. Exploring the use of mobile sensors for noise and black carbon measurements in an urban environment. Proceedings of Acoustics 2012; , 2012; pp. 1543–1548.
57. Schall 03. Directive for the calculation of the sound emissions of railways (*Richtlinie zur Berechnung der Schallimmissionen von Eisenbahnen und Strassenbahnen*), 2006.
58. ISO 9613-1:1993. *Acoustics-Attenuation of sound during propagation outdoors-Part 1: Calculation of the absorption of sound by the atmosphere*; International Organization for Standardization, 1993.
59. Bocher, E.; Petit, G.; Fortin, N.; Palominos, S. H2GIS a spatial database to feed urban climate issues. 9th International Conference on Urban Climate (ICUC9); Météo-France, , 2015.
60. Bocher, E.; Petit, G. *OrbisGIS: Geographical Information System Designed by and for Research*; John Wiley & Sons, Inc., 2013; pp. 23–66.

61. Herring, J. OpenGIS® Implementation Standard for Geographic information - Simple feature access - Part 1: Common architecture. *Open Geospatial Consortium Inc.* **2006**, 95.
62. Herring, J. OpenGIS® Implementation Standard for Geographic information - Simple feature access - Part 2: SQL option. *Open Geospatial Consortium Inc.* **2006**, 95.
63. NF S31-130. *Acoustique-Cartographie du bruit en milieu extérieur-Élaboration des cartes et représentation graphique (Acoustics-Cartography of outside environment noise-Drawing up of maps and graphical representation)*; AFNOR Association Française de Normalisation (French national organization for standardization), ICS: 17.140.30, 2008.
64. CERTU. *Comment réaliser les cartes de bruit stratégiques en agglomération. Mettre en œuvre la directive 2002/49/CE (How to realize the strategic noise maps in agglomeration. Implementing the directive 2002/49/EC)*, Center for studies on Urban Planning, Transportation and Public Facilities, Methodological guide ed.; CERTU, 2006.
65. Fouillé, L.; Broc, J.; Bourges, B.; Bougnol, J.; Mestayer, P. La place des modèles de trafic dans les récentes modélisations des impacts environnementaux des transports. Importance de l'explicitation des méthodes et hypothèses. *Rech. Transp. Secur.* **2012**, 28, 190–200.
66. Probst, F.; Probst, W.; Huber, B. Comparison of noise calculation methods. *Proceedings of 40th International Congress and Exposition on Noise Control Engineering*; , 2011; Internoise, pp. 962–967.
67. CERTU. *Méthodes d'estimations de population : Comparaisons et seuils de validité (Population estimation methods: Comparisons and validity thresholds)*; CERTU, 2005.
68. French Decree no. 2006-361. *Décret relatif à l'établissement des cartes de bruit et des plans de prévention du bruit dans l'environnement et modifiant le code de l'urbanisme (Decree related to the drawing up of noise maps and of environmental noise prevention plans)*, 24 mars 2006.
69. Gauvreau, B.; Guillaume, G.; Can, A.; Gaudio, N.; Lebras, J.; Lemonsu, A.; Masson, V.; Carissimo, B.; Richard, I.; Haouès-Jouve, S. Environmental quality at district scale: A transdisciplinary approach within the EUREQUA project. *Proceedings of the first International Conference on Urban Physics (FICUP)*; , 2016.