

Article

Vinasse as a Sustainable Medium for the Production of *Chlorella vulgaris* UTEX 1803

Viviana Quintero-Dallos ¹, Janet B. García-Martínez ², Jefferson E. Contreras-Ropero ², Andrés F. Barajas-Solano ², Crisostomo Barajas-Ferrerira ³, Roberto Lavecchia ⁴ and Antonio Zuorro ^{4,*}

¹ Universidad Mariana

² Universidad Francisco de Paula Santander

³ Universidad Industrial de Santander

⁴ Sapienza Università di Roma

* Correspondence: antonio.zuorro@uniroma1.it

Abstract: This study investigates distillery wastewater, commonly known as vinasse, as a potential culture medium for the production of *Chlorella vulgaris* and its most relevant metabolites. The effect of vinasse concentration on the composition of the biomass (proteins, carbohydrates and lipids) was evaluated in treatments performed in 6-L tubular air-lift reactors. The reactors were operated at 25 °C for 18 days, in total darkness, under a continuous flow of air. Results showed a rapid growth of microalgae in the first ten days, when an average production of 0.87 g/L was reached. Then, the daily biomass productivity began to decrease, up to an average value of 11.8 g/L at the 16th day. For all treatments, there was a significant reduction in the concentration of most metabolites in the first eight days. This was likely due to the adaptation of the biomass to the new conditions, with a transition from autotrophic to heterotrophic metabolism. From the 10th day, the concentration of metabolites in the biomass began to increase, reaching a nearly constant value at the 16th day. The observed maximum concentrations (%w/w) were: 48.95% proteins, 2.88% xylose, 7.82% glucose, 4.54% arabinose, 8.28% fructose and 4.82% lipids. These values were only marginally affected by the type of treatment. Overall, the results obtained suggest that vinasse is a promising and sustainable medium for the growth of *C. vulgaris* and the production of valuable metabolites.

Keywords: distillery wastewater; vinasse; heterotrophic cultures; biorefinery; *Chlorella vulgaris*

1. Introduction

Large-scale production of wastewater is an inevitable consequence of contemporary societies. It leaves a trace on global biochemical cycles, mainly nitrogen and phosphorus [1], as well as high concentrations of carbon and other nutrients. This has significantly reduced the self-purification capacity of natural water bodies [2,3]. As a result, several environmental regulations have been established to control this problem and regulate the levels of organic load, nitrogen and phosphorus in the treated water [4].

The bioethanol industry produces large volumes (12–14 liters per liter of ethanol) of a wastewater known as vinasse [5]. Its characteristics depend on various factors such as variety and maturation degree of sugarcane, efficiency of the fermentation process and the conditions of the distillation process [6]. It is an acidic effluent (pH 3–5) with high chemical and biochemical oxygen demands (COD: 60–134 g/L, BOD: 16–96 g/L) and average contents of nitrogen, phosphorus and potassium equal to 0.55–4.2 g/L, 0.13–3.03 g/L and 2–17.5 g/L, respectively. Furthermore, the presence of phenolic compounds and melanoidins gives an intense coloration to vinasse, which is detrimental for living organisms and contributes to the deterioration of water quality [7].

In Colombia, Praj Delta T technology is used for the industrial production of bioethanol. This technology allows achieving about 1.6–2 liters of vinasse per liter of anhydrous alcohol produced [8].

In 2017, the production of this biofuel was around 367 million liters [9], generating about 920 million liters of vinasse, which was mainly used for fertigation of sugarcane crops. However, due to the accumulation of nutrients and the presence of heavy metals, this practice has been related to the increase in eutrophication of water bodies and soil instability [10].

National policies encourage the production and the use of liquid biofuels. According to resolution 40185, from 2018 it is mandatory a bioethanol-gasoline mixture E10 in vehicles on the national territory consuming oxygenated fuel. This new guideline implies an expansion in biofuel production and, consequently, a considerable increase in the generation of vinasse, which can represent an environmental threat if not properly managed.

For the treatment of vinasse, both physicochemical and biological methods have been investigated. The former seek to eliminate organic load or chemical contaminants from water by membrane separation, solvent extraction, adsorption or electrochemical treatments. However, these technologies exhibit inherent disadvantages, due to their high cost and the tendency to generate secondary pollutants [11].

An increasingly large number of studies confirm the ability of microalgae to remove phosphorylated substances [1]. These microorganisms can assimilate inorganic nitrogen and thus represent an excellent option for the bioremediation of wastewater [12]. In addition, from the knowledge of the different metabolites present in the biomass, it is possible to develop an integrated approach for their recovery in a facility called biorefinery [13].

The use of microalgae for the removal of pollutants and their transformation into biomass is one of the most promising technologies for water remediation [14-17]. In particular, these processes allow: (a) nutrient removal effluents with high organic load; (b) treatment of industrial wastewaters with trace metals and acids; (c) CO₂ sequestration; (d) transformation and degradation of xenobiotics and (e) detection of toxic compounds by algae-based sensors.

Chlorella vulgaris has been proposed as a candidate for many of the above purposes due to its easy adaptability and rapid growth [18]. The treatment of vinasse by microalgae has been investigated over the last 20 years. Travieso et al. [19] used cultures of *C. vulgaris* SR/2, obtaining high nitrogen and phosphorus removal (>85%) and a reduction in total solids of over 90%. Valderrama et al. [20] showed that a sequential treatment by *C. vulgaris* and *Lemma minuscula* of a recalcitrant anaerobic distillery effluent allowed a reduction in organic matter and color of up to 52%.

However, only since 2012 has the possibility of integrating the treatment of vinasse with the production of biofuels been investigated. Singh and Patel [11] showed that microalgae are promising candidates for the bioremediation of a large number of industrial effluents, including vinasses, and the combined production of components of interest to many industries. For example, Liu et al. [21] evaluated the use of sugarcane molasses as a carbon source for *C. zoofingensis* to obtain astaxanthins in addition to lipids for the production of biofuels. In 2016, Dos Santos et al. [22] proposed a two-stage process (12:12 hours) for the production of *Spirulina maxima*. In the first 12 hours, the microalgae were grown under autotrophic conditions (light plus CO₂); in the second stage, the medium was enriched with vinasse. On the seventh day of each cycle, the biomass concentration at the end of the two stages was 0.495 g/L and 0.609 g/L, respectively, and the protein content was 74.3% and 77.3% (w/w). Santana et al. [23] investigated the growth of forty microalgae strains in sugarcane vinasse at different concentrations. Two of these strains, *Micractinium* sp. Embrapa|LBA32 and *C. biconvexa* Embrapa|LBA40, resulted in very high biomass productivity (around 180 mg/L per day) when grown in an airlift flat-plate photobioreactor. Proteins and carbohydrates were the major classes of components of microalgae biomass. Glucose was the main monosaccharide detected, ranging between 46% and 76% of the total carbohydrate content.

From the above considerations, it clearly emerges that a biorefinery approach combining microalgae cultivation with the biological degradation of vinasse can be a sustainable option for the production of value-added compounds for the biofuel and other sectors. However, due to its chemical composition, high organic content and low pH, not all microalgae strains are able to grow in media containing vinasses. The main objective of this study was to evaluate whether the *C.*

vulgaris strain UTEX 1803 could be grown in a culture medium supplemented with vinasse. This strain was selected because of its ability to grow in wastewater and its relatively high productivity of valuable metabolites, such as proteins, carbohydrates and lipids. We were also interested in determining the biomass productivity and the evolution of the main microalgae components during the investigated treatments.

2. Materials and Methods

2.1. Vinasse Production

The vinasse used was obtained from the fermentation of molasses in the Laboratory of Chemical Processes at Universidad Industrial de Santander. For the fermentation process, 45 kg of commercial molasses were diluted in 151 L of water until reaching approximately 18° Brix. The mixture was pasteurized at 80 °C for 1 h, then it was cooled to 40 °C and the pH was adjusted to 4.2 by addition of sulfuric acid (95 wt%). The inoculum was prepared using 20 L of the mixture, to which ammonium chloride (144 g), magnesium sulfate (24 g), urea (24 g), phosphate rock (10 g) and 500 g of commercial yeast *Saccharomyces cerevisiae* (Levapan, Colombia) were added. The inoculum was transferred to the tank together with the other diluted molasses. After 1-h aeration, the tank was covered to allow the fermentation process to proceed. The process was carried out for three days. Then, the mixture was evaporated by an evaporator operating at 94 °C in two stages, each lasting 210 min.

2.2. Vinasse Characterization and Nutrient Consumption

Once obtained, the vinasses were assayed for total nitrogen, sodium, potassium, phosphorus and organic carbon. Other parameters such as alcoholic degree and the concentration of total sugars and solids were also determined. Total antioxidants content was assessed following procedure of Zuorro et al. [24, 25]. Total nitrogen (TN) was evaluated by the Kjeldahl method; according to SM 4500-N. Sodium and potassium were determined by atomic absorption, according to SM 3111 B and EPA 3050, respectively. Phosphorus was determined spectrophotometrically by SM 4500-P C and total organic carbon (TOC) by NTC 5167. These measurements were made at the Laboratory of Technical Consultations, Universidad Industrial de Santander (Colombia). Finally, sugar content (AOAC 932.14), total solids (AOAC 925.23) and alcoholic degree (ICONTEC 74) were determined by the Food Laboratory CICTA of Universidad Industrial de Santander.

2.3. Inoculum Preparation

Chlorella vulgaris UTEX 1803 was obtained from the UTEX collection (Austin, Texas, USA). The alga was grown in tubular glass reactors with a culture volume of 2 L containing Bold's Basal Medium [26]. Each reactor was equipped with a bubble aeration system for the injection of air with 1% (v/v) CO₂ at a flow-rate of 0.6 L min⁻¹.

2.4. Microalgae Cultivation

Tubular 6-L air-lift reactors with a culture volume of 5 L were used. The reactors were equipped with a bubble aeration system for the injection of air at a flow-rate of 0.6 L min⁻¹. The temperature was 25 ± 1°C and the pH was not controlled. Each reactor was coated with an aluminum foil to provide a fully dark environment over the 24-h period. To test the effect of vinasse on microalgae growth and composition, different dilutions of inoculum in vinasse were made (Tables 1–3). Each treatment was carried out in triplicate for 18 d.

Table 1. Culture media composition.

Treatment	Microalgae (mL)	Vinasse (mL)	Water (mL)	Final vinasse concentration (% v/v)	Final Volume (mL)
CM1	1250	375	3375	10	5000
CM2	1250	1875	1875	25	5000
CM3	1250	3750	0	75	5000

Table 2. Inoculation of diluted *C. vulgaris* in vinasse.

Treatment	Microalgae (mL)	Vinasse (mL)	Final Volume (mL)
D1	1250	3750	5000
D2	500	4500	5000

Table 3. Inoculation of concentrated *C. vulgaris* in vinasse.

Treatment	Microalgae (g)	Vinasse (mL)	Final Volume (mL)
C1	1	5000	5000
C2	2	5000	5000
C3	3	5000	5000

2.5. Quantification of Biomass Growth and Biomass Components

Several methods are available in the literature for measuring biomass growth. The most widely used procedures include cell counting, absorbance or turbidity measurements, dry weight determination and quantification of some growth-related metabolites such as chlorophyll [27]. We used a dry-weight method. In particular, every two days a 10-mL sample was removed from each reactor, centrifuged at 3400 rpm for 20 min and the supernatant was withdrawn. The solid fraction was resuspended in 10 mL of distilled water, filtered on pre-combusted CF/C glass fiber filters and dried overnight at 60 °C in an oven containing a bed of silica gel.

The main biomass components were quantified every two days. Protein content was determined as reported in [27]. Lipids were determined as described by Barajas-Solano et al. [28], while total carbohydrates were evaluated by the method of Dubois et al. [29] modified by Jerez-Mogollón et al. [30].

3. Results and Discussion

3.1. Vinasse Characterization

Vinasse is mainly composed of organic matter, potassium, sulfur, magnesium, nitrogen, and calcium, in amounts depending on the effluent source. It also contains phenolic dyes, caramel and melanoidins, which are responsible for its characteristic dark color. Studies carried out by Gloria and Filho [31], showed that vinasse from molasses had higher contents of organic matter and mineral elements. Table 4 shows the concentration ranges for the main compounds identified in the vinasse used as culture medium in this study.

Table 4. Chemical composition of vinasse.

Nutrients	Concentration range
Phosphorus (g P/L)	0.055 – 0.057
Potassium (g K/L)	24.60 – 24.62
Sodium (g Na/L)	0.57 – 0.58
Total nitrogen (g N/L)	2.32 – 2.38
Total organic carbon (g/L)	2.13 – 2.14
Alcoholic degree (%v/v)	0.05 – 0.07
Total sugars (%)	11.3 – 11.5

Total solids (%)	12.4 – 12.7
------------------	-------------

3.2. Biomass Production

The biomass growth rates determined in the investigated treatments are reported in Table 5.

Table 5. Biomass growth rates in the eight treatments.

Treatment	Growth rate (g L ⁻¹ d ⁻¹)
CM1	0.05 ± 0.02
CM2	0.15 ± 0.04
CM3	0.24 ± 0.06
D1	0.64 ± 0.06
D2	0.64 ± 0.03
C1	0.58 ± 0.04
C2	0.72 ± 0.05
C3	0.67 ± 0.08

Figure 1 displays the time variation of biomass production at different vinasse concentrations. As can be seen, the highest growth rate was achieved using undiluted vinasse (75% v/v), which led to a biomass concentration of 5.11 g/L after 18 days. This is probably due to the higher concentration of nutrients in the medium.


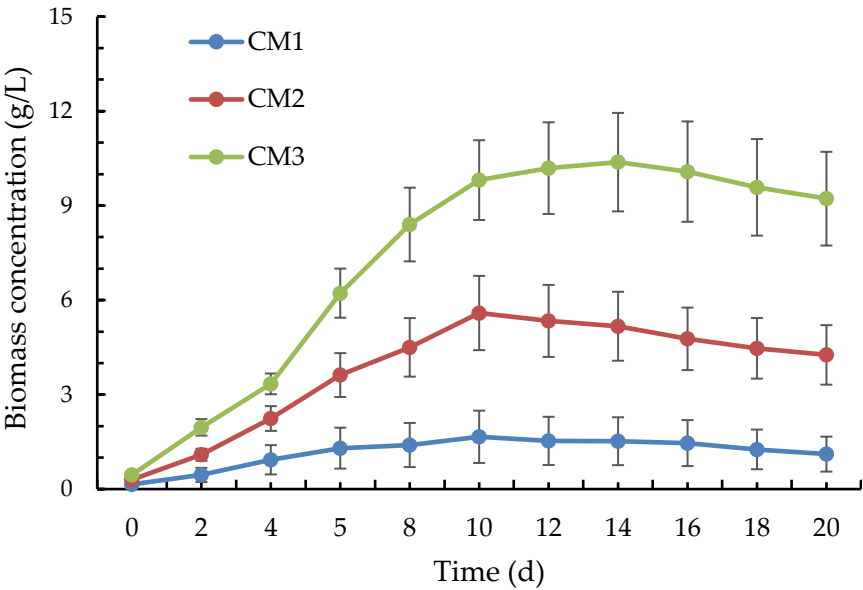


Figure 1. Production of biomass in culture media with different concentrations of vinasse.


In Figure 2, the pH changes in media with different concentrations of vinasse are shown. A first point to note is that in all media, including the most acidic one (CM3), a steady-state pH value close to 7 was reached. This can be attributed to different factors, such as the uptake of acidic vinasse components by the microalgae, the production of extracellular compounds capable of complexing or reacting with those components and the continuous injection of air in the medium, which contributes to the removal of the carbon dioxide produced during cellular respiration. Another important consideration to be made is that, despite the optimum pH for the growth of the investigated microalgal strain is around 7–7.5, the biomass is capable of growing even at pH value close to 4–4.5. This is what was observed during the first four days of growth in CM3, the medium with the highest concentration of vinasse and hence of nutrients. Since the growth rate of microalgae depends on both the pH and the amount of nutrients, the above results suggest that the reduction in

184 biomass growth due to the low pH value is compensated for by the increase resulting from the
185 higher amount of nutrients

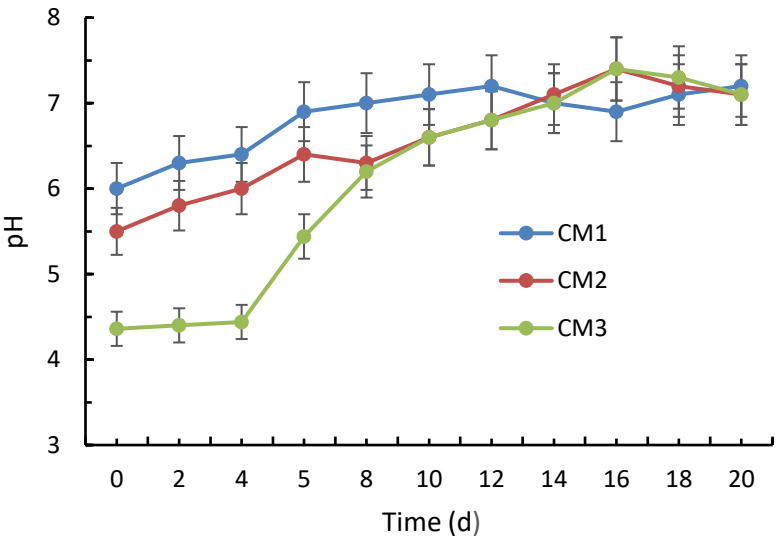

186 **Figure 2.** pH changes during biomass production in media with different concentrations of vinasse.

187 The five treatments performed at different biomass/vinasse ratios (see Tables 2 and 3) gave the
188 results presented in Figure 3. The trends were qualitatively similar for all treatments, with a
189 progressive increase in biomass concentration during the first 8–10 days, followed by a nearly
190 stationary phase. At day 18, treatment C2 resulted in the highest biomass concentration (8.7 g/L) and
191 productivity (0.48 g L⁻¹ d⁻¹), while the lowest values (6.1 g/L and 0.34 g L⁻¹ d⁻¹) were observed for C1.

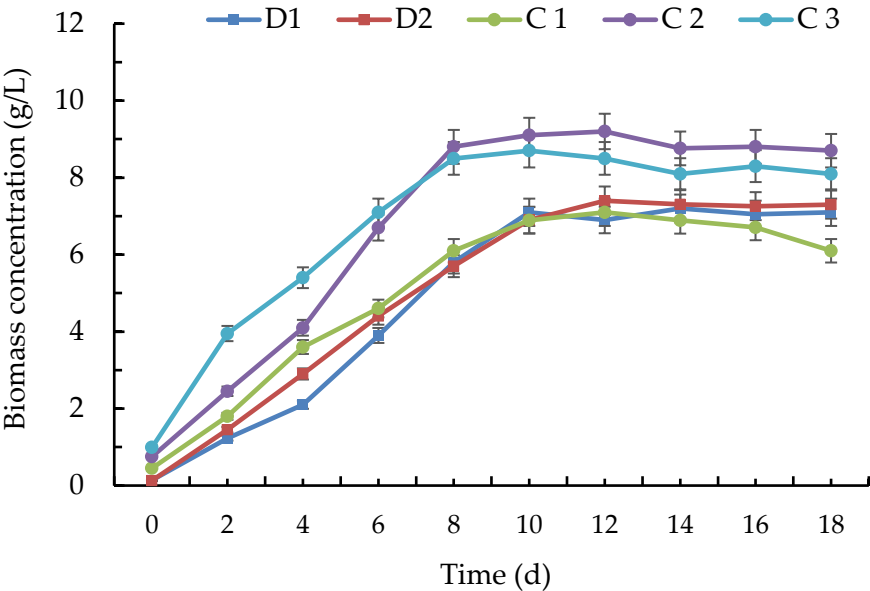

192 **Figure 3.** Biomass production during the five treatments (see Tables 2 and 3).

193 In the present work, *C. vulgaris* was not affected by the concentration of the vinasse evaluated.
194 Liu et al. [21] used industrial cane molasses as a carbon source for the production of *Chlorella*
195 *zofingiensis*. When the microalgae were subjected to an ion-exchange pretreatment to remove metal
196 ions, a biomass productivity of 1.55 g L⁻¹ d⁻¹ was obtained. This value was slightly higher than that
197 found using glucose instead of molasses. At higher nutrient levels, the production of biomass was
198 decreased, which was attributed to substrate inhibition. Doucha and Livansky [32] obtained up to

117.2 g/L of *C. vulgaris* under heterotrophic conditions with glucose as carbon and energy source. This high production of biomass was achieved with an initial glucose concentration of 65 g/L. However, the specific growth rate decreased approximately linearly with increasing glucose concentration, which again was attributed to substrate inhibition phenomena. It was also shown that the content of some microalgae components, such as proteins, chlorophylls and β -carotene, could be increased by keeping the biomass in the fermenter for an additional time after the cell growth was arrested due to glucose deficiency. Candido and Lombardi [33] used conventional and biodigested vinasses pretreated by filtration or centrifugation as a culture medium for *C. vulgaris*. The highest growth rates were obtained in 60% (v/v) filtered conventional and 80% (v/v) biodigested vinasses. The authors pointed out that filtration or centrifugation are essential treatments to be performed on vinasses before their use as a culture medium in order to eliminate toxic components and improve light penetration into the medium. In another study on a novel strain of *Micractinium* sp., sugarcane vinasse was used as a nutrient source for the heterotrophic and mixotrophic growth of the biomass [34]. Mixotrophic cultures resulted in higher specific growth rates and productivities, compared to the heterotrophic ones. For both of them, the highest biomass concentration and productivity were obtained with 10% (v/v) vinasse. Higher vinasse concentrations caused a decrease in microalgal growth, which was ascribed to toxic effects of vinasse components and/or light intensity reduction due to their presence. These considerations provide a possible explanation for the results of the present study displayed in Figure 3. In particular, there appears to be an optimal vinasse concentration (C2 treatment) at which the negative effects on biomass growth and productivity due to the presence of inhibiting and/or toxic compounds are balanced by the positive effects resulting from the higher nutrient levels.

3.3. Nutrient Consumption by the Microalgae

Figure 4 shows the consumption of the primary nutrients (phosphorus, potassium, nitrogen) and carbon present in vinasse by the microalgae in the C2 treatment. This consumption is strictly related to the amount of biomass produced.

Carbon is the major component of the biomass, reaching up to 50% of the total weight [35]. At day 18 it was reduced by about 85%. The amount of nitrogen consumed was approximately 38%, corresponding to about 950 mg/L. Travieso et al. [36] tested the suitability of pretreated vinasse as a culture medium for *C. vulgaris* in a continuous photobioreactor. They found a total nitrogen reduction of up to 1000 mg/L, which is very close to that of the present study, although the vinasse we used was not subjected to any pretreatment. From Figure 4 it can also be seen that 25% of all phosphorous present in the vinasse was consumed by the biomass at day 18, which corresponds to 14.25 mg/L of its initial content. Similar results were obtained by Valderrama et al. [20] using *C. vulgaris* and pretreated vinasse.

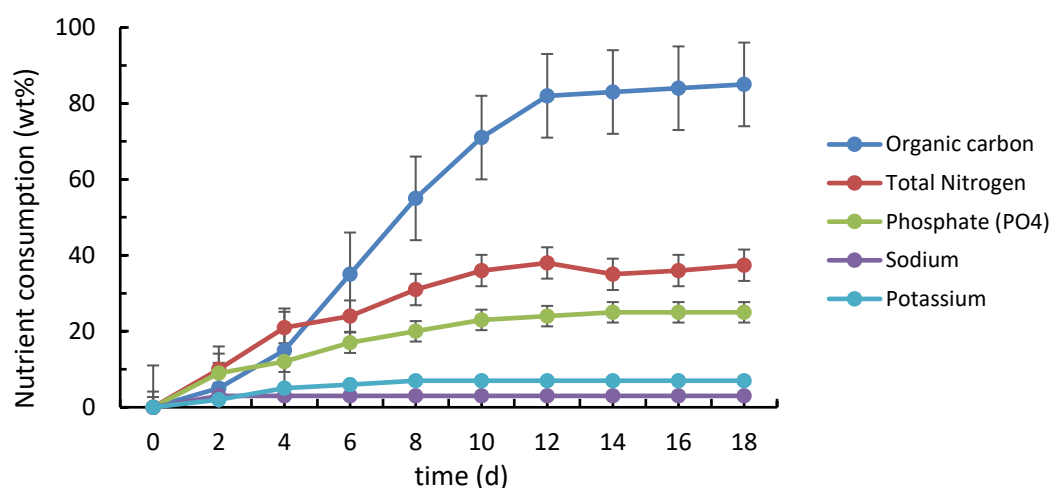


Figure 4. Nutrient consumption by the microalgae in the C2 treatment.

In vinasse two carbon sources are present: ethanol and residual sugars. They can be consumed through both autotrophic and heterotrophic pathways (Figure 5). Due to its low content (0.05–0.07 % v/v), ethanol can be expected to be consumed very quickly by *C. vulgaris* without exerting any inhibitory effect on it. Regarding sugars, their content decreased from 11.3–11.5% to about 6% in the first eight days. Then, they increased up to 8.3% at day 18. This increase, and also that observed for total solids, can be explained by the secretion of exopolysaccharides by the microalgae. As is known, depending on the growth phase and culture conditions, microalgae can produce biofilms containing carbohydrates and proteins [37,38].

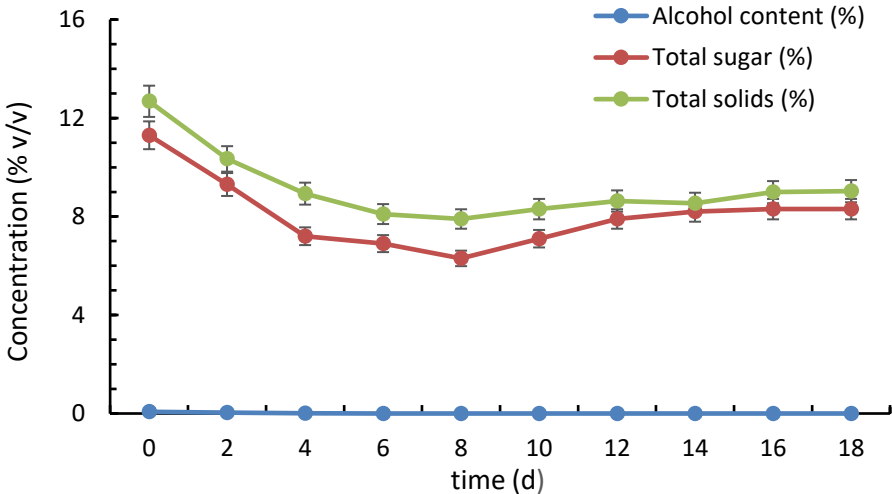


Figure 5. Variation in total solids, total sugars and alcohol content in vinasse in the C2 treatment.

3.4. Biomass Composition

During each of the five investigated treatments (D1, D2, C1, C2, C3, C4 and C5) the biomass was characterized in terms of protein, carbohydrate and lipid content. The results of measurements performed at intervals of two days are shown in Figure 6.

Regarding the protein content, in all treatments a decrease was observed during the first six days. After this period, the amount of proteins began to increase until reaching a nearly constant value around the 14th day. At the 6th day, the following values were determined (% w/w): 20.47% (D1), 26.37% (D2), 27.78% (C1), 17.90% (C2) and 15.90% (C3), while at the 18th day they were, respectively, equal to: 47.53%, 48.95%, 46.67%, 45.95% and 47.37%. Changes in the protein content occurring during the first ten days can be attributed to a progressive shift of the metabolism from photoautotrophic to mixotrophic and to fully heterotrophic. In a study by Coca et al. [39], *Spirulina platensis* was grown in an airlift photobioreactor using a culture medium supplemented with 1 or 2 g/L of beet vinasse. At the lowest vinasse concentration, both biomass and protein productivities were increased, while at higher concentration they showed a decrease, although the protein content of the biomass remained relatively stable, at about 53%. In another study on *Spirulina maxima* grown in media supplemented with 3% (v/v) sugarcane vinasse under cyclic two-stage cultivation (12-h autotrophic conditions followed by 12-h fed-batch heterotrophic conditions during the dark phase), a protein content ranging from 74.3 to 77.3% (w/w) was determined [22]. In yet another study on the cultivation of selected microalgae strains in sugarcane vinasse, a protein content between 34 and 40% (w/w) was obtained [23]. Furthermore, an inverse correlation was observed between protein and carbohydrate contents. According to the authors, this could be related to the high availability of a nitrogen source in vinasses, which would favor the accumulation of proteins over that of carbohydrates.

As for the carbohydrate content, the values obtained in the different treatments were very close to each other. This was particularly evident in cultures inoculated with diluted microalgae (D1 and D2). The content of all monosaccharides decreased during the first eight days, reaching a minimum on the 6th day (C1, C2 and C3) or the 8th day (D1 and D2). This reduction may be a reflection of the switch of autotrophically grown microalgae to heterotrophic metabolism. After the 10th day, the amount of these metabolites showed a progressive increase, reaching a maximum around the 16th day. Xylose was the compound present at the lowest concentration in the biomass. At day 8, the following values were determined (% w/w): 0.53% (D1), 0.61% (D2), 1.43% (C1), 1.91% (C2) and 2, 2% (C3). From the 10th to the 18th day, the concentration of xylose increased and stabilized to 2.57% (D1), 2.39% (D2), 2.85% (C1), 2.64% (C2) and 2.88% (C3). Glucose and fructose were the major monosaccharides in the biomass. As observed for the other metabolites, they reached their minimum during the first eight days. The minimum glucose levels were (%w/w): 1.02% (D1), 1.71% (D2), 3.70% (C1), 4.82% (C2) and 5.84% (C3). From the 10th day, this metabolite began to increase, reaching a value of 7.07% (D1), 6.97% (D2), 7.29% (C1), 7.40% (C2) and 7.82% (C3). During this time period, the measured standard deviations ranged from 2.13% to 0.034% on the 18th day. Fructose was the monosaccharide with the highest concentration in the biomass. Its maximum level was reached at day 16, although a decrease in concentration was observed during the first eight days. The minimum concentration values were (%w/w): 1.83% (D1), 2.13% (D2), 4.94% (C1), 5.62% (C2) and 6.77% (C3) with a maximum standard deviation of 2.46 at day 8. The maximum concentration values were (% w/w): 7.52% (D1), 6.85% (D2), 7.87% (C1), 8.41% (C2) and 8.28% (C3), with a standard deviation at the 18th day of 0.63%. Arabinose levels showed the same qualitative changes observed for the other carbohydrates. Its minimum concentration occurred at day 8, when the following values were determined (%w/w): 0.94% (D1), 0.88% (D2), 2.39% (C1), 3.09% (C2) and 3.57% (C3), with a standard deviation of 1.37% at the eighth day. From the 10th day, the concentration began to increase, reaching a maximum at the 18th day, when the following values were observed (%w/w): 4.07% (D1), 3.78% (D2), 4.50% (C1), 4.17% (C2), 4.54% (C3).

In previous studies on different strains of *C. vulgaris* carbohydrate levels ranging between 41% and 55% were found [18,40,41]. Monosaccharides were up to 22% of the total biomass on day 18, with a biomass production of 13.17 g/L. The presence of carbohydrates in low amount in the biomass is likely due to the high level of nitrogen in the culture medium, as these two quantities appear to be inversely related [40,42]. Jerez-Mogollón et al. [30] obtained a maximum content of xylose of 9.70% (w/w) in a culture of *C. vulgaris* UTEX 1803 enriched with sodium acetate. In the same study, a glucose content of up to 9.30% (w/w) was determined [30].

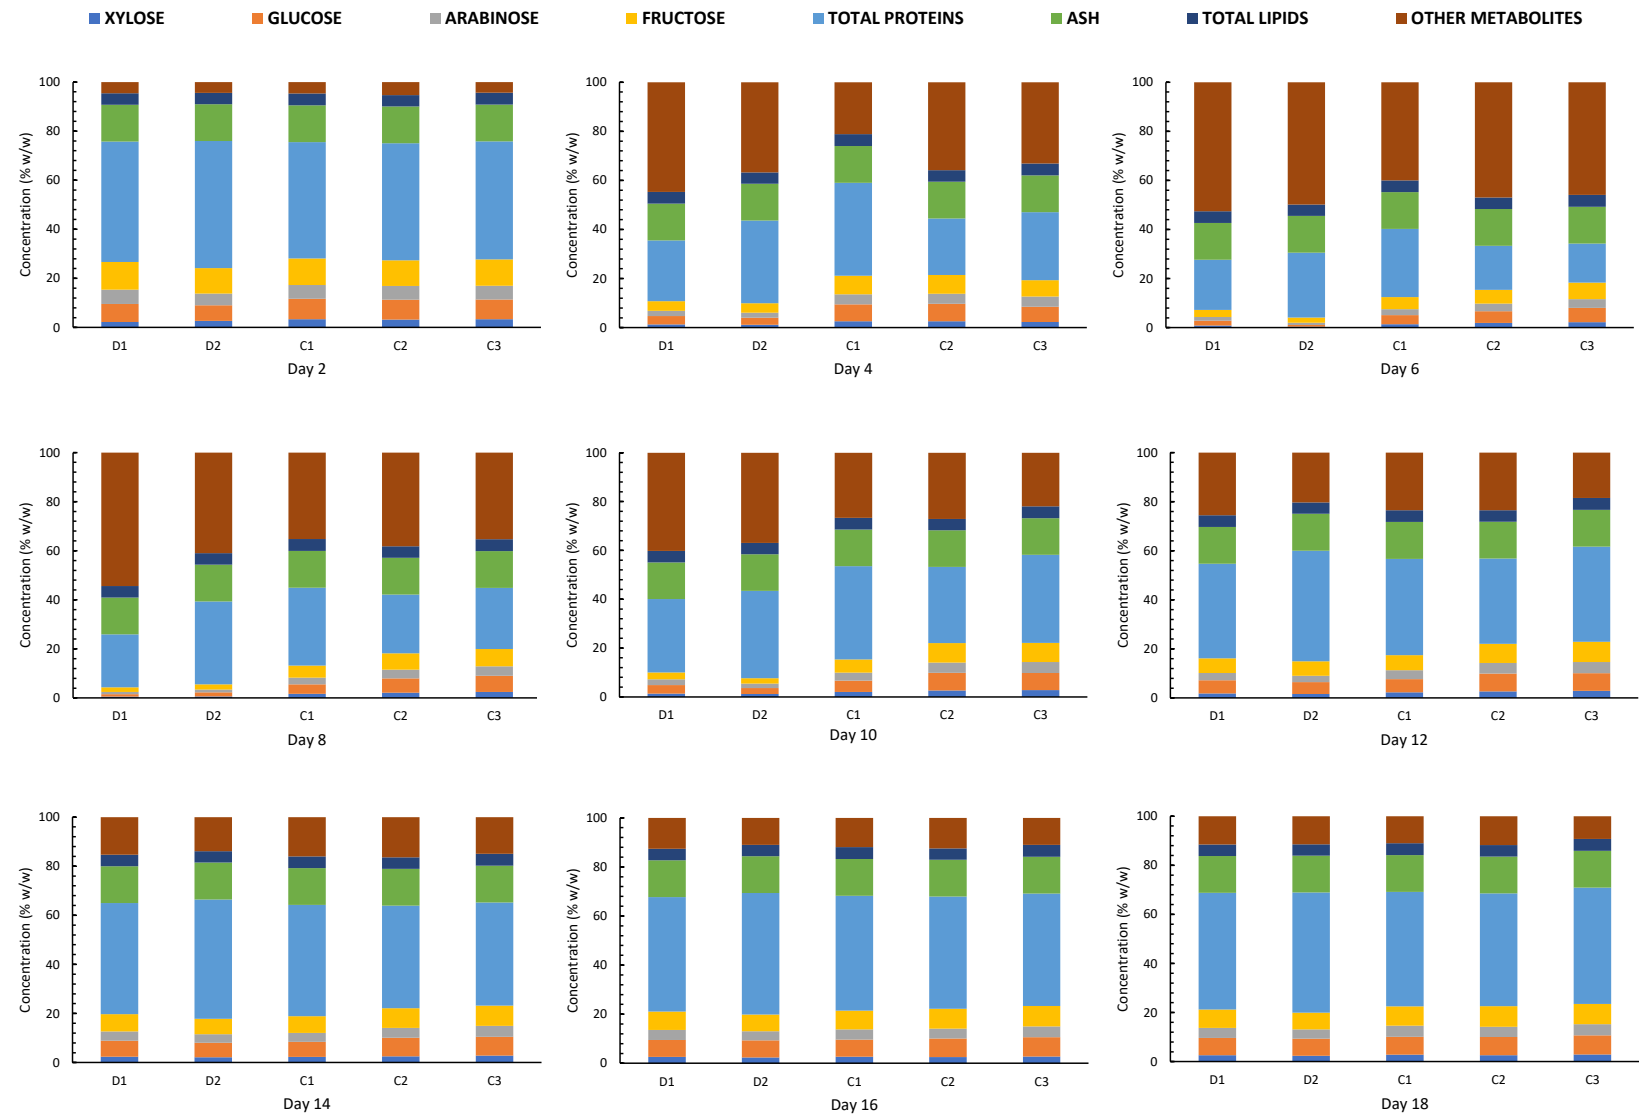


Figure 6. Changes in the composition of *C. vulgaris* over the 18-day period of treatments with diluted (D1, D2) and concentrated (C1, C2, C3) biomass.

Finally, from Figure 6 it can be seen that lipids were the metabolites at the lowest concentration, their amounts (%w/w) being: 1.72% (D1), 1.63% (D2), 1.79% (C1), 1.67% (C2) and 1.83% (C3). Similar low levels of these compounds were found by Engin et al. [34], who used a culture medium supplemented with vinasse to grow *Micractinium* sp., although in other studies significantly higher lipid contents were achieved [43,44]. However, as already mentioned, there seems to be an inverse correlation between protein accumulation in algal biomass and carbohydrates and/or lipid content [23], consistently with the results of the present study.

Overall, it can be concluded that incorporation of appropriate amounts of vinasse in culture media is not only an effective remediation strategy for the treatment of this effluent but also an attractive alternative for the production of valuable metabolites such as carbohydrates and proteins from *C. vulgaris* [45,46]. This approach can be included in the wider context of the sustainable reuse of waste materials for reducing the consumption of natural resources and the environmental impact of human activities [47–49]. Furthermore, it has the potential of being easily transferred to the industrial scale, as the conditions necessary for the heterotrophic growth of microalgae are similar to those employed for the large-scale production of yeast and bacteria [50,51]. In principle, vinasse could be treated in either open or closed bioreactors, with suspended or non-suspended biomass [52]. The experience gained so far from similar systems suggests that a closed photobioreactor with a periodic harvesting of the biomass is the best option, as this reactor configuration allows better pH and temperature control, better mixing, higher cell densities, better protection against culture contamination and lower evaporative losses, compared to the open one [53], and it will be optimized in a response surface methodology study [54].

4. Conclusions

The results of this study indicate that vinasse represents a suitable and effective medium for the growth of *C. vulgaris* UTEX 1803. The algal biomass can be used as a source of value-added compounds for food, nutraceutical, cosmetic and biofuel applications. Concerning the inoculation of the strain, there appear to be no significant differences in the amount of metabolites produced by the biomass in the five treatments examined.

Future studies should be focused on the optimization of the treatment conditions for the vinasse–biomass system. Another important issue to be addressed is to evaluate whether the production of a specific metabolite or class of metabolites can be controlled by proper selection of process conditions.

Author Contributions: The authors contributed equally to this work.

Funding: This research was funded by Universidad Francisco de Paula Santander internal Research funding: FINU 44-2018 and The APC was funded by Universidad Mariana.

Acknowledgments: We would like to express our sincere gratitude to Universidad Francisco de Paula Santander for providing equipment for successfully conclude this research and the Departamento Administrativo de Ciencia, Tecnología e Innovación COLCIENCIAS for its Francisco José de Caldas scholarship program to support national PhD doctorates.

Conflicts of Interest: The authors declare no conflict of interest.

References

- Aslan, S.; Kapdan, I. Batch kinetics of nitrogen and phosphorus removal from synthetic wastewater by algae. *Ecol. Eng.* **2006**, *28*, 64–70. DOI: 10.1016/j.ecoleng.2006.04.003
- Boursier, H.; Béline, F.; Paul, E. Piggery wastewater characterization for biological nitrogen removal process design. *Bioresour. Technol.* **2005**, *96*, 351–358. DOI: 10.1016/j.biortech.2004.03.007
- Olguin, E.J.; Galicia, S.; Angulo-Guerrero, O.; Hernandez, E. The effect of low light flux and nitrogen deficiency on the chemical composition of *Spirulina* sp. (*Arthrospira*) grown on digested pig waste. *Bioresour. Technol.* **2001**, *77*, 19–24. DOI: 10.1016/S0960-8524(00)00142-5

4. Sheng, A.L.K.; Bilad, M.R.; Osman, N.B.; Arahman, N. Sequencing batch membrane photobioreactor for real secondary effluent polishing using native microalgae: Process performance and full-scale projection. *J. Clean. Prod.* **2017**, *168*, 708–715. DOI: 10.1016/j.jclepro.2017.09.083
5. Leme, R.M.; Seabra, J.E.A. Technical-economic assessment of different biogas upgrading routes from vinasse anaerobic digestion in the Brazilian bioethanol industry. *Energy* **2017**, *119*, 754–766. DOI: 10.1016/j.energy.2016.11.029
6. Tapie, W.A.D.; Prato-García, D.; Guerrero, H. Biodegradation of sugarcane vinasses by the white-rot fungi *Pleurotus ostreatus* in a packed bed reactor. *Trop. Subtrop. Agroecosyst.* **2016**, *19*, 145–150.
7. Hoarau, J.; Caro, Y.; Grondin, I.; Petit, T. Sugarcane vinasse processing: Toward a status shift from waste to valuable resource. A review. *Water Proc. Eng.* **2018**, *24*, 11–25. DOI: 10.1016/j.jwpe.2018.05.003
8. Incauca SAS. Informe de sostenibilidad 2016–2017. Available online: <https://www.incauca.com/wp-content/uploads/2018/04/Informe-Sostenibilidad-Incauca-2016-2017.pdf> (accessed on 05.04.2019)
9. Fedebiocombustibles. Cifras Informativas del Sector Biocombustibles. Alcohol Carburante (Etanol Anhidro). Available online: <http://www.fedebiocombustibles.com/nota-web-id-487.htm> (accessed on 05.04.2019).
10. Cristiano, E.; Rodrigues, R.; Bo Hu. Vinasse from sugarcane ethanol production: Better treatment or better utilization? *Energy Res.* **2017**, 1–7. DOI: 10.3389/fenrg.2017.00007
11. Singh, N.K.; Patel, D.B. Microalgae for Bioremediation of Distillery Effluent. In: *Farming for Food and Water Security*; Lichtfouse, E. Ed.; Springer: Dordrecht, The Netherlands, 2012; pp. 83–109.
12. Salgueiro, J.L.; Perez, L.; Maceiras, R.; Sanchez, A.; Cancela, A. Bioremediation of wastewater using *Chlorella vulgaris* microalgae: phosphorus and organic matter. *Int. J. Environ. Res.* **2016**, *10*(3), 465–470. DOI: 10.22059/IJER.2016.58766.
13. González, A.; Kafarov, V. Microalgae based biorefinery: Issues to consider. *Ciencia Tecnol. Fut.* **2011**, *4*:4, 5–22.
14. Olguin, E.J. Phycoremediation: Key issues for cost-effective nutrient removal processes. *Biotechnol. Adv.* **2003**, *22*, 81–91. DOI: 10.1016/S0734-9750(03)00130-7
15. Ayala, J.F.; Bravo, B.P. Animal wastes media for *Spirulina* production. *Algol. Stud.* **1984**, *36*, 349–355. DOI: 10.1127/algol_stud/67/1984/349
16. Costa, R.H.; Medri, W.; Perdomo, C.C. High-rate pond for treatment of piggery wastes. *Water Sci. Technol.* **2000**, *42*, 357–362.
17. Jimenez-Perez, M.V.; Sanchez-Castillo, P.; Romera, O.; Fernandez-Moreno, D.; Perez-Martinez, C. Growth and nutrient removal in free and immobilized planktonic green algae isolated from pig manure. *Enzyme Microb. Technol.* **2004**, *34*, 392–398. DOI: 10.1016/j.enzmictec.2003.07.010
18. Brennan, L.; Owende, P. Biofuels from microalgae – A review of technologies for production, processing, and extractions of biofuels and co-products. *Renew. Sust. Energ. Rev.* **2010**, *14*(2), 557–577. DOI: 10.1016/j.rser.2009.10.009
19. Travieso, L.; Benitez, F.; Dupeyrón, R. Algae growth potential measurement in distillery wastes. *Bull. Environ. Contam. Toxicol.* **1999**, *62*, 483–489. DOI: 10.1007/s001289900901
20. Valderrama, L.; Del Campo, C.; Rodriguez C.; Bashan, Y.; de-Bashan, L. Treatment of recalcitrant wastewater from ethanol and citric acid production using the microalga *Chlorella vulgaris* and the macrophyte *Lemna minuscule*. *Water Res.* **2002**, *36*, 4185–4192. DOI: 10.1016/S0043-1354(02)00143-4
21. Liu, J.; Huang, J.; Jiang, Y.; Chen, F. Molasses-based growth and production of oil and astaxanthin by *Chlorella zofingiensis*. *Bioresour. Technol.* **2012**, *107*, 393–398. DOI: 10.1016/j.biortech.2011.12.047
22. Dos Santos, R.R.; Araújo, O.D.Q.F.; de Medeiros, J.L.; Chaloub, R.M. Cultivation of *Spirulina maxima* in medium supplemented with sugarcane vinasse. *Bioresour. Technol.* **2016**, *204*, 38–48. DOI: 10.1016/j.biortech.2015.12.077
23. Santana, H.; Cereijo, C.R.; Teles, V.C.; Nascimento, R.C.; Fernandes M.S.; Brunale, P.; Campanha R.C.; Soares, I.P.; Silva, F.C.P.; Sabaini, P.S.; Siqueira, F.G.; Brasil, B.S.A.F. Microalgae cultivation in sugarcane vinasse: Selection, growth and biochemical characterization. *Bioresour. Technol.* **2017**, *228*, 133–140. DOI: 10.1016/j.biortech.2016.12.075
24. Zuorro, A.; Lavecchia, R.; Medici, F.; Piga, L. Use of cell wall degrading enzymes for the production of high-quality functional products from tomato processing waste. *Chem. Eng. Trans.* **2014**, *38*, 355–360. DOI: 10.3303/CET1438060
25. Zuorro, A.; Maffei, G.; Lavecchia, R. Effect of solvent type and extraction conditions on the recovery of phenolic compounds from artichoke waste. *Chem. Eng. Trans.* **2014**, *39*, 463–468. DOI: 10.3303/CET1439078

26. Andersen, R.A.; Berges, J.A.; Harrison, P.J.; Watanabe, M.M. Appendix A – Recipes for Freshwater and Seawater Media. In *Algal Culturing Techniques*; Andersen, R.A., Ed.; Elsevier Academic Press: Burlington, MA, USA, 2005; pp. 429–538.
27. Moheimani, N.R.; Borowitzka, M.A.; Isdepsky, A.; Sing, S.F. Standard Methods for Measuring Growth of Algae and Their Composition. In *Algae for Biofuels and Energy*; Borowitzka, M.A., Moheimani, N.R., Eds.; Springer: New York, USA, 2013; pp. 265–284.
28. Barajas-Solano, A.; Guzmán-Monsalve, A.; Kafarov, V. Effect of carbon–nitrogen ratio for the biomass production, hydrocarbons and lipids on *Botryococcus braunii* UIS 003. *Chem. Eng. Trans.* **2016**, *49*, 247–252.
29. DuBois, M.; Gilles, K.A.; Hamilton, J.K.; Rebers, P.A.; Smith, F. Colorimetric method for determination of sugars and related substances. *Anal. Chem.* **1956**, *28*(3), 350–356. DOI: 10.1021/ac60111a017.
30. Jerez-Mogollón, S.J.; Rueda-Quiñonez, L.V.; Alfonso-Velazco, L.Y.; Barajas-Solano, A.F.; Barajas-Ferreira, C.; Kafarov, V. Improvement of lab-scale production of microalgal carbohydrates for biofuel production. *Ciencia Tecnol. Fut.* **2012**, *5*(1), 103–116.
31. Glória, N.A.; Filho, O. Aplicação da vinhaça como fertilizante. *Boletim Técnico do PLANALSUCAR* **1983**, *5*, 5–38.
32. Doucha, J.; Livansky, K. Production of high-density *Chlorella* culture grown in fermenters. *Appl. Phycol.* **2012**, *24*, 35–43.
33. Candido, C.; Lombardi, A.T. Growth of *Chlorella vulgaris* in treated conventional and biodigested vinasses. *J. Appl. Phycol.* **2017**, *29*(1), 45–53. DOI: 10.1007/s10811-016-0940-2
34. Engin, I. K.; Cekmecelioglu, D.; Yücel, A.M.; Oktem, H.A. Evaluation of heterotrophic and mixotrophic cultivation of novel *Micractinium* sp. ME05 on vinasse and its scale up for biodiesel production. *Bioresour. Technol.* **2018**, *251*, 128–134. DOI: 10.1016/j.biortech.2017.12.023
35. Bumbak, F.; Cook, S.; Zachleder, V.; Hauser, S.; Kovar, K. Best practices in heterotrophic high-cell-density microalgal processes: achievements, potential and possible limitations. *Appl. Microbiol. Biotechnol.* **2011**, *91*, 31–46. DOI: 10.1007/s00253-011-3311-6
36. Travieso, L.; Benítez, F.; Sánchez, E.; Borja, R.; León, M.; Raposo F.; Rincón B. Performance of a laboratory-scale microalgae pond for secondary treatment of distillery wastewaters. *Chem. Biochem. Eng.* **2008**, *22*(4), 467–473.
37. Flemming, H.C.; Wingender, J. The biofilm matrix. *Nat. Rev. Microbiol.*, **2010**, *8*, 623–633. DOI: 10.1038/nrmicro2415
38. De Philippis, R.; Vincenzini, M. Exocellular polysaccharides from cyanobacteria and their possible applications. *FEMS. Microbiol. Rev.* **1998**, *22*(3), 151–175. DOI: 10.1111/j.1574-6976.1998.tb00365.x
39. Coca, M.; Barrocal, V.M.; Lucas, S.; González-Benito, G.; García-Cubero, M.T. Protein production in *Spirulina platensis* biomass using beet vinasse-supplemented culture media. *Food Bioprod. Process.* **2015**, *94*, 306–312. DOI: 10.1016/j.fbp.2014.03.012.
40. Rodolfi, L.; Zittelli, G.C.; Bassi, N.; Padovani, G.; Biondi, N.; Bonini, G.; Tredici, M.C. Microalgae for oil: strain selection, induction of lipid synthesis and outdoor mass cultivation in a low-cost photobioreactor. *Biotechnol. Bioeng.* **2009**, *102*(1), 100–112. DOI: 10.1002/bit.22033
41. Illman, A.M.; Scragg, A.H.; Shales, S.W. Increase in *Chlorella* strains calorific values when grown in low nitrogen medium. *Enzyme Microb. Technol.* **2000**, *27*, 631–635. DOI: 10.1016/S0141-0229(00)00266-0
42. Dragone, G.; Fernandes, B.; Abreu, A.; Vicente, A.; Teixeira, J. Nutrient limitation as a strategy for increasing starch accumulation in microalgae. *Appl. Energy* **2011**, *88*, 3331–3335. DOI: 10.1016/j.apenergy.2011.03.012
43. Ling, J.; Nip, S.; Cheok, W.L.; de Toledo, R.A.; Shim, H. Lipid production by a mixed culture of oleaginous yeast and microalga from distillery and domestic mixed wastewater. *Bioresour. Technol.* **2014**, *173*, 132–139. DOI: 10.1016/j.biortech.2014.09.047
44. Olguín, E.J.; Dorantes, E.; Castillo, O.S.; Hernández-Landa, V.J. Anaerobic digestates from vinasse promote growth and lipid enrichment in *Neochloris oleabundans* cultures. *J. Appl. Phycol.* **2015**, *27*(5), 1813–1822. DOI: 10.1007/s10811-015-0540-6
45. Pérez-García, O.; Escalante, F.; de-Bashan, L.; Bashan, Y. Heterotrophic cultures of microalgae: Metabolism and potential products. *Water Res.* **2011**, *45*(1), 11–36. DOI: 10.1016/j.watres.2010.08.037
46. Demirbas, M.F. Biorefineries for biofuel upgrading: A critical review. *Appl. Energy* **2009**, *86*, 151–161. DOI: 10.1016/j.apenergy.2009.04.043
47. Bhatt, A.K.; Bhatia, R.K.; Thakur, S.; Rana, N.; Sharma, V.; Rathour, R.K. Fuel from waste: A review on scientific solution for waste management and environment conservation. In *Prospects of Alternative Transportation Fuels*; Singh, A.P., Agarwal, R.A., Agarwal, A.K., Dhar, A., Shukla, M.K., Eds.; Springer, Singapore, 2018; pp. 205–233. DOI: 10.1007/978-981-10-7518-6_10

462 48. Roversi, R.; Cumo, F.; D'Angelo, A.; Pennacchia, E.; Piras, G. Feasibility of municipal waste reuse for
463 building envelopes for near zero-energy buildings. *WIT Trans. Ecol. Environ.* **2017**, *224*, 115–125. DOI:
464 10.2495/ESUS170111

465 49. De Santoli, L.; Basso, G.L.; Garcia, D.A.; Piras, G.; Spiridigliozzi, G. Dynamic simulation model of
466 trans-critical carbon dioxide heat pump application for boosting low temperature distribution networks in
467 dwellings. *Energies* **2019**, *12*(3), 484. DOI: 10.3390/en12030484

468 50. D'Souza, F.M.L.; Kelly, G.J. Effects of a diet of a nitrogen-limited alga (*Tetraselmis suecica*) on growth,
469 survival and biochemical composition of tiger prawn (*Penaeus semisulcatus*) larvae. *Aquaculture* **2000**,
470 *181*(3), 311–329. DOI: 10.1016/S0044-8486(99)00231-8

471 51. Chen, F. High cell density culture of microalgae in heterotrophic growth. *Trends Biotechnol.* **1996**, *14*(11),
472 421–426. DOI: 10.1016/0167-7799(96)10060-3

473 52. Whitton, R.; Ometto, F.; Pidou, M.; Jarvis, P.; Villa, R.; Jefferson, B. Microalgae for municipal wastewater
474 nutrient remediation: Mechanisms, reactors and outlook for tertiary treatment. *Environ. Technol. Rev.* **2015**,
475 *4*(1), 133–148. DOI: 10.1080/21622515.2015.1105308

476 53. Christenson, L.; Sims, R. Production and harvesting of microalgae for wastewater treatment, biofuels, and
477 bioproducts. *Biotechnol. Adv.* **2011**, *29*(6), 686–702. DOI: 10.1016/j.biotechadv.2011.05.015

478 54. Zuorro, A.; Maffei, G.; Lavecchia, R. Reuse potential of artichoke (*Cynara scolimus* L.) waste for the
479 recovery of phenolic compounds and bioenergy. *J. Clean. Prod.* **2016**, *111*, 279–284. DOI:
480 10.1016/j.jclepro.2015.06.011