

Perspectives on Electrification for the Automotive Sector: A Critical Review of Average Daily Distances by Light-Duty Vehicles, Required Range and Economic Outcomes

Bruno DALLA CHIARA^a, Francesco DEFLORIO^a, Luca CASTELLO^a, Marco EID^a, Michela PELLICELLI^b

^a POLITECNICO DI TORINO, Engineering, Dept. DIATI, Transport systems, Corso Duca degli Abruzzi 24, 10129 Torino, Italy

^b UNIVERSITY OF PAVIA, Department of Economics and Management, Via San Felice 5, 27100 Pavia, Italy

Keywords: motorised mobility; average distances; international comparison; future automobiles; automotive companies; battery autonomy (range); economic analysis

Highlights

- We consider variables influencing the choice of electric or plug-in hybrid vehicles
- We outline range as a relevant variable
- We collect and characterise Italians' average motorised mobility, noticing recurrent average km/year
- We compare Italians' motorised mobility with results from other countries
- We provide support for decisions concerning electric traction range while also calculating costs
- We outline the economic consequences on the operational costs of plug-in vehicles

Abstract

This paper aims at providing a multisource data analysis, including direct data collection, focussed on *daily average distances* covered with motorised mobility. Its results can be used as a basis for policies involving a shift towards new propulsions, electric motors or hybrid electric vehicles (HEV) for road vehicles.

A number of variables influence the propensity of drivers to acquire or use electric traction, even the option of plug-in hybrid electric vehicles (PHEV). This paper addresses one of such variable: the compliancy of electric traction regarding both hybrid plug-in solutions and full-electric vehicles, in addition to the autonomy of batteries (range), with the daily travels by road vehicles, mainly by automobiles. We want to understand whether the constraints leading towards a greater independence from crude oil rather than constraints concerning emissions, mainly in urban contexts, might be compliant with the habitual daily trips of drivers. We also want to understand if these daily trips have varied much during recent years and the consequences they may have on operational costs of plug-in automobiles.

We are well aware that the average distances do not represent the actual daily runs of vehicles; yet similar distributions of daily distances for different case studies indicate that a high percentage of trips respond to certain features. After introducing a general overview of road-motorised mobility in Italy, the paper compares data from other studies to provide an indication of average daily driving distances. This reveals how different recent analyses converge on a limited range of average road distances covered daily by Italians, which is compliant with ranges allowed by electric batteries, provided that their low energy density in comparison with that of oil-derived fuels do not imply a significant increase in vehicle mass. Subsequently, average distances in some EU Countries are taken from the literature, and the results are also compared with U.S. data. The study extends the analysis of trends on the use of automobiles and road-vehicles to the international context by also addressing average daily distances covered for freight transport in some EU Countries, thereby providing a further basis for comparison and for understanding whether the daily motorised mobility can be considered as a stable phenomenon. Finally, an analysis is provided of the economic operational advantages from using plug-in vehicles.

The main aim of this paper is thereafter to investigate the average daily motorised mobility of *single vehicles* – so not an aggregated motorised mobility as collected by some statistics – by using private motorised vehicles in Italy, with related trends; thereafter, to compare these data with those obtained from other countries, making use of both existing research studies and directly collected data; the final aim is to understand both the *compliance of daily activities based on the use of automobiles with the autonomy of batteries* (range) and to calculate some *economic outcomes*.

Introduction

This study aims at providing a multisource data analysis, including direct data collection, regarding *daily average distances* covered with motorised mobility, light-duty road vehicles in particular with a look also at heavy-duty ones.

The results might be used as a basis for policies involving a shift towards new propulsions for road vehicles (Gerboni R. et al., 2017): namely, electric motors or plug-in hybrid powertrains.

As a matter of fact, a number of *variables* influence the propensity of drivers to use electric vehicles or just their electric traction as an option for plug-in hybrid vehicles; these also influence the propensity to acquire either battery electric vehicles (BEV) or hybrid ones as alternatives to the traditional thermic engines (diesel or gasoline based). The main recurrent variables can be:

- a. environmental sensibility and, more importantly, constraints, i.e., when the concentration of pollutants in a city overcomes existing thresholds (e.g., in the European Union, under the May 21, 2008 Directive 2008/50/EC of the European Parliament and of the Council regarding ambient air quality and cleaner air for Europe), which have inhibited the use of Euro 0 up to 4, sometimes even Euro 5 diesel engines in the winter of 2018 in some European cities;
- b. the energy cost for electric traction and the alternative fuel cost for engine propulsion per distance unit;
- c. the availability of charging spots either at home, at the workplace parking areas or in public ones (park and ride areas, restaurants, stadiums, etc.);
- d. the price of the electric/hybrid vehicles and their maintenance costs;
- e. the range or autonomy of the battery compared to that of the tank;
- f. the daily scheduling of one's daily activities and their compliancy with the parking and recharging times during daylight or night time in case of a shared parking area: i.e., one not belonging to an individual;
- g. the actual availability of a charging spot compliant with the drivers' needs, in terms of power, recharging time and distance to be covered;
- h. the possibilities for solving the risk associated with the exhaustion of the battery in the case of full electric vehicles, whose recharging is more complex than just putting a liquid into a tank (refueling);
- i. the risk aversion;
- j. the actual independence from electricity, on the one hand, or crude-oil on the other, associated with different model options (full electric instead of hybrids);

In urban and metropolitan contexts, both *pollutants*, when surpassing existing thresholds, and the availability of *charging spots* – wired or wireless – in addition to future possible areas for charging when driving (CWD), are frequently the most relevant variables for a driver who has to choose the proper traction, and therefore the powertrain to acquire.

As far as possible (e.g., 90-95% of electric recharging, according to results provided by eCo-FEV, 2015) charging points are expected to be placed and used with *slow electric charging* either at home or in extended parking areas of companies, universities, public institutions, markets, interchange areas (park and ride), and

stadiums; a smaller market (5-10%) if left thereafter to the *rapid and fast electric charging* on generic public land, given the shorter time usually available for parking, moreover paying, on public metropolitan areas as well as the more expensive (than slow charging) and time-constraining car stay (because the parking area is shared).

Charging spots might be placed even in the countryside, with a focus on more extended coverage needs. The most flexible motor vehicle – also for extra urban trips – is the rechargeable hybrid one (PHEV) because of user needs (Dalla Chiara B. et al., 2018) and - in some areas - the fact a diffused charging network outside cities cannot be imagined at present or in the short-medium term: Italy has been covered with diesel-gasoline stations in almost twenty years, entailing lower fuelling times than that required for electric recharging.

Whenever a user could not afford the more flexible plug-in vehicles, which allows him to use both the electric traction within a city and the traditional internal combustion engine (ICE) outside it, he may avail himself of the full-electric vehicles in a sharing option; in this context, electric car-sharing might be a good path towards a future of more flexible – though more expensive – automobiles.

However, regardless of whether the driver decides to use electric traction within an urban centre for personal economic reasons or environmental ones, more frequently imposed by the public administration, his usual *daily trips* (i.e. covered distances) and *daily scheduling* needs to be compared with the typical *autonomies* of electric batteries, for which abundant technical and commercial sheets are available. These autonomies typically reach 300-350 km approximately, sometimes 400 km, for a vehicle up to around 1.5 t of total mass on the ground, in the most optimistic options, without specific needs related to air conditioning and heating within the vehicle.

In this paper, we address therefore just *one of the abovementioned variables*: the compliancy of pure electric traction, and therefore of the autonomies of batteries (for PHEV or BEV), with the actual daily trips of road vehicles, mainly automobiles. We did not focus on the fact that such distances may be covered by full electric vehicles or with just the electric traction of a rechargeable (i.e. plug-in) hybrid-electric one, the latter being used most likely with an electric motor within an urban context and with the ICE when travelling outside the city. We just wanted to understand whether the aims and constraints on oil independence – such as those imposed in the EU, U.S. and Japan – rather than those concerning pollutants, typically applied in some metropolitan contexts, might be compliant with the daily trips of drivers, considering mainly the charging time availability during nighttime at home or during daylight at the workplace. If both these charging possibilities are not available for a driver, this analysis is probably not relevant, as the driver would not have to make this choice for an automobile, focusing his attention instead on a traditional one equipped with an ICE or a car sharing option, in case of personal motorized mobility, not public transport. We also want to understand if these daily trips have varied much in recent years.

We are well aware that the “average distances” do not represent the actual distribution of daily runs of road vehicles; yet similar distributions of daily distances covered by automobiles reported in different studies indicate that a high percentage of trips respond to specific features; therefore, as discussed below, a road vehicle can probably use electric traction for a high percentage of shorter daily trips throughout the year and the ICE for a few days, typically during longer trips at weekends. This seems to be the most flexible solution, according to the real data directly collected and that reported in the literature. Some deeper considerations will be provided on this aspect.

After introducing a general overview of motorised mobility by road in Italy, the study compares data from other studies to provide an overview on average daily driving distances. This allows us to show how different recent analyses converge on a limited range of average distances covered daily by Italians on the road, which seems compliant with ranges allowed by electric batteries when the possibility to recharge each day exists. It also allows for an estimation of the average distances of vehicle runs in both urban and non-urban contexts, with the former compliant with electric traction and the latter with the range of tanks for ICEs.

Subsequently, average distances in some EU Countries are taken from the literature, and the results are also compared with U.S. data. Finally, the study extends the analysis on trends in road-vehicle usage to an international context, addressing average daily distances covered also for freight transport in some EU

countries to provide a further basis for comparison and for understanding whether daily motorised mobility can be considered as a stable phenomenon.

Having explored the average distances covered for passenger mobility and, in a more general way, for freight, the link to the usage of electric traction – whether for full electric or hybrid road vehicles – implicitly emerges, once the range of batteries and recharging time features are examined in the literature. A common ground for shifting a part of the present mobility, satisfied only by ICEs, towards electric traction, even PHEVs, is thereafter provided. The average distances in relation to the main features of electric or hybrid vehicles are highlighted, namely, for their driving range and recharging times. These are useful also for supporting a viable shift of automobiles based on ICEs towards flexible hybrid electric ones equipped with plug-in solutions (including conductive and inductive charging), without the need to change driving behaviour; alternatively, short distances can be satisfied by full electric vehicles, even shared, while still leaving longer distances to traditional automobiles. The economic effect of this possibility is quantified in the final section. Our analysis and related data might also be used as a basis for deducing a market share for electric traction.

1. Introduction: the automotive companies and sustainable innovation, market opportunities and actual user needs

For a number of years, many studies have highlighted that car makers are investing resources in the transition to alternative fuel vehicles (Aggeri et al, 2009, Avadikyan, 2010, Hensley, 2009, Plots, 2014, Skippon, Garwood, 2011), with some researchers predicting that HEV technologies will gradually gain popularity in the market (Chan, 2007). For this reason, the power of the incremental innovation trajectory will remain strong in the automotive industry (Magnusson, 2009). By introducing innovations, Swann (2009) identified an incentive to innovate in the competitiveness of the market share and an opportunity for the investments firms can make to support innovation.

Within this panorama of innovation, car makers recognize their role in making companies more sustainable and recognize the need to convert their production to cleaner or less-polluting products (Lozano, 2013, Nilsson, 2012, Wesseling, 2015); however, we need to verify that this transition can be *compliant with existing travellers' daily behaviour*, which is the main scope of this paper.

Christensen (2011) underlined that the pressure on the automotive industry to innovate is created by a combination of consumer demand for fuel efficient cars (though not necessarily electric vehicles), European Union legislation on CO₂ emissions of newly registered cars (European Commission, 2009), and the incentives or subsidies implemented by national and local authorities to get car-users to purchase cleaner and more fuel efficient vehicles (Christensen, 2011).

The automotive industry therefore represents a fertile terrain for progress in innovation, especially with the introduction of alternative fuels and alternative powertrain technologies (Zapata and Nieuwenhuis, 2010).

Increasing attention is being paid to sustainability and environmental issues. Porter, Kramer (2011) invited corporations to redefine their goals to create shared value, trying to push them to move beyond profit as a primary objective. In the industrialised nations, as pointed out by Hart (1997), the automotive companies are 'going green', having realized they can reduce pollution and increase profits simultaneously. However, car makers "have to respond to increasingly strict governmental regulation, environmental and social expectations by applying management strategies" (Koplin, 2006).

Some factors more than others influence the development of these technologies by car makers, such as: investment costs for the innovation process and the conversion of production; EU emission rules (sanctions for the CO₂ emission level of production and eventual incentives for production conversion); competition among car makers focusing on these technologies, with some of them declaring they have been converting their production for a few years now, thereby satisfying new consumer behaviour and consumer demand, which is currently largely derived from the mid-high price range. However: "When individuals consider the adoption of *sustainable lifestyles*, they engage with an increasingly complex decision-making process" (Young et al, 2010).

The impact of *purchase price, fuel efficiency and fuel prices* on buying decisions is highlighted in numerous studies and included in many models of consumer buying behaviour (Plots, 2014; Train and Winston, 2007; Santini and Vyas, 2005, Shende, 2014).

Lane and Potter (2007) point out that car purchases are predominantly driven by financial and performance considerations including price, fuel consumption, comfort, size, practicality and reliability. In addition, as suggested by numerous studies, we should consider the subjective psychological factors, which include attitudes, lifestyle, personality, self-image, risk-perception, corporate culture and company image, considering also that some drivers like to advertise their 'green' credentials by using highly observable eco-products (Lane, Potter, 2007; Skippon and Garwood, 2011; Graham-Rowe et al., 2012; Axsen et al., 2012; Schuitema et al., 2013; Burgess et al., 2013; Rezvani et al, 2015).

In particular, studies on EV purchase intentions highlight affective or hedonic attributes such as pleasure and joy (Schuitema et al., 2013), consumer emotions (Moons and De Pelsmacker (2012; Ajzen, 1991; Richins (1997), the perception of supportive policy, knowledge, and perceived behavioural control; social norms have also been shown to significantly influence consumer intentions to adopt EVs (Kahn, 2007; Lane and Potter, 2007; Ozaki and Sevastyanova, 2011; Egbue and Long, 2012; Moons and De Pelsmacker, 2012; Rezvani et al., 2015).

The paper by Hardman S. et al (2018) presents a literature review of studies that investigate infrastructure needs to support the market introduction of plug-in electric vehicles (PEVs).

In this field, it is indeed necessary to consider the increasing consumer involvement towards sustainability and environmental issues, especially air pollution and attention to health and the degree of product innovation. Other factors that could considerably influence consumer choices are the *penalties to nations for not reducing CO₂ emissions from road transport in cities* – discussed later in the paper – *and the consequent new steps to reduce pollution in the city centres*, as well as apprehension regarding oil resource depletion in the future with the possibility of increasing prices.

The PHEV may have desirable attributes other than fuel savings (Heffner et al, 2007, Lemoine, 2008).

The consumer choices about PHEV and full electric vehicles (BEV) are primarily influenced by:

- a) the satisfaction of the consumer's *daily needs*, primarily the possibility given the *daily distances* to recharge the vehicle sometime during the day (slow charging), at night (slow charging) or from time to time (rapid or fast charging);
- b) the *costs*, including purchase prices, taking account of possible government or car manufacturer subsidies, and operational costs;
- c) powertrain with related fuel efficiency;
- d) the availability of charging stations in public and private areas;
- e) services provided by the car manufacturers.

2. State of the art

Technological progress – mainly in the so-called green-motors and ITS fields (Böhm M., 2010), in an attempt to reduce dependence on the near-monopoly of crude oil¹ and to reduce air emissions – has favoured the development of both new-ICE and electric motors for road vehicles, also interconnecting them with infrastructures for various aims, including booking facilities for recharging the batteries. All this has mainly taken place since the beginning of the 21st century in most industrialised countries, with much higher emphasis in recent years. In the same period, traffic demand in the EU and the U.S. seems to have reached a period of stabilisation (Figure 1, Figure 2, Figure 3).

¹ For example, nearly 94% in terms of tons of oil equivalent (toe) in Europe and 93% in the U.S. in 2017 and 2018.

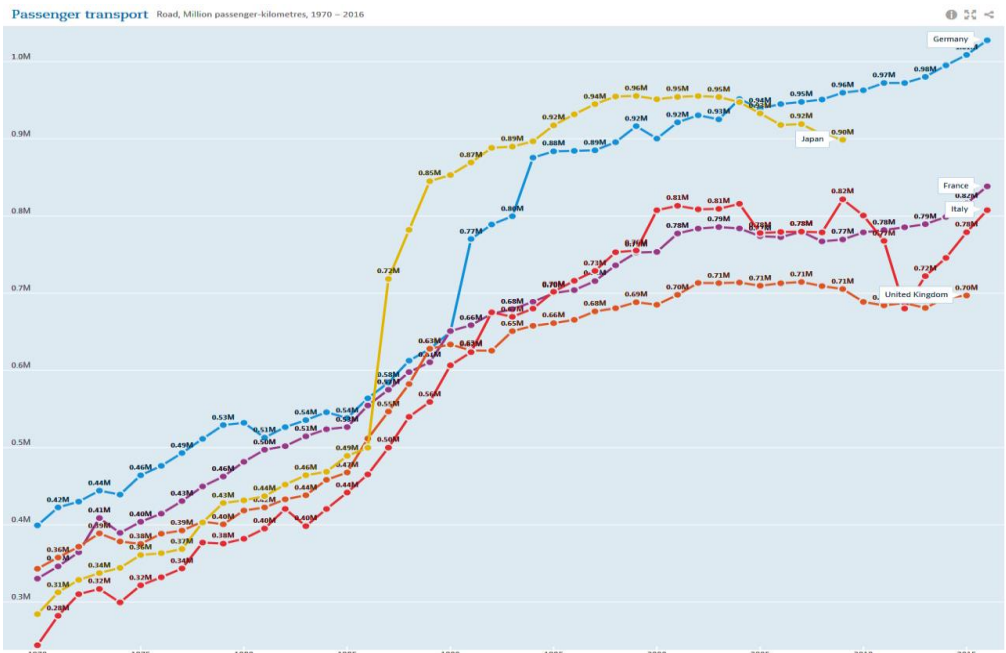


Figure 1 - Million passenger kilometres travelled by road, passenger transport, 1970-2015 (OECD, 2018), with a focus (top-down) on Germany, Japan, France, Italy, United Kingdom

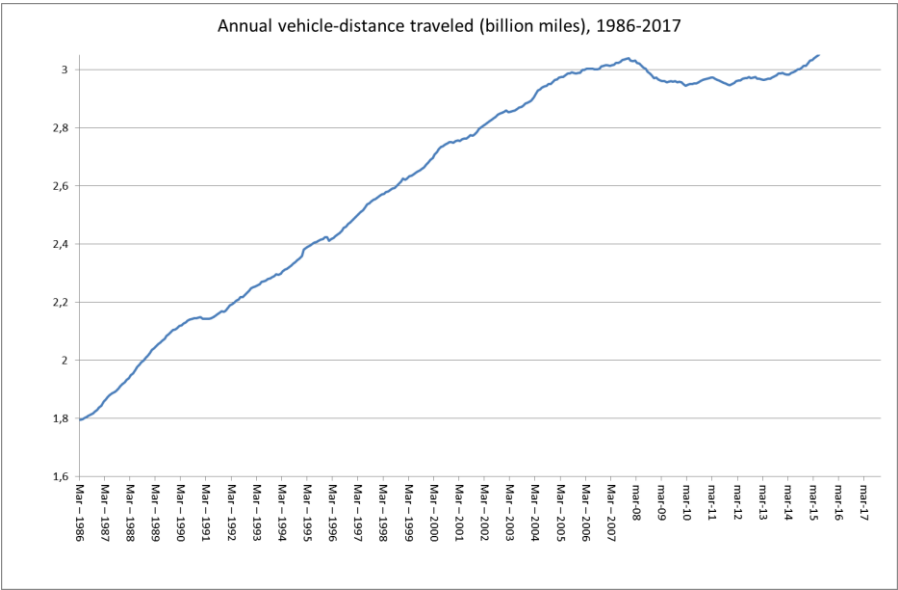


Figure 2 - Annual vehicle distance covered on highways in the USA, *Moving 12-month total on all highways* [US Department of Transportation, 2018; US Department of Transportation, Federal Highways Administration (FHA); 2018, Traffic volume trends].

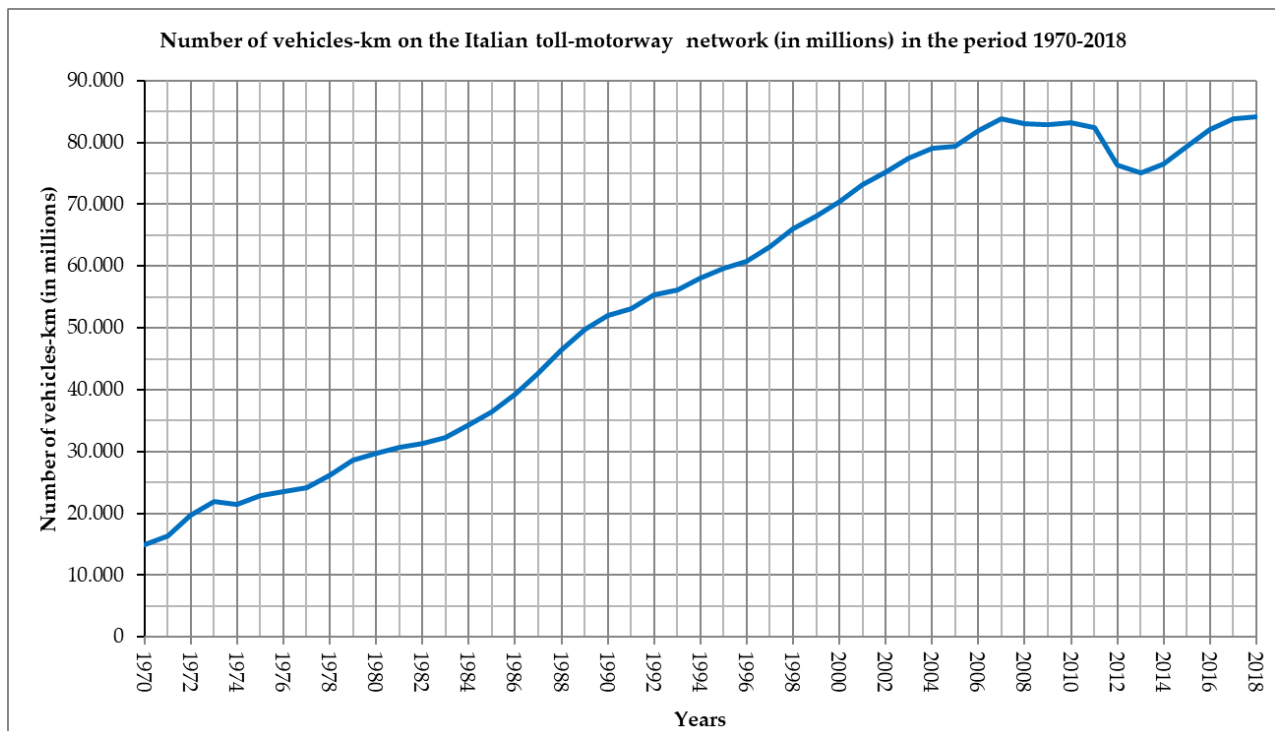


Figure 3. Vehicles per kilometre for all vehicles on the whole Italian toll-motorways network, 1970-2018 (elaboration by the authors on data obtained from AISCAT, 2019).

The main aim of this paper is to investigate the average daily motorised mobility of *single vehicles* – so not an aggregated motorised mobility as shown in Figure 1 and in Figure 2, which help only for framing the issue – by using private motorised vehicles in Italy and, more generally, heavy-duty vehicles, with related trends; thereafter, to compare these data with those from other countries, making use of both existing research studies, including technical reports, and directly collected data; the final aim is to understand both the *compliance of daily activities based on the use of automobiles with the autonomy of batteries* (range) and to calculate some *economic outcomes*.

The results add also a number of potential results of interest for transport research: from energy consumption, according to daily covered distances, to the most appropriate types of propulsions, either by ICEs or electric motors with BEVs or by hybrid powertrains, namely PHEVs. The *actual usage of roads* can also be useful for *road pricing policies*² in order to calculate yearly well-balanced vehicle taxation per travelled km, computed on actual distances covered by road users, at least at the national level, that we obtain in this paper. As is well-known, road pricing can be a substitute to the fixed taxation adopted until now by numerous countries, whether an automobile is used on public roads or parked in a garage during the year the tax is paid. However, road pricing needs a sound analysis of actual travelled distances so that, on average, a national income can be adequately calculated.

To support both analyses on energy issues – either consumption or emissions – and the development of BEVs or of just the electric traction used in PHEVs, many studies have investigated the current use of road vehicles. The main literature on these aspects is discussed below.

The European Commission introduced the concept of Sustainable Urban Mobility (SUMPs) as a new planning paradigm with a focus on people's needs. The program encourages the development of alternative fuels such as electricity, hydrogen fuel cells and natural gases to reduce the negative impacts of both passenger

² Directive (EU) 2019/520 on the interoperability of electronic road toll systems and facilitating cross-border exchange of information on the failure to pay road fees in the Union.

transport and private, public and freight transport in terms of the environment and emissions posing a health risk (Arsenio E. et al.).

As outlined in (Tamor et al., 2015), a reliable estimation of the potential for electrification of personal automobiles in a given region is dependent on a detailed understanding of vehicle usage in that region. Studies recording details of individual vehicle usage over a sufficient period are available for a few regions in the U.S. In their paper, the authors compare statistical characterisations of four such studies – three in the U.S., one in Germany – and find remarkable similarities between them: the Puget Sound Regional Council Traffic Choices Study (PSRC, 2008); 446 vehicles in the greater Seattle area, the Commute Atlanta Value Pricing Program (Guensler and Williams, 2002 and Ogle et al., 2005); 651 vehicles in greater Atlanta, and the Europe Field Operations Test (euroFOT, 2012); 100 mid-sized Ford vehicles in several German cities. This commonality would provide, according to (Tamor et al., 2015), high confidence that ensemble data can be used to predict the spectrum of usage and acceptance of alternative vehicles in general.

The relationship between location and household vehicle miles of travel was previously studied for a dense city (Chicago) by Lindsey et al. (2011), who mainly considered the effects on energy consumption.

The recent availability of innovative engines and electric motors for vehicles, in addition to conventional ICEs, such as HEVs, PHEVs and BEVs of varying designs and prices, induced many authors to investigate the relationship between their features and trip needs where travelled distance is a relevant factor. In Arslan et al. (2014), the focus is on PHEVs, whereas Axsen and Kurani (2013) explored user preferences for the whole range of EVs. Their study also reported some user motivations and implications for policy. Many studies have recently become available concerning daily mobility and user preferences for EV from various specific perspectives (Pucher J. et al., 2007; Metz, 2010; Axsen et al., 2013; Hidrue et al. 2011; Jensen et al., 2013; Le Duigou et al., 2014; Plötz et al., 2014; Van Rijnsoever et al., 2013; Ziegler, 2012; Hjorthol R. et al. 2014).

Dalla Chiara, Bottero, Deflorio, Filidoro (2014) and Dalla Chiara, Pellicelli (2016) review the literature and some analyses on typical trips of freight vehicles – on the basis of the international, national or local trips – and then present a range of competitiveness of electric vehicles on the basis of demand analysis. Performances and quantitative limitations on the supply side: range (autonomy), batteries, power, performances, consumption, are outlined, as well as recharging possibilities most suitable to user needs.

Dalla Chiara et al. (2018) present a methodology and an analysis applied to a real-life dataset, which refers to an extended period that lasted more than one year pertaining to trips undertaken in Europe by more than one thousand vehicles. The main scope was to focus on variables concerning the duration and length of the trips, the idle times, and the energy consumed by engines. The study provides a quantitative analysis of the energy needs, obtained over a wide range of usage of road vehicles, and attempts to correlate them with the opportunities of recovering energy during the idle time detected over real-life 24h driving cycles, assuming the availability of intermediate charges.

In Tark J.; Link C.; Simic D.; Bäuml T. (2015) the analysis is focused on *range as a crucial technical feature* of EVs: many of the existing studies underestimate range requirements, as they are based on one-day analyses and on mean values of daily trip distances. This data is not appropriate to answer questions on user needs; longitudinal mobility data is more suitable.

We therefore try to sustain our proposal with subsequent analyses: according to our results, reported below, at the current stage of technology a set of new vehicles seems to be the most viable approach for satisfying actual driver requirements, without modifying daily travel behaviour. *In our opinion, and supporting our ideas with subsequent data, this set can flexibly satisfy both short daily travel needs, with an electric traction, and longer trips with propulsion by ICEs, as well as direct battery charging or indirect charging through the ICE itself.* The demand for such motorised mobility, which must be compliant with constraints on CO₂ emissions and greater independence from crude-oil in many countries, in addition to taking into account constraints on urban motorised accessibility in many cities, can be sustainably satisfied in multiple ways: a hybrid bi- or multi-fuel motor vehicle with independent engine and independent recharging, allowing use of the electric engine on short trips and fuelled engine propulsion for longer ones, would be a good synthesis, though more expensive than both BEV and ICE vehicles. This approach might allow the driver to maintain the free mobility guaranteed in the last century by ICE vehicles, mitigating at the same time overall consumption and emissions.

Another important aspect related to consumptions, both from the company and the customer (car owner) or fleet manager (in case of shared mobility) viewpoints is the *total cost of ownership* (TCO) of these new vehicles, which combine an electric motor with a traditional one in a unique powertrain. Some relevant aspects have already been analysed by Rusich A. and Danielis R. (2015) when assessing the total cost of ownership, social lifecycle cost and energy consumption of 66 cars with different fuel/powertrains available in Italy in 2013. That work also focused on the importance of subsidies for low emission vehicles, which helps them penetrate in the market at a lower price than the others.

In addition, the following analysis is aimed at evaluating how the TCO of a medium-size vehicle (SUV) may vary depending on six different tractions: gasoline and Diesel traditional ICE, gasoline and Diesel HEV, and gasoline and Diesel PHEV. Calculations are carried out according to our analysis on the average daily and annual travelled distances, assuming that plug-in vehicles first use electric autonomy (43 km, compliant with our results) and then continue with the ICE. In order to have maximum efficiency, electric batteries are assumed to be charged every day, in a slow charging way, typically during night-time; the main alternative, which is still as slow as electric charging, would be during the working time in parking areas at the workplace, if feasible.

Furthermore, the European Commission has set environmental goals to reduce air pollution and greenhouse gas emissions; in order to contribute to more energy efficiency and less fossil dependency, several studies have confirmed that PHEVs have this potential. Concerning the diffusion of electric traction, a study by Wikström, M., Eriksson, L. and Hansson, L. (2016) confirms that the policy entrepreneur affects and accelerates the introduction of PHEVs in local public authorities, assesses the travel demand, finds appropriate applications, and supervises the deployment process.

The Chinese market is important for the objective of reducing the prices of electric traction systems by exploiting scale economy. It is the largest consumer and producer of automobiles worldwide, and it has the potential to change the economic incentives for emerging technology development worldwide. Even though EV adoption in China might increase local emissions, global emissions from automobiles could nevertheless plausibly decrease as a result of increased development and adoption of electric vehicle technology worldwide (Helveston, J.P., Liu, Y., Feit, E.M., Fuchs, E., Klampfl, E., Michalek, J.J., 2015).

In Carley et al. (2013), the authors examine consumer stated intent to purchase plug-in electric vehicles and assesses the factors that increase or decrease interest.

Tal G., Nicholas M. A, Davies J. and Woodjack J. (2014) deeply analysed the growing plug-in electric vehicle (PEVs) market features, new models of battery electric vehicles (BEVs) and Plug-in hybrid vehicles (PHEVs) with varying battery sizes and electric driving range. They wondered to know how are these different models are used in the real world. A common assumption in PEV impact analysis is that PEV owners will maximize their vehicle utility by appropriately sizing their battery to their driving needs and by charging their vehicles as much as possible to recover the cost of the vehicle purchase. Based on these assumptions the Authors expected a high correlation between PHEV owners usage of the vehicle and the number of plug-in events, and they expected drivers of PHEVs with small battery to plug in more than owners of vehicles with a larger battery and similar driving patterns. This paper examines the assumptions presented using a survey of more than 3,500 PEV owners conducted in California from May and June 2013. The results show that small battery PHEV electric vehicle miles travelled (eVMT) are lower than larger range PHEV or BEVs not only because of the battery size but also as a result of the public charging availability and charging behaviour. Higher electric range PHEV and BEV drivers charge more often and report more charging opportunities in the same areas that smaller battery PHEVs could not find chargers. This paper in particular is quite related and useful with reference to the aims of our work.

The importance of local transport policies on the diffusion of HEV and E-vehicles is highlighted by Hagman, J., Ritzén, S., Stier and J.J., Susilo, Y. (2016). In fact, TCO depends strictly on local subsidies that help to increase the use of battery electric vehicles (e.g., economic and regulatory environments, existing fuel/road infrastructure); nevertheless, the most appropriate business models are based on consumer conditions (e.g., vehicle performance and applications, attitudes, lifestyle, personality and self-image, price, fuel economy, comfort, size, practicality and reliability). Below, the present study presents an automobile cost model based on driver habits and existing economic conditions in order to better fit real driving data.

Over the last few years, the efforts regarding technological improvements and innovation in transport have been intensified, and fleets of vehicles using renewable sources is now the new trend for public authorities, non-profit organizations and many private companies promoting sustainable development. A study by Margaritis, D., Anagnostopoulou, A., Tromaras, A. and Boile, M. (2016) also provides some future perspectives on freight transport. In fact, modern composite materials for the chassis of the EVs could reduce the weight without any compromise to crash safety and vehicle stability. *Loss of weight* is actually a manufacturing target to allow the vehicle to maintain its crash compatibility, along with other advantages such as lower rolling resistance, brake power and energy saving. Moreover, the production of EV modular concepts on a cabin-chassis design for a city vehicle of max 7.5 t gross weight is a current industry need in order to deliver different goods to customers. This could achieve reductions to production costs, and consequently make EVs more attractive to fleet operators that own a multi-purpose fleet.

3. Actual usage of public roads, trip characterisation and average distances: Italian data

One relevant database derives from ISFORT³ (2018) research, which is focused on Italians' daily mobility on working days. The database is annually developed with direct interviews of a sample of 12,200 Italians aged 14–80 years. The sample composition aims at acquiring data that can be considered representative of the entire Italian population.

This report shows how the period of consumption contraction, which has characterised the Italian economy over the last eight years, has affected daily trips. In 2008, there were 128.1 million trips on an average working day, while in 2017 this number fell to 97.9 million, a 24% decrease. Additionally, daily passenger-kilometres travelled, the other measure of mobility used, decreased, although less so: from 1,561 million in 2008 to 1,037.1 million in 2017, a contraction of approximately 34%.

During the monitored period, according to another, institutional, source, the population of Italy increased by approximately 3.2%, from 58.7 million in 2008 to 60.6 million in 2017 (ISTAT, 2017). After a long period of continuous growth in road trips, which started after the Second World War, a period of *stabilisation, slight decrease, followed by a recent slight increase in demand* seems to have begun with the new century.

This contraction of consumption, associated with households' need to minimise expenses, would suggest that some Italians intend to reduce their use of private cars in favour of generally cheaper *public carriers, bicycles or walking*, sometimes even *motionless communications* such as teleconferences, exchanges of e-mails or messages via the web. The ISFORT survey seems to confirm this supposition about a modal shift. Respondents were asked to indicate their future intentions regarding means of transport to be used: 34.0% of those interviewed expressed a propensity to a modal shift away from private cars (32.8% in large cities), but only 9.8% (10.6% in large cities) away from public transport; on the other hand 32.3% (32.6% in large cities) expressed a desire for a future modal shift towards public transport and only 7.6% (10.6% in large cities) towards private automobiles. The propensity to a modal shift towards bicycles has seen a big increment in the past couple of years: 38.8% of the respondents expressed their interest in increasing their use of the bicycle, a consistent increment from the 28.9% in 2015. The modal share for trips on foot was estimated at 22.3% (17.5% in 2008) and by bicycle at 5.2% (3.6% in 2008). However, in analysing motorised mobility, this propensity to a modal shift is reflected in the actual ISFORT data.

³ ISFORT (*Istituto Superiore di Formazione e Ricerca per i Trasporti*) is an Italian institute that operates in the transportation and mobility sector. It has organised three longitudinal studies (observatories) - on mobility demand, logistics and urban mobility - that has collected an extensive amount of data, thereby generating a comprehensive database.

	2008	2016	2017
Public carriers	8.4	9.3	9.3
Private vehicles (automobiles and motorcycles)	58.8	59.1	52.1
Foot and/or bike	32.8	31.6	38.6

Table 1 - Trip distribution for means of transport in urban mobility (%) in Italy [Source: ISFORT, 2017]

	2008	2016	2017
Public carriers	12.9	12.7	12.3
Private vehicles (automobiles and motorcycles)	85.8	86.3	84.8
Foot and/or bike	1.3	1.0	2.9

Table 2 - Trip distribution for means of transport in extra-urban mobility (%) in Italy [Source: ISFORT, 2017]

As shown in Table 1 and Table 2, from 2008 until 2017 public transport in urban areas has increased by 10%, while in extra-urban areas it is almost constant.

The amount of automobile use has decreased over the years in the *urban context*; however, if we only consider the motorised means, the percentage of automobile use is steady at around 85%, very similar to the use percentage *in extra-urban contexts*.

The ISFORT report also investigates public transport use according to city dimensions. Public transport is relevant only in large towns (above 250,000 inhabitants) and middle urban ones (100,000-250,000 citizens), with rates equal to 21.1% and 9.8%, respectively (private automobile rates equal 44.7% and 60.4%). However, this use drops drastically to 4.8% in small cities (population < 100,000 inhabitants), where automobile use is 68.8%.

The modal share of home-work trips was analysed by the Politecnico di Torino (2013). The study was performed on a sample of 880 employees, 83% of whom *employ regularly motorised mobility*; trips by bicycle or on foot represent 17%. Regarding motorised mobility, 63% of people ride at least one bus to get to work, 49% *use their own automobile*, and only 8% use a motorcycle or a moped. Note that the sum of the percentages is greater than 100%; this is caused by multimodal trips. For instance, among the Politecnico di Torino employees, 17% *of motorised mobility involve both automobile and public transport*. The values obtained in the research conducted by the Politecnico di Torino on the use of public transport are greater than those documented by ISFORT, but they refer exclusively to trips to work, which are generally characterised by a higher use of public transport. Furthermore, the Politecnico di Torino is one of the major traffic-attractive poles in Turin; therefore, it is well integrated with public transport by different bus lines and by the automated subway line, besides being not far from the two primary train stations of the city (approximately 15 minutes on foot).

After this general description of Italian demand features, which reveals *80-85% of daily mobility accounted for by car use*, our analysis will now deal with *trip distance*.

This section aims at assessing the *average daily distances* covered in Italy with a road vehicle, both in *urban* and *extra-urban* contexts. It investigates the use of vehicles via an *aggregated* approach, aimed at identifying the *average distance ranges*. The results can support the decision-making process regarding the most suitable propulsion or engine features – including plug-in hybrid solutions – of present or future motor vehicles from a demand viewpoint.

The lack of an equivalent structured study that characterises Italians' trips requires an analysis, by comparison and merging, of different sources; each study considered refers to a particular sample and provides different information that partially contributes to the overall analytical result.

ISFORT divides trips into three categories, based on distance.

	2007	2012	2013	2016	2017
Urban propensity trips (<10 km)	73.5	70.4	68.9	73.6	76.4
Middle distance trips (10-50 km)	23.5	26.6	27.7	23.5	21.3
Long distance trips (>50 km)	3.0	3.0	3.3	2.9	2.3

Table 3 - Total distribution of trips per distance (%) in Italy [Source: ISFORT, 2013]

The increase in the weight of urban propensity trips and the consequent decrease in middle and long-distance trips can be partially explained also by the increment of workday recreational trips, which usually entail short distances. In fact, according to ISFORT data, such trips are primarily recreational (41.2% in 2017, 32.7 in 2008). On the other hand, work or study trips have decreased in weight from 35.9% in 2008 to 31.5% in 2017, while trips related to household management have decreased from 31.4% in 2008 to 27.3% in 2017.

Comparable results have been obtained by the survey in the Politecnico di Torino (2013), which, considering only automobiles, estimates a percentage of 64.3% for *urban propensity trips* (<10 km), 32.9% for the *middle-distance trips* (10-50 km), and 2.9% for *long distance trips* (>50 km). If compared to the ISFORT data, the increase in *middle distance trips* and the decrease in *urban propensity trips* can be justified by the aim of the trip; the analysis produced by the Politecnico di Torino considers exclusively home-work trips whereas ISFORT investigates every trip scope. Figure 4 illustrates a diagram based on data from the cited survey (Politecnico di Torino, 2013). 812 people responded to the questionnaire (out of a universe of approximately 1,300), all working at university either as teaching staff or in a technical-administrative capacity). The questionnaire related to trip distances (x axis) and to their frequency as observed in the reference sample (y axis).

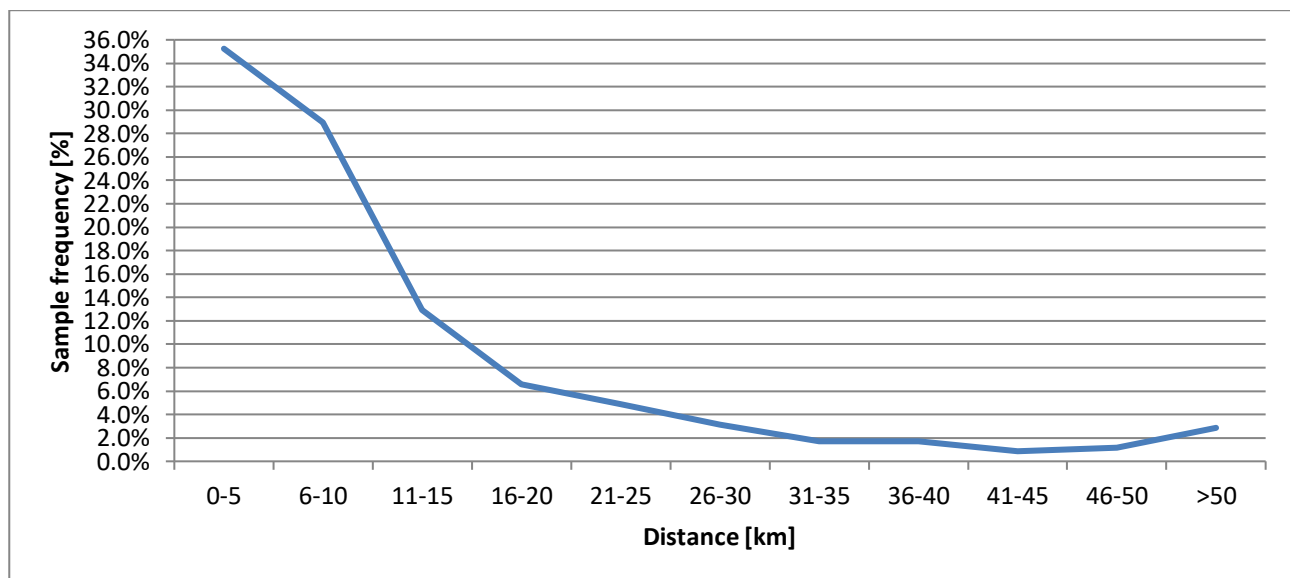


Figure 4 - Average trip distance distribution (home-work trips, by motorised mobility) in Italy on the basis of 821 people working at university [Source: Politecnico di Torino, 2013]

As any expert in transport engineering would expect, there is a *reduction in sample frequency with the increase in distance covered*. Dividing the first bin (0-5 km) into two other bins (0-2.5 km and 2.6-5 km), the overall percentage is split into 11.7% within 2.5 km and 23.5% within the 2.6-5 km range. This distribution is easily justified by the major inclination towards personal mobility, either on foot or by bicycle, for short distances (0-2.5 km).

According to data from the same survey, the daily *average distance covered altogether by automobile* is equal to 12.9 km; in urban contexts, this distance is estimated at 6.2 km whereas in extra-urban areas it is 14.4 km. The study by ISFORT determined the daily average distance of a trip as 10.6 km, similar to the distance

obtained by the Politecnico di Torino. In contrast, the detailed daily average distance of the ISFORT survey is 4.2 km in urban areas.

Based on the latest available value referred to in the 2017 ISFORT survey, the *daily average distances* is 25.8 km globally.

For further comparison, data provided by 5T⁴ and extracted by Viola (2012) are reported in Table 4.

	Entire area	Turin
Daily trips	2,115,483	1,435,289
Daily distance (km)	25,194,773	6,533,061
Trips average distance (km)	11.9	4.6

Table 4 - Average distances covered in Turin (I) and its metropolitan area in Italy [Source: 5T, 2012]

5T data refer to all of the trips without distinguishing among different transport means and considering both weekdays and holidays. It refers to Turin and its metropolitan area; therefore, interregional trips are not included. The reference area for 5T and for the Politecnico di Torino data is nearly identical, but the first sample refers only to home-work trips whereas 5T data include all trip generation scopes. Considering the entire metropolitan area of Turin, the average distance from 5T data is 11.9 km, a bit less than the 13–13.8 km range found by the surveys previously introduced. The average distance considering only the urban area is 4.6 km, a value similar to ISFORT's (4.2 km) but less than that found by the Politecnico di Torino (6.2 km). 5T distances are on average less than in the Politecnico di Torino data because 5T also considers recreational trips, which are generally characterised by short distances: i.e., 5T data exclude interregional trips and, therefore, long-distance recreational trips.

The national official report provided by the Statistical Office of the Ministry of Infrastructures and Transport (Ministero delle Infrastrutture e dei Trasporti, CNIT - 2004) estimated the *annual average distance by automobile in Italy as 12,326 km*. A *daily average distance* obtained from this aggregated value is close to *34 km*. This last figure considers exclusively weekday trips, while the value by the Ministry of Infrastructure and Transport also includes trips for holidays: it includes aggregated data without distinguishing between urban and extra-urban trips but provides information that includes holiday trips, excluded in previous analyses made by other institutions.

Caserini et al. (2013) provide additional aggregated data. They estimate the annual average travel distances of vehicles, divided by age and fuel, analysing odometer values declared by the automobile owners when they start the selling procedure of their vehicles on specialised websites. The study results depend on an effective correspondence between actual data and the data indicated by the owners regarding the total mileage of their cars; regarding older vehicles in particular, sellers might tend to avoid providing correct odometer data to make the vehicle appear less worn, trying to obtain a higher final price. The reference sample is composed of 32,950 vehicles divided into 18,652 gasoline vehicles from 1 to 16 years old and 14,298 diesel vehicles from 1 to 14 years old, covering the period between June and September 2010. The reference sample is the 1.1% of the automobiles sold in Italy per year; the vehicle age distribution is similar to the distribution indicated in the national database by ACI⁵ for 2011. The actual use of the vehicles is not reported; it is impossible to know whether private vehicles used exclusively for personal purposes constitute the sample or, especially for diesel vehicles, there are some vehicles previously used for freight transport. The developed analysis estimates that gasoline vehicles cover 10,636 km per year, corresponding to 29.1 km per day, whereas gasoil or diesel vehicles cover 18,685 km per year, equalling 51.2 km per day. Weighting the distances by the size of the related subgroups, an annual average distance of 14,129 km is obtained, which corresponds to a *daily average distance of 38.7 km*.

⁴ 5T (i.e., Telematic Technologies for Transport and Traffic in Turin) is a public company that operates in the ITS and info-mobility fields, mainly to manage the traffic monitoring and control system in the Turin (I) metropolitan area.

⁵ ACI (i.e., Automobile Club d'Italia) is a public society that publicises and contributes to regulatory issues in the automotive field.

ACI (2012) investigates the influence of number of inhabitants of urban areas on average distances by car. Daily average distances are greater in small cities: from 31 km and 3.8 trips on an average working day for cities up to 10,000 inhabitants to 23.2 km and 2.7 trips in cities with more than 250,000 inhabitants. Finally, data related to the motorway network managed by Autostrade per l'Italia (2013) have been investigated. These data are quite reliable because they derive from automatic registrations at tolling stations at toll motorway entrances and exits. This sample refers primarily to long-distance trips, including both working and holiday days. Even on motorways, a reduction of traffic flows in recent years has emerged, quantified as a decrease of 7.5% in motorised mobility demand (2012 on 2011), with a decline of light vehicles of 7.3% (going back to the 2003 levels); a slight increase was recorded in 2014 and at the beginning of 2015. Globally, the daily average distance covered on Italian highways is equal to 77.9 km, with a daily distance for light vehicles equal to 72.65 km. Approximately 62% of the light traffic covers a distance of less than 50 km. Analysis of the average distances shows that different studies, even though they considered different samples and used different approaches, achieved *quite comparable results*. Specifically, a comparison of all the above-mentioned results shows that *the daily average distances* travelled by Italians ranges from 25.8 km to 38.7 km and is characterised by an average vehicle trip length between 4.2 and 6.2 km in *urban areas* and between 11.9 and 26.5 km in *extra-urban areas*, as summarized in Table 5 and Table 6.

Source	Distance (km)
ISFORT	37.3(2013), 25.8 (2018)
Politecnico di Torino	34.8
5T	32.1
CNIT 2004	33.8
Caserini	38.7

Table 5 - Average daily distances covered with vehicles according to all mentioned Italian sources, recent years

Source	Length (km)	
	Urban	Extra-urban
ISFORT	4.2	N/A
Politecnico di Torino	6.2	14.4
5T	4.6	11.9

Table 6 - Average vehicle trip length according to three independent Italian sources

The similarity and nearly steady values in recent years of these data are quite useful; however, it is still not enough for our purpose, i.e. a critical review to understand the sustainability of partial or full electrification with consequent economical outcomes.

Furthermore, both the Politecnico di Torino and ISFORT studies found that more than 60% of Italian trips take place within a distance of 10 km whereas only approximately 3% exceed 50 km. Detailed analysis of the results collected by the Politecnico di Torino confirms a decreasing trend in the percentage of the sample covering a given daily distance, but with a slight increase in distances. In

Figure 5 a simple qualitative scheme is presented to relate the distances travelled and their frequency to possible vehicle types (BEV, ICE automobiles, HEV) used to satisfy the different ranges required.

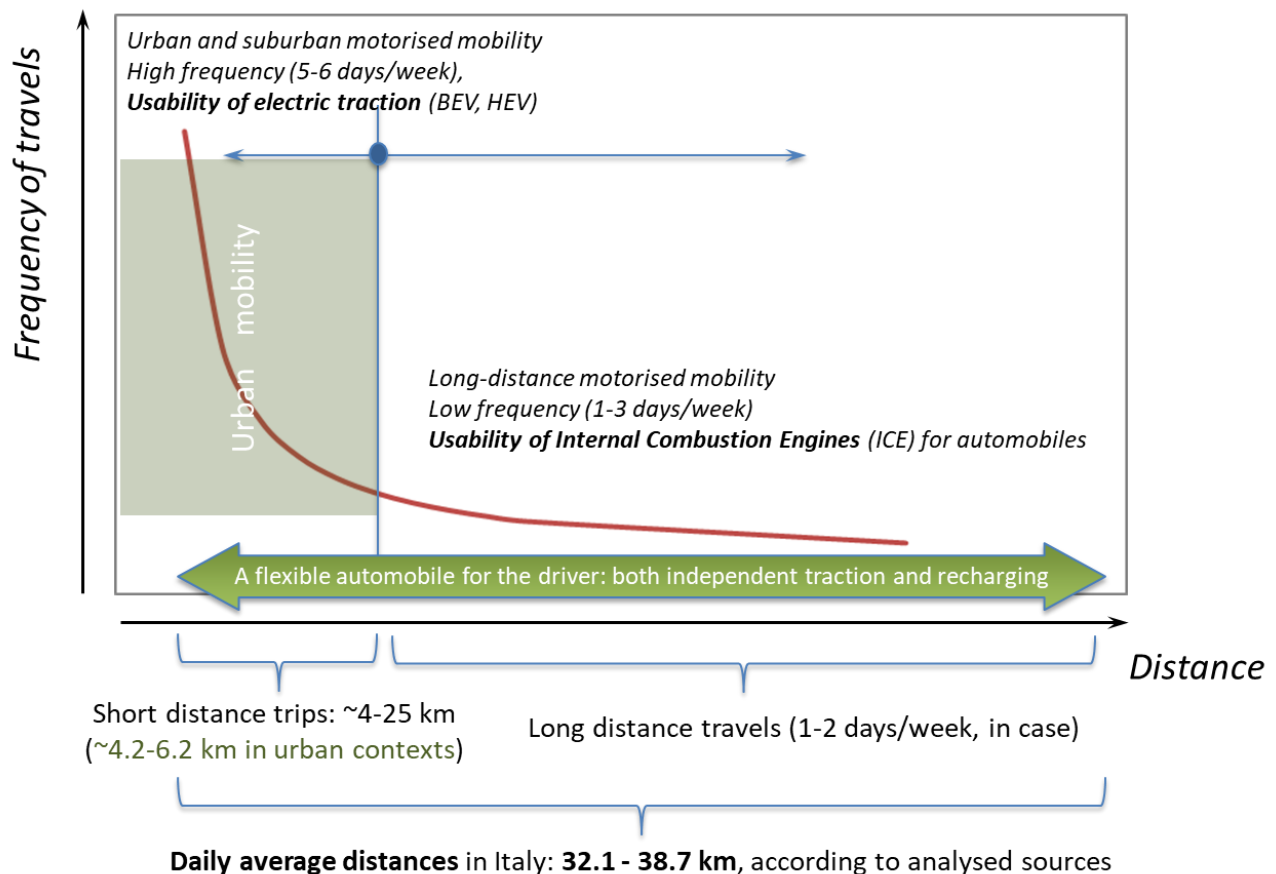


Figure 5 - Typical distribution of frequency of trips on distance covered in Italy, according to available data: vehicle types which may satisfy the demand

An initial conclusion which implicitly emerges is: urban daily trips, which correspond to a far higher frequency in the yearly usage of automobiles – typically for weekdays between Mondays and Fridays, in some cases also Saturdays – are wholly compliant with the range of full electric vehicles, as quoted from the literature and obtained from the authors' data collection and direct analyses. These distances are in any case compliant with the autonomy of most batteries when plug-in hybrid ICE-electric vehicles are used with their electric traction and not with their ICEs. ICEs are instead preferable for long-range trips, which typically occur a few days a week or during weekends, involving distances that may easily surpass 150-200 kms before the need arises to recharge the battery at home, at the workplace or within the city. Moreover, given the high average percentage of people living in cities and suburbs with respect to the overall population (3/4 in Europe, approximately), the daily trips correspond to the high mass of daily mobility. The possibility of placing electric charging spots in urban or metropolitan areas – such as at home, work or public parking places – is more feasible and maintainable than elsewhere. The most flexible automobile turns out to be the plug-in hybrid one; yet for drivers who cannot afford it, BEV-sharing (i.e. a car sharing of plug-in automobiles) may be a good solution, at least during a transitional phase.

4. Comparison of average distance in other countries

A primary aim of this study has been to provide a structured investigation of average motorised mobility in Italy, as only data from different sources and samples, including those directly collected, were available to the authors. The following section provides a comparison with mobility in other EU Countries and in the United States, to ascertain if some relevant differences in daily mobility features are observable, given also the different electric market share in these countries (Figure 6).

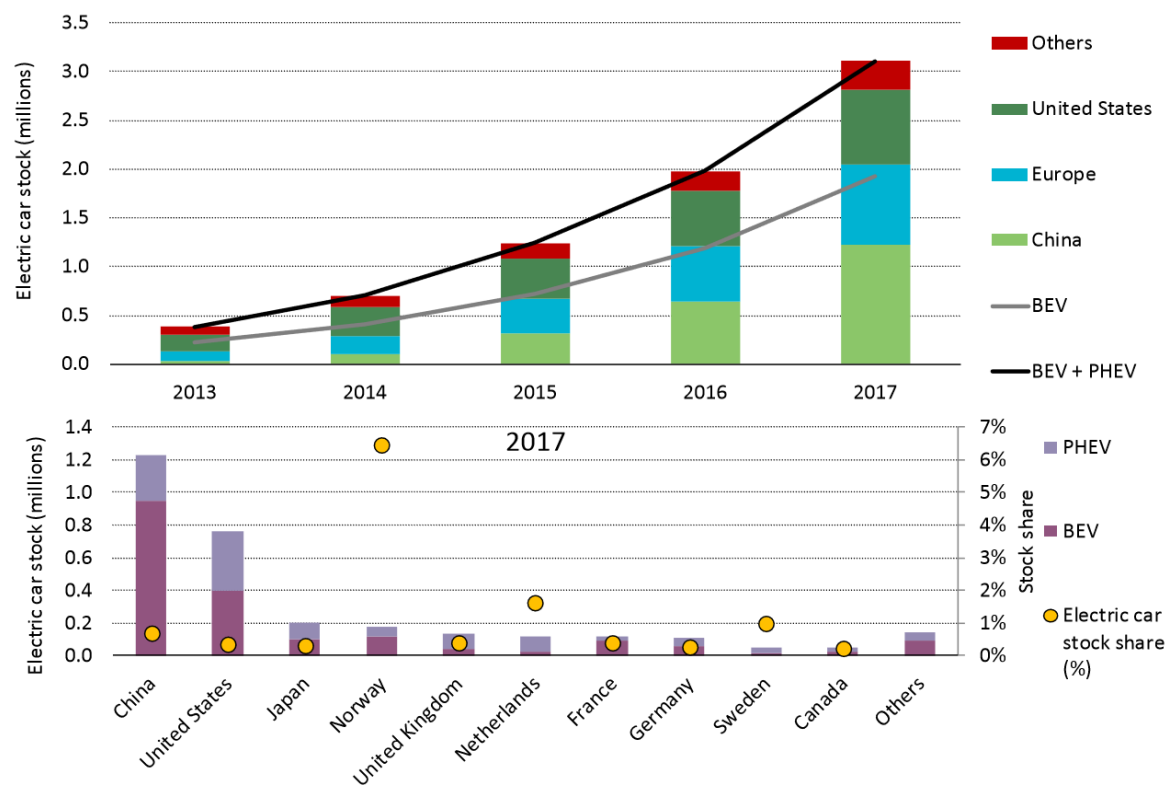


Figure 6 - Passenger electric car stock in major regions and the top-ten countries in vehicle electrification initiatives⁶

The next step will be to compare demand and supply. Our aim is to assess the possibility of shifting from ICE to more innovative solutions (such as BEV, HEV, PHEV) without the need to change daily driving patterns and of accomplishing high-level aims to influence transport policy (such as in U.S. and EU), keeping in mind the presence of a near-monopoly in energy provision for transport, as mentioned above: EU leaders have agreed (23.10.2014) on the domestic 2030 greenhouse gas reduction target of at least 40% compared to 1990, together with the other main building blocks of the 2030 policy framework for climate and energy, as proposed by the European Commission in January 2014. This 2030 policy framework aims to make the EU's economy and energy system more competitive, secure and sustainable and also sets a target of at least 27% for renewable energy and energy savings by 2030.

Within this context, Franke and Krems (2013) investigated factors outside Italy that influence the range preferences of potential electric vehicle customers. They collected the results from different studies and calculated a 39-41 km range of daily distances in Germany; 61-80% of vehicles travel fewer than 50 km per day, with 91-95% travelling fewer than 100 km. Greaves et al. (2014) pursued a similar aim but employed GPS data collected in Sydney by 166 participants, assuming a simple home-based re-charging set-up.

Figenbaum et al. (2014) investigated the actual use of EVs in Norway, based on a survey of 1,721 EVs. Based on a combination of responses to questions about insured driving distance and odometer readings, they obtained an average distance of 14,000-15,000 km/year, which is not so different from the Italian values (12,500 km). This value is close to the annual average mileage of new ICE vehicles in Norway: 15,160 km the first year, 14,800 km the second and 13,400 km the third year. They thus concluded that the annual driving distance for EVs with the latest technology is approximately the same as that for new gasoline vehicles. The average distance to work for EV owners is 26 km, considerably greater than the Norwegian average of 15 km. Eighty-one percent of EVs are driven daily whereas another 16% are driven 3-5 days per week, and the majority of respondents reported that they *had not changed their travel patterns*. Older data from Norway

⁶ Global EV Outlook 2018, International Energy Agency.

(Econ 2006) indicated a driving distance of EVs in 2006 of 10,400 km for privately owned EVs and approximately 7,600 km for those owned by companies.

Even French data collected and elaborated by Feildel and Martouzet (2012) is quite similar to the Italian data, with 6.8 km as the average distance for *single trips* by traditional automobile for urban and extra-urban trips.

Focusing on the United States, Pearre et al. (2011) carried out a study of 484 sample vehicles (470 were observed for more than 50 days; the research is focussed on this subset) in the metropolitan area of Atlanta, Georgia. Of the 30 top industrialised areas in the United States, the Atlanta area is the second in terms of number of miles travelled daily per person by car, exceeded only by Houston, Texas. Therefore, the results should presumably be greater than the U.S. average. To collect the data, the sample automobiles were equipped with a GPS data logger that, after collecting the data during the day, transmitted it daily to the central station. The data reported in the following graph refers to 2004. Specifically, a single trip is composed of the sum of one or more trips divided by pauses shorter than 30 minutes.

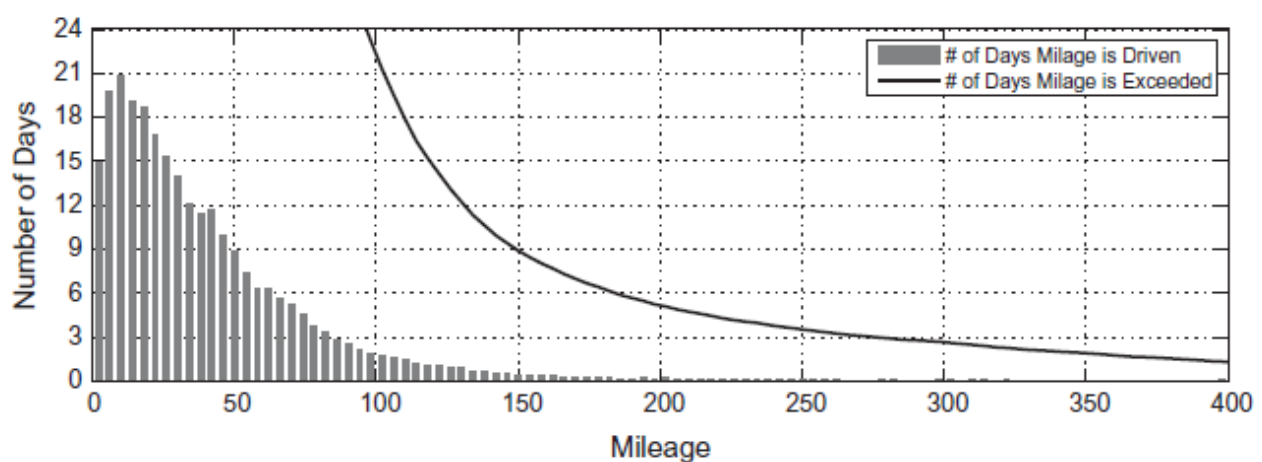


Figure 7 - Distribution of daily trips (U.S.). Each bar corresponds to a 4 mile/day interval. 0 miles are not considered. [Source: Pearre et al., 2011]

The graph in Figure 7 shows that a majority of the trips take place within a range of 50 miles (80.5 km). Excluding days without trips, the average mileage of the daily trips is 44.7 miles (71.9 km), while when considering all of the days, the daily average becomes 32.6 miles (52.5 km), values considerably greater than those found in European countries, though the shape or trend is quite similar to that in Figure 4 and in Figure 5. The daily average distance in the United States, according to the NHTS (National Household Travel Survey) by the Bureau of Transportation Statistics (U.S.) and reported in the analysed research, is 29.1 miles (46.8 km), a value less than the 32.6 miles obtained for the metropolitan Atlanta area and in accordance with previous forecasts. The value corresponds to a daily trip of 12-16 miles (19.3-25.7 km), made on average 21 days per year.

A further confirmation of the previous values is provided by data from the *Transportation Energy Data Book* (Davis et al., 2012), reported in Table 7, which synthesises the main data related to average private motorised mobility in the United States.

	Number of daily vehicle trips (per driver)	Average vehicle trip length (miles)	Daily vehicle miles of travel (per driver)
1990	3.3	8.9	28.5
1995	3.6	9.1	32.1
2001	3.4	9.9	32.7
2009	3.0	9.7	29.0

Table 7 - Private vehicle trips in the USA [Source: NHTS, 2009]

Figure 8 reports the distribution of daily trips according to various collected or analysed sources while Figure 9 reports the daily distance covered by automobile according to various collected or directly analysed sources.

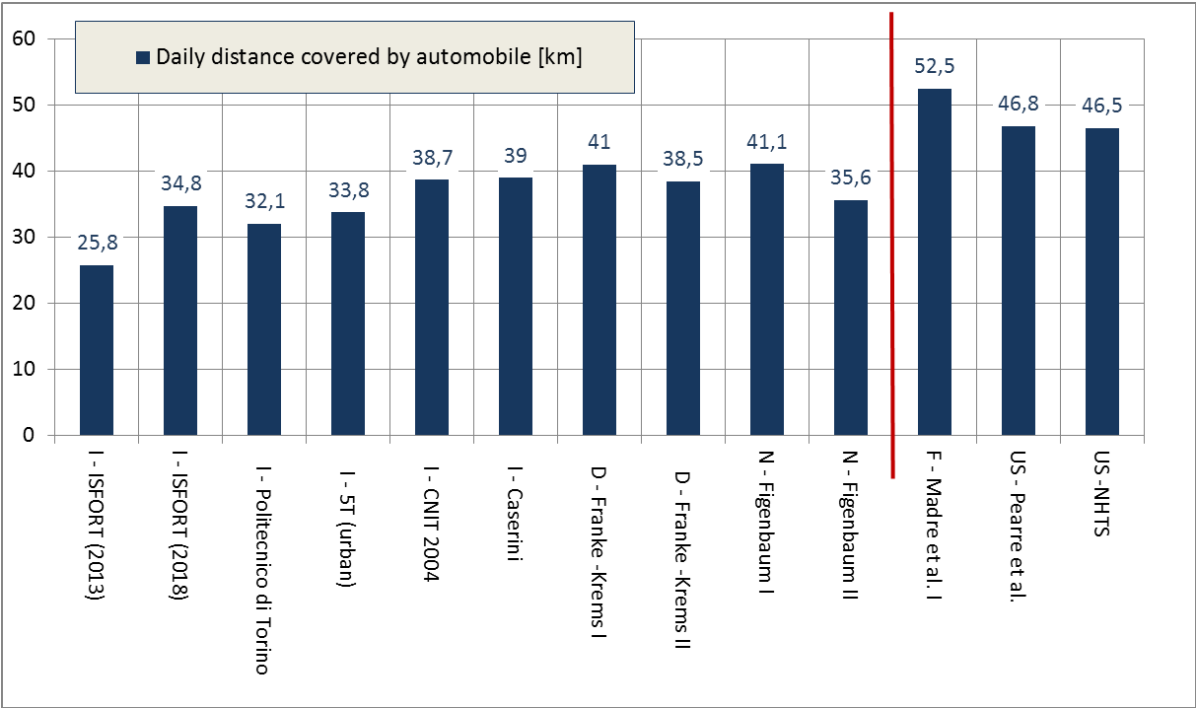


Figure 8 - Distribution of daily trips according to various collected or directly analysed sources

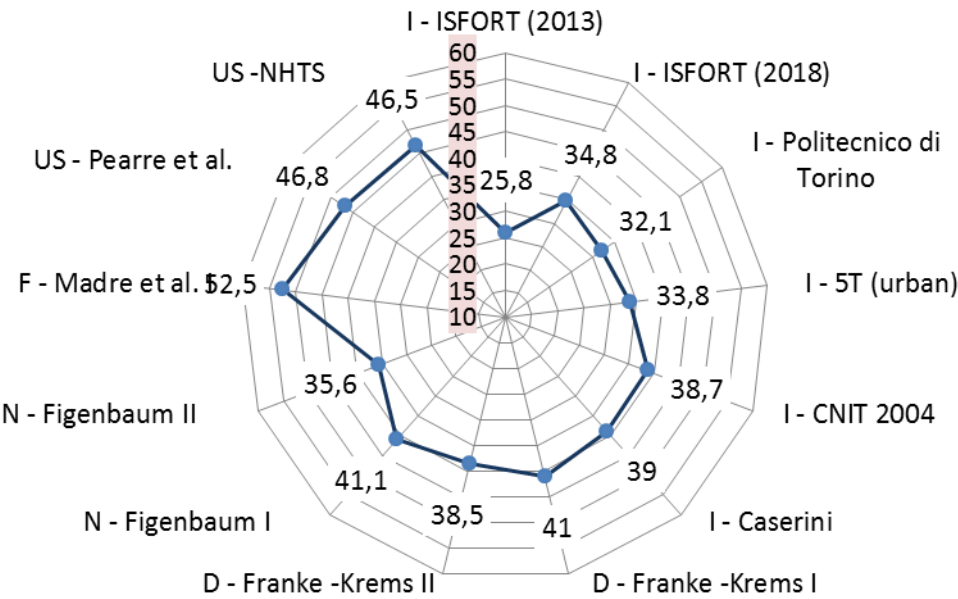


Figure 9 - Distribution of daily distance covered by automobile according to various collected or directly analysed sources

5. Automobile usage trend in the international context

After analysing the average distance travelled by automobile on a daily basis in Italy and in other countries, **which resulted satisfying considering our declared aims**, this section investigates typical annual automobile usage in an *international context* in order to show how this is changing *over time*. This may be useful also in understanding whether a highly varying trend over the years might compromise the compliance of *battery autonomies* with the usage of PHEVs and BEVs, still considering the average daily distances, according to our results.

A Dutch analysis (Van Der Waard, 2012) indicates that about half of the trips take place by car, 20% by bicycle, 20% on foot, and 5% by public carriers. Alternatively, referring to passenger-kilometres covered, 75% is covered by car, 13% by public carriers, and 8% by bicycle. The lower weight of the mobility by bicycle in terms of passenger-kilometres is easily interpretable since this transport mode, even if deeply rooted in the Netherlands, is used mostly for short distances. Forty percent of the trips take place within 2.5 km and 70% within 7.5 km, while 25% exceed 10 km (in Italy, according to ISFORT data from 2013, this value is 31.1%). The average distance of commuters to get to work is 18 km, which can be compared to the values previously indicated.

The use of automobiles in different OECD Countries –mainly referring to the EU – is reported in the graph in Figure 10, extracted from Litman's study (2013).


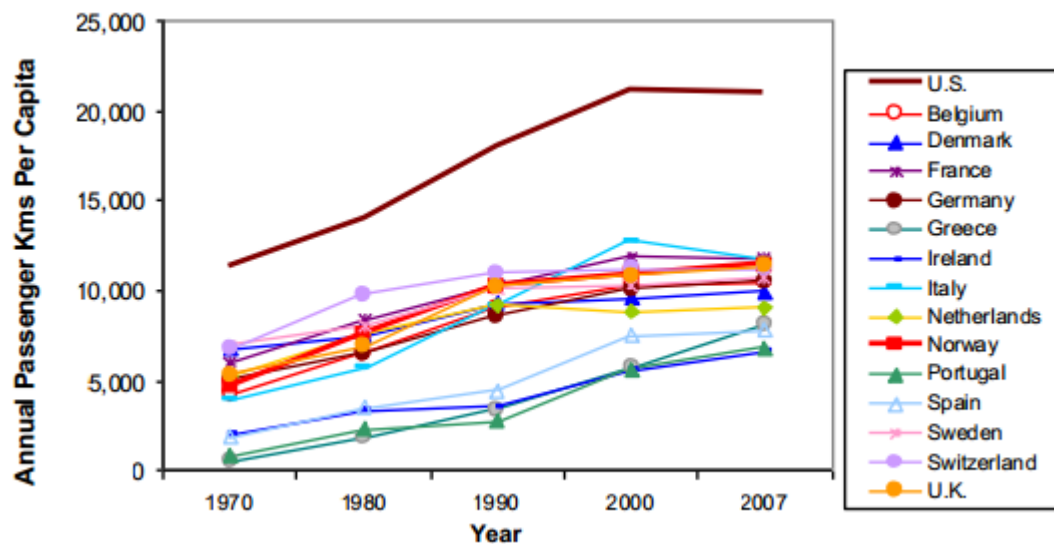


Figure 10 - Trend in the use of automobile in different OECD Countries [Source: Litman, 2013]

Figure 10 shows that *per capita vehicle travel has levelled off* in this century, even in the case of Italy, which is the only EU country with a higher value in 2000 when compared to data from the most recent available year. ACI (2008) confirms this decreasing trend, reporting a 22% decrease between 2003 and 2007 versus a 14.5% increase in the number of automobiles. The average annual distances in different OECD countries have similar trends; shorter overall covered distances refer to countries (Greece, Ireland, Portugal and Spain) where economic systems were not as consolidated as those in countries where statistics for average automobile use are more relevant. Nevertheless, their increasing rates were higher. In 2007, at the end of the monitoring period, the average distances covered in all of the countries considered are uniform, except for the United States, where the average annual distances by automobile are much higher.

Madre et al. (2012) report average annual distances in France, dividing the population into quartiles according to household living standards, in increasing order from Q1 to Q4.

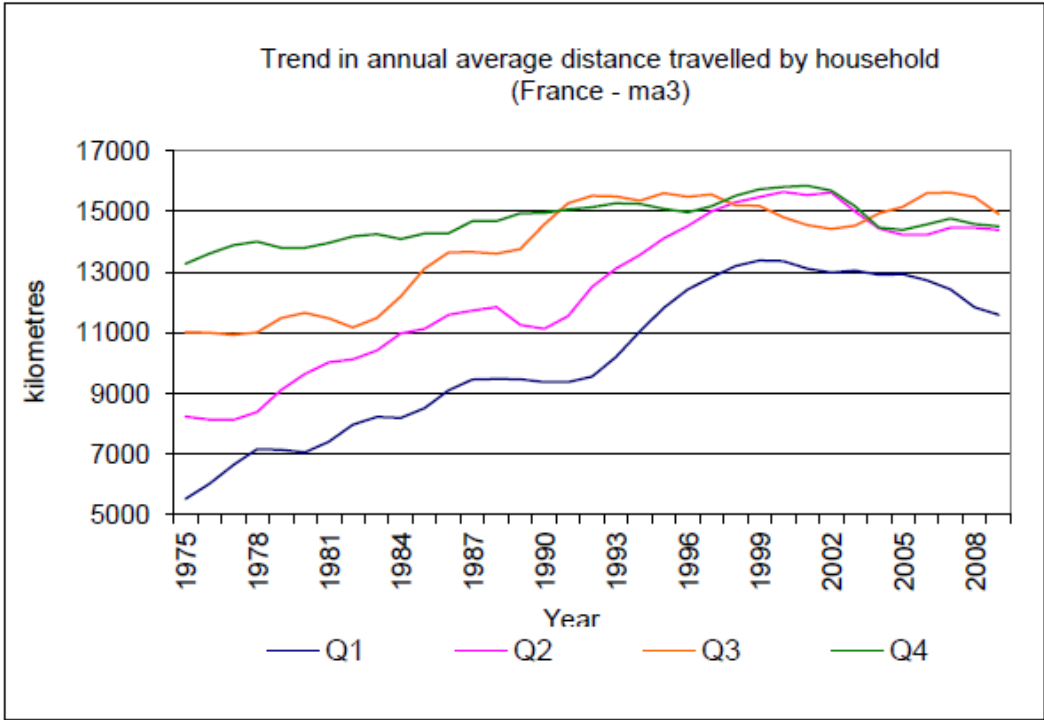

Source: DEST-IFSTTAR – ma3 = moving average over three years.

Figure 11 - Distribution of annual average distances in France (moving average over three years) [Source: Madre et al., 2012]

This analysis, besides being compliant with previous average data, also shows the close relationship that occurs between mobility and economic aspects, with higher living standards associated with higher average annual distances. Considering the higher percentage of medium-low living standards in the whole population, it can be affirmed that the global average annual distance is not so different from the Italian one, being approximately between 12,000 and 14,000 km. Sivak’s study (2013) investigated the average distances of light vehicles in the United States using FHWA (Federal Highway Administration) data. The data refer to all light vehicles – private, commercial and public – since data on private vehicles alone was not available. The result should presumably be greater than what would be obtained by analysing only private light vehicles. Figure 12 illustrates the annual average distances of light vehicles.

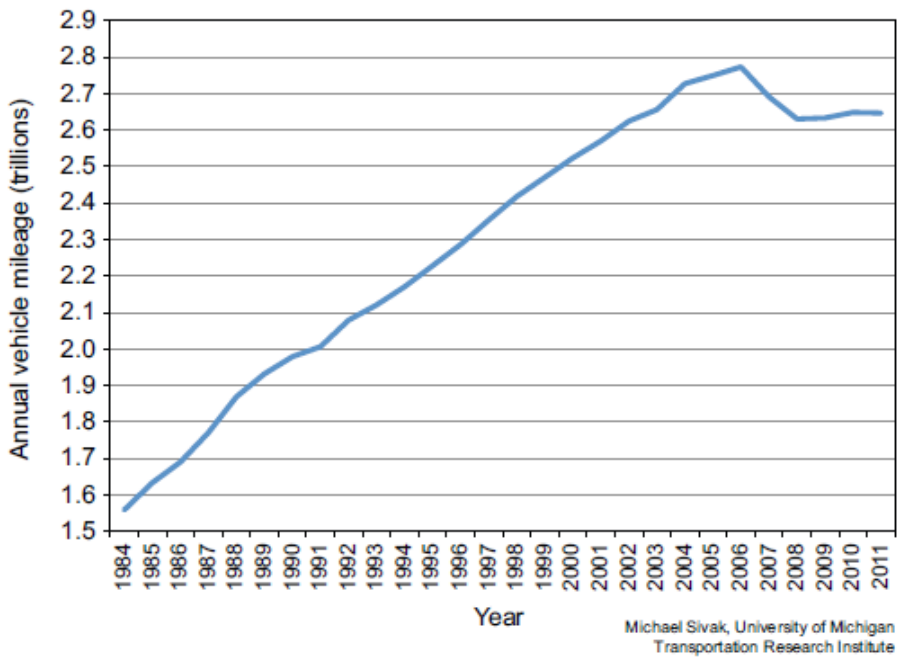
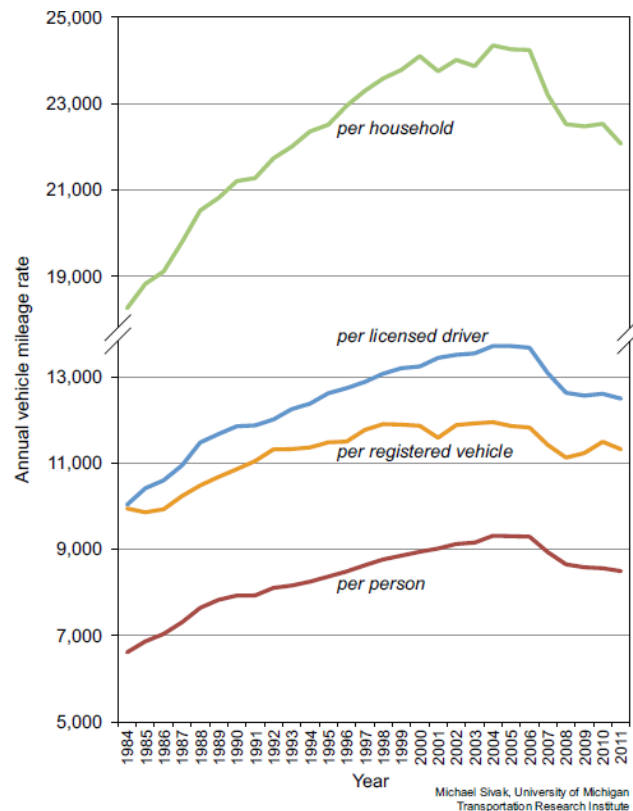


Figure 12 - Distribution of annual average distances [miles] of light vehicles in the U.S. [Source: Sivak, 2013]

The trend in the annual average distances of all light vehicles in the United States has increased, with a peak in the year 2006, after which there was an initial reduction followed, in 2008 on, by a tendency towards stabilisation. The aggregated data has been reported exclusively to provide an overview of the mobility trend in light vehicles in the United States. Figure 13 provides a detailed look at annual average distances.

**Figure 13 - Annual average distances [miles] of light vehicles in the U.S. per person, per driver and per household [Source: Sivak, 2013]**

As shown by the graph, all trends reach their peak in 2004-2006. After 2004, the annual average distance per vehicle decreases by 5.4%, from 11,946 miles (19,225 km) in 2004 to 11,318 miles (18,215 km) in 2011. 1992 is the latest year prior to the 2004 peak that had a rate lower than the 2011 rate. A daily average distance of 31 miles (49.9 km) can be determined from the annual data; the obtained value is next to that related to the Atlanta study (32.6 miles) and to the NHTS numbers (29.1 miles).

Finally, Figure 14 reports the trend in the annual average distances in the United States, extracted from a study of motorised mobility on the population between 16 and 34 years of age (Frontier Group and U.S. Pirg Education Fund, 2012).

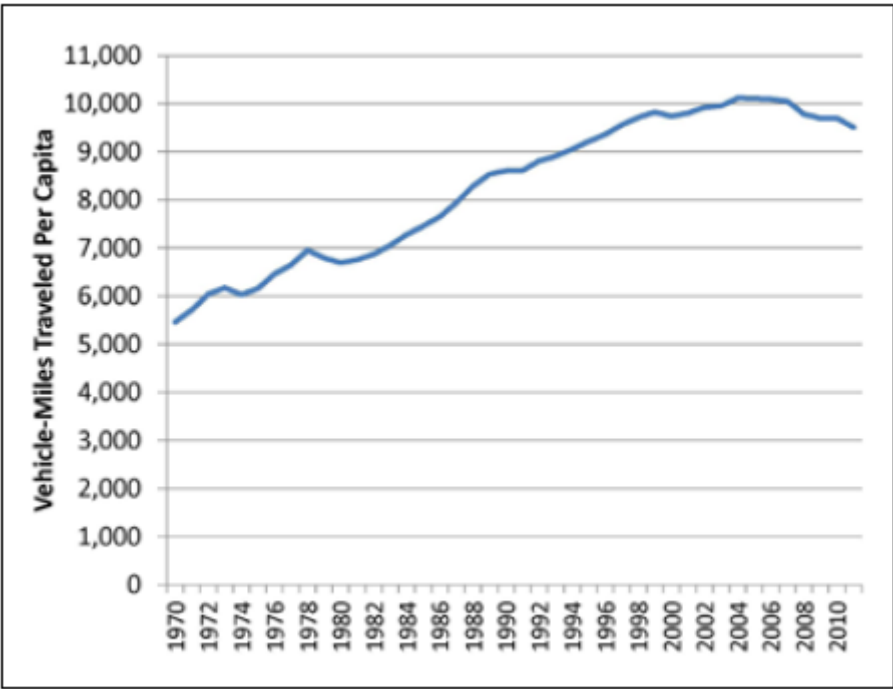


Figure 14 - Annual average distances [miles] covered in the U.S. by population between 16 and 34 years of age [Source: Frontier Group and U.S. Pirg Education Fund, 2012]

After a period of practically constant growth, from the end of the 90s a *trend towards stabilisation* is shown repeatedly, with a decreasing final tendency. In 2010, the annual average distance of the analysed sample is 7,900 miles (12,714 km), corresponding to a daily average distance of approximately 21.6 miles (34.8 km).

6. Economic approach

As shown in this study, the operational costs for the consumers may be relatively low and, in some cases, convenient. Literature studies demonstrate that the lower operational costs encourage EV adoption (Caperello and Kurani, 2011; Graham-Rowe et al., 2012; Sovacool and Hirsh, 2009; Egbue and Long, 2012; Jensen et al., 2013; Lieven et al., 2011; Zhang et al., 2011; Rezvani et al., 2015).

Sierzchula (2012) identifies three important policy approaches to encourage the transition to more sustainable transport: 1) economy-wide policies to develop all types of alternative fuel vehicles (AFV) powertrains, especially incremental innovations; 2) policies for the construction of fuel or charging infrastructure; 3) technology-specific policies for the development and adoption of radical systemic AFVs.

The increasing regulations and pollution restrictions for cities and the other changes that emerge could push consumer choices toward electric or hybrid powertrains characterised by a strong level of innovation. Recently, this phenomenon is already affecting some consumers who are willing to pay a mid-high price for higher quality and innovation. Research demonstrates that early adopters of EVs generally have a higher socio-economic status as they need to make the necessary higher investment in an EV (Curtin et al., 2009; de Haan et al., 2006; Ozaki and Sevastyanova, 2011; Rogers, 2003; Plots, 2014).

However, as highlighted by Xia (2011), the future of automobile industry supply chain management will also be influenced by *sustainable development*, less dependence on gas, green energy reform, and a high moral standard.

This trend could grow substantially in terms of government subsidies for automobile makers and consumers, and in a short time involve most of the traditional market. Some studies have highlighted that financial subsidies provided by governments or manufacturers positively influence the decision to adopt EVs (Krupa et al., 2014; Lane and Potter, 2007; Zhang et al., 2011; Rezvani et al., 2015).

However, from a more practical viewpoint, having understood how far average daily distances are compliant with the range of electric batteries or, vice-versa, what kind of autonomy can be required in batteries, we still need to understand if this is also sustainable from the economic viewpoint, in addition to the technical one. So far, the winning solution is a hybrid-electric traction, if we consider a flexible automobile which is compliant with both non-polluting daily urban trips and with less environmentally-constrained, though less frequent, longer extra-urban trips.

This section is therefore aimed at evaluating the economic impact on final users, i.e., drivers of the new hybrid-electric traction technologies, and at assessing the economic interest of the companies in this sector from the business economic viewpoint. The following analysis first defines the main costs, proportional and non-proportional to the travelled length, and compares the total cost of ownership of different traction types: traditional gasoline and diesel, gasoline and diesel HEVs, and gasoline and diesel PHEVs.

The economic analysis is closely linked to previous mobility analyses, in particular for urban and extra-urban travel distances. Moreover, this section can be useful from both a car driver or fleet manager and car maker point of view, providing an indication of the possible economic advantages when using electric tractions, either pure or in combination with ICE in hybrid powertrains.

As a first step, it is necessary to define the main relevant costs for a car that is useful for our computations. The ACI (Automobile Club of Italy) provides the following definition: «The total cost of a vehicle is to be intended as the sum of the operating costs plus the initial costs averaged along the life cycle of the vehicle. Of course, results have some approximations such as: interest rate, real life cycle of the engine/powertrain and other components, fuel cost. Total operating costs plus the amortization cost, referred to averaged annual travelled length, give as output the value of the total cost of ownership (TCO) expressed in Euro per kilometre».

Total annual cost for the owner is composed of two main important parts:

- A. Costs not proportional to the travelled length [€]:
 1. Car Tax

2. Insurance, compulsory by law (hereafter “RCA”, according to the national denomination)
 3. Interest on purchasing capital (depreciation)
 - B. Costs proportional to the travelled length [€/km]:
 4. Amount of capital amortization invested
 5. Fuel
 6. Tires
 7. Maintenance and repair
 8. Battery traction
 9. Electric Energy (only for PHEVs and BEVs).
1. The car tax is calculated considering some important factors: country of matriculation, power of the engine (kW), emission class of the engine (Euro I, Euro II, ..., Euro VI) and power; when the engine power is higher than 185 kW, a supplement of 20 €/kW must be paid. Hybrid vehicles are considered atypical, and car taxes regard only the thermal engine. Many discounts are available for full electric automobiles or BEVs according to the country (e.g., in Italy, electric vehicles are free of taxes for the first five years, then users pay 75% less than normal). Other fuels, such as GPL or methane, can take advantage of eco – subsidies. In this paper, the car tax is calculated for a user in an average Italian region (Lazio) for 88.25 kW (120 HP) of engine power.⁷
 2. The Italian average car tax in 2017 was 2.58€/kWh; engine power higher than 100 kW have a price of 3.87€/kWh (Table 8). These rates apply to both traction, diesel and gasoline. Since 2014, many Italian regions have adopted some tax discounts for hybrid electric vehicles (PHEVs and HEVs), and since 2016, nine Italian regions have planned on abolishing them (and for the most part have gone ahead with this): i.e., Lombardy, Veneto, Lazio, Campania, Puglia, Emilia Romagna, Basilicata, Liguria and Umbria).⁸

Euro 4,5,6	100 kW	2.58 €
	>100 kW	3.87 €
Euro 3	100 kW	2.70 €
	>100 kW	4.05 €
Euro 2	100 kW	2.80 €
	>100 kW	4.20 €
Euro 1	100 kW	2.90 €
	>100 kW	4.35 €

Table 8 - Car taxes in Italy, differentiated by pollution class and engine power. Source: website⁹

3. RCA (Civil Liability for road vehicles) is a compulsory insurance that considers the following variables: region of matriculation, car owner’s age, driving years, vehicle type, and frequency of accidents (Merit Class). Penalties or a higher insurance amount are expected only if the responsibility of an accident is more than 50% (Italian law 248/2006). The calculation is done for a Roman employee, 40 years old, expert driver, with a range covering insurance starting from 1 to 5 million¹⁰ (minimum by law).
4. The depreciation rate is calculated from Equation 1:

⁷ Source: from website <http://www.utelio.it/calcolo-bollo-auto.php>

⁸ Source: from website <http://www.lifegate.it/persone/stile-di-vita/chi-compra-lauto-ibrida-cinque-regioni-non-paga-il-bollo>

⁹ Source: from website <http://www.calcolafacile.it/bollo-auto/come-calcolare-il-bollo-auto-tabelle-kw-e-verifica-del-pagamento/>

¹⁰ Source: from website <http://www.allianz.it/preventivi-assicurazione/preventivo-assicurazione-auto/calcolo-preventivo-auto-tradizionale>

$$Q_{interest\ rate} = (V_0 + V_N) \cdot \frac{i}{2}$$

Equation 1 - Interest rates

Where $Q_{interest\ rate}$ is the interest rate to calculate, V_0 is the official price list of the vehicle (including matriculation or registration, testing and transport fees, and IVA-Value Added Tax (VAT), V_N is the residual value estimated to be 20% of the initial purchase cost, i is the interest rate (the average of the interest rates of the entire financial operation in the medium term), which here is 5.5%.

5. The interest rate on purchase capital is calculated from Equation 2:

$$Q_{rate\ capital} = \frac{(V_0 - V_N)}{K}$$

Equation 2 - Interest capital rate

Where $Q_{rate\ capital}$ is the interest rate for the invested capital, V_0 is the official price list of the vehicle (including registration, testing and transport fees, and IVA-Value Added Tax, i.e., VAT), V_N is the residual value estimated to be 20% of the initial purchase cost, and K is a factor that depends on fuel and engine displacement (Table 9):

FATTORE K			
Gasoline		Diesel	
<1000 cc	120000 km	<1500 cc	250000 km
1001<cc<1500	130000 km	>1500 cc	300000 km
>1500 cc	150000 km		

Table 9 - K factor

6. Fuel cost refers to the certified fuel consumption for the automobile (NEDC cycle, valid until 2017). The fuel cost is calculated as follows in Equation 3:

$$\text{Combined fuel consumption} * \text{fuel price} = \text{fuel cost} \left[\frac{\text{€}}{\text{km}} \right]$$

Equation 3 - Fuel cost.

Gasoline price refers to the European average of 1.30 €/l.

7. Tires are estimated to be at their end of life after 30,000 km for Crossover and SUV (Sport Utility Vehicles); the price is based on the sellers, discounted by 15%. Equation 4 defines the cost:

$$\text{Tires cost} \left[\frac{\text{€}}{\text{km}} \right] = \frac{4 * \text{Tire price}}{\text{Life averaged}}$$

Equation 4 - Tire cost

where tire price is €100 and average life of SUV tires is 30,000 km.

8. The maintenance is considered both ordinary (imposed by the car maker) and extraordinary (brake pad replacement, shock absorbers, friction, small collisions, scratches, etc.). These costs also include the spare parts and is based on professional work paid at 25.82 € plus VAT per hour. According to ACI indications, for medium-size Crossover and SUV vehicles, the maintenance cost is estimated at 0.068 €/km for diesel and 0.064 €/km for gasoline.
9. Battery cost depends on its initial purchasing price and its average life cycle. A number of car makers compare battery life with engine life. Battery cost regards only electric vehicles such as BEVs (Battery

Electric Vehicle) and PHEVs (Plug-in Hybrid Electric Vehicle); Equation 5 defines how battery cost is calculated:

$$\text{Battery Cost} = \text{INTEGER} \left(\frac{\text{Average ICE life}}{\text{Average battery life}} \right) * \frac{\text{Battery price}}{\text{Average ICE life}}$$

Equation 5 - Battery cost

where average ICE life is taken from Table 9, average battery life is estimated with reference to ICE life (Toyota assesses this at approximately 200,000 km).¹¹ Battery price is estimated to be approximately 200 €/kWh.¹² HEV are equipped with a 1.5 kWh battery and PHEVs with a 9.4 kWh one, which corresponds to 5 and 43 km of range, respectively (approximately on NEDC).

10. Electric energy cost depends on daily distances covered in electric mode. The energy demand also depends on the capacity of BEV and PHEV batteries, and the price expressed in €/kWh is influenced by the global energy market. The main hypothesis taken in this study regards traction control: in fact, it is assumed that vehicles initially use the energy accumulated on batteries and, once this has ended, traditional engine power (only for PHEVs). Equation 6 defines energy cost:

$$\text{Electric energy cost} = \frac{\text{Electric energy price}}{\text{Averaged energy consumption}} \left[\frac{\text{€}}{\text{km}} \right]$$

Equation 6 - Electric energy cost

where electric energy price is considered fixed with a cost of 0.225 €/kWh¹³ and the average energy consumption on mixed urban and extra-urban trips is estimated using current automobiles for sale at 21.74 kWh/100 km (NEDC consumption).

¹¹ <https://www.toyota.it/tecnologia-hybrid/faq.json>.

¹² <https://electrek.co/2017/01/30/electric-vehicle-battery-cost-dropped-80-6-years-227kwh-tesla-190kwh/>.

¹³ <http://www.e-station.it/Guida%20al%20Servizio%20di%20Ricarica%20per%20Veicoli%20Elettrici.pdf>.

Example 1: comparing traditional and electric traction with NEDC consumption

The following different car tractions have been compared for this study:

- Traditional gasoline
- Traditional diesel
- Hybrid Electric Vehicle (HEV) gasoline
- Hybrid Electric Vehicle (HEV) diesel
- Plug – in Hybrid Electric Vehicle (PHEV) gasoline;
- Plug – in Hybrid Electric Vehicle (PHEV) diesel.

As reported in this critical review, the average annual mileage is estimated at 12,000 to 14,000 km (Section 4). The following analysis is based on that mileage and, in accordance with previous indications, an urban average daily trip is considered to be 10 km and an extra-urban daily trip 28 km. According to these distances, total daily travelled length is 38 km (12,500 km annually).

Vehicle prices vary, but comparing the actual market for PHEV and traditional automobiles, it is possible to make some approximation. In fact, the gasoline cost for PHEVs is approximately 30% more than for traditional gasoline, and the cost for diesel fuel for PHEVs is approximately 40% more than for traditional diesel (Table 10 and Table 11).

Diesel	Price	Difference on price
Audi Q7	61850 €	36.6 %
Audi Q7 e-tron	84500 €	
Volvo V60	42000 €	42.9 %
Volvo V60 Plug-in	60000 €	
Total		39.7%

Table 10 - Difference in price between PHEV and traditional diesel

Gasoline	Price	Difference on price
Mitsubishi Outlander In-style	36800 €	29.2%
Mitsubishi Outlander Plug-in	47550 €	
Golf 1.4	28350 €	33.7%
Golf GTE 1.4	37900 €	
VW Passat	39000 €	20.5%
VW Passat GTE	47000 €	
BMW serie 3	31750 €	42.0%
BMW serie 3 hybrid	45100 €	
BMW X5	68000 €	7.0%
BMW X5 Plug-in	72765 €	
Audi A3	27000 €	48.1%
Audi A3 hybrid	40000 €	
Kia Optima	30000 €	46.7%
Kia Optima Plug-in	44000 €	
BMW serie 7	90000 €	7.8%
BMW serie 7 Plug-in	97000 €	
BMW serie 2 Active Tourer	25450 €	50.9%
BMW serie 2 Active Tourer Plug-in	38400 €	
Total		28.6%

Table 11 - Difference in price between PHEV and traditional gasoline (2017)

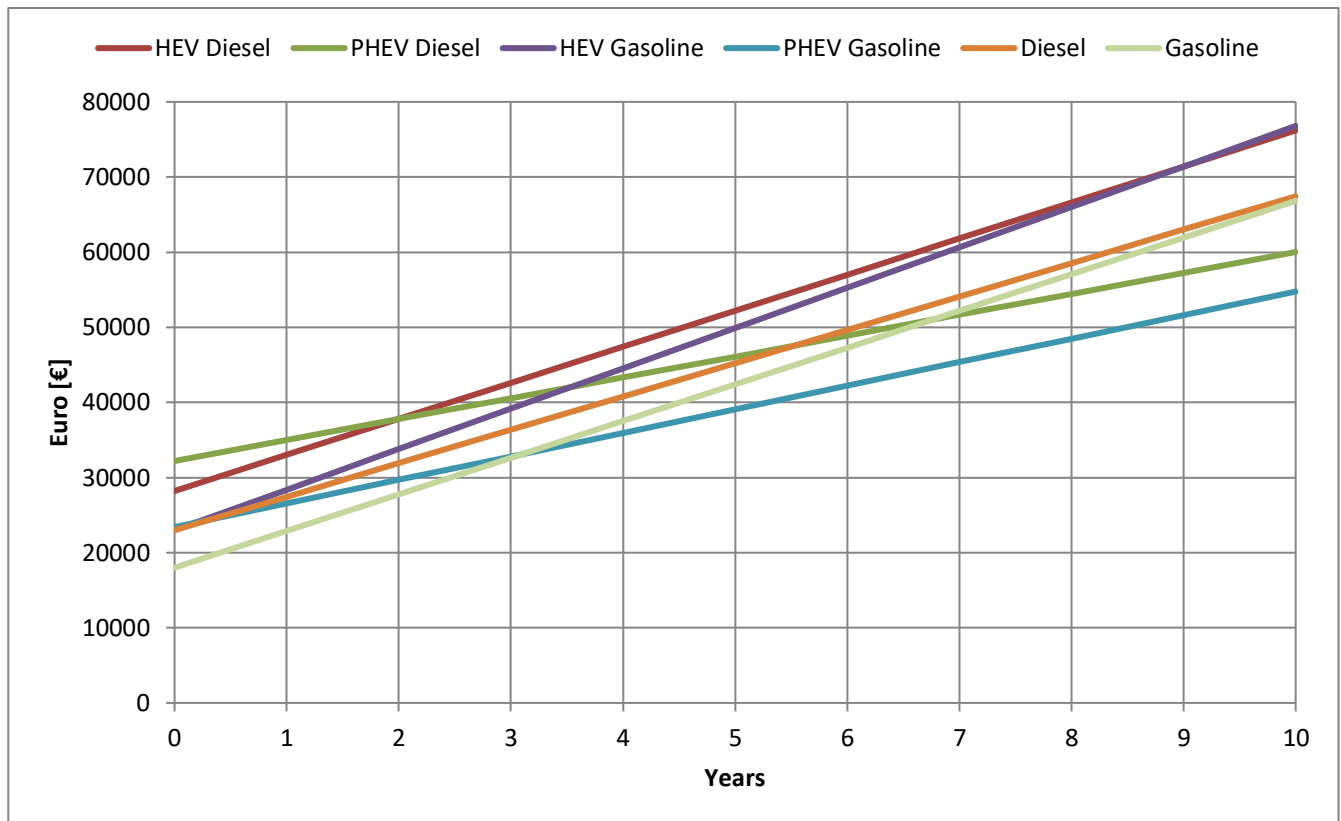


Figure 15 - Total cost of ownership for different fuel tractions based on NEDC fuel consumption

As shown in Figure 15, year 0 corresponds to the moment of purchase, and every subsequent year includes previous costs and ongoing costs. PHEV diesel and gasoline costs equalize their costs with traditional powertrains after 5 and 3 years, respectively. In addition, after approximately 3 years and according to the previous distance covered, gasoline for PHEVs is the cheapest traction compared to the others. The most expensive tractions are diesel and HEV gasoline, since they balance the efficiencies of traditional and electric engines instead of using only electric traction like PHEVs.

Finally, electric traction seems to be very suitable for mixed urban and extra-urban usage. Even medium-short distances allow all the electric capacity of batteries to be used and to do so properly during low efficiency periods (acceleration, stop and start, low engine loads). In addition, PHEVs and HEVs could recover some energy during braking phases. On the other hand, inboard units such as air conditioning, lights and radios could reduce the battery energy.

	HEV Diesel	PHEV Diesel	HEV gasoline	PHEV gasoline	Diesel	Gasoline
Cost NEDC [€/km]	0.38		0.43		0.36	0.39
Annual cost [€]	4800	2782	5380	3135	4443	4882

Table 12 - Cost of ownership for different fuel traction (NEDC).

Example 2: comparing traditional and electric traction with real consumption

Several studies have confirmed¹⁴ that homologation cycles are done without on-board units powered on and with other approximations (less vehicle load, slow accelerations, etc.), thus accounting for fuel consumption and emissions below the true levels.

In this section, the same calculation that was carried out above is repeated, leading to an increase in the average electric and fuel consumption. In particular, electric traction expenditures and traditional fuels are increased by 21%, resulting in electric fuel consumption equal to 26.3 kWh/100 km.

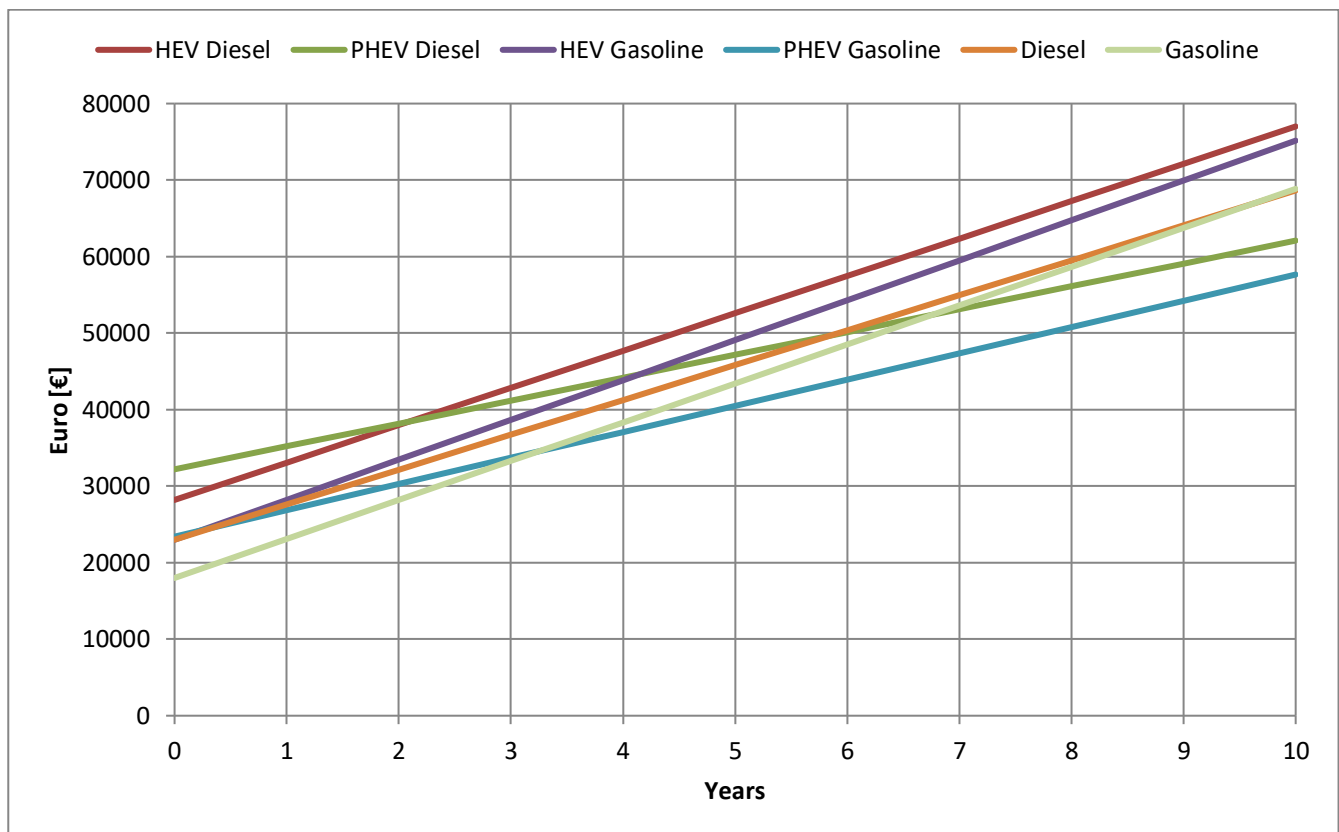


Figure 16 - Total cost of ownership for different fuel tractions using real fuel consumption

As shown in Figure 16, even in the case of real consumption, the costs for PHEV diesel and gasoline become equalized with traditional powertrains after 5 and 3 years, respectively. Gasoline PHEV remains the cheapest traction compared to the others after 3 years of usage.

	HEV Diesel	PHEV Diesel	HEV gasoline	PHEV gasoline	Diesel	Gasoline
Cost [€/km]	0.39		0.44		0.37	0.41
Annual cost [€]	4881	2989	5500	3425	4565	5085

Table 13: Cost of ownership for different fuel tractions (real consumption)

¹⁴ Source: <http://www.theicct.org/fuel-consumption-discrepancies>

7. A glimpse at freight transport

To complete the review on road distance travelled, this section reports and analyses average daily distance covered for freight transport, trying to understand whether constant values similar to those for personal motorised mobility exist here as well. Information about the transported tons is omitted because such a deep analysis would require knowledge of the paths and capacities of the vehicles; this was beyond the scope of this study and is not treated in the literature, unlike the case for travellers. The compulsory introduction of a black box for e-calls in Italy, as well as in the other EU countries (since 2017) has laid the bases for an excellent future contribution to this analysis. Therefore, only available aggregated data are considered. According to the main aims of this study, the analysis is mainly focused on Italian freight transport; only a general overview of freight transport in other countries is provided.

Referring to data provided by the association of toll-motorways (Autostrade per l'Italia, 2013) on heavy-duty vehicles, traffic flow on highways in 2012 decreased by 8.2% with respect to 2011, returning to values comparable to those in 2000. Average daily distance was equal to 100.6 km per truck, and almost half (48%) of heavy vehicles covered distances less than 50 km.

According to CONFETRA¹⁵ (2011), national trips cover a daily average distance of 97.2 km (118.6 km in 2003, a decrease of 18%), divided between 37.5 km (48.8 km in 2003, a decrease of 23%) of trips on own account (not outsourced) and 119.8 km (165.1 km in 2003, a decrease of 27%) in transport for hire. This data is in line with an aforementioned report by Autostrade per l'Italia, since freight transport takes place mostly on motorways. Considering international trips, the daily average distance is 597.0 km (863.1 km in 2003, a decrease of 31%). This is divided between 149.5 km (279.5 km in 2003, a decrease of 47%) of trips on own account and 623.6 km (897.9 km in 2003, a decrease of 31%) of trips for third parties. Finally, considering both national and international trips, the daily average distance was 106.6 km (140 km in 2003, a decrease of 24%), divided between 37.9 km (49.7 km in 2003, a decrease of 24%) of trips on own account and 132.1 km (197.7 km in 2003, a decrease of 33%) of trips for third parties. Trips for third parties have a significantly greater weight than do trips on own account, and national is more frequent than international transport. To the authors' knowledge, an estimation of the number of vehicles that cover a certain distance is not available; therefore, a statistical distribution of trip frequency by average daily distance cannot be determined.

Data reported in a study by the Ministry for Environmental protection (Ministero dell'Ambiente e della Tutela del Territorio e del Mare, 2013) refers to 2008. The study describes a national daily average distance of 102.5 km. This is divided between 36.6 km of trips on own account and 133.2 km of trips for third parties. It also cites 727.4 km in international trips, divided between 110.1 km of trips on own account and 768.8 km of trips for hire. Considering both national and international trips, a daily average distance of 118.7 km was obtained. The data confirm the overall *decreasing trend in average daily distances between 2003 and 2011*, with the exception of trips on own account, which seem to have had a slightly increasing trend between 2008 and 2011. Analysing traffic distribution of heavy-duty vehicles, the greater average distances, 149.7 km (2008 data), involve trips originating in the south of Italy, while the lower average distances are estimated at 89.3 km (2008 data) and correspond to trips originating on the islands. This distribution can be explained by several reasons: as an example, the greater concentration of urban areas in northern Italy leads to shorter trips whereas trips originating on the islands require alternative transport modes for connecting with the peninsula, thus creating shorter distances.

This implies that if we want to direct freight transport toward solutions alternative to ICEs, typically based on gasoil - which represents almost the entire energy carrier for heavy-duty vehicles - we cannot do so because of a lack of data, **the high variability of both masses (from 3.5 up to 44 tons on the ground) and runs as well as, as average**, and a prevalence of long trips, which are not compliant with the current energy stored in batteries. Short ranges and lighter vehicles for urban distribution might be compliant with alternative solutions (BEVs, R-HEVs, PHEVs); however, there is no possibility of quantifying this potential market.

¹⁵ CONFETRA (Confederazione Generale Italiana dei Trasporti e della Logistica) represents business categories that operate in the freight transportation sector and in the political, economic, social and trade union fields.

8. Conclusions

Many constraints or preferences, sometimes also State subsidies, of modern society are pushing toward road transport electrification. Many variables influence this possible transition and one of these is autonomy (range), with related charging times and actual plug-in possibilities, which leads to considering the *main usage of electric traction in urban and metropolitan contexts*, according also to our results.

We may even consider that charging spots are expected to be positioned and used as much as possible (e.g., 90-95%) at home as well as in the extended areas of companies, universities, public institutions, markets, interchange areas (park and ride), and stadiums, leaving a smaller market to the charging spots on public land, given the typically shorter (charged) parking times within metropolitan areas.

Small batteries (e.g., with autonomies of around 70 km) result compliant with most of the daily motorised mobility by automobiles, as demonstrated - at least for the Italian market - in this review. These dimensions are compliant with both light masses and domestic or workplace slow charging as well as other uses of electricity, without compromising daily scheduling, as the shared use of charging spots would usually imply (i.e. for leaving the equipped parking areas to other plug-in automobiles). We need to remember that batteries have an energy density at least 1/20 lower than that of oil-derived fuels, which means that – given a certain amount of energy on board an automobile – the battery for a BEV is quite heavier than the fuel tank for a traditional combustion engine, with consequent energy consumption.

The need to induce the automobile market to move toward solutions different from the near-monopoly of oil-based engines, such as BEVs and various HEV solutions compliant with the range of batteries, on the one hand, and the lack of data analysis on average distances daily covered on the other, has motivated the direct collection and a critical comparative review of different studies and surveys.

The aim of this paper has been to build a framework which allows for a general characterisation of the average distance of trips in order to understand if automobiles based only on internal combustion engines might be replaced by those also, but not exclusively, based on electric traction, without the need to change mobility average run and to provide a data crossing interpretation for a subsequent quantification of the market, out of the scope of this paper. Certainly, this is not the only constraint; yet it is a relevant variable when considering electric traction and related autonomy constraints.

This unexplored compared analysis of daily motorised mobility and related data – undertaken in Italy, in some EU countries and in the United States – shows that this type of mobility has nearly maintained its values with starting from the new century, approximately, though sometimes dropped in magnitude, both in Italy and in the other considered Countries. The trend has changed after a well-known nearly constant growth in the last half century, perhaps in part because of the period of consumption contraction that characterises the economy, possibly also because of a change in daily behaviour related to the new diffusion of mobile communications and teleconferences.

The automobile, though remaining the most utilised transport mode with a weight of approximately 80% of the Italian motorised mobility in urban contexts, has a higher use for extra-urban trips as well as in small cities, given the reduced availability of public transportation services. Having understood that we might not expect a substantial change in daily covered distances by automobile and focusing on trip characterisation, this analysis has shown that the different studies considered, even though they inevitably refer to different samples and use different approaches, achieved comparable results. Specifically, the result of our analysis is a range of daily average distances travelled by Italians that falls *between 32.1 km and 38.7 km and is characterised by an average trip distance between 4.6 and 6.2 km in urban areas and between 11.9 and 25 km in extra-urban contexts*. As expected, daily average distances travelled in the United States are greater than those travelled in Italy and the other European countries; the U.S. average distances range between 29.0 and 32.6 miles (46.5-52.5 km).

Referring to freight transport, the collected data reveals the impossibility of classifying them in our context and indicates relevant differences in average distances travelled by light and heavy-duty vehicles on own

account and for third parties (for hire). Daily average distances have decreased in 2003-2011, primarily for international trips. An exception is represented by trips on own account, which seem to have a slightly increasing trend between 2008 and 2011. Some reliable sources indicate that almost half of heavy-duty vehicles cover an average distance of less than 50 km.

Considering then the need to develop *more oil independent and less locally polluting vehicles* according to the EU goals in 2014, this study might be used as a support for industrial choices and decisions concerning the *suitable propulsion – either by ICEs, electric motors or both – of future motor vehicles*.

In the authors' opinion, emerged distance requirements can be satisfied by a set of vehicles: a hybrid powertrain with an ICE and an electric motor as well as independent recharging, which means using the electric motor on short trips and engine propulsion for longer ones, would be a good although more expensive combination.

This approach might be able to mitigate overall consumption and emissions. Traditional ICEs can also be combined with full-electric vehicles in a road vehicle sharing modality in urban contexts for another interesting solution, thereby satisfying mobility needs with two different concepts: a multipurpose private vehicle, excluded from urban contexts, and a shared one, purposely conceived for electric mobility in metropolitan areas, as the increase of urban car sharing services based on BEVs has demonstrated. Given the nature of this study, the analysis of sharing mobility is evidently a limitation of the current analysis and possibly a subject to consider in future researches.

Another important emission aspect affects automobile makers: penalties on CO₂ emissions which are over the limits. In fact, they could find it difficult to satisfy only with traditional engines both the environmental constraints imposed, for example, by the European community (Regulation (CE) n. 443/2009 and modification n. 333/2014) and new homologous cycle WLTP, which has been in force since 2017. In particular, the European target for 2020 will be 95 grams of CO₂ per kilometre for passenger cars, and the new driving cycle will be longer than the current NEDC cycle, thus better simulating real driving conditions. These constraints especially affect diesel engines since there are many technological limits to further reduce gases emissions. In other words, diesel vehicles will have a very hard and maybe short life in the near future.

Nowadays, the best solution to achieve European Community goals, meet the needs of users, and avoid damaging car makers economically is by electrifying new automobiles. In fact, much scientific evidence confirms that the electric motor can break down the low efficiencies of traditional ICEs at low loads (starting, low loads, etc.), especially in cities. New social and economic benefits may be achieved if local and European transport policies focus on renewable energies and low carbon emission power generation plants.

According to our economic results, plug-in hybrid vehicles (PHEV) appear to be the best traction solution. Furthermore, if batteries fall in price in the near future thanks to economies of scale, new automobiles can be cheaper and the cost of ownership also reduced.

As already argued, driver behaviour will not change significantly, except for drivers needing to charge their vehicle once a day or every two days at home or at work. Plug-in hybrid vehicles allow for both ordinary urban and extra-urban daily trips with the electric unit and longer trips with traditional ICEs, thus matching the needs of stakeholders. Generally, this type of traction could be seen as a recommended compromise between actual traditional engines (which have almost reached best efficiency optimization) and future traction types such as fuel cells or hydrogen. In addition, European policies regarding transport will be sustained without sacrificing private mobility.

The subsidies to producers could ensure coverage of the costs for the conversion of production, willing to let PHEVs available on the market at affordable prices. Consumer subsidies could allow for even greater accessibility to that part of the market reluctant to pay more for electric or hybrid cars.

References

- [1]. ACI, 2008, *Rapporto Automobile*
- [2]. ACI, 2012, XX rapporto ACI-CENSIS
- [3]. ARSENIO, E., MARTENS, K., DI CIOMMO, F., 2016. Sustainable urban mobility plans: Bridging climate change and equity targets? Research in Transportation Economics, Climate Change Targets and Urban Transport Policy 55, 30–39. doi:10.1016/j.retrec.2016.04.008
- [4]. ARSLAN O., YILDIZ B., EKIN KARAŞAN O., 2014, *Impacts of battery characteristics, driver preferences and road network features on travel costs of a plug-in hybrid electric vehicle (PHEV) for long-distance trips*, in Energy Policy, <http://dx.doi.org/10.1016/j.enpol.2014.08.015>
- [5]. AUTOSTRADE PER L'ITALIA, 2013, *Il traffico sulla rete del gruppo autostrade, valori a consuntivo anno 2012*
- [6]. AXSEN J., KURANI, K.S., 2013, *Hybrid, plug-in hybrid, or electric—What do car buyers want?*, in Energy Policy, V 61, pp. 532–543, <http://dx.doi.org/10.1016/j.enpol.2013.05.122>
- [7]. AXSEN J., ORLEBAR, C., SKIPPON, S., 2013, *Social influence and consumer preference formation for pro-environmental technology: The case of a U.K. workplace electric-vehicle study*, in Ecological Economics, V 95, pp. 96–107, <http://dx.doi.org/10.1016/j.ecolecon.2013.08.009>
- [8]. BÖHM M., STUDER L., MANS D., Toolkit for sustainable decision making in ITS deployment, 2010, 17th ITS World Congress
- [9]. S. CARLEY, R.M. KRAUSE, B.W. LANE, J.D. GRAHAM, 2013, Intent to purchase a plug-in electric vehicle: a survey of early impressions in large US cities, Transp. Res. D: Transp. Environ., 18 (2013), pp. 39–45
- [10]. CASERINI S., 2013, PASTORELLO C., GAIFAMI P., NTZIACHRISTOS L., *Impact of the dropping activity with vehicle age on air pollutant emissions*, in Atmospheric Pollution Research, V 4, pp. 282–289, <http://dx.doi.org/10.5094/APR.2013.031>
- [11]. CONFETRA, 1998, *Effetto serra – Emissioni di CO₂ trasporto merci*, Quaderno n. 109/1
- [12]. CONFETRA, 2003, *Trasporti interni ed internazionali per titolo di trasporto e classe di percorrenza*
- [13]. CONFETRA, 2011, *Trasporti interni ed internazionali per titolo di trasporto e classe di percorrenza*
- [14]. DALLA CHIARA B., DEFLORIO F., EID M., Analysis of real driving data to explore travelling needs in relation to hybrid–electric vehicle solutions, Transport Policy, Available online 26 April 2018, ISSN 0967-070X, <https://doi.org/10.1016/j.tranpol.2018.04.009>
- [15]. DALLA CHIARA B., BOTTERO M., DEFLORIO F.P., FILIDORO I., “Competence Area of Electric Vehicles and Relevance of an ITS Support for Transport and Parking Issues”, in proceedings of the 21st ITS World Congress, Detroit, Michigan – USA, 7–11 September 2014;
- [16]. DALLA CHIARA B., PELLICELLI M., 2016, Sustainable road transport from the energy and modern society points of view: Perspectives for the automotive industry and production, Journal of Cleaner Production (2016), pp. 1283–1301 Volume 133, 1 October 2016
- [17]. DAVIS S.C., DIEGEL S.W., BOUNDY R.G., 2012, *Transportation Energy Data Book: edition 31*, prepared for the Vehicle Technologies Program – Office of Energy Efficiency and Renewable Energy – U.S. Department of Energy
- [18]. ECo-FEV Consortium, Impact assessment, deliverable, Dalla Chiara B. et al., EU project eCo-FEV - combining infrastructures for efficient electric mobility, June 2015
- [19]. Econ Analyse, 2006, *Elbileiernes reisevaner (Travel behaviour of EV owners)*, Rapport 2006-040, Oslo, Econ.
- [20]. euroFOT, 2012, European Field Operational Test, http://www.eurofot-ip.eu/en/welcome_to_eurofot.htm.
- [21]. FEILDEL B., MARTOUZET D., 2012, *La mobilité comme modalité de l'ancrage: enrichir l'évaluation de la durabilité des espaces périurbains*, in Recherche Transports Sécurité, V 28, N 3–4, pp. 271–289, <http://dx.doi.org/10.1007/s13547-012-0042-8>, Springer-Verlag
- [22]. FIGENBAUM E., KOLBENSTVEDT M., ELVEBAKK B., 2014, *Electric vehicles - environmental, economic and practical aspects - As seen by current and potential users*, TØI report 1329/2014, COMPETT project (Competitive Electric Town Transport)

- [23]. FRANKE T., KREMS J. F., 2013, *What drives range preferences in electric vehicle users?*, in Transport Policy, V 30, pp. 56-62, <http://dx.doi.org/10.1016/j.tranpol.2013.07.005>
- [24]. FRONTIER GROUP and U.S. PIRG EDUCATION FUND, 2012, *Transportation and the new generation – Why young people are driving less and what it means for transportation policy*
- [25]. GERBONI R., GROSSO D., CARPIGNANO A., DALLA CHIARA B., 2017, Linking energy and transport models to support policy making, Energy Policy, Volume 111, December 2017, Pages 336–345
- [26]. GREAVES S., BACKMAN H., ELLISON A.B., 2014, *An empirical assessment of the feasibility of battery electric vehicles for day-to-day driving*, in Transportation Research Part A: Policy and Practice, V 66, pp. 226–237, <http://dx.doi.org/10.1016/j.tra.2014.05.011>
- [27]. GUENSLER, R., WILLIAMS, B. OGLE, J., 2002, *The role of instrumented vehicle data in transportation decision making. In: Fourth International Conference on Decision Making in Urban and Civil Engineering*, London, England
- [28]. HAGMAN, J., RITZÉN, S., STIER, J.J., SUSILO, Y., 2016. Total cost of ownership and its potential implications for battery electric vehicle diffusion. Research in Transportation Business & Management, Innovations in Technologies for Sustainable Transport 18, 11–17. doi:10.1016/j.rtbm.2016.01.003
- [29]. HARDMAN S., JENN A., TAL G., AXSEN J., BEARD G., DAINA N., et al. A review of consumer preferences of and interactions with electric vehicle charging infrastructure, Transportation Research Part D: Transport and Environment, Volume 62, 2018, Pages 508-523, ISSN 1361-9209
- [30]. HELVESTON, J.P., LIU, Y., FEIT, E.M., FUCHS, E., KLAMPFL, E., MICHALEK, J.J., 2015. Will subsidies drive electric vehicle adoption? Measuring consumer preferences in the U.S. and China. Transportation Research Part A: Policy and Practice 73, 96–112. doi:10.1016/j.tra.2015.01.002
- [31]. HIDRUE M.K., PARSONS, G.R., KEMPTON, W., GARDNER, M.P., 2011, *Willingness to pay for electric vehicles and their attributes*, in Resource and Energy Economics, V 33, pp. 686–705, doi:10.1016/j.reseneeco.2011.02.002
- [32]. HJORTHOL R., VÅGANE L., FOLLER J., EMMERLING B., Everyday mobility and potential use of Electric Vehicles, TØI Report, 1352/2014, ISSN 0808-1190, ISBN 978-82-480-1567-3 Paper version, ISBN 978-82-480-1563-5 Electronic version Oslo, October 2014
- [33]. ISFORT, ANAV, ASSTRA, 2014, *Poca luce in fondo al tunnel - Come ripartire dopo la crisi – 11° rapporto sulla mobilità in Italia*
- [34]. ISTAT, 2013, *Popolazione residente al 1° gennaio*, available at: [http://dati.istat.it/Index.aspx?DataSetCode=DCIS_POPRES1&Lang= \(consulted on July, 2014\)](http://dati.istat.it/Index.aspx?DataSetCode=DCIS_POPRES1&Lang= (consulted on July, 2014))
- [35]. JENSEN A.F., CHERCHI E., MABIT S.L., 2013, *On the stability of preferences and attitudes before and after experiencing an electric vehicle*, in Transportation Research Part D: Transport and Environment, V25, pp. 24–32. <http://dx.doi.org/10.1016/j.trd.2013.07.006>
- [36]. LE DUIGOU A., GUAN, Y., AMALRIC, Y., 2014, *On the competitiveness of electric driving in France: Impact of driving patterns*, in Renewable and Sustainable Energy Reviews, V 37, pp. 348–359, <http://dx.doi.org/10.1016/j.rser.2014.04.056>
- [37]. LINDSEY M., SCHOFFER J.L., DURANGO-COHEN P., GRAY K.A., 2011, *The effect of residential location on vehicle miles of travel, energy consumption and greenhouse gas emissions: Chicago case study*, in Transportation Research Part D: Transport and Environment, V 16, pp. 1–9, <http://dx.doi.org/10.1016/j.trd.2010.08.004>
- [38]. LITMAN T., 2013, *Evaluating public transit benefits and costs – Best practices guidebook*
- [39]. MADRE J-L., BUSSIÈRE Y. D., COLLET R., VILLAREAL I.T., 2012, Are we heading towards a reversal of the trend for ever-greater mobility?, Discussion paper n. 2012-16 at International Transport Forum at the OECD
- [40]. MARGARITIS, D., ANAGNOSTOPOULOU, A., TROMARAS, A., BOILE, M., 2016. Electric commercial vehicles: Practical perspectives and future research directions. Research in Transportation Business & Management, Innovations in Technologies for Sustainable Transport 18, 4–10. doi:10.1016/j.rtbm.2016.01.005
- [41]. METZ D., 2010, Saturation of demand for daily travel, Transport Reviews, 30 (5), pp. 659-674
- [42]. MINISTERO DELL’AMBIENTE E DELLA TUTELA DEL TERRITORIO E DEL MARE, 2013, *Il trasferimento modale sui grandi assi di scorrimento*

- [43]. MINISTERO DELLE INFRASTRUTTURE E DEI TRASPORTI, 1999, 2000, 2001, 2004, 2011, *Conto nazionale delle infrastrutture e dei trasporti*
- [44]. OGLE, J., GUENSLER, R. ELANGO, V., 2005, *Commute Atlanta value pricing program: recruitment methods and travel diary response rates*, Transportation Research Record, National Academy of Sciences, Washington, DC, No. 1931, pp. 28–37.
- [45]. PEARRE N. S., KEMPTON W. et al., 2011, *Electric vehicles: how much range is required for a day's driving*, in Transportation Research Part C: Emerging Technologies, V 19, N 6, pp. 1171-1184, <http://dx.doi.org/10.1016/j.trc.2010.12.010>
- [46]. PLÖTZ P., SCHNEIDER U., GLOBISCH J., DÜTSCHKE E., 2014, *Who will buy electric vehicles? Identifying early adopters in Germany*, in Transportation Research Part A: Policy and Practice, V 67, pp. 96–109, <http://dx.doi.org/10.1016/j.tra.2014.06.006>
- [47]. POLITECNICO DI TORINO, Dip. DIATI-Trasporti, 2013, *Indagine su mezzi di trasporto e mobilità motorizzata per il personale del Politecnico di Torino, Risultati salienti*
- [48]. PSRC, 2008, Puget sound regional council traffic choices study – summary report, <<http://psrc.org/assets/37/summaryreport.pdf>>. Data available from NREL
- [49]. Secure Transportation Data Project, <http://www.nrel.gov/vehiclesandfuels/secure_transportation_data.html>.
- [50]. PUCHER J., PENG Z.-R., MITTAL N., ZHU Y., KORATTYSWAROOPAM N., (2007), Urban transport trends and policies in China and India: Impacts of rapid economic growth, Transport Reviews, 27 (4), pp. 379-410.
- [51]. RUSICH, A., DANIELIS, R., 2015. Total cost of ownership, social lifecycle cost and energy consumption of various automotive technologies in Italy. Research in Transportation Economics, Electric Vehicles: Modelling Demand and Market Penetration 50, 3–16. doi:10.1016/j.retrec.2015.06.002
- [52]. SIVAK M., 2013, *Has motorization in the U.S. peaked? Part 2: use of light-duty vehicles*, Report N. UMTRI-2013-20
- [53]. STARK J., LINK C., SIMIC D., BÄUML T.: 'Required range of electric vehicles – an analysis of longitudinal mobility data', IET Intelligent Transport Systems, 2015, 9, (2), p. 119-127, DOI: 10.1049/iet-its.2013.0019, IET Digital Library
- [54]. TAL G., NICHOLAS M.A., DAVIES J., WOODJACK J., 2014, Charging Behavior Impacts on Electric VMT: Who is Not Plugging in?. Transportation Research Record 2454, 53 - 60
- [55]. TAMOR M.A., MORAAL P.E., REPROGLE B., MILAČIĆ M., Rapid estimation of electric vehicle acceptance using a general description of driving patterns, Transportation Research Part C: Emerging Technologies, Volume 51, February 2015, Pages 136-148, ISSN 0968-090X, <http://dx.doi.org/10.1016/j.trc.2014.10.010>.
- [56]. VAN DER WAARD J., IMMERS B., JORRITSMA P., 2012, *New drivers in mobility: what moves the Dutch in 2012 and beyond?*, Discussion paper n. 2012-15 at International Transport Forum at the OECD
- [57]. VAN RIJNSOEVER, F.J., HAGEN, P., WILLEMS, M., 2013, *Preferences for alternative fuel vehicles by Dutch local governments*, in Transportation Research Part D: Transport and Environment, V 20, pp. 15–20, <http://dx.doi.org/10.1016/j.trd.2013.01.005>
- [58]. VIOLA A., 2012, I veicoli ibridi plug-in ed elettrici in relazione alla domanda di mobilità motorizzata: linee guida per soluzioni progettuali e d'esercizio, Master Degree thesis, Politecnico di Torino
- [59]. WIKSTRÖM, M., ERIKSSON, L., HANSSON, L., 2016. Introducing plug-in electric vehicles in public authorities. Research in Transportation Business & Management, Innovations in Technologies for Sustainable Transport 18, 29–37. doi:10.1016/j.rtbm.2016.01.009
- [60]. ZACHARY S., 2013, "Electric vehicle market share in 19 countries". ABB Conversations. Retrieved 2015-03-12.
- [61]. ZIEGLER A., 2012, *Individual characteristics and stated preferences for alternative energy sources and propulsion technologies in vehicles: A discrete choice analysis for Germany*, in Transportation Research Part A: Policy and Practice, V 46, pp. 1372–1385, <http://dx.doi.org/10.1016/j.tra.2012.05.016>