

Article

Improved Estimates of the Vertical Structures of Rain Using Single Frequency Doppler Radars

A. R. Jameson ^{1,*}, M. L. Larsen ² and D. B. Wolff ³

^{1,*} RJH Scientific, Inc., arjatrjhsci@gmail.com

² College of Charleston, Department of Physics, larsenml@cofc.edu

³ NASA Wallop's Island Flight Facility, david.b.wolff@nasa.gov

* Correspondence: arjatrjhsci@gmail.com

Abstract: It is important to understand the statistical-physical structure of the rain in the vertical so that observations aloft can be translated meaningfully into what will occur at the surface. In order to achieve this understanding, it is necessary to gather high temporal and spatial resolution observations of rain in the vertical. This can only be accomplished using radars. It can be achieved by translating radar Doppler spectra into drop size distributions which can then be integrated to calculate variables such as the rain fall rate. A long-standing difficulty in using such measurements, however, is the problem of vertical air motion which can shift the Doppler spectra, and, therefore, significantly alter the deduced drop size distributions and integrated variables. In this work, we illustrate the improvement in measured rain structures using a new approach for removing the effect of mean vertical air motion. It is demonstrated that the new approach proposed here not only produces what appear to be better estimates of the rainfall rates, but, also as a consequence, provides estimates of the temporal and spatial regionally coherent updraft and downdrafts occurring in the precipitation. Furthermore, the technique is readily applicable to other radars especially those operating at non-attenuating frequencies.

Keywords: Raindrop size distributions (DSD) from Doppler radar; Removing vertical air motion from radar Doppler spectra; Vertical pointing Doppler rain observations

1. Introduction

With the development of Doppler radar, it was quickly realized that by pointing the radar antenna vertically, it would be possible to observe the vertical motion of the rain drops and that this motion could provide estimates of the drop size distributions aloft [1-4]. The reason for this is that the terminal fall speeds of drops are well-known functions of the sizes of the drops [5-8]. However, one of the primary difficulties in performing the transformation of Doppler fall speeds into drop sizes is the potential effect of vertical air motion. In downdrafts, for example, a drop of a particular size will move faster toward the radar than when the air is still, leading to an overestimation of its true size.

In an attempt to account for this air motion, two approaches have been proposed. The first was the lower bound method originally suggested by Probert-Jones and Harper [1] and implemented by Battan [9]. Another was that of relating the mean particle fall velocity to the radar reflectivity factor through a power-law [10]. Both methods suffer from unproven assumptions. Specifically, the lower bound method assumes that the Doppler spectra coincide with broad distributions of drop sizes containing some of the smallest detectable sizes. If true, then in a sufficiently strong updraft the fastest moving particles observed moving away from the radar would correspond to the updraft velocity minus the fall speed of the smallest detectable drops (often around 1 ms^{-1}), while in a strong downdraft the slowest moving particles moving toward the radar would correspond to

the downdraft velocity plus the fall speed of the smallest drops. The remaining fall speeds are then then assigned to the remaining velocity bins according to their fall speeds. While a logical approach, size sorting of raindrops in convective storms is not unusual so that there is no guarantee that the drop size distributions are going to be sufficiently broad. In the second power-law-method, the fall speed depends upon the radar reflectivity factor, Z . This is hard to justify since Z also depends upon the drop concentration while fall speeds do not.

In some instances, a direct separation of air motion from rain drop fall speed is possible if one also happens to have simultaneous observations at 94 GHz [11], provided that signal is not obliterated by attenuation. However, in almost all actual situations, such measurements are not available so that one is left with picking one of the first two choices just discussed above.

In this work, we propose an alternative approach by looking for vertical air speeds which are consistent with both the diameter dependence of the rainfall rate in still air, R , and with the diameter dependence of the backscatter by raindrops at the frequency of the radar as elaborated on further below. The idea is to use all of the available information. The total measured backscattered power is $P_m = C \times Z_m$, where C is a constant associated with the characteristics of the radar and Z_m is then the measured radar reflectivity. However, Z_m is also equal to $Z_m = C_\eta \sum N(D) \sigma(D)$ where C_η is factor related to the radar wavelength, λ that is described below. The Doppler spectrum provides the bridge between theory (Z) and measurements (Z_m).

That is, it is well known that drops fall at a velocity determined by its size. This means that in principle, the distribution of these velocities in a Doppler spectrum can be transformed into the distribution of drop sizes, $N(D)$ [12]. However, the vertical air velocity, w , usually alters this distribution of drop fall speeds. In order to compute $N(D)$, then, w must be estimated and removed. As just discussed above, this has been a lingering problem for 60 years. A potential solution when a radar is well-calibrated, though, is to use the additional information provided by the direct measurement of Z_m while the calculated Z can be computed either by circularly shifting the array of drop fall speeds corresponding to each radar velocity bin with the null vertical air speed across the observed Doppler spectrum or alternatively by circularly shifting the Doppler spectrum systematically across a fixed array of drop sizes (fall speeds) to produce Z . By computing different $N_{ob}(D, w)$ for different w one can then search for the w that produces the correct $N_{ob}(D, w) = N(D)$ so that the computed $Z = Z_m$. This is where the Doppler spectra enter because the spectral power values can be shifted one velocity bin at a time through the entire Nyquist velocity interval of the radar until $Z = Z_m$. The number of velocity bins shifted to achieve this result then provides the estimate of w required to derive $N(D)$. This will become clearer in the next section.

In this particular paper, we focus on the Micro-Rain Radar Pro (MRR) that is a vertical pointing continuous wave radar operating at a frequency of 24.23 GHz. The characteristics, for example, are described in [13]. When the vertical velocities (w) are large enough, they can lead to Doppler spectral aliasing as noted by others (e.g., [14], but as we show below, the effects of vertical air motion are significant even without aliasing. The important point here is that the MRR calculation of the rainfall rate assumes that the vertical air motion is null on average over long time periods. While that is certainly open to dispute, if one were interested in examining the detailed temporal and spatial structure of rain in the vertical, as we are, such an assumption is not justified.

While the general outline above of the approach applies to most meteorological radars, the MRR data pose additional challenges arising from attenuation by rain at that frequency. Specifically, the MRR processor attempts to account for this attenuation by taking the computed drop size distribution deduced assuming $w = 0$ and then computing what the attenuation would have been and adjusting the observed Z accordingly. On the other hand, the spectral powers are not adjusted so that when attempting to use them to

recompute quantities for $w \neq 0$, they will not agree with this corrected Z . Hence, when comparing our computed Z as described below with the MRR adjusted Z , there will be some need to augment the spectral powers when looking for different solutions for different w , as discussed further below. Hence, without an exact knowledge of the attenuation, all results below must be considered estimates where attenuation is likely to be significant particularly with increasing altitude.

In the next section we develop the approach for overcoming this difficulty. This is then followed by a section of data analyses applying this approach to MRR Pro data in convective rain provided by the NASA Wallop's Island precipitation facility.

2. Background

2.1. Basic considerations

To start this process, we first consider the dependence of the backscatter cross-section of raindrops at the frequency of the MRR for spherical drop diameters (D) over the size range used by the MRR ranging from about 0.077 mm up to 5.13 mm. It is well-known that the scattering at this frequency no longer strictly satisfies the Rayleigh-Gans criteria for a D^6 dependence. Nevertheless, the deviations do not appear as severe as often thought. Using cross-sections as computed in Jameson (1991) [see Appendix A2)], it is clear from Figure.1 that over the indicated range of drop sizes where σ_B is in cm^2 and D is the drop

$$\sigma_B = 1.339 \times 10^{-4} D^{6.083} \quad (1)$$

diameter in mm.

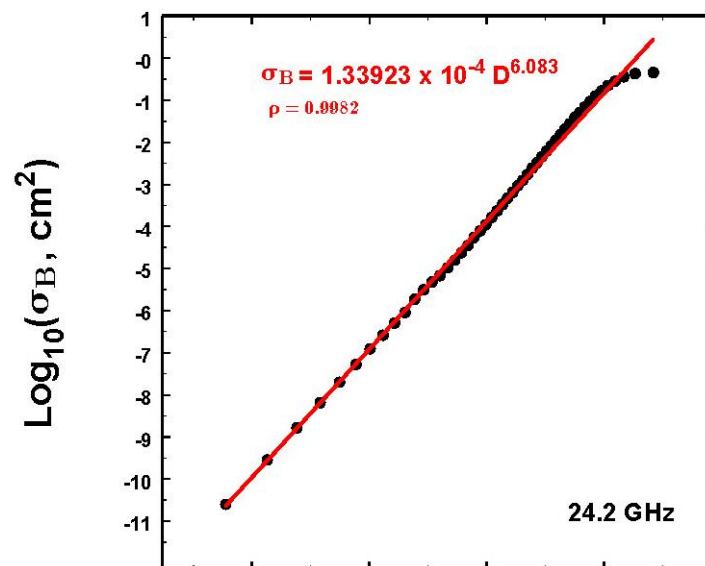


Figure 1. A plot of the T-matrix computed [15] backscatter cross-sections of spherical raindrops of size D (appropriate for vertical pointing observations) corresponding to the Micro-rain Radar (MRR). The validity of these cross-sections is illustrated in Figure A4 in the Appendix. While there is a slight roll-off at the very largest D , these drops rarely contribute much to most rainfall rates or even Z so that these deviations are likely usually inconsequential.

Note that this power law somewhat over-estimates σ_B at the largest drop sizes. Such large drops are usually a rarity compared to the prevalence of the other drop sizes,

however. Other fits are possible, of course, but tests of a few alternatives show that they do not significantly alter the deduced vertical structures in the rain shown below.

The backscatter power observed by a radar is often expressed using the radar reflectivity $\eta = \sum \sigma_B$ where the summation is over all of the drops in a unit volume. For a Doppler spectrum, η is then spread over the velocity bins that for our purpose here using the MRR is 64 bins distributed over a range from 0.1858 m s⁻¹ to 11.89 m s⁻¹ depending upon the drop sizes and concentrations at each velocity.

On the other hand, the rainfall rate is the volume flux per unit area and per unit time or simply

$$R = \frac{\pi}{6} \sum D^3 V_t(D) \quad (2)$$

where $V_t(D)$ is the terminal fall speed of drop of diameter D and the summation is over all the drops. Often V_t is in m s⁻¹ while D is usually expressed in cm. However, for convenience in this case, D is in mm. Using the relation in Foote and Du Toit (1969) (i.e., $V_t = -0.193 + 4.96 D - 0.904 D^2 + 0.0566 D^3$ where D is in cm), we consider the combined term $D^3 V_t$ to yield the relation shown in Figure 2 namely,

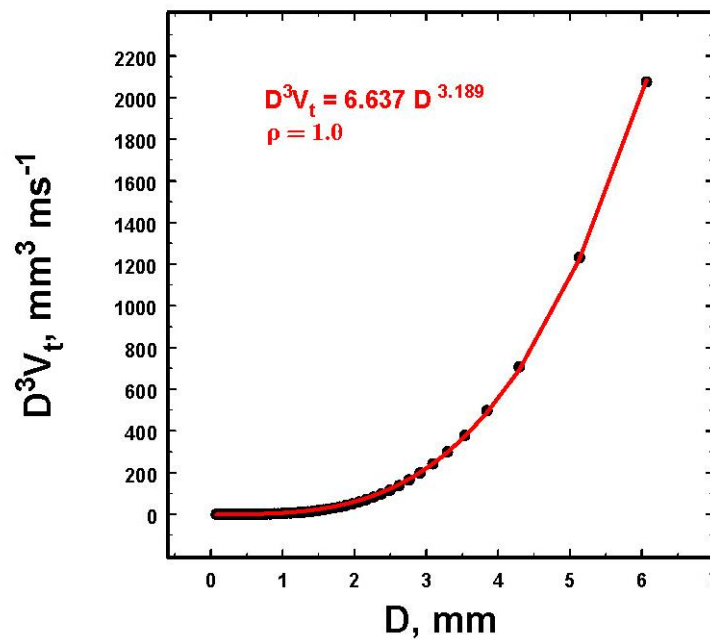


Figure 2. The volume flux of raindrops falling at terminal velocity, V_t as a function of spherical drop size.

The MRR uses two scattering quantities, namely the radar reflectivity as defined above and the equivalent radar reflectivity factor. For Rayleigh scatterers, it is related to what is known as the equivalent radar reflectivity, Z , such that [for example see [16]]

$$Z = \frac{\lambda^4}{\pi^5 |K|^2} \eta \quad (5a)$$

where λ is the radar wavelength and $|K|^2$ is a factor related to the microwave complex index of refraction of the scattering material and is 0.92 for water at most precipitation radar wavelengths. The measured Z is then derived from [16]

and more specifically for the MRR radar by

177

$$Z = \frac{\lambda^4}{\pi^5 |K|^2 f(D)} \eta \quad (5b)$$

181

where $f(D)$ is the adjustment function accounting for the slight deviations of the raindrop backscatter cross-section from Rayleigh scatter as discussed in the MRR literature from the company ("MRR Physical Basics", p.16 and included in the attached data set). This minor change is included in the development below so that when we calculate Z later will be equivalent to the Z_m reported by the MRR radar processor.

Now let us consider the distribution functions over drop diameters of the rainfall rate and the radar reflectivity. Then for a particular drop size bin of size ΔD centered on diameter D , it follows from the distribution functions of R and η over D that

where $1/C_\eta = 1.339 \times 10^{-2}$ when η has units of $\text{mm}^2 \text{m}^{-3}$ while $C_R = (\pi/6) (3.6 \times 10^{-3})$

$$\begin{aligned} \Delta R &= C_R D^{3.189} N(D) \Delta D \\ \text{while} \\ \Delta \eta &= C_\eta D^{6.08} N(D) \Delta D \end{aligned} \quad (6)$$

$^3) \times 6.637 = 1.2510 \times 10^{-2}$ and R is in mm h^{-1} . We then have

$$\Delta \eta = \frac{C_\eta}{C_R} D^{2.89} \Delta R \quad (7a)$$

so that after integrating η and R over drop sizes we have

where the over bar denotes R weighted averaging of $D^{2.89}$ term over the diameter distribution of R . What is done in practice is that for a given Doppler spectrum, the distri-

$$\eta = \frac{C_\eta}{C_R} \overline{D^{2.89}} R \quad (7b)$$

bution of R is calculated using the diameter bins corresponding to a particular spectrum. The mean $D^{2.89}$ is then computed weighted by that distribution and nor-

malized by the total R . Also, since $Z = \frac{1}{C_\eta} \eta$ from (4), it follows finally that

$$Z = \frac{1}{C_R} \overline{D^{2.89}}_R \quad (8)$$

so that

It is this Z that is then compared to Z_m .

$$\begin{aligned} Z &= \frac{1}{C_R} \overline{D^{2.89}}_R \\ &= 79.936 \overline{D^{2.89}}_R \end{aligned} \quad (9)$$

The challenge, then, is to find the vertical air velocity, w , such that this computed Z

$$v_i = V_i(D_i) + w_i + j\Delta v \quad (10)$$

equals the Z_m measured by the radar. We know that $\eta = \sum S(v) \Delta v$ where $S(v)$ are the spectral power densities and Δv is the Doppler velocity increment that for the MRR is approximately $\Delta v = 0.1858 \text{ ms}^{-1}$ ($= 11.89 \text{ ms}^{-1} / 64 \text{ bins}$). We also know that to the first approximation at the i^{th} velocity bin the measured $v_i = V_i(D_i) + w_i$ where $V_i(D_i)$ is the actual fall speed of the drop of diameter D_i and w_i is the true vertical air speed. To search for w_i , we can add (or subtract) $j\Delta v$ for j from 1 to 64. That is, for each velocity bin v_i and the j^{th} Δv

Using the new D'_i corresponding to V'_i we can then compute a new estimate of Z using (9). We then do this for all 64 Δv so that we end up with an ensemble of calculated Z_j for j from 1 to 64. By then using the observed Z_m reported by the MRR, we can find the j corresponding to the $Z_j = Z_m$. We then know that this is the incremental change to all the fall speeds for all the drops because of w . However, since we also now know that we have the correct size distribution because $Z = Z_m$, we know that the spectral fall speeds now represent their true values in still air, namely $v_i = V_i(D_i)$ so that from (10) $0 = w_i + j\Delta v$, and $w_i = -j\Delta v$.

According to the MRR literature the summed power over the spectrum should be the attenuated η where η is in units of m^{-1} . Thus, one expects that the ratio $Z / \sum \eta(v)$ should vary as illustrated in Figure 3.

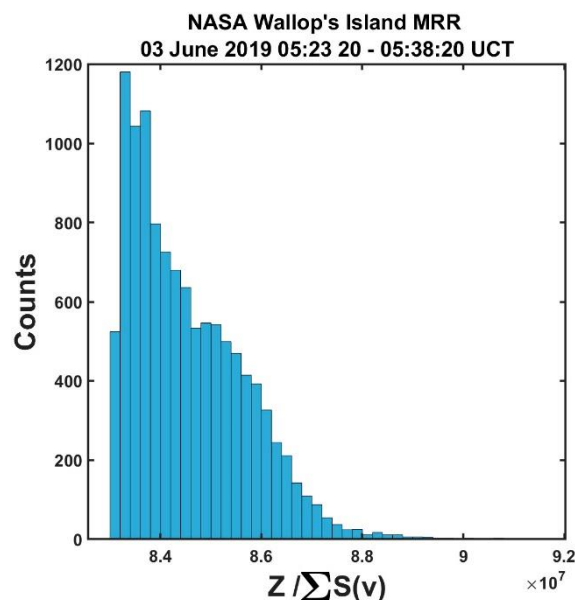


Figure 3. Histogram of the ratio of the measured radar reflectivity to the sum of the power densities over the Doppler spectrum showing variable rather than a constant value.

2.2. An example

As an example of the approach used here, we consider data from one range bin as illustrated in Figure 4. Because there can be both updrafts and downdrafts, however, the null for vertical air velocity, w , must be centered in the middle of the velocity (Nyquist) interval so that $-5.945 \leq w \leq +5.945 \text{ m s}^{-1}$ where the sign convention is such that negative values are downdrafts. This means that the w_i above is null at $j = 32$. Consequently, the estimated $w_t = (32 - j)\Delta v$ if j is determined by a counter clockwise circular shift of the velocity bins with respect to the fixed array of drop diameters and $w_t = (j - 32)\Delta v$ if j is determined by a clockwise circular shift of the velocity bins.

To be clear, when solutions such as in Figure 4 are found, the associated rainfall rates are those in still air. However, in the MRR observations, those same drops are actually in moving air so that MRR estimates of their sizes and estimates of the integrated properties will deviate from their true values unless the air just happens to be still at the time. As we will see below, that is rarely the case.

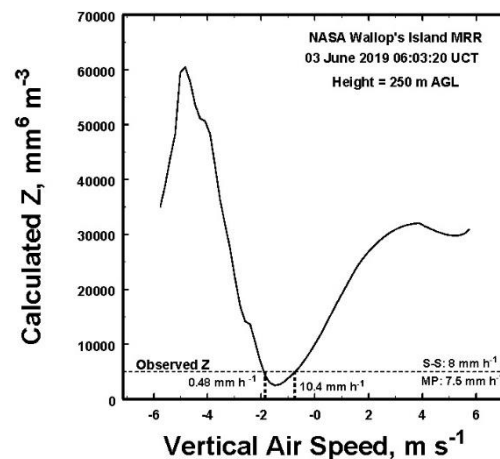


Figure 4. An example of the application of the approach described in the text. The solid line represents the theoretical calculated radar reflectivity using (9) while the dashed line represents the MRR measured value. There are two solutions one of which is the preferred as discussed in the text.

When there are two potential solutions matching the observed radar reflectivity as illustrated in Figure 4, the question is which one is the optimal? First we note that only one of these solutions ($R = 10.4 \text{ mm h}^{-1}$) is most consistent with historical Z-R relations (e.g., Sekhon and Srivastava, 1971; Marshall and Palmer, 1948). More significantly, it is also the one associated with the greatest total concentration of particles, N , as shown in Figure 5.

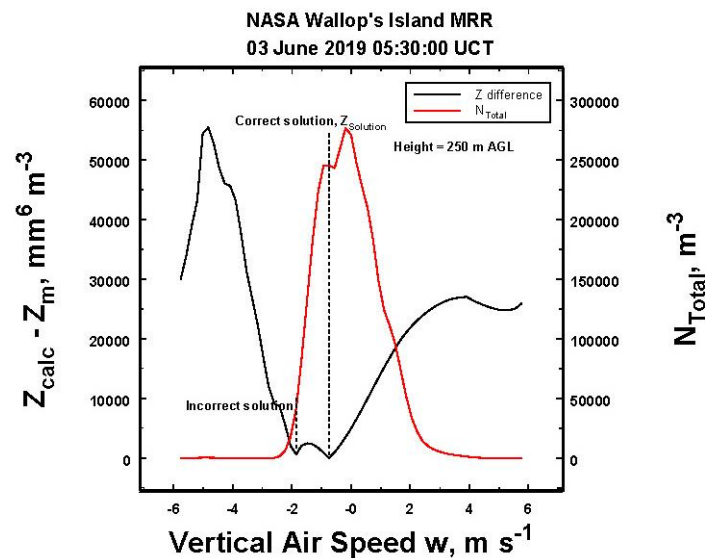


Figure 5. A plot of the difference between the measured (Z_m) and the calculated Z (Z_{calc}) illustrating that the likely correct solution ($Z_{Solution}$) is associated with large values of the total number of drops, as appears to always be the case in this study.

Because Z is an increasing function of the rainfall rate and because the rainfall is known to be a well correlated increasing function of N [18,19], the large value of the observed N strongly suggests that it is this solution that makes the most physical sense. Inspections of several other results show this always appears to be the case as well, so that when selecting between two potential solutions, the one having the greatest number of particles is used as an indicator of correct choice. This is denoted in the figures as $Z_{Solution}$ or Z_{Sol} .

In the next section, we consider two time-height profiles, each lasting about 15 minutes with observations every 10 seconds and every 10 m up to 1.28 km. These solutions show dramatic differences from the output produced directly by the MRR.

3. Some results of analyses

We begin by considering MRR observations collected during the passage of the later, weaker trailing section of a convective system over Wallop's Island, Virginia on 03 June 2019. In these analyses we use the reported Z_e (referred to as Z_m above). However, in order to match these Z_e to the observed $S(v)$, the reported Z_e were adjusted downward as explained further in the Appendix (A1) because the attenuation is likely greater than that used in the MRR calculations which were based upon the usually erroneous assumption that the vertical air velocities were null. The solution spaces for the two time periods analyzed below are shown in Appendix (A3).

3.1. Lighter convective rain during later period of convection

First, consider the time-height profiles during the passage of the later, weaker trailing section of a convective system of the estimate of the rainfall rates provided by the MRR processor as illustrated in Figure 6. These estimates are all based on the assumption that the $w = 0 \text{ m s}^{-1}$. [All times are in Universal Coordinated Time (UCT)]. The outstanding features are the overall weak rainfall rates with the exception of those at the top of the figure (1.28 km) showing values in excess of 1023 mm h^{-1} . This is a peculiar structure that is difficult to understand physically.

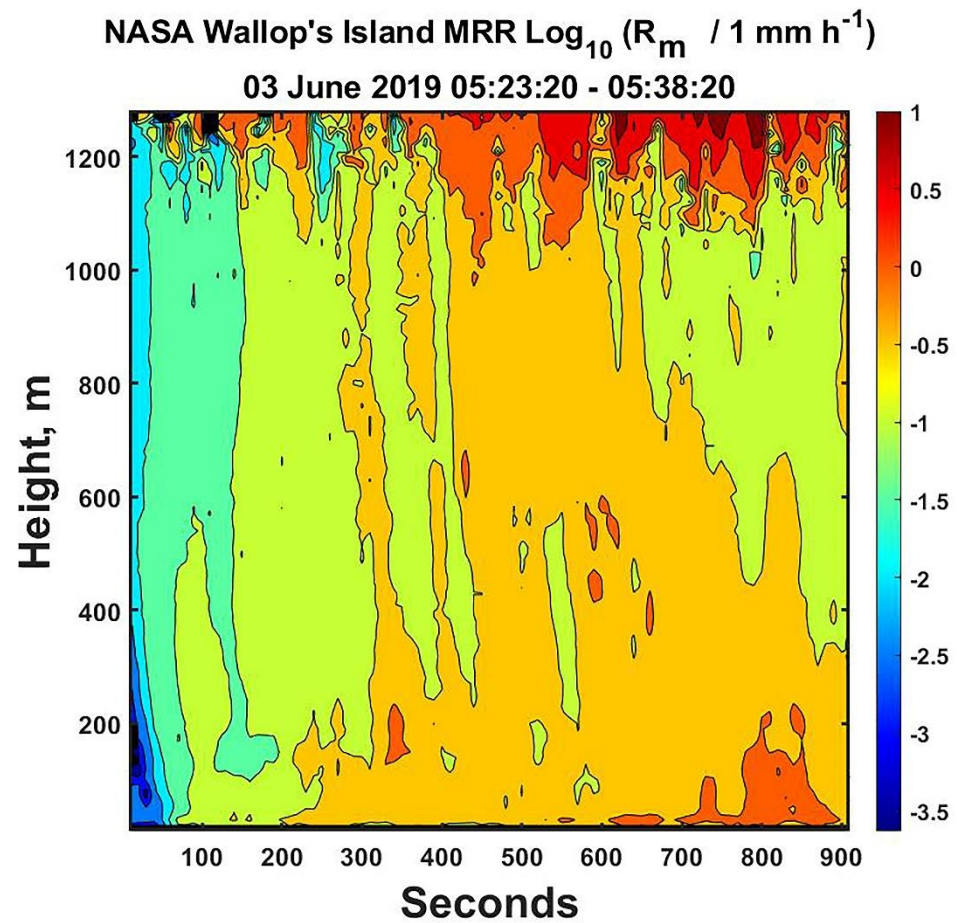


Figure 6. The contour plot of the time height values of the log of the measured rainfall rates, R_m reported by the MRR processor, that assumes that there is no vertical air velocity. Note the weak value except near the top of the figure. Times are UCT and a log scale is used to highlight the weak structure.

On the other hand, when we correct for the vertical air speed, we derive the time-height plot of the rain fall rates illustrated in Figure 7 which shows much more vertical structure with more intense rainfall. The values approach 65 mm h^{-1} , which seem much more consistent with convection while the unusual layer at the top in Figure 6 is also gone.

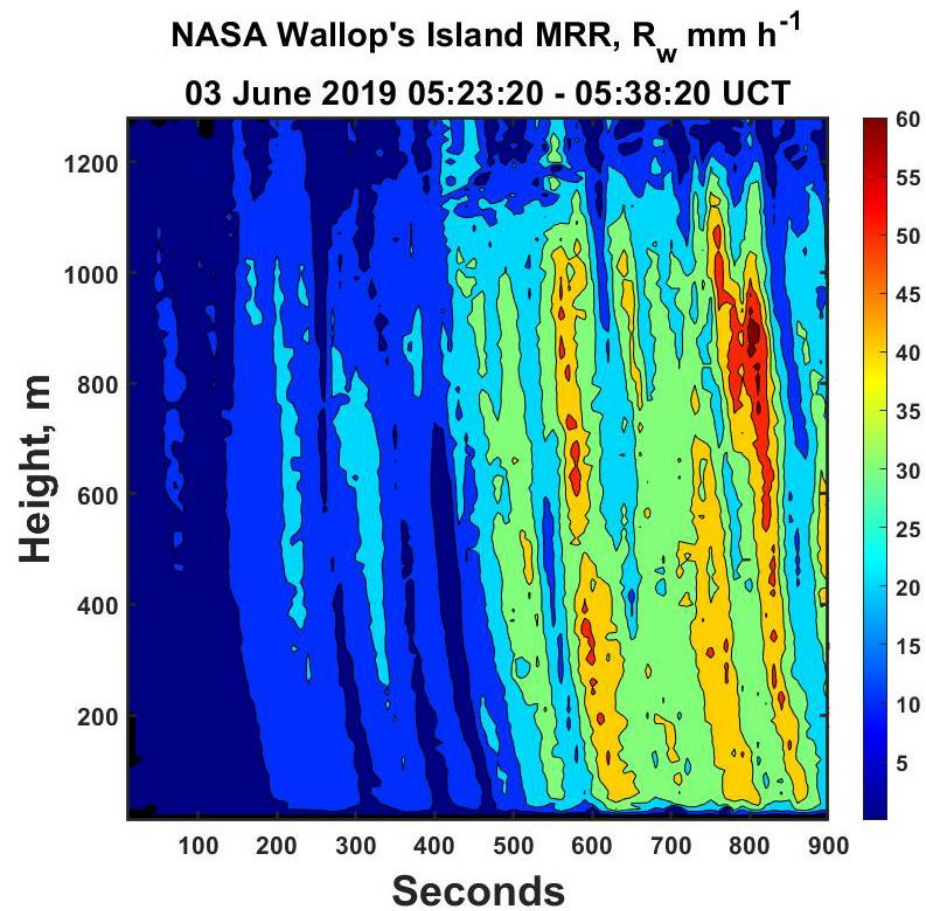


Figure 7: The time height plot of air velocity corrected the rainfall rate (R_w) corresponding to Figure 6. Note the dramatic vertical shafts of rain that are now apparent as well as the disappearance of the spurious values at the top compared to the previous figure. Note also at the general significant increase in the values of R .

These results (Figure 8b) also appear much more consistent with the vertical structure and magnitudes of the observed Z_m in Figure 8a. A comparison of the two histograms for the observed and calculated Z (Figure 9) also illustrates that the calculated solution values of Z remain consistent with the observations, lending credibility to the results in Figure 7. In contrast, the MRR reported values of R in Figure 6 bear little resemblance to the observed structure of Z in Figure 8a.

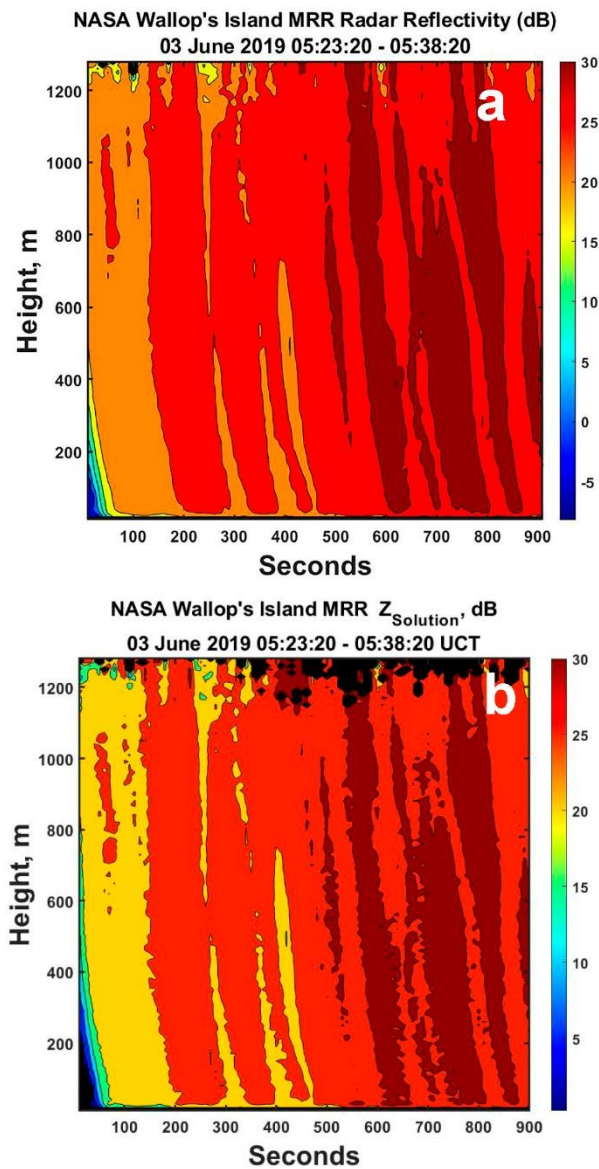


Figure 8. (a)The time-height plot of the measured MRR measured radar reflectivity for this time period and (b) the calculated solution values ($Z_{Solution}$). Note the vertical structure in Z as reflected by the rainfall rates in Figure.7. The added jitter in (b) is due to the quantization of the velocity bins.

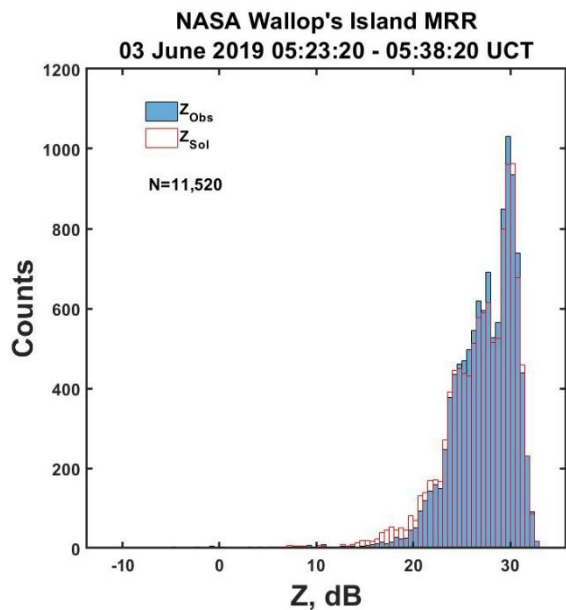


Figure 9. Histograms of the MRR measured (subscript Obs) and of the solution (subscript Sol) radar reflectivities in Figure 8 showing the excellent matching suggesting the general validity of the solutions.

In addition, consider the Z-R plots in Figure 10. The air speed corrected values produce a believable Z-R relation (Figure 10a) while the values output from the MRR processor do not (Figure 10b). Rather the observed Z_m appears to be uncorrelated to the MRR raw rainfall rates, which, of course, is nonsense. It must be concluded then that when looking at 'instantaneous' MRR data, one must account for the effect of the vertical air velocity if the rainfall rate values are to be believed.

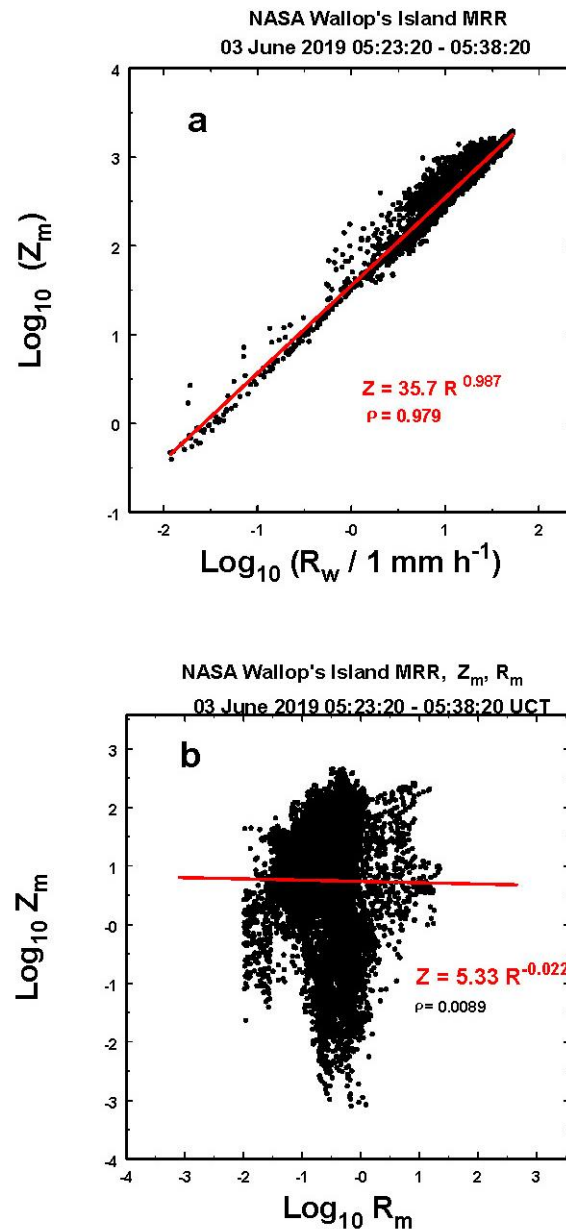


Figure 10. Z-R correlations derived (a) for the rainfall rates adjusted for vertical air speed and (b) those from the MRR processor as discussed further in the text.

Moreover, the deduced vertical air speeds exhibit quite correlated structures both in time and in space as illustrated in Figure 11 where there are clear regions of weak updrafts and stronger downdrafts. The values are also of quite reasonable magnitude which are very consistent with near surface observations of air speeds in weak convective from UHF-VHF studies, e.g., [20,21]. Even though the air velocities are modest (having an approximately Gaussian distribution with a mean value of 0.13 ms^{-1} with a standard deviation of 0.57 ms^{-1}), they can obviously profoundly alter the deduced drop size distributions and their integrated properties as noted previously by [12].

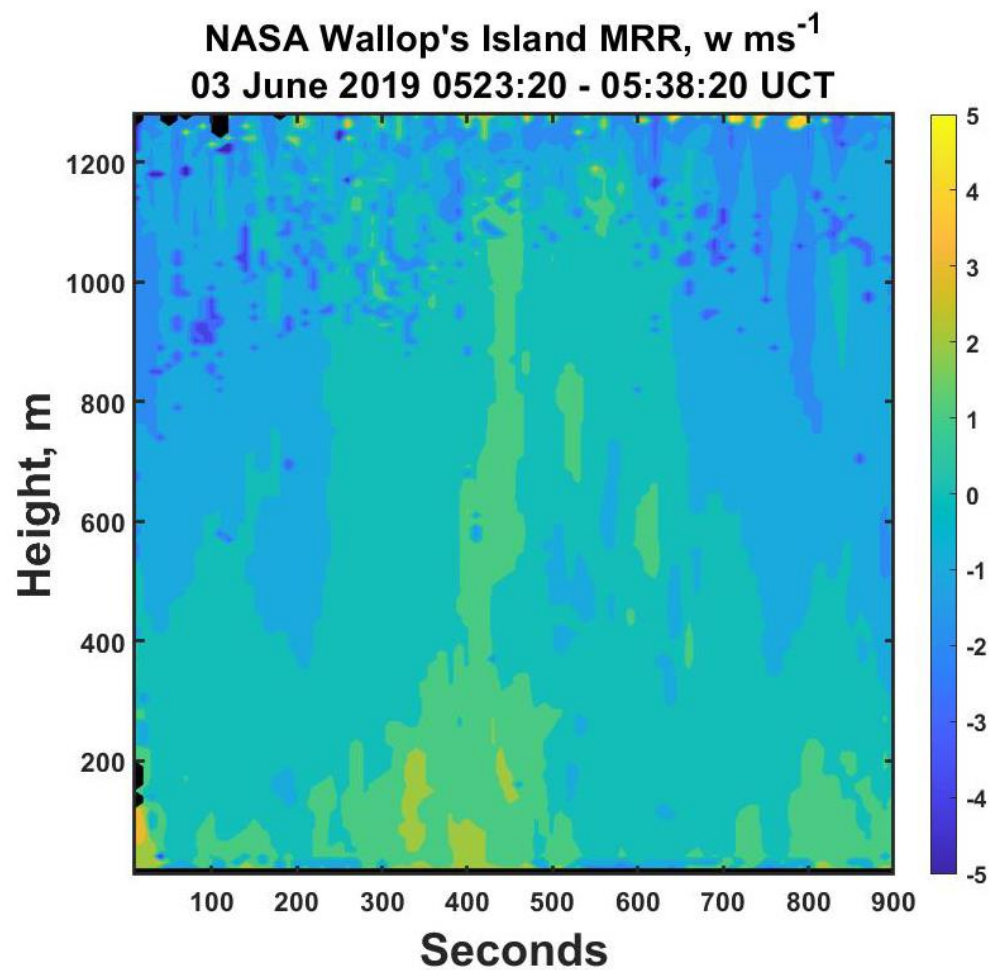


Figure 11. The air vertical velocities derived using the approach described in the text. Note the coherent temporal and spatial structure of the winds with weak updrafts and downdrafts in the center and stronger downdrafts on each side. The velocity magnitudes are also consistent with the observations of others elsewhere as discussed in the text.

3.2. Convective rain early period

These particular data were associated with the leading part of a convective system. Unlike the values in the previous section, the Z_e had to be decreased to account for more attenuation as discussed in the Appendix (A1).

The radar reflectivity values from the MRR processor and those computed adjusting for the vertical air velocity are illustrated in Figures 12a and 12b, respectively. The two structures are remarkably similar as also illustrated by a comparison of the two histograms for each as illustrated in Figure 13.

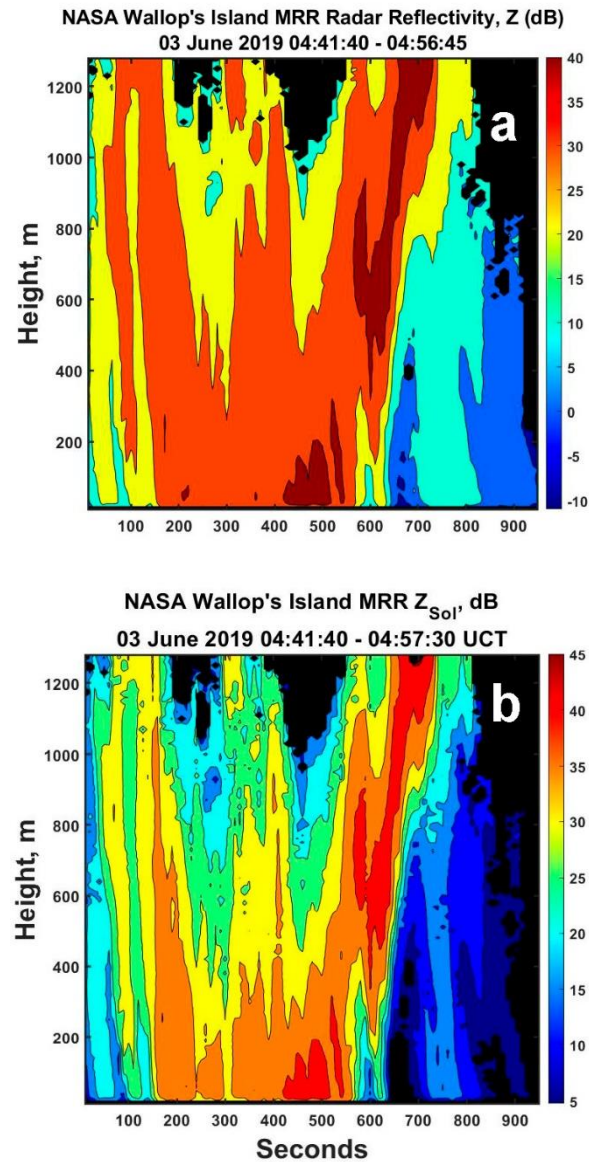


Figure 12. The time-height plots of (a) the observed radar reflectivity and (b) Z_{sol} from the solutions for the earlier, more convective time period on this day. Finer structure is apparent in (b), but the values are nearly identical on the whole a indicate in the next figure.


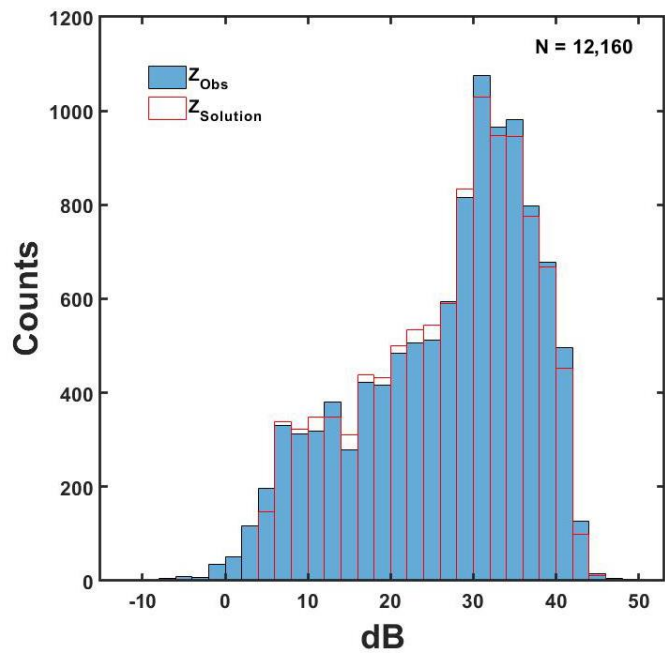


Figure 13. Histograms of the MRR measured (obs) and solution radar reflectivities in Figure 12 showing the excellent matching suggesting the general validity of the solutions.

However, the MRR raw rainfall rates and those computed after removing air velocity effects differ significantly (Figure 14). Once again, the MRR appears to underestimate most rainfall rates when compared to the recomputed values accounting for the vertical air speed. The exception is the top of the figure at about 700 s when the MRR estimates R_m to be to 1054 mm h⁻¹, a very unrealistic value.

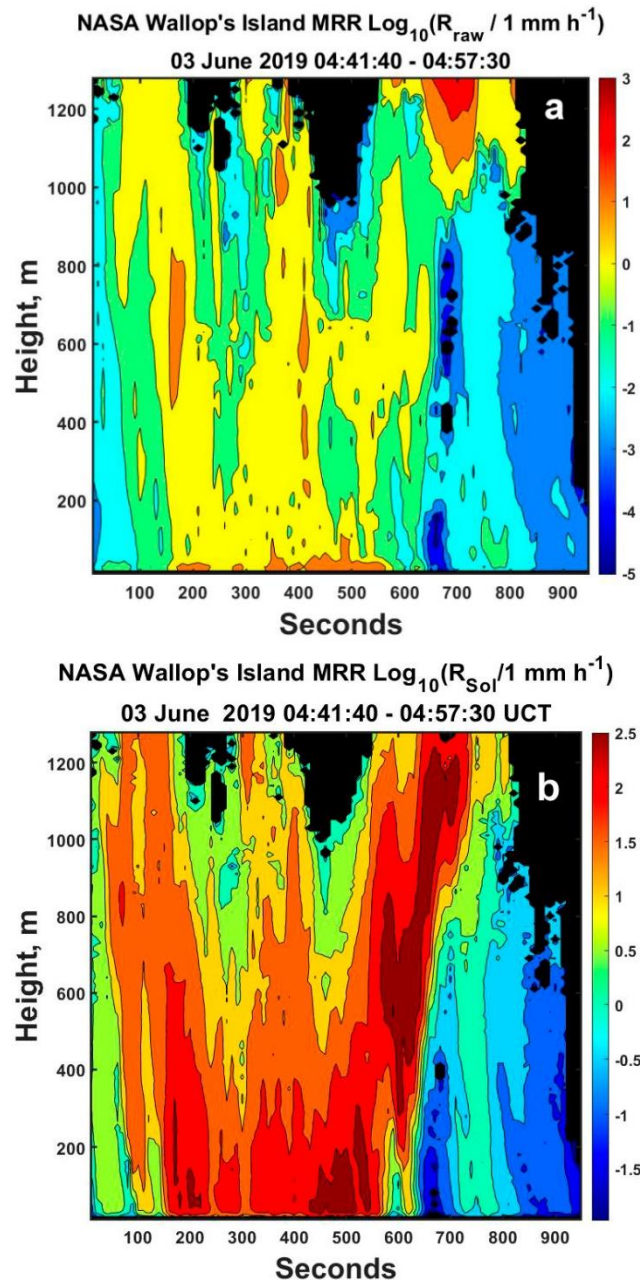

528

Figure 14. Time height plots of the rainfall rates (a) from the MRR processor (R_m) and (b) those after accounting for vertical air speed ($R_{sol}=R_w$). Compared to (a) note the significantly larger values throughout (b) which are consistent with the structure of Z in Figure 12.

The rainfall rates in Figure 14b suggest much more significant convection than was present in the first set of data analyzed above. This is confirmed in Figure 15 that shows values of downdrafts in excess of about 5 m s⁻¹. Indeed, at a few locations the vertical airspeeds at the top right at times exceed the Nyquist interval so that there was folding of the Doppler spectra. This has been taken into account in Figure 15 which is why the vertical air speed is shown to exceed -5.94 m s⁻¹ at some locations. In this case the mean w was 0.07 m s⁻¹ while the standard deviation was 1.66 m s⁻¹. Consequently, while the mean value was indeed close to zero, the standard deviation illustrates that significant deviations from this mean was occurring throughout the data. In any event, as evident from the analyses,

small changes in w can have profound consequences on the deduced drop size distributions and their integral properties such as the rainfall rate. Nevertheless, it is clear that the patterns indicate that the air velocity estimates are coherent and not just random numbers.

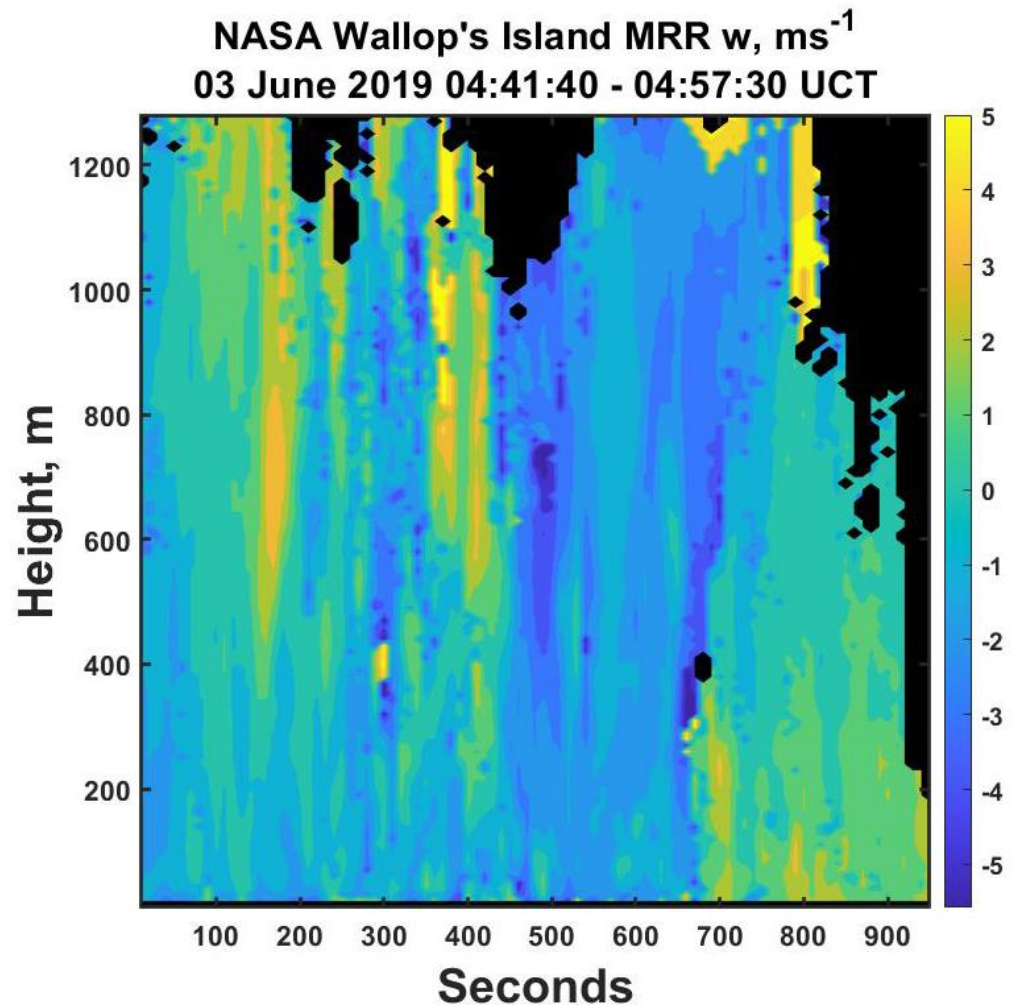


Figure 15. The air vertical velocities derived using the approach described in the text. Note the coherent but smaller scale temporal and spatial structure of the winds compared to those found in the later time period (Figure 11) likely reflecting the more convective nature of these data. Spectral folding occurred in a few locations leading to the enhanced velocity scale. The large black areas are due to a lack of power while smaller ones are where no solutions were found without having to further process the data.

As before, we again construct the two Z - R relations for these data as illustrated in Figure 16. This time, the MRR processor produces values yielding a resemblance to an actual Z - R relation (Figure 16a). However, the coefficient is on the large side and there is definitely more scatter about the relation as reflected in the lower correlation coefficient. On the other hand, the air velocity adjusted values (Figure 16b) produce a tighter relation having a correlation coefficient of 0.99 and a much more realistic coefficient, once again suggesting that the vertical velocity adjustment improves the estimates of the rainfall rates.

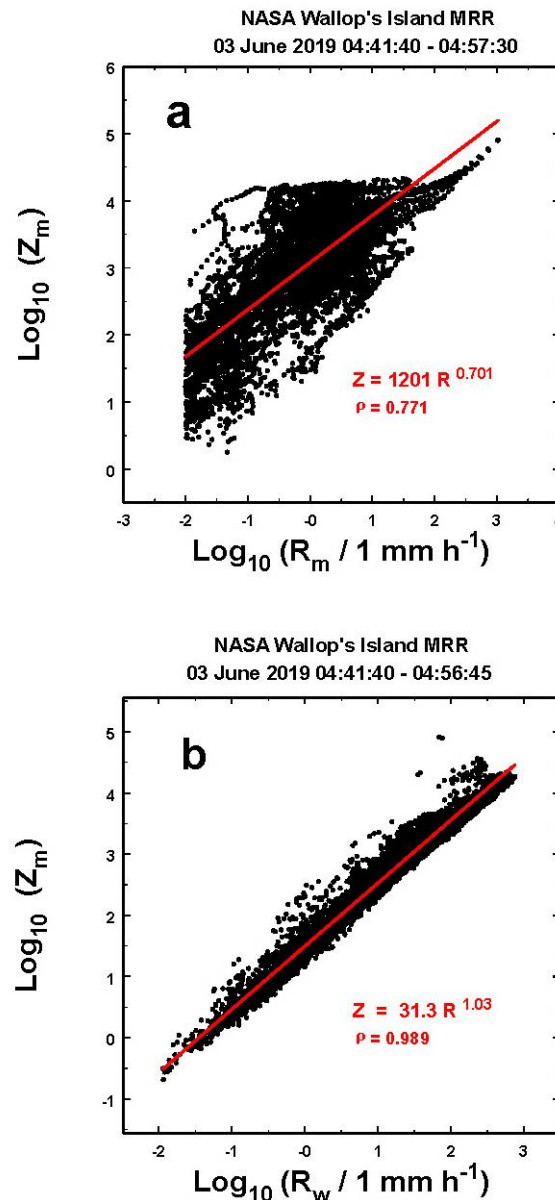


Figure 16. Z-R correlations derived (a) for the measured rainfall rates (R_m) from the MRR processor and (b) those corrected for vertical air speed (R_w) as discussed further in the text.

Like almost all rainfall studies, it is very difficult to prove results. However, it is worth at least to try by comparing ground observations with the radar estimates. This is especially challenging in this case because the radar is making measurements at a minimum of 20 m (66 feet) AGL so that what it sees will actually usually reach the ground at a location removed from the site of the radar (and ground devices) because of advection particularly in a convective rain storm. According to nearby wind measurements, during the early period the winds near the surface changed direction from south to north while the speeds increased from around 3 ms^{-1} up to around 6 ms^{-1} in gusty conditions. In the later time, the speeds were steadier at around $2\text{--}3 \text{ ms}^{-1}$, but the direction was fluctuating between west to north. Hence, some differences between the ground and MRR observations are to be expected since the comparison will only be as meaningful as is the persistence of the correlations in time and height over the distance the precipitation moves.

This difficulty is compounded further by the vast differences in sample volumes of, say, a 2DVD disdrometer and the radar. Many distributions of the rainfall rate are peaked near drop sizes of 2 mm. Drops having this diameter have fall velocities of around 6 m s^{-1} so that over one minute (the resolution of the data to be shown), they fall a distance of 360 m. The nominal sampling area of a 2DVD disdrometer is around 0.01 m^2 so that the sample volume for this size of drops would be on the order of 3.6 m^3 . On the other hand,

the radar has a sample volume depth of 10 m and a nominal 1.5° beam width with an averaging interval of 10 s for these data. Hence, over one minute (the temporal resolution of the ground measuring devices), the radar samples over approximately 22 m^3 or a volume about 6 times larger than does the 2DVD. In addition, of course, the precipitation is moving say at 2 ms^{-1} so that any comparison must assume rain coherence over around 120 m horizontally and over 20 m vertically for a volume coherence over 2.4 km^3 . Figs. 7 and 14b suggest that that can certainly but not always happen. Under that assumption, then, we compare ground observations with the near surface radar observations in Figure 17.

In Figure 17a corresponding to the early period of observations we plot the one-minute average values of the rainfall rates for the nearby 2DVD (as reported by NASA) and the those reported by the MRR processor (R_m) along with the values after adjusting for the vertical air velocity. There is remarkable agreement between the disdrometer and R_w at 4 minutes, and both plots show a peak at 8 min although the R_w value is significantly larger, certainly possible in convective given the 20 m height separation.

During the later observation interval in Figure 17b, the 2DVD and radar adjusted (R_w) values are remarkably similar while the MRR raw values are unrealistic, again suggesting the importance of adjusting the MRR observations for the vertical air speed when estimating rainfall rates.

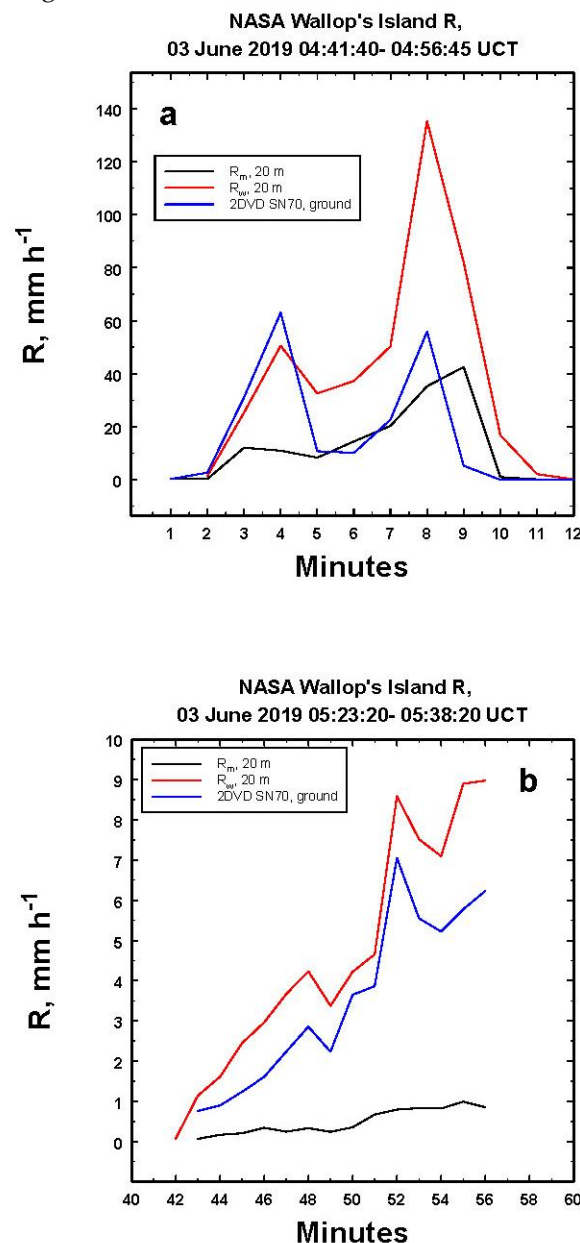


Figure 17. Comparisons of the MRR measured (black lines) average one-minute rainfall rates (R_m) at 20 meters AGL and of the air velocity adjusted (red lines) rainfall rates (R_w) with the nearby 2DVD estimated rainfall (blue lines) as discussed in greater detail in the text for (a) the more convective time period and (b) for the later time period. Note the poor performance of the measured MRR values in (b).

4. Discussion and conclusions

As has been realized for about 60 years, the vertical air speed can strongly affect the retrieval of the drop size distributions and their integrated properties from vertical pointing single frequency Doppler radar measurements. Previously, this challenge has been addressed using the lower bound method and the radar reflectivity estimate of the mean fall speed of the raindrops as discussed in the opening of this work. Both approaches have weaknesses, namely that the lower bound of the spectrum may not correspond to a particle fall speed of 1 ms^{-1} , and the radar reflectivity is poorly related to the mean fall speed in part because it also depends upon drop concentration and assumptions about the form of the size distribution.

In this work, a different approach is taken. Using parametric representations of the backscatter cross-sections and the relationship of the volume flux of the raindrops to diameter, radar reflectivity and the rainfall rate can be calculated as functions of the shift of an observed Doppler spectrum over the Nyquist interval of the radar. By determining those shifts which produce radar reflectivities matching those observed, it is possible to determine the vertical air speeds and the correct rainfall rates as discussed in detail in the paper.

The approach developed here is generally applicable to many other radars including those operating at 10 cm wavelength when the raindrops are Rayleigh scatterers and (9) then becomes

$$Z = C_R \overline{D^{2.81}}^R \quad (11)$$

where the value of C_R depends upon the fit to $D^3 V_f$ is used, and equals 79.936 using the fit in Figure 2. However, only having access to MRR data, this approach has been applied to some MRR observations at 24.2 GHz frequency. While one might argue about some of the simplifications above used at this frequency, the approach for removing the effects of the mean vertical air speed remain quite general outside of these particular MRR measurements. In any event using this approach leads to greatly improved vertical structures in the observed rain.

The values of the rainfall rates appeared to be much better than those produced by the MRR processor, and the derived vertical air speeds were found to be consistent with those reported by other investigators using multi-wavelength profilers in other locations. Thus, these results show a clear advantage of using this approach rather than just using the standard MRR assumption that the vertical air speed is always zero. This becomes particularly important when attempting to gather rain measurements at significant height and temporal resolutions for use in characterizing the vertical statistical-physical properties of rain over depths not possible using any other approach. As with any new method, however, additional substantiation must be pursued in future research.

As a final cautionary point with regard to MRR data in rain, however, is that one must be aware of uncertain knowledge of the attenuation that can significantly affect the results. For example, the MRR processor computes a path integrated attenuation (PIA), but those calculations are based upon the deduced drop size distributions assuming $w = 0 \text{ m s}^{-1}$. These values are often deficient and likely produce unrealistic results. In contrast, the approach used here has the advantage that one can experiment with different values of over-all attenuation that can maximize the number of solutions derived using (9) while producing much more realistic results. It must be remembered, however, that these results are only estimates that may or may not be correct, but they are likely better than just using the raw MRR values. Moreover, as a reminder, the important point here is *that this approach is applicable to other radar frequencies particularly to those without the complications that attenuation poses for the MRR radars.*

Author Contributions: There are three authors who contributed to this work, namely A. R. Jameson (AJ), M. L. Larsen (ML) and D.B. Wolff (DW). AJ devised and developed this idea, ML carefully checked the science and made important suggestions, while DW provided data and data support as well as a review and editorial suggestions.

Funding: This work was supported (AJ) by the National Science Foundation (NSF) under grant AGS2001343 and by grants AGS201490, 1823334 and 1532977 (ML). Support was also provided by the NASA Wallop's Island Flight Facility, Earth Sciences Field Support Office (DW).

Data Availability Statement The data are at Jameson, Arthur (2020), "MRR Data for Analyses", Mendeley Data, V1, <http://dx.doi.org/10.17632/skyg4f9fhv.1>

Conflicts of Interest: We wish to confirm that there are no known conflicts of interest associated with this publication and there has been no significant financial support for this work that could have influenced its outcome. All of the sources of funding for the work described in this publication are acknowledged above.

Appendix A

A.1 Corrections to MRR Z

The Doppler spectra for the MRR radar are the attenuated power spectra. In order to properly apply the technique described in this work, it is necessary to use the effective reflectivity factors that would correspond to these spectra. The MRR provides measurements of the attenuated reflectivity Z_a and estimates of the equivalent reflectivity factor Z_e calculated by using the drop size distributions deduced from the spectra under the assumption that the vertical air velocities were null. As shown in the paper this is not usually a good assumption that likely contains unaccounted attenuation. A different approach is used here.

Specifically, for the nominal reported wavelength of 1.24 cm for the MRR radar, expression (5a) in the paper can be written in terms of logarithms as

$$Z_e(\text{dB}) = 79.241(\text{dB}) + \sum S(v)(\text{dB}) \quad (\text{A1})$$

when $\lambda=1.24$ cm, Z_e is in $\text{mm}^6 \text{m}^{-3}$, and η is in m^{-1} while η is the sum over the Doppler spectrum, $\eta = \sum S(v)$. A similar expression can be written for Z_a as well except that it contains the unknown attenuation component, A , namely where A is used as a characteristic measure of the net total attenuation affecting the relation. The expressions equivalent to (A1) and (A2) for the earlier period data are shown in Figure A1.

$$\begin{aligned} Z_a(\text{dB}) &= 79.241(\text{dB}) + \sum S(v)(\text{dB}) - A(\text{dB}) \\ &= [79.241(\text{dB}) - A(\text{dB})] + \sum S(v)(\text{dB}) \end{aligned} \quad (\text{A2})$$

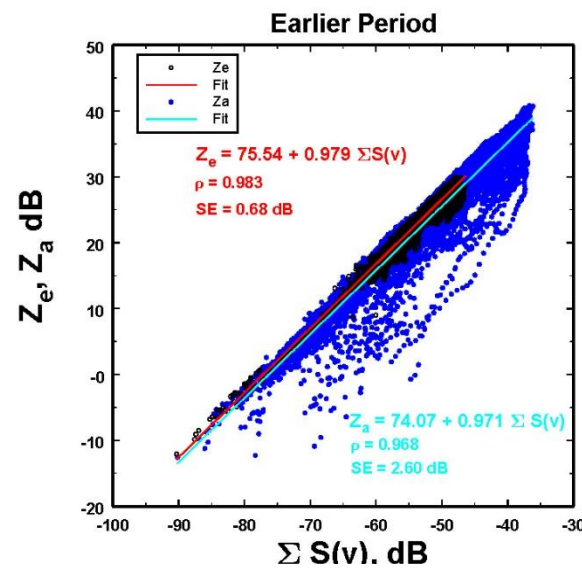


Figure A1. Linear fits of the logarithms of the MRR reported equivalent radar reflectivities, Z_e , and the attenuated reflectivities vs. the logarithms of the summations over the reported Doppler spectral powers. SE is the standard error of the fits.

Clearly, Z_a is affected by varying amounts of attenuation evident by the spread in the $\Sigma S(v)$. While some spread may also arise from non-Rayleigh scattering, the largest effects in rain will be likely largely from attenuation.

In contrast, for the later data, the resulting fits are shown in Figure A2. I

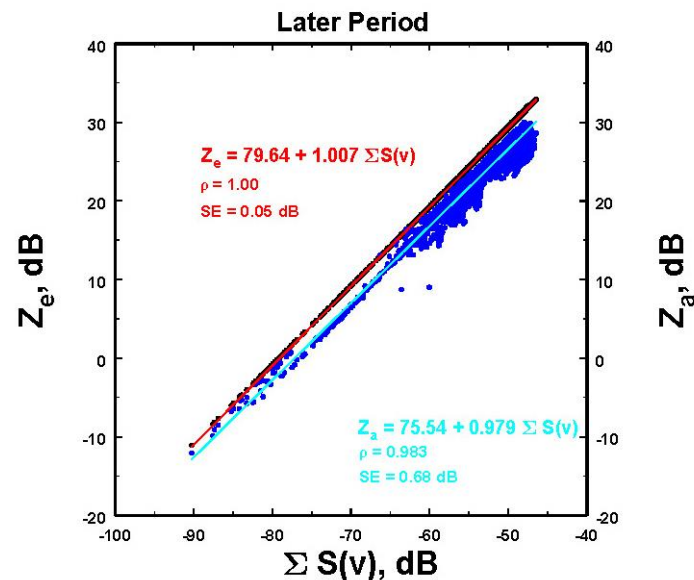


Figure A2.: As in Figure A1, linear fits of the logarithms of the MRR reported equivalent radar reflectivities, Z_e , and the attenuated reflectivities vs. the logarithms of the summations over the reported Doppler spectral powers but for the later period. SE is the standard error of the fits.

In this case, Z_e will mostly match Z_a simply by subtraction. This can be determined by looking at the end farthest to the left when attenuation should be a minimum so that

the shift represents some other change in the system aside from attenuation. However, at larger $\Sigma S(v)$, some additional adjustment has to be included as evident in Figure A2 where the separation between the Z_a and the Z_e lines increase with increasing $\Sigma S(v)$ likely because of increasing attenuation. Thus, for the later set of data, Z_e only had to be mostly adjusted downward to get solutions using (9) as Figure A2 illustrates.

However, attenuation was a more severe problem in the earlier set of data as shown in Figure A1. While one could try to correct each time period at each altitude for the accumulated attenuation, such a procedure seems unwarranted given the uncertainties in the observations and estimates of the attenuation as well as the unknown error propagation that could occur. For now, instead, we use the difference between the fits to the MRR reported Z_a and the Z_e as a measure of the characteristic A . This turns out to be equivalent to the shift between the Z_a and the Z_e fits plus the combined standard errors given in Figure A1 which are used to provide a measure of this spread caused by the attenuation. This procedure produces solutions using (9) throughout most of the data field. The final resulting fit for these data is illustrated in Figure A3. It is close to theoretical expectations as given in (A1).

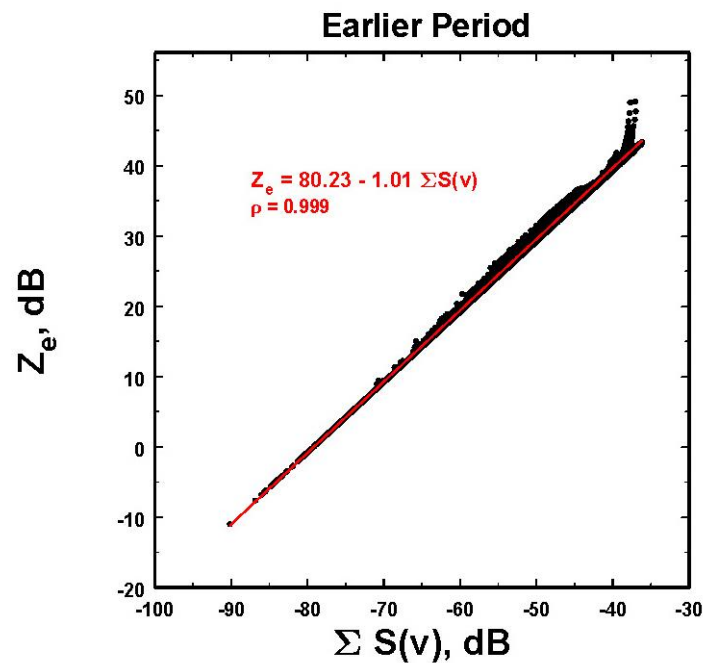


Figure A3. Resulting relation between Z_e and $\Sigma S(v)$ after the adjustments for attenuation to the Z_e in Figure A1 as described in the text.

A.2 Backscatter cross-sections used

On a different topic, some reviewers have questioned the accuracy of the T-matrix backscatter cross-sections calculated in [15]. Figure A4 illustrates that the ratio of the T-matrix backscatter cross-sections to Rayleigh scatters is consistent with that published in the literature for the MRR. The T-matrix values are, therefore, quite acceptable.

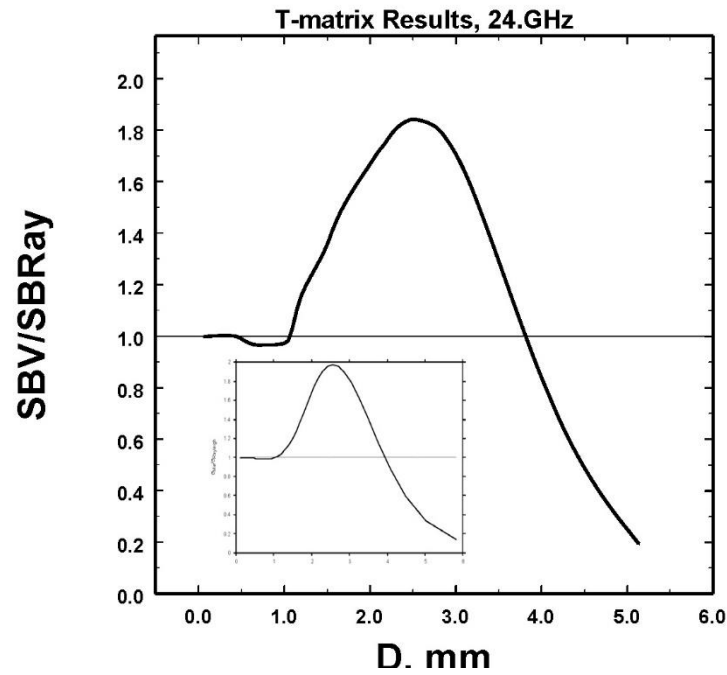


Figure A4. The ratio of the T-matrix calculated backscatter cross-sections for spherical raindrops to that expected if the scattering were Rayleigh. The inset corresponds to that reported in the MRR literature showing that the backscatter cross-sections used in this study are in agreement.

A.3 Examples of solution time-height profiles

Figure A5 shows the solution space for (a) the earlier period and (b) the later period. The black areas indicate where there were no solutions because there were no back-scattered powers. Obviously, elsewhere solutions using (9) were universal in both sets of data after optimizing the MRR data as discussed in Appendix A1.

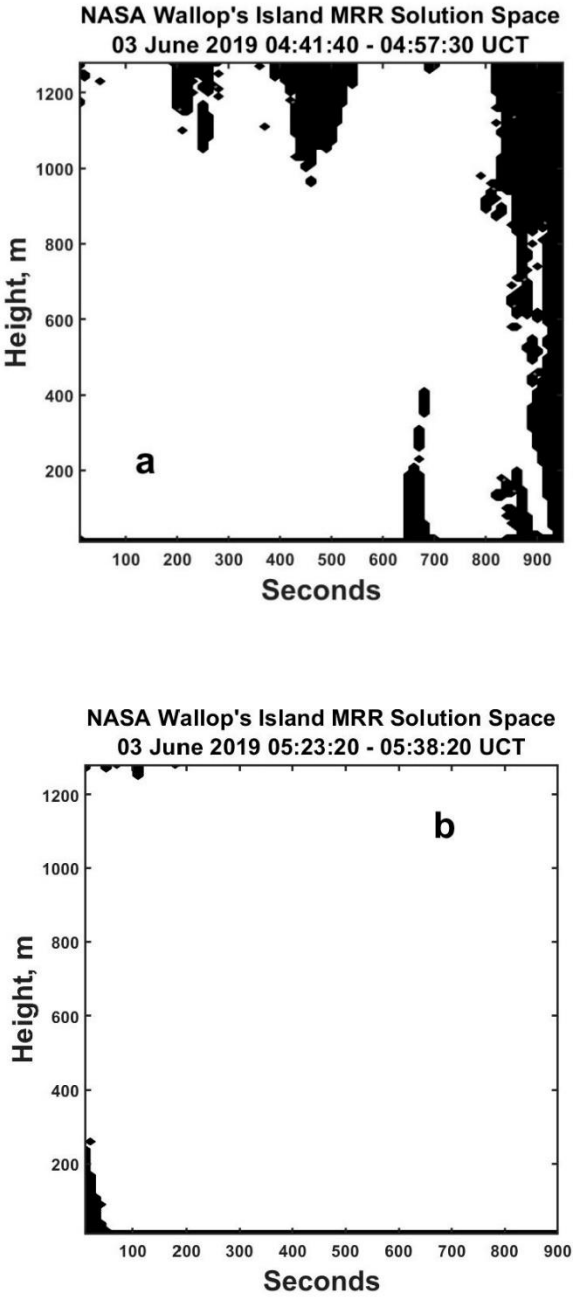


Figure A5. Plots of the solution spaces using (9) for the earlier time period (a) and the later time period (b). Solutions were found throughout except at the locations in black where there were no back-scattered powers.

References

1. Probert-Jones, J.R.; Harper, W.G. Vertical Air Motion in Showers Revealed by Doppler Radar. In Proceedings of the Preprints of Papers; Amer. Meteor. Soc.: Kansas City Mo., 1961; pp. 225–232.
2. Caton, P.G.F. A Study of Raindrop-Size Distribution in the Free Atmosphere. *Q. J. R. Meteorol. Soc.* **1966**, *92*, 577–579, doi:10.1002/qj.49709239418.
3. Rogers, R.R. Doppler Radar Investigation of Hawaiian Rain. *Tellus* **1967**, *19*, 432–455, doi:10.1111/j.2153-3490.1967.tb01498.x.
4. Toit, P.S.D. Doppler Radar Observation of Drop Sizes in Continuous Rain. *J. Appl. Meteorol.* **1967**, *6*, 1082–1087, doi:10.1175/1520-0450(1967)006<1082:DROODS>2.0.CO;2.
5. Spilhaus, A.F. Raindrop Size, Shape and Falling Speed. *J. Meteorol.* **1948**, *5*, 108–110, doi:10.1175/1520-0469(1948)005<0108:RSSAFS>2.0.CO;2.
6. Gunn, R.; Kinzer, G.D. The Terminal Velocity Offset for Water Droplets in Stagnant Air. *J. Meteorol.* **1949**, *6*, 243–248, doi:10.1175/1520-0469(1949)006<0243:TTVOFF>2.0.CO;2.
7. Best, A.C. The Size Distribution of Raindrops. *Q. J. R. Meteorol. Soc.* **1950**, *76*, 16–36, doi:10.1002/qj.49707632704.
8. Foote, G.B.; Du Toit, P.S. Terminal Velocity of Raindrops Aloft. *J. Appl. Meteorol.* **1969**, *8*, 249–253, doi:10.1175/1520-0450(1969)008<0249:TVORA>2.0.CO;2.
9. Battan, L.J. Some Observations of Vertical Velocities and Precipitation Sizes in a Thunderstorm. *J. Appl. Meteorol.* **1964**, *3*, 415–420, doi:10.1175/1520-0450(1964)003<0415:SOOVVA>2.0.CO;2.
10. Rogers, R.R. An Extension of the Z-R Relation for Doppler Radar. In Proceedings of the Preprints of Papers; Amer. Met. Soc.: Boulder, Co., 1964; pp. 158–161.
11. Lhermitte, R.M. Observation of Rain at Vertical Incidence with a 94 GHz Doppler Radar: An Insight on Mie Scattering. *Geophys. Res. Lett.* **1988**, *15*, 1125–1128, doi:10.1029/GL015i010p01125.
12. Sekhon, R.S.; Srivastava, R.C. Doppler Radar Observations of Drop-Size Distributions in a Thunderstorm. *J. Atmospheric Sci.* **1971**, *28*, 983–994, doi:10.1175/1520-0469(1971)028<0983:DROODS>2.0.CO;2.
13. Löffler-Mang, M.; Kunz, M.; Schmid, W. On the Performance of a Low-Cost K-Band Doppler Radar for Quantitative Rain Measurements. *J. Atmospheric Ocean. Technol.* **1999**, *16*, 379–387, doi:10.1175/1520-0426(1999)016<0379:OTPOAL>2.0.CO;2.
14. Jana, S.; Rakshit, G.; Maitra, A. Aliasing Effect Due to Convective Rain in Doppler Spectrum Observed by Micro Rain Radar at a Tropical Location. *Adv. Space Res.* **2018**, *62*, 2443–2453, doi:10.1016/j.asr.2018.07.010.
15. Jameson, A.R. A Comparison of Microwave Techniques for Measuring Rainfall. *J. Appl. Meteorol.* **1991**, *30*, 32–54, doi:10.1175/1520-0450(1991)030<0032:ACOMTF>2.0.CO;2.
16. Atlas, D. Advances in Radar Meteorology. In *Advances in Geophysics*; Elsevier, 1964; Vol. 10, pp. 317–478 ISBN 978-0-12-018810-9.
17. Marshall, J.S.; Palmer, W.M.K. The Distribution of Raindrops with Size. *J. Meteorol.* **1948**, *5*, 165–166, doi:10.1175/1520-0469(1948)005<0165:TDORWS>2.0.CO;2.
18. Jameson, A.R.; Larsen, M.L.; Kostinski, A.B. Disdrometer Network Observations of Finescale Spatial–Temporal Clustering in Rain. *J. Atmospheric Sci.* **2014**, *72*, 1648–1666, doi:10.1175/JAS-D-14-0136.1.
19. Jameson, A.R.; Larsen, M.L. The Variability of the Rainfall Rate as a Function of Area. *J. Geophys. Res. Atmospheres* **2016**, *121*, 746–758, doi:10.1002/2015JD024126.
20. Williams, C.R. Simultaneous Ambient Air Motion and Raindrop Size Distributions Retrieved from UHF Vertical Incident Profiler Observations: SIMULTANEOUS AMBIENT AIR MOTION AND RAINDROP SIZE DISTRIBUTIONS. *Radio Sci.* **2002**, *37*, 8-1-8–16, doi:10.1029/2000RS002603.
21. Schumacher, C.; Stevenson, S.N.; Williams, C.R. Vertical Motions of the Tropical Convective Cloud Spectrum over Darwin, Australia: Vertical Motions of the Tropical Convective Cloud Spectrum. *Q. J. R. Meteorol. Soc.* **2015**, *141*, 2277–2288, doi:10.1002/qj.2520.