

Article

Energy Efficiency, Emissions, Tribological Challenges and Fluid Requirements of Electrified Passenger Car Vehicles

Robert Ian Taylor

¹ University of Central Lancashire; RITaylor@uclan.ac.uk

Abstract: The motivations for the move to electrified vehicles are discussed with reference to their improved energy efficiency, their potential for lower CO₂ emissions (if the electricity system is decarbonized), their lower (or zero) NO_x/particulate matter (PM) tailpipe emissions, and the lower overall costs for owners. Some of the assumptions made in life-cycle CO₂ emissions calculations are discussed and the effect of these assumptions on the CO₂ benefits of electric vehicles are made clear. A number of new tribological challenges have emerged, particularly for hybrid vehicles that have both a conventional internal combustion engine and a battery, such as the need to protect against the much greater number of stop-starts that the engine will have during its lifetime. In addition, new lubricants are required for electric vehicle transmissions systems. Although full battery electric vehicles (BEVs) will not require engine oils (as there is no engine) they will require a system to cool the batteries – alternative cooling systems are discussed, and where these are fluid based, the specific fluid requirements are outlined.

Keywords: Energy Efficiency; Emissions; Tribology; Lubrication; Battery Electric Vehicles; Hybrid Electric Vehicles; Life Cycle Analysis; Thermal Cooling Fluids

1. Introduction

Many countries around the world have signed up to the legally binding international treaty on climate change agreed at COP 21 in Paris 2015 [1]. The goal of the treaty, (an agreement within the United Nations Framework Convention on Climate Change (UNFCCC), which entered into force in November 2016, is to limit global warming to well below 2°C, and preferably to 1.5°C, compared to pre-industrial levels. Each signatory to the agreement develops increasingly ambitious 5-year plans for climate action known as Nationally Defined Contributions (NDCs). Since passenger cars in developed countries account for approximately 10-20% of global CO₂ emissions [2-5] and since the sector is relatively easier to decarbonize than others (such as shipping and aviation), it has been a key focus of many countries in their early plans to reduce their CO₂ emissions. Initially, different regions, such as Europe, Japan, China have introduced tough fuel consumption targets for passenger car vehicle fleets. Up until around 2021, most of these targets can, and have been met by OEMs (Original Equipment Manufacturers) developing more efficient conventional gasoline and diesel engines, with a small number of electric vehicles (either full battery electric vehicles (BEVs), plug-in hybrid electric vehicles (PHEVs) or mild hybrids). Mild hybrid cars are those which have a relatively small battery that is charged up by the internal combustion engine, such as the original Toyota Prius. However, future anticipated fuel consumption targets for Europe (for 2025) and China will not be met without significant electrification of the passenger car fleet.

In addition to CO₂ targets, local air pollution is also an issue in some countries and cities, and in such locations, electric vehicles are being favoured due to the lower tailpipe emissions of NO_x and particulate matter. In some cities, older conventional vehicles that do not meet current emissions standards have either been banned entirely or face significant costs to enter parts of the city (for example, in Central London, at the time of writing, a daily charge of £12.50 is payable by drivers of passenger cars, unless their vehicles

meet Ultra Low Emission Zone standards – and this is in addition to a daily “congestion” charge that is in operation from 0700-2200. Drivers of electric vehicles would generally not need to pay the emissions charge [6]).

This paper discusses in some detail (1) the energy efficiency benefit of electric vehicles, (2) the potential CO₂ benefits of electric vehicles, and how these benefits are calculated using a life cycle analysis (3) the lower tailpipe emissions of electric vehicles, (4) the various tribological challenges that will need to be overcome with electrified vehicles (particularly hybrid electric vehicles in which there is both a conventional engine AND a battery), and finally (5) the different fluid requirements of such vehicles are outlined.

2. The Motivations for Electrification of the Passenger Car Fleet

The main motivations for electrifying the passenger car fleet are (1) much improved energy efficiency, (2) the potential for lower CO₂ emissions (provided the electricity system is sufficiently decarbonized), (3) reduced or zero particulate matter (PM) and NO_x emissions (zero emissions if it is a full Battery Electric Vehicle, and potentially reduced emissions if it is a Plug-In Hybrid Electric Vehicle, depending on how much the engine in the hybrid vehicle is used), and (4) the potential for lower total cost of ownership. These different motivations are discussed in more detail below:

2.1 Energy Efficiency

OEMs that manufacture and sell electric vehicles give information on how much energy is needed for the vehicle to travel 100 km. Typically, electric vehicles need 15-25 kWh of energy to travel 100 km (the higher figures will tend to be for heavier vehicles). This can be contrasted with a fuel-efficient passenger car that is powered by a gasoline engine. For the sake of argument, assume the gasoline car has a fuel consumption of 6 litres/100 km (which is the equivalent to about 47 miles per (imperial) gallon). The energy content of 1 litre of gasoline is approximately 34 MJ [7], and so the energy needed for the car to travel 100 km is about 204 MJ, which is about 57 kWh. Therefore, a Battery Electric Vehicle (BEV) is typically between 2-4 times more energy efficient than a conventional gasoline car. (In fact, since most gasoline cars on the road are likely to have significantly higher fuel consumption (i.e. higher than 6 litres/100 km), BEVs could be even more energy efficient than this simple estimate suggests).

Just for clarification, it should be noted that vehicles with the same mass, driven on the same driving cycle, will have exactly the same power requirements *at the wheel*, irrespective of whether the car is electric or driven by a conventional gasoline engine. The only difference between an electric vehicle and a conventional gasoline vehicle is the amount of useful power that gets to the wheels from the propulsion unit (the engine or battery). In the case of an electric vehicle, approximately 80% of the power in the battery is available at the wheels, compared to a conventional gasoline engine, in which only 20% of the power contained in the gasoline gets to the wheels [8]. (For a typical driving cycle, such as the New European Driving Cycle (NEDC), the average power required at the wheels, assuming the car mass is 1400 kg, is only about 4 or 5 kW). The NEDC cycle has a duration of approximately 20 minutes, and the distance travelled is 10.93 km. If it is assumed the battery uses 15 kWh for 100 km of travel, and that 80% of this energy gets to the wheels, then for a distance of 10.93 km, the energy at the wheels is about 1.3 kWh, and if we divide this by 1/3 hour (the duration of the driving cycle), the average power at the wheels is 3.9 kW. For a gasoline engine, the energy from the fuel, to travel 10.93 km is approximately 6.2 kWh, but only 20% of this gets to the wheels [8], about 1.24 kWh, which gives an average power at the wheels, of 3.72 kW, in reasonable agreement with the calculation for the electric vehicle.

2.2 The Potential for Lower CO₂ Emissions

BEVs clearly have no local CO₂ emissions, but CO₂ will be emitted at the power station that generates the electricity. In addition, CO₂ emissions generated during vehicle manufacture should also be accounted for. Useful data on the CO₂ content of different fuels used to generate electricity are found in reference [9]. Figure 1 shows the estimated CO₂ emissions from BEVs running on electricity from different types of fuel, and compares it to a gasoline vehicle (in this case the gasoline vehicle was assumed to have a fuel consumption of 6 litres/100 km). Figure 1 shows that if electricity is generated from coal, the “in use” CO₂ emissions are actually higher than those from a gasoline car. On the other hand, if electricity is generated from natural gas, or even better, solar, wind or nuclear energy, significant reductions in CO₂ emissions are potentially achievable.

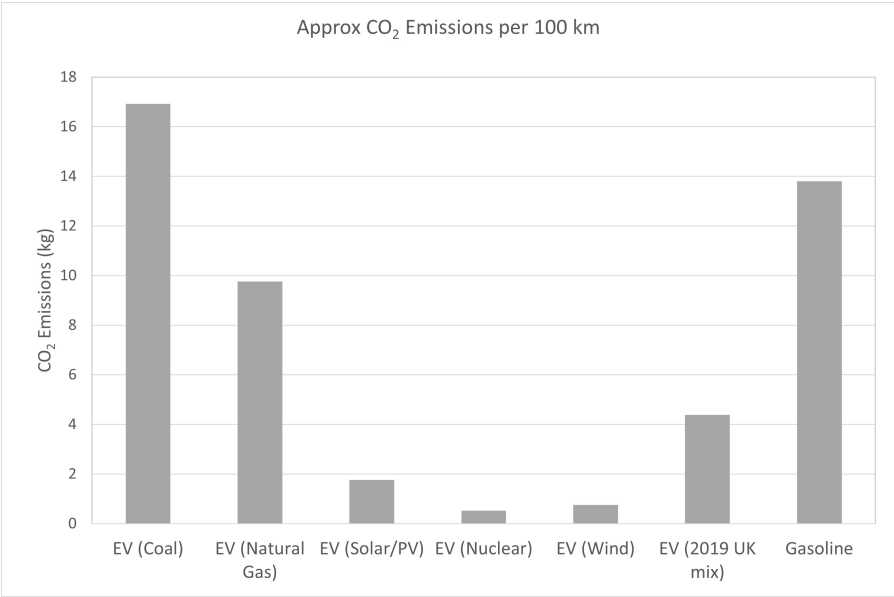


Figure 1. CO₂ emissions (in kg) for a car travelling 100 km. The electric vehicle emissions have assumed 20 kWh per 100 km, and for the gasoline car it was assumed the fuel consumption was 6 litres/100 km

The CO₂ emissions of the various types of fuel used to generate electricity, as reported in [9] are summarized in Table 1.

Table 1. Equivalent CO₂ emissions per kWh for different sources of electricity generation [8]

Source of electricity generation	gCO ₂ eq/kWh
Coal	846
Natural Gas	488
Solar Photovoltaic (PV)	88
Wind	38
Nuclear	26
UK average (2019)	219

A more detailed, total life cycle calculation for CO₂ emissions that compares electric and conventional cars needs to account for the greater CO₂ emissions involved in the

manufacture of electric vehicles, and also needs to make assumptions on the lifetime mileage of such vehicles, and what happens to the batteries at the end of vehicle life. This is discussed in more detail in the Section 3.

2.3 Reduced Particulate Matter (PM) and NO_x Emissions

Although CO₂ emissions are of global concern, at a local level, air pollution can be a significant issue. Conventional cars, particularly those containing diesel engines, can emit high levels of both particulate matter (PM) and various oxides of nitrogen (generally referred to as NO_x). Although different regions around the world have limits on these tailpipe emissions, it has recently transpired that some manufacturers designed their emission control systems so that vehicles would meet the legislated limits on the official test cycles, but that the emissions could be significantly higher in real world driving situations. This has led to a number of cities (particularly in Europe) imposing bans on older vehicles (with higher emissions) and/or the payment of fees to enter certain regions. Clearly, BEVs will emit no PM or NO_x, and so should help to improve local air quality. Plug-In Hybrid Electric Vehicles (PHEVs) will emit no PM or NO_x when the car is driving in electric only mode but will emit these pollutants when it is driving using the conventional engine, and so the emissions of PHEVs will depend on how much of the time the car is driving electric only compared to when driving using the engine.

2.4 The Potential for Lower Total Cost of Ownership

Battery electric cars generally have fewer parts than those of conventional cars and need less servicing – no oil/oil filter changes are needed for example. Clearly, tyres, brakes, and transmissions still need servicing, but in general, servicing costs would be expected to be lower than those for conventional vehicles.

In addition, at the time of writing, electricity costs are substantially cheaper compared to the cost of gasoline or diesel (particularly in Europe where fuels are heavily taxed). Returning to the example of a conventional car travelling 100 km, where it was assumed that the conventional car had a fuel consumption of 6 litres/100 km. At the time of writing, the cost of the fuel needed for this 100 km journey would be approximately £7.20 (assuming a gasoline cost of £1.20 per litre). On the other hand, using a typical UK electricity price (£0.18 per kWh), the cost of the journey, (using an average energy of 20 kWh per 100 km), would be just £3.60, roughly half the cost. In fact, if the electric vehicle is charged up at home via solar panels, or using cheaper overnight electricity tariffs, the cost savings could be even higher. Clearly, if the majority of the car fleet becomes electrified, Governments may, in the future, have to introduce a car mileage tax to recover lost tax revenues (from lower fuel duties). Although this calculation has been performed using UK figures, studies from other countries (such as the USA) have also calculated lower total cost of ownership (despite the fact fuel is taxed at a much lower rate in the US) [10].

3. Deeper Dive into Life Cycle CO₂ Emissions of Electric Vehicles

3.1. Life Cycle CO₂ Emissions

The previous section demonstrated that in-use CO₂ emissions are substantially decreased for electric cars that use electricity from low carbon fuels (in particular, solar, wind and nuclear energy). However, the energy used to manufacture an electric car is often greater than that used to manufacture a conventional car. Therefore, life cycle analysis is used to better understand the CO₂ emissions of electric vehicles and conventional vehicles over their entire lifetime.

Two recent papers have reported useful data [11,12].

Holmberg and Erdemir [11] have calculated both in-use CO₂ emissions and CO₂ emissions arising from vehicle manufacture. For a conventional vehicle that uses a gasoline engine (and the authors assumed a fuel consumption of 7 litres/100 km), it was estimated that total CO₂ emissions were 224g per km, of which 31g originated from vehicle manufacturing, maintenance, and recycling, 30g is from the gasoline production stage, and 163g is from CO₂ emissions from the combustion of gasoline. For an electric vehicle, Holmberg and Erdemir [11] estimated a higher level of emissions from the vehicle manufacturing stage (48g per km). The emissions from electricity generation were quoted as being 180g/km for electricity generated by coal, 84g/km for electricity generated from gas, and only 8g per km if electricity is generated from solar or wind (these figures for gas, solar and wind are comparable to those from reference [9]). The authors also commented that the emissions from electricity generation would be 60g per km for an electric car using electricity generated from the average “mix” in the EU, giving total life cycle emissions of 108 g/km (compared to 224 g/km for a conventional gasoline car).

Qiao et al [12] have reported similar data for Chinese electric vehicles. They assumed a lifetime mileage of 150,000 km, and assumed a 27 kWh capacity battery in the electric vehicle. CO₂ emissions for vehicle manufacture were quoted as being approximately 10.5 tonnes for the conventional vehicle and 13 tonnes for the electric vehicle (with about 3.2 tonnes being due to battery manufacture). Since lifetime mileage was assumed to be 150,000 km, the CO₂ emissions from manufacture were thus approximately 87g/km (as compared to the figure from Holmberg and Erdemir [11] of 48 g/km). The total life cycle greenhouse gas emissions of an electric vehicle in China were estimated to be 41 tonnes CO₂eq in 2015, decreasing to about 34 tonnes CO₂eq in 2020, compared to emissions from a conventional vehicle of around 50 tonnes CO₂eq. This is based on the electricity generation mix in China. The authors also noted that further reductions in greenhouse gas emissions were possible if batteries could be recycled (or re-used in other applications) at the end of the vehicle life.

It is worth pointing out that a major assumption in these life cycle calculations is the lifetime mileage of the vehicle. If the CO₂ emissions from manufacture of an electric vehicle were to be averaged over 250,000 km the manufacturing CO₂ emissions would only be 52 g/km, whilst Qiao et al [12] assumed a lifetime mileage of 150,000 km which corresponded to around 87 g/km. If on the other hand, the owner of the electric vehicle only travelled 75,000 km during the vehicle’s lifetime, the manufacturing CO₂ emissions would be 173 g/km!

As Qiao et al [12] also mentioned, if EV batteries can be recycled at the end of vehicle life (or re-used), then this would mean that the CO₂ emissions from battery manufacture could be spread over a longer time period, which would further reduce CO₂ emissions from electric vehicles.

3.2 Decarbonization of Electricity Generation

It is clear that significant CO₂ reductions can potentially be achieved by the widespread use of electric vehicles, provided that electricity is generated from low carbon

sources. Useful historic data on electricity generation in the UK is available from reference [13]. Figure 2 shows how the source of electricity generation in the UK has changed over the last few decades. Table 2 summarizes the mix of UK electricity generation types from 2018 [13], when for the first time, low carbon electricity generation exceeded 50%. Finally, Figure 3 shows how UK electricity generation has varied over the last few decades. One concern with electric vehicles is that much new electricity generation capacity is needed for the anticipated future demand. What Figure 3 shows is that, in fact, over the last 20 years, electricity demand has decreased substantially from its peak (which occurred in the early 2000s) – this decrease corresponds to the increased use of low energy lighting, and the widespread use of more energy efficient appliances (flat screen TVs, more energy efficient washing machines, spin dryers, dish washers etc.). Since there will not be a sudden transition to everyone suddenly having an electric vehicle, there will potentially be time to build up electricity generation capacity in line with increased EV ownership.

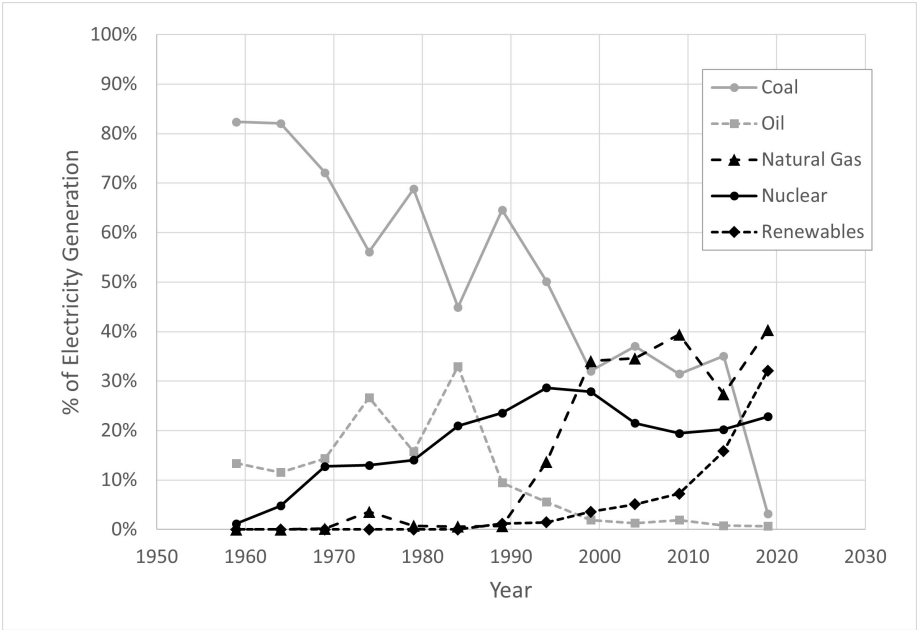


Figure 2. Graph showing mix of UK electricity over time. From the 1950s until 2000 coal was dominant (although in 2020 is now much less than 5%) In 2020, natural gas, wind/solar and nuclear were the main sources of electricity in the UK)

Table 2. UK Electricity mix 2018. For the first time, low carbon sources were greater than 50% of the total [14]

Source of electricity generation	%
Coal	5
Natural Gas	39.4
Nuclear	19.5
Renewables	33.3
Oil & Other	2.8

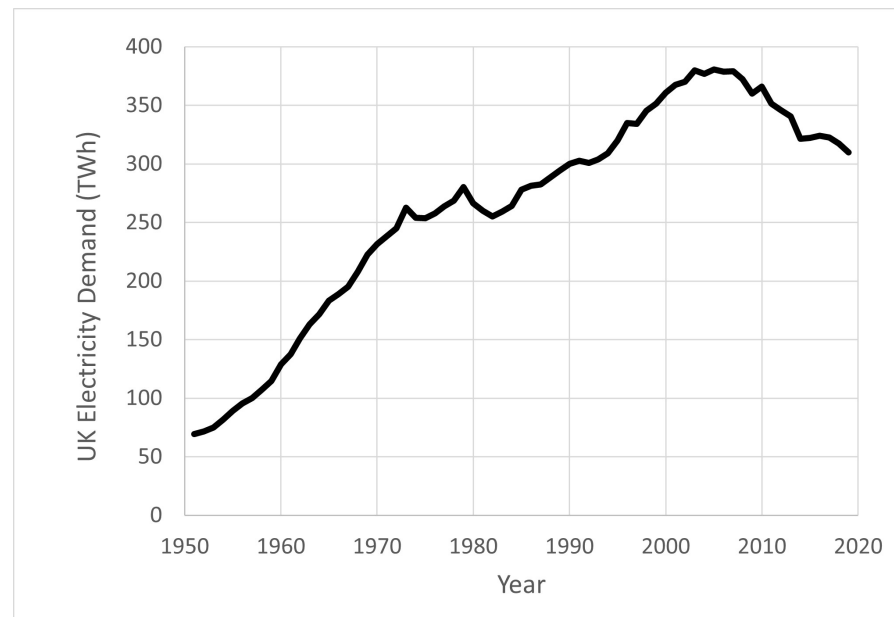


Figure 3. Graph showing UK electricity demand (in TWh) over time. Note the peak demand was around 2005 at approximately 380 TWh, compared to 2020 demand of about 300 TWh. Data is from reference [13]

3.3 CO₂ Emissions of Plug-In Hybrid Electric Vehicles

Although most of this section has dealt with Battery Electric Vehicles (BEVs) in which there is no internal combustion engine, it is well known that there are many hybrid vehicles in use. Plug-In Hybrid Electric Vehicles (PHEVs) have both a conventional engine and a battery. In many cases, the battery is typically large enough to allow an electric only driving range of around 50 km (for example, in the current Mitsubishi Outlander PHEV, a 13.8 kWh battery is installed which allows for 45 km of electric only driving). The reader may well ask how the fuel consumption of such a vehicle can be calculated. Roughly speaking, the vehicle is driven on the standard driving cycle on the internal combustion engine only, and fuel consumption F_{engine} (litres per 100 km) is measured in the usual way. Then the vehicle is driven in electric model only, and the maximum range, R (in km) that can be driven in electric only mode is calculated. The official fuel consumption, F_{overall} (litres per 100 km) is then calculated as:

$$F_{\text{official}} = F_{\text{engine}} / (1 + R/25) \quad (1)$$

More details may be found in reference [15].

For example, the previous model of the Mitsubishi Outlander PHEV, when run on the older NEDC driving cycle (which was used in Europe until recently) had a measured fuel consumption of 6.4 litres per 100 km (approximately 44.1 miles per imperial gallon). It also had a range R of 54 km. Using equation (1) above, the calculated official fuel consumption is 2.03 litres per 100 km (approximately 139 miles per imperial gallon). Clearly, these figures assume that owners regularly charge up the battery in their PHEV. If such vehicles are only ever run on the engine only, then the official fuel consumption will greatly underestimate their CO₂ emissions. “Super credits” were available to vehicle manufacturers that sold PHEVs that had CO₂ emissions (calculated by the method above) less than 50 g/km. A wide selection of PHEV vehicles were available in Europe when the older NEDC driving cycle was used to estimate CO₂ emissions. Now that the new WLTP

driving cycle is in use, less PHEV models are available since it is more difficult to develop a PHEV with CO₂ emissions less than 50 g/km. This is because the fuel consumption of the internal combustion engine is higher on the WLTP test cycle, and also because the range that the vehicle can go in “electric-only” mode is lower for the WLTP test cycle.

3.2 e-Fuels and Hydrogen

There has been much recent discussion about the use of renewable electricity to create e-fuels (from hydrogen, oxygen and CO₂) or green hydrogen. As has been pointed out by Mackay [16] and more recently by Cebon [17], if renewable electricity is used to create hydrogen, approximately four times as much electrification would be needed, compared to simply using renewable electricity directly in batteries. As for e-fuels (which are also known as synthetic fuels), there are significant doubts as to whether these could be manufactured economically and sold at a price attractive to consumers. In addition, there is a significant reduction in energy efficiency from e-fuels, compared to simply using the renewable electricity directly in electric vehicle batteries. As an example, assume there is 100 kWh of renewable electricity available. If used directly in the battery of an electric vehicle, this could propel the electric vehicle over a distance of 400-600 km. If, however, it is assumed 50 kWh of renewable electricity were used to make an e-fuel, the energy content of this e-fuel (the remaining 50 kWh) would only propel the conventional vehicle a distance of around 88 km. In addition, of course, there would be CO₂ emissions from the vehicle during driving, from the combustion of the e-fuel. Although these considerations suggest that e-fuels and hydrogen may not be sensible for passenger cars, there may be other “harder to decarbonize” sectors (such as shipping, aviation, heavy duty transport) in which these find their niche.

4. Tribological Challenges with Electric Vehicles

4.1 Electric Vehicle Transmissions

Electric vehicle transmissions are quite different from those in conventional cars. In a modern conventional car, an automatic transmission may have as many as 8,9 or even 10 gears. However, in an electric vehicle, there are only three gears at most, so shaft speeds in a EV gearbox will generally be higher than those found in a conventional car (Gangaopadhyay [18] has noted that shaft speeds could be 15000 rpm or greater). In addition, of course, there is the possibility in some EV gearboxes that the lubricant may come into contact with copper wiring. Therefore, lubricants for EV gearboxes need to be formulated to protect against lubricant aeration and foaming, and require improved copper compatibility. In addition, Gahagan [19] and Beyer et al [20] have also reported that lubricant electrical and thermal properties need to be chosen carefully. Beyer et al [20] also note that the formulation balance is not straightforward since additives that impart friction durability, and anti-wear additives, tend to be antagonistic towards copper, and also tend to increase electrical conductivity.

4.2 Mild Hybrid and PHEV Engine Lubrication

For mild hybrid and plug-in hybrid electric vehicles (PHEVs), there is both an engine and a battery. In a mild hybrid vehicle, the battery is charged up via the engine only (and the battery tends to be relatively small (for the first-generation Toyota Prius XW30, from 2012-2016, the battery size was 4.4 kWh). In a PHEV, the battery tends to be larger (12-15 kWh) and the vehicle can typically travel around 50 km in electric only mode. In addition, in a PHEV, the battery can be charged externally. (A very recent review that contains data on the different battery sizes, in kWh, for different vehicles can be found in reference [21]).

Both mild hybrid and PHEVs have engines that are generally fitted with stop-start systems (so that when the vehicle is stationary with the parking brake engaged, the engine will stop). This means there will be many more stop-starts than for conventional vehicles, potentially leading to higher levels of wear. Fan et al [22] found that when the PHEV was run in electric only mode, the engine could still engage if accelerations were high and/or if the battery charge level was too low. The intermittent nature of engine operation can lead to lower engine oil temperatures (compared to that typical of conventional engines). In addition, Fan et al [21] found higher levels of fuel dilution in the lubricant (more details are given in Section 5). They also noted that tailpipe emissions (NO_x and PM) could be higher since the aftertreatment systems were not always at optimum operating temperature. There is also the danger that the engine could start operating when the vehicle is at high speed on a motorway, if the battery charge level is too low. If this happens and the oil pump has not sufficiently distributed oil to key components (such as pistons and valve trains) then the components could be operating at high speed with insufficient lubricant. The car manufacturer would need to ensure that the oil pump operates before the engine starts in such conditions, to avoid this possibility.

When the engine is operating in electric only mode, the engine is being constantly vibrated but no lubricant is flowing around the engine. Niizato, of Honda, highlighted that this could lead to fretting wear of the main engine bearings [23].

It should be noted that there are different configuration possibilities for hybrid electric vehicles. In a vehicle such as the Mitsubishi Outlander, the engine is connected directly to the wheels, and operates essentially as a conventional combustion engine, and conventional engine oils are used for engine lubrication. On the other hand, there are vehicles (such as those using Nissan's e-Power technology [24]) in which the engine operates only as a generator for the battery (and the engine is not connected to the vehicle wheels). In this type of system, the battery does not need external charging, yet impressive vehicle fuel consumption figures can be achieved (Nissan's Note e-Power Nismo S is quoted as having a fuel consumption of 2.9 litres per 100 km [25], equivalent to 97.4 miles per imperial gallon). In this type of design, the engine will operate over a much more restricted range of engine speeds and loads, and in principle, an engine lubricant could be optimized just for this operating cycle, the formulation of which could differ substantially from that of a conventional engine lubricant.

5. Fluid Requirements for Electric Vehicles

Battery electric vehicles will clearly not need an engine oil, but will still need a transmission oil, will need grease (both for the electric motors and other grease lubricated parts of the vehicle) and will also potentially need a thermal fluid for the battery.

5.1 Thermal Fluids for Control of Battery Temperature

At vehicle start-up, the thermal fluid will need to warm the battery up, and for high ambient temperatures, and/or for when the battery is being charged, the thermal fluid will need to cool the battery. The battery works optimally in a temperature range of about 20-40°C. If the battery is too cold, the electric vehicle range will decrease substantially. If the battery becomes too hot, there is a possibility of a thermal runaway reaction, which could lead to a battery fire. Good recent reviews of (fast) battery charging, and cooling methods for batteries can be found in references [26] and [27].

As discussed in reference [27] some electric vehicles (such as the Nissan Leaf) are air cooled – they simply rely on the flow of air through the battery cells to cool the battery (some cars rely on the motion of the vehicle for airflow through the battery, whereas others actively pump the external air so it flows faster through the battery cells). How-

ever, this is not entirely satisfactory as the air ambient temperature can vary widely. Many electric vehicles use indirect cooling, in which the batteries are in contact with a surface that is cooled (via the flow of a fluid). In a Tesla vehicle, thin pipes run through the battery cells, whilst a 50:50 propylene glycol/water mixture is pumped through the pipes, enabling heat to be removed from the battery. In a Tesla, the coolant volume is 7 litres. In other vehicles (such as BMW electric vehicles) the bottom surface of the vehicle is cooled by a refrigerant (the same fluid as used in the air conditioning system, R1234yf) and the battery cells sit on top of this cooled surface.

Direct (or immersive) cooling of batteries is thought to be the best solution but requires a redesign of the battery cell so that the insulating thermal fluid can flow directly over the battery cells. This thermal fluid would be in direct contact with the battery cells, and the amount of cooling (or heating) could be controlled by changing the flow rate. At the time of writing, no commercial electric vehicles available today use this technology, although it is used in some Formula E racecars.

Thermal fluids are commercially available from a number of suppliers such as 3M (Novec fluid [28]), Solvay (Galden perfluoropolyether (PFPE), [29]), MIVolt [30], and established lubricant companies such as Shell and Castrol are jointly working with direct immersion cooling companies (such as Kreisel [31] and Xing [32]) to develop thermal fluids based on hydrocarbon base oils. Some of these thermal fluids have also found application in direct immersion cooling of server circuit boards (resulting in significant electricity savings in server data centres). The final choice of fluid used will generally depend on a combination of: density, thermal conductivity, heat capacity, flash-point, cost, and environmental friendliness.

Finally, it should also be mentioned that some research is ongoing into the use of phase-change materials for electric battery cooling. Such materials rely on the large latent heat of vaporization that occurs during a phase change (for example, when a wax melts to become a liquid). Further information on work in this area may be found in references [33]-[35].

5.2 Electric Vehicle Transmission Lubricants

As pointed out in [36] the requirements of electric vehicle transmission lubricants are quite different from those of conventional automatic transmission fluids (ATFs). The specific requirements depend on whether the electric motor is in contact with the lubricant or not (wet e-motor or dry e-motor). The requirements on the fluid are set by the different electric vehicle transmission manufacturers, and there is, as yet, no industry standard specification. Key performance requirements for the transmission fluid in electric vehicle transmissions are: copper compatibility, electrical insulation, thermal properties (as the fluids need to cool e-motors), foam control and thermal stability. Friction control, which is key for standard ATFs, is of lesser importance for EV transmission fluids.

5.3 Engine Oils for Plug-In and Mild Hybrid Electric Vehicles

Generally, both mild and plug-in hybrid electric vehicles have used conventional engine oils for their lubrication. There is no separate industry standard lubricant specification in place for hybrid electric vehicle engine oils at the present time. The Toyota Prius has been a popular mild hybrid electric vehicle (over 5 million of these vehicles have been sold worldwide) and in the USA and Japan, the engine oil used will have been a standard API or ILSAC specification lubricant (whilst in Europe, a standard ACEA lubricant would have been used). There have only been a few studies on the impact of engine lubricant on hybrid electric vehicle lubrication. In 2014, Clarke [37] reported field trial data from Toyota hybrid vehicles used in taxi service in New York City (taxi type operation is generally regarded as the most severe type of driving for a passenger car).

The vehicles in the trial used ILSAC GF-5 quality engine oils. It was found that hybrid vehicle operation resulted in cooler lubricant operating temperatures, and more frequent engine starts. However, engine teardowns after more than 250,000 miles, for two vehicles, did not find significant wear issues, and there were no issues with wear metals or oxidation, with 10,000 mile oil drain intervals. There was some evidence of sludge, varnish and lacquer in some of the vehicles.

Fan et al [21] recently investigated the impact of oil viscosity and driving mode (hybrid versus conventional) on fuel dilution of the lubricant and emissions (including particle number) for different drive cycles (WLTC, the World-Wide Harmonized Light Duty Driving Test Cycle, and the continuous, ECE-15 portion of the New European Driving Cycle, NEDC). For hybrid operation the state of charge of the battery was controlled at a low level (10-13%) to ensure more engine starts. It was found in both driving cycles that frequent engine starts resulted in high particulate number (PN) and unburned hydrocarbon emissions. Lower oil operating temperatures were also reported. For the ECE-15 driving cycle, the oil temperature for conventional engine operation at the end of the driving cycle was approximately 95°C, whereas for hybrid engine operation, on the same driving cycle, the final oil temperature was slightly under 80°C. Fuel dilution was measured for both conventional and hybrid vehicle operation during continuous driving (using repeats of the ECE-15 cycle). After around ten ECE-15 cycles, the fuel dilution for conventional driving levelled off at around 1.5%. However, for hybrid operation, fuel dilution kept increasing as the number of ECE-15 cycles increased, and after twenty ECE-15 cycles, the fuel dilution increased to over 3%. The work showed that fuel dilution is potentially a critical issue for PHEV vehicles. The work by Fan et al [21] used Geely vehicles equipped with a 1.5 litre turbo-charged direct injection (TGDI) engine. In the work, engine oils with viscosity grade SAE 0W-20 and SAE 5W-30 were tested, and, as expected, use of the SAE 0W-20 lubricant viscosity grade gave lower fuel consumption.

Some lubricant manufacturers market lubricants which are claimed to be optimized for stop-start operation. However, since there are no industry standard tests for stop-start operation, these claims will be based on in-house tests. It is possible that as the numbers of hybrid vehicles increase, some OEMs may start to consider whether a separate lubricant specification should be developed.

In the work referenced above, both types of vehicle contained engines that were directly connected to the vehicle wheels, and so essentially operated as conventional engines, over a wide range of speeds and loads. There are vehicles available that operate differently, in which the engine in the hybrid vehicle is NOT connected to the wheels, and essentially operates as a generator for the electric battery (the vehicles that Nissan have in the e-Power range operate like this [24]). In this case, the engine operates over a much narrower range of speeds and loads than a conventional engine, and there would be potential benefits of developing an optimized lubricant for this specific type of operation.

5.4 Greases for Electric Vehicles

Electric vehicles are already affecting greases. Since electric vehicles generally use lithium-ion batteries, the demand for lithium is rapidly increasing, leading to higher lithium prices, which impacts the costs of lithium complex greases. Therefore, there has been a surge of interest in developing alternative greases that do not contain lithium [38] (see for example, the recent increased interest in the development of calcium complex greases [39]). For electric vehicle application, low noise greases are desirable (due to the lower overall noise level in an electric vehicle). In addition, there is increased interest in the performance of lubricants (and greases) in the presence of electric fields, as discussed in two recent reviews [40], [41].

6. Conclusions

Some of the motivations behind the increasing electrification of the passenger car vehicle fleet have been discussed, with the main ones being much improved energy efficiency, the potential for lower CO₂ emissions, lower (or zero) local emissions of NO_x and particulate matter, and lower overall total costs of ownership.

In Europe, there has been increasing decarbonization of the electricity systems, and examples have been given of how the UK electricity system has transitioned to lower carbon fuel sources in the last ten to twenty years.

With the new battery electric vehicles (BEVs) and hybrid electric vehicles come new tribological challenges particularly for electric vehicle transmissions and the engine that is used in a hybrid electric vehicle. To overcome these challenges, new fluids are needed for these applications, and even though a BEV will not need an engine oil, it will generally need a thermal fluid (to ensure that the battery stays within an optimum temperature range during both driving and fast charging).

The changing vehicle landscape will continue to provide challenges for tribologists and fluid developers, and there will be increasing interest, in the future, on how lubricants and fluids are impacted in the presence of electric and magnetic fields.

Supplementary Materials: N/A

Funding: This research received no external funding.

Data Availability Statement: Data in this paper can be found in the various references listed.

Conflicts of Interest: The authors declare no conflict of interest.

References

1. "Paris Agreement", United Nations Treaty Collection, https://web.archive.org/web/20210319011906/https://treaties.un.org/Pages/ViewDetails.aspx?src=TREATY&mtdsg_no=XXVII-7-d&chapter=27&clang=en
2. R.M. González, G. Marrero, J. Rodríguez-López & A.S. Marrero, "Analyzing CO₂ emissions from passenger cars in Europe: A dynamic panel data approach", *Energy Policy*, 2019, **129**, pp 1271-1281
3. J. King, "The King Review of Low Carbon Cars", 2007, <https://www.zemo.org.uk/assets/presentations/Julia%20King.pdf>
4. P. Nejat, F. Jomehzadeh, M.M. Taheri, M. Gohari & M.Z.A. Majid, "A Global Review of Energy Consumption, CO₂ Emissions and Policy in the Residential Sector (with an Overview of the Top Ten CO₂ Emitting Countries)", *Renewable and Sustainable Energy Reviews*, 2015, **43**, pp 843-862
5. <https://www.europarl.europa.eu/news/en/headlines/society/20190313STO31218/co2-emissions-from-cars-facts-and-figures-infographics>
6. <https://tfl.gov.uk/modes/driving/congestion-charge>
7. https://www.engineeringtoolbox.com/fossil-fuels-energy-content-d_1298.html
8. "Electric Vehicles", UK Houses of Parliament Parliamentary Office of Science & Technology PostNote, Number 365, October 2010, https://www.parliament.uk/globalassets/documents/post/postpn365_electricvehicles.pdf
9. "Carbon Footprint of Electricity Generation", Houses of Parliament Parliamentary Office of Science and Technology, Postnote Update, Number 383, June 2011 (https://www.parliament.uk/globalassets/documents/post/postpn_383-carbon-footprint-electricity-generation.pdf)
10. "Electric Vehicle Ownership Costs: Today's Electric Vehicles Offer Big Savings for Consumers", Consumer Reports, 2020 <https://advocacy.consumerreports.org/wp-content/uploads/2020/10/EV-Ownership-Cost-Final-Report-1.pdf>
11. K. Holmberg & A. Erdemir, "The Impact of Tribology on Energy Use and CO₂ Emissions Globally and in Combustion Engine and Electric Vehicles", *Tribology International*, **135**, pp 389-396, 2019
12. Q. Qiao, F. Zhao, Z. Liu, X. He and H. Hao, "Life Cycle Greenhouse Gas Emissions of Electric Vehicles in China: Combining the Vehicle Cycle and Fuel Cycle", *Energy*, **177** pp 222-233, 2019
13. UK Historical Electricity Data (from 1920 to 2019): <https://www.gov.uk/government/statistical-data-sets/historical-electricity-data>

14. "UK Energy Statistics, 2018 & Q4 2018", Department for Business, Energy & Industrial Strategy Press Notice, 28th March 2019: https://assets.publishing.service.gov.uk/government/uploads/system/uploads/attachment_data/file/791297/Press_Note_Mar_ch_2019.pdf
15. "Too Low to be True? How to Measure Fuel Consumption and CO2 Emissions of Plug-In Hybrid Vehicles, Today, and in the Future", ICCT Briefing Paper, July 2017, <http://www.theicct.org/file/2942/>
16. D. MacKay, "Sustainable Energy – Without the Hot Air", published by UIT, 2008
17. D. Cebon, "Blog: Should Lorries be Powered by Hydrogen", 25th June 2018, <http://www.csrf.ac.uk/2018/06/should-lorries-be-powered-by-hydrogen/>
18. A. Gangopadhyay, "Next Generation Driveline Lubricants for Electrified Vehicles", STLE TLT Webinar, March 2018
19. M. Gahagan, "Lubricant Technology for Hybrid Electric Automatic Transmissions", SAE paper 2017-01-2358, 2017
20. M. Beyer, G. Brown, M. Gahagan, T. Higuchi, G. Hunt, M. Huston, D. Jayne, C. McFadden, T. Newcomb, S. Patterson, C. Prengaman & M. Shamszad, "Lubricant Concepts for Electrified Vehicle Transmissions and Axles", Tribology Online, Vol. 14, Issue 5, pp 428-437, 2019
21. J.A. Sanguesa, V. Torres-Sanz, P. Garrido, F.J. Martinez & J.M. Marquez-Baria, "A Review on Electric Vehicles: Technologies and Challenges", Smart Cities, 4, pp 372-404, 2021
22. Q. Fan, Y. Wang, J. Xiao, Z. Wang, W. Li, T. Jia, B. Zheng & R. Taylor, "Effect of Oil Viscosity and Driving Mode on Oil Dilution and Transient Emissions Including Particle Number in Plug-In Hybrid Electric Vehicle", SAE 2020-01-0362
23. T. Niizato, "Tribology in Power-Train Tribology", presentation delivered at TTRF-Taiho International Tribology Symposium, Nagoya, Japan, 2017
24. https://www.nissan-global.com/EN/TECHNOLOGY/OVERVIEW/e_power.html
25. <https://www.roadandtrack.com/reviews/a35821860/nissan-note-e-power-nismo-s-is-the-future-of-hot-hatches/>
26. A. Tomaszewska, Z. Chu, X. Feng, S. O'Kane, X. Liu, J. Chen, C. Ji, E. Endler, R. Li, L. Liu, Y. Li, S. Zheng, S. Vetterlein, M. Gao, J. Du, M. Parkes, M. Ouyang, M. Marinescu, G. Offer & B. Wu, "Lithium-Ion Battery Fast Charging: A Review", eTransportation, 1, pp 1-28, 2019
27. G. Offer, Y. Patel, A. Hales, L. Bravo Diaz & M. Marzook, "Cool Metric for Lithium-Ion Batteries Could Spur Progress", Nature, Vol. 582, pp 485-487, 25 June 2020
28. https://www.3m.com/3M/en_US/oem-tier-us/applications/propulsion/ev-battery/novec-for-ev-battery/
29. <https://www.solvay.com/en/press-release/solvay-spotlights-materials-battery-show-0>
30. <https://mivoltcooling.com/>
31. <https://www.shell.com/business-customers/lubricants-for-business/news-and-media-releases/2020/shell-and-kreisel-electric-farm-strategic-alliance-to-offer-high-performance-electric-battery-solution.html>
32. https://www.castrol.com/en_gb/united-kingdom/home/castrol-story/newsroom/press-releases/castrol-and-xing-mobility.html
33. C. Liu, D. Xu, J. Weng, S. Zhou, W. Li, Y. Wan, S. Jiang, D. Zhou, J. Wang & Q. Huang, "Phase Change Materials Application in Battery Thermal Management System: A Review", Materials, 13, 4622, 2020
34. Y. Zhao, B. Zou, C. Li & Y. Ding, "Active Cooling Based Battery Thermal Management Using Composite Phase Change Materials", Energy Procedia, 158, pp 4933-4940, 2019
35. S. Landini, J. Leworthy & T.S. O'Donovan, "A Review of Phase Change Materials for the Thermal Management and Isothermalization of Lithium-Ion Cells", Journal of Energy Storage, 25, 100887, 2019
36. https://www.shell.com/promos/shell-efluids-white-paper/_jcr_content.stream/1557393426168/21d420a180929299e6513272f519fd1d87d240df/shell-white-paper.pdf
37. D. Clarke, "Understanding Lubricant Requirements of Hybrid-Electric Vehicles", SAE paper 2014-01-1476, 2014
38. "The Future of Lubricating Greases in the Electric Vehicle Era", Tribology & Lubrication Technology, STLE, May 2019
39. "Calcium Sulphonate Complex Greases", Tribology & Lubrication Technology, STLE, October 2016
40. J. Krim, "Controlling Friction with External Electric or Magnetic Fields: 25 Examples", Front. Mech. Eng. 5:22 (doi: 10.3389/fmech.2019.00022), 2019
41. H.A. Spikes, "Triboelectrochemistry: Influence of Applied Electric Potentials on Friction and Wear of Lubricated Contacts", Tribology Letters, 68, 90, 2020 (<https://doi.org/10.1007/s11249-020-01328-3>)