

Disclaimer/Publisher's Note: The statements, opinions, and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of MDPI and/or the editor(s). MDPI and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions, or products referred to in the content.

Review

A Review on Electrohydrodynamic (EHD) Pump

Yanhong Peng ^{1,*}, Dongze Li ², Xiaoyan Yang ³, Zisu Ma ³ and Zebing Mao ⁴

- ¹ Department of Information and Communication Engineering, Graduate School of Engineering, Nagoya University, Furo-cho, Chikusa-ku, Nagoya, Aichi, 464-8603, Japan
- ² Department of Intelligent Science and Technology, College of Computer Science and Technology, Qingdao University, 308 Ning Xia Lu, Laoshan District, Qingdao, Shandong, 266071, China
- ³ School of Computer Science, The University of Sydney, Sydney, NSW 2006, Australia
- ⁴ Department of Mechanical Engineering, Tokyo Institute of Technology, 2-12-1 Ookayama Meguro-Ku Tokyo, 152-8550, Japan
- * Correspondence: yhpeng@nagoya-u.jp

Abstract: In recent years, functional fluidic and gas electrohydrodynamic (EHD) pumps have received considerable attention due to their remarkable features, such as simple structure, quiet operation, and energy-efficient utilization. EHD pumps can be applied in various industrial applications, including flow transfer, thermal management, and actuator drive. In this paper, the author reviewed functional fluidic and gas EHD pump research in these aspects: the initial observation of the EHD effect, mathematical modeling, and the choice of pump structure, electrode configuration, and working medium. Based on the review, a summary of the development and latest research on EHD pumps can be provided for the readers. This paper conducts a critical analysis of the current limitations of EHD pumps and identifies potential areas for future research. Additionally, the potential application of artificial intelligence in the field of EHD pumps is discussed in the context of its cross-disciplinary nature. As many reviews on EHD pumps focus on rigid pumps, and the contribution of this review is to summarize and analyze soft EHD pumps that have received less attention, thus reducing the knowledge gap.

Keywords: functional fluidic pumps; electrohydrodynamic pumps; flow delivery; robotics

1. Introduction

Pumps have been vital in various micromotors and actuators in the last several decades, and it has promoted the development of various mechanical equipment. The EHD effect directly converts electrical energy into kinetic energy. The EHD pumps with functional fluid or gas that operate based on the EHD effect have received much attention recently. However, there are few papers reviewing the recent work on soft EHD pumps with the rapid rise of this field. This paper reviews the mechanism, structures, fluid types, and current progress of functional fluidic EHD pumps and EHD gas pumps, including soft pumps, as well as prospects for future development. We provide a reference for developing this emerging field by outlining relatively mature EHD research. Our contribution is to summarize and analyze soft and hard EHD pumps and reduce the knowledge gaps.

2. Brief History of EHD Pump

EHD effects were first discovered in 1629 by Cabeo, who observed that electric fields could attract sawdust, and he touched it and was repelled [1]. However, Cabeo did not know the rationale for this phenomenon. Over the next few hundred years, Wilson investigated the EHD effect using the term electric wind for the first time and tried to make it practical [2]. In 1961, a theory relating to ionic wind was developed by Robinson, who proposed it is possible to make functional electrostatic blowers, that is, the EHD gas pumps [3]. Although this electrostatic blower had the advantage of low worn and quiet operation without the requirement for lubrication comparing the conventional fan (i.e., a

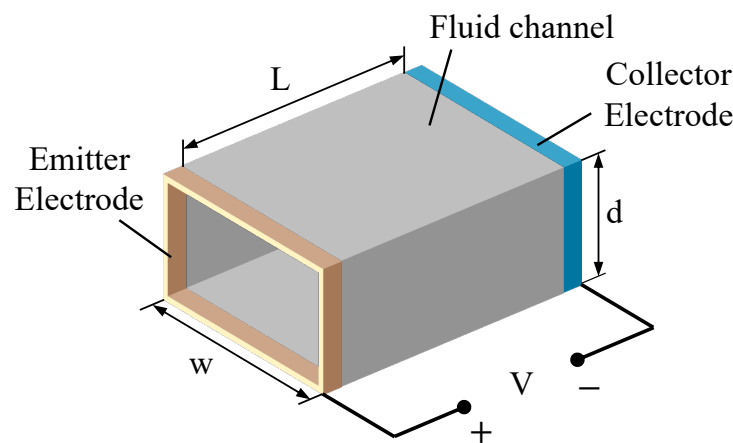


Figure 1. Geometry of fluid EHD pump [6]. L , d and w are channel length, depth and width, respectively. V denotes the high voltage power source.

mechanical pump), Robinson was disappointed by the inability to overcome the extremely low operating efficiency (the conversion efficiency was less than 1% from corona discharge to mechanical energy). The low conversion efficiency from electrical to mechanical energy was a limitation of EHD pumps. Many researchers attempted to improve the device structure using EHD pumps, and there have been some experimental studies focused on improving the flow rate and efficiency of EHD pumps. In 2008, Moreau et al. made substantial improvements [4]. Morrow et al. increased the electrical energy conversion efficiency to 1.72% for the pin-ring and pin-grid electrode configuration, which is more than twice the conversion efficiency in previous EHD effect studies. In recent times, the higher energy conversion efficiency of EHD pumps has also been demonstrated by June et al. [5]. June et al. experimentally tested a five-needle mesh-like EHD pump prototype and found static efficiencies of up to 14%.


Besides EHD air pumps, functional fluidic EHD pumps have also developed in recent decades. Sharbaugh et al. [7] was the first study using media other than air in EHD pumps, attempting to apply EHD pumps to transformers, but it is not practical because the electrode of the collector becomes contaminated after hundreds of hours of operation. Five years later, Crowley et al. was the first researcher to publish an experimental study on the behavior of multiple working fluids using a rectangular EHD pump with a parallel strip-to-strip electrode [6]. This paper develops a basic EHD pumping model to illustrate the working fluid's material properties. He applied the model to several experimental pumps reported earlier and found good agreement. Examples of this model demonstrate several new fluids suitable for EHD pumping. The author concluded that there are considerable differences in the maximum velocity that can be achieved for different fluids and that the maximum velocity for a given fluid cannot determine the maximum efficiency. The functional fluidic EHD pump geometry is depicted in Figure 1. Several years later, a multi-stage EHD pump with transformer oil as the working fluid was designed and can be a practical solution for motor cooling [8,9]. There are also studies using a dielectric fluid (dibutyl sebacate, an organic plasticizer) as a medium, both as a single-stage and a multi-stage configuration of the same geometry. There were also studies using a dielectric fluid (like dibutyl sebacate) as a medium, both as single- and multi-stage configurations of the same geometry [10,11].

Despite the computational conditions, the flawed theory of physics and materials science, and the limitations of experimental equipment, previous explorations built foundations for future research, as these results retain the majority of their validity even today.

3. Principles

3.1. Fluid theory and chemical synthesis methods

There is a reversible process of dissociation and recombination between the neutral substances of this structure and their corresponding positive and negative ions. These generated positive and negative ions can act as charge carriers between parallel electrodes. For example, a neutral species AB, and its positive A^+ and negative B^- ions have the following relation:



The dissociation-recombination process of the electrolyte is the only source of ions in the liquid, and the electric field in the EHD conduction pump is not high enough to generate charge injection from the electrodes [12]. This model consists of reversible processes of dissociation and recombination of neutral species that can be expressed as a state in equilibrium [13]:

$$k_D c_0 = k_R n_+^{eq} n_-^{eq} = k_R (n_{eq})^2 \quad (2)$$

where c_0 is the concentration of neutral species and n_+^{eq} and n_-^{eq} are the concentrations of positive and negative species (in equilibrium, $n_+^{eq} = n_-^{eq} = n_{eq}$). The dielectric liquid of the EHD conduction pump is non-polar or weakly polar, and the concentration c_0 of neutral substances can be considered constant. k_D and k_R are the dissociation and recombination rates, respectively.

The dissociation rate increases when an external electric field $|E|$ is applied, because of the Onsager-Wien effect [14]:

$$k_D(|E|) = k_D^0 F(w(|E|)) \quad (3)$$

where F is the Onsager function (4) and $w(|E|)$ is the enhanced dissociation rate coefficient (5),

$$F(w(|E|)) = \frac{I_1(4w(|E|))}{2w(|E|)} \quad (4)$$

$$w(|E|) = \frac{L_B}{L_O} = \left(\frac{e_0^3 |E|}{16\pi\epsilon k_B^2 T^2} \right)^{\frac{1}{2}} \quad (5)$$

$I_1(x)$ is the first kind modified Bessel function with order 1. L_B and L_O are the Bjerrum and Onsager distances, respectively [15],

$$L_B = \frac{e_0^2}{8\pi\epsilon k_B T}, \quad L_O = \sqrt{\frac{e_0}{4\pi\epsilon |E|}} \quad (6)$$

L_B is the distance between two ions where the electrostatic energy becomes of the same order as the thermal energy. When two ions are separated by less than L_B , they can be considered bounded in an ion pair because thermal motion cannot overcome their electrical attraction. The length L_O is the distance from the point charge at which the magnitude of the external electric field $|E|$ is of the same order as the electric field produced by the charge in the working medium. In (6), ϵ is the absolute permittivity (equal to the product of the permittivity of liquid and that of vacuum). For an external electric field to affect the equilibrium of an associated ion pair, the external electric field must be strong enough to affect the electrical attraction between ions in the associated ion pair ($L_O \leq L_B$). When $|E| = 0$, we have $w(0) = 0$ and $F(0) = 1$, and no enhancement occurs. In the presence of enhancement, assuming that the dissociation-recombination equilibrium does not change significantly, the equilibrium concentration of the ionic species is [16]:

$$n_{eq} = n_{eq}^0 \sqrt{F(w(|E|))} \quad (7)$$

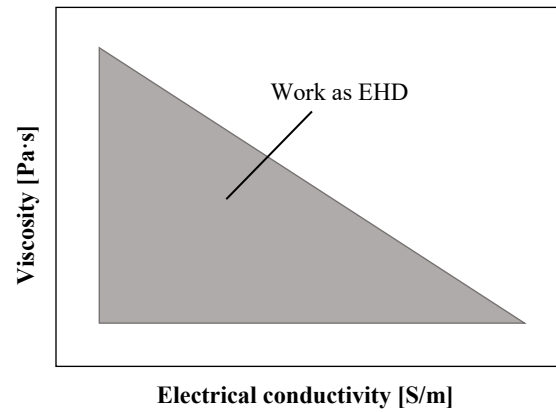


Figure 2. Distribution of working fluids in the electro-conjugate fluid triangle (log scale) [17]. The area inside the gray triangle is available for working fluids.

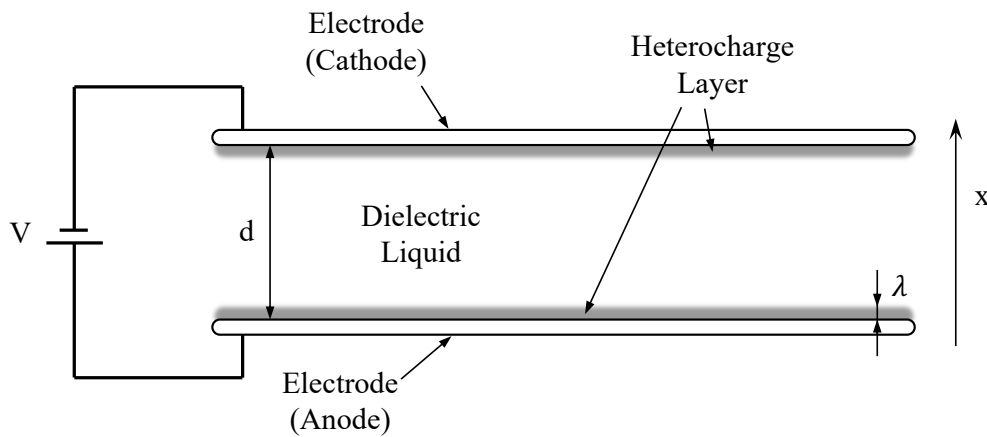


Figure 3. Parallel electrodes in dielectric liquid. V is the direct current (DC) supply, d is the electrode spacing, λ is the thickness of the heterocharge layer, and x is characteristic length for the normalization of the variable.

where n_{eq}^0 is the concentration of the ionic species without an applied external electric field. Conductivity is proportional to the concentration of ionic species at equilibrium. For symmetric electrolytes, it is

$$\sigma = 2e_0Kn_{eq} \quad (8)$$

where K is the ionic mobility. Moreover, the conductivity with the electric field can be expressed as

$$\sigma = \sigma_0 \sqrt{F(w(|E|))} \quad (9)$$

where σ_0 is the conductivity without field-enhanced dissociation. According to Mao et al. [17], the selection of working fluid can follow the Figure 2. Typically the dielectric fluid used in EHD pumps has a conductivity of 10^{-11} to 10^{-7} S/m [12].

3.2. Physical model

The basic EHD pump structure can be represented by two parallel electrodes immersed in a pure dielectric liquid [18], which is depicted in Figure 3. The resultant force drives the dielectric medium in the electric field is composed of Coulomb force, dielectric force and electrostrictive force.

Corona discharge in fluids is a complex physical phenomenon that has not yet been fully understood. However, we can simplify the mathematical problem by setting proper

boundary conditions [19]. Combined Poisson's equation (10) with Gauss' law (11) describing the electric field strength:

$$\nabla^2 V = -\frac{\rho}{\varepsilon_0} \quad (10)$$

$$\mathbf{E} = -\nabla V \quad (11)$$

where ρ , ε_0 and V are the space charge density, the dielectric permittivity of the fluid and voltage potential of the emitter electrode, respectively. Here, the space charge density ρ can be expressed by the volume concentration of positive n_+ and negative n_- species:

$$\rho = e_0(n_+ - n_-) \quad (12)$$

The current density \mathbf{j} can be described by the following equation because of the current continuity condition:

$$\mathbf{j} \cdot \nabla = 0 \quad (13)$$

Then, the current density \mathbf{j} passing through the dielectric liquid can be calculated as following:

$$\mathbf{j} = (\mu_e \rho \mathbf{E} + \rho \mathbf{U} - D \nabla \rho) \quad (14)$$

where μ_e is the ion mobility, D is the ion diffusion coefficient, and \mathbf{U} is the velocity of the fluid flow. Mathematical EHD problems can be simplified when proper boundary conditions are set. We can describe the motion of the fluid by the Navier-Stokes equation [20]:

$$\rho \cdot \left[\left(\frac{\partial \mathbf{U}}{\partial t} \right) + (\mathbf{U} \cdot \nabla) \mathbf{U} \right] = -\nabla p + \mu \nabla^2 \mathbf{U} - \rho \nabla V \quad (15)$$

where ρ is the density of the fluid, p is the pressure, and μ is the dynamic viscosity of the fluid. If the fluid flow has constant density and cannot be compressed, the continuity equation can be expressed as:

$$(\mathbf{U} \cdot \nabla) = 0 \quad (16)$$

In addition, the functional fluidic EHD phenomenon is due to the interaction of electric and flow fields in a dielectric fluid medium. The interaction between the electric field and the flow field causes flow motion through a ponderomotive force, and the density of this force can be expressed as follows [21,22]:

$$\mathbf{f}_e = \rho_e \mathbf{E} - \frac{1}{2} E^2 \nabla \varepsilon + \frac{1}{2} \nabla [E^2 \frac{\partial \varepsilon}{\partial \rho} \rho] \quad (17)$$

The first term is the Coulomb force, where ρ_e being the free electric charge density, \mathbf{E} being the electric field. This force is acting on the free charge in the electric field. The second and third terms represent the polarisation forces acting on polar fluids, where ρ is the free electric charge density, and ε is the dielectric constant. In a homogeneous fluid at constant temperature (i.e. $\nabla \cdot \varepsilon = 0$), the polarizing force is a gradient can be described as:

$$\mathbf{f} = \nabla \cdot p \quad (18)$$

where the p is the pressure. On the other hand, the electrostatic polarisation force or dielectrophoretic force is:

$$\mathbf{f}_d = \mathbf{P} \cdot \nabla \mathbf{E} \quad (19)$$

where \mathbf{P} is the polarization vector. The polarization force is only effective near the electrode, where the field gradient has the greatest effect. Moreover, the convective forces dominate in liquids with non-zero charge density. The main factor controlling the flow is the Coulomb force [23].

In the microscopic model, a fixed potential is assumed at the metal electrodes [12]. Therefore, the electrical boundary conditions on non-metallic substrates must be taken

into account. When an electrolyte comes into contact with a surface, an electric double layer (EDL) forms in the absence of an external electric field [24,25]. Assuming ζ is the potential difference between the surface of the liquid and the electrically neutral body. By utilizing the Debye-Hückel approximation, the potential of the undisturbed EDL can be approximated as:

$$\phi_{EDL} \simeq \zeta e^{-\frac{z}{\lambda_D}} \quad (20)$$

where z is the distance to the interface, and the volumetric charge density within the Debye layer can be described as

$$\rho_{EDL} = -\nabla \cdot (\epsilon \nabla \phi_{EDL}) = -\frac{\epsilon \zeta}{\lambda_D^2} e^{-\frac{z}{\lambda_D}} \quad (21)$$

Then, the total charge in the Debye layer can be expressed as:

$$Q_{EDL} = S \int_0^\infty \rho_{EDL}(z) dz = -\frac{\epsilon \zeta S}{\lambda_D} \quad (22)$$

where S is the area of the interface. As the liquid is electrically neutral, the total charge in the Stern layer is $-Q_{EDL}$, resulting in a surface charge of

$$\sigma_S = \frac{\epsilon \zeta}{\lambda_D} \quad (23)$$

Equation (23) represents a surface charge on an infinite plane whose electric field is $\frac{\zeta}{\lambda_D}$. Then, the electric boundary conditions on the positive and negative electrodes are $\phi = \phi_0$ and $\phi = 0$, respectively. Moreover, the electric boundary conditions of substrate is $\mathbf{n} \cdot \nabla \phi = \frac{\sigma_S}{\epsilon}$.

These equations can explain the mathematical model under appropriate boundary conditions. However, for irregular geometries where the voltage is a function of multiple coordinates, the mathematical model used to solve the described problem can become quite complex [19].

3.2.1. Pure mathematical model

Modeling EHD pump operation is a complex process governed by electrostatic and hydrodynamic partial differential equations. Manual solutions to these equations are complicated. Therefore, numerical methods are used to study and simulate EHD pump operation. The geometric parameters of the electrodes of the actuator and the working fluid can determine the performance of the EHD pump [6]. However, the modeling of parameters determined experimentally is costly. Therefore, the use of numerical simulation to predict the design of micro-pumps is used by many scholars. Experimentally validated simulation models are used primarily for fluidic EHD pump design, thermal management, and flow distribution. In addition to the mainstream finite element-based COMSOL Multiphysics commercial software, some open-source software such as OpenFOAM and Finite Element Method Magnetics can also be used for simulation. The softwares used in the numerical methods research in recent years are shown in Table 1.

Simulation software is mainly based on the finite element. Most fluidic EHD pump simulations have been performed with the commercial software COMSOL Multiphysics in recent years because of the friendly interaction and reliable algorithms. The software can represent physical model equations and boundary conditions using the Electrostatics, Laminar Flow, and Transport of Diluted Species modules [40]. The solver allows the solution to obtain accurate results within a reasonable period.

The high cost of commercial software has encouraged some researchers to use open-source software, though COMSOL Multiphysics conducted the majority of simulations. In addition, in future research, due to the recent rapid development of machine learning and

Table 1. numerical methods for fluidic EHD pumps simulation in recent years.

Year	Author	Problem type	Software
2008	Jewell et al. [26]	Flow analysis	COMSOL Multiphysics
2014	Fylladitakis et al. [27]	EHD pumps design	FEMM
2014	Ongkodjojo et al. [28]	Thermal management	COMSOL Multiphysics
2015	Chirkov et al. [29]	Flow analysis	COMSOL Multiphysics
2016	Luo et al. [30]	Flow analysis	-
2016	Yang et al. [31]	Flow analysis	COMSOL Multiphysics
2017	Kuwajima et al. [32]	EHD pumps design	COMSOL Multiphysics
2017	Sato et al. [33]	EHD pumps design	COMSOL Multiphysics
2018	Ramadhan et al. [34]	Thermal management	COMSOL Multiphysics
2020	Adamiak [35]	Flow analysis	COMSOL Multiphysics and ANSYS
2020	O'Connor and Seyed-Yagoobi [36]	Flow analysis	COMSOL Multiphysics
2020	Nourdanesh et al. [37]	Flow analysis	COMSOL Multiphysics
2020, 2021	Mao et al. [38,39]	Flow analysis	COMSOL Multiphysics
2021	Talmor and Seyed-Yagoobi [40]	Flow analysis	COMSOL Multiphysics
2021	Wang et al. [41]	Flow analysis	- (GPU based computation)
2021	Monayem [42]	Flow analysis	ANSYS/FLUENT
2022	Selvakumar et al. [43]	Thermal management	OpenFOAM
2022	Mazumder et al.	Thermal management [44], flow analysis [45]	ANSYS/FLUENT

increasing open-source projects, the author believes that neural networks can be used to explore the relationship between various parameters of the working fluid and the operation performance of the EHD pump [46,47]. After the vigorous development of computing resources, more research and applications exist on the EHD pump.

4. Pump Structure and Material

This section introduces the EHD functional fluidic and gas pump’s base, electrode material, and geometry selection.

Many EHD pump electrode geometries exist, such as needle, ring, planar, wire, mesh, and disk. These electrodes can form five basic electrode pairs in functional fluidic EHD pumps: thin planner electrode pairs, needle-to-ring electrode pairs, disk electrode pairs, triangular prism-to-silt electrodes (TPSE), and helical electrodes. Schematic of some electrode pairs are shown in Figure 4. Thin planner electrode pairs can have a low power density of

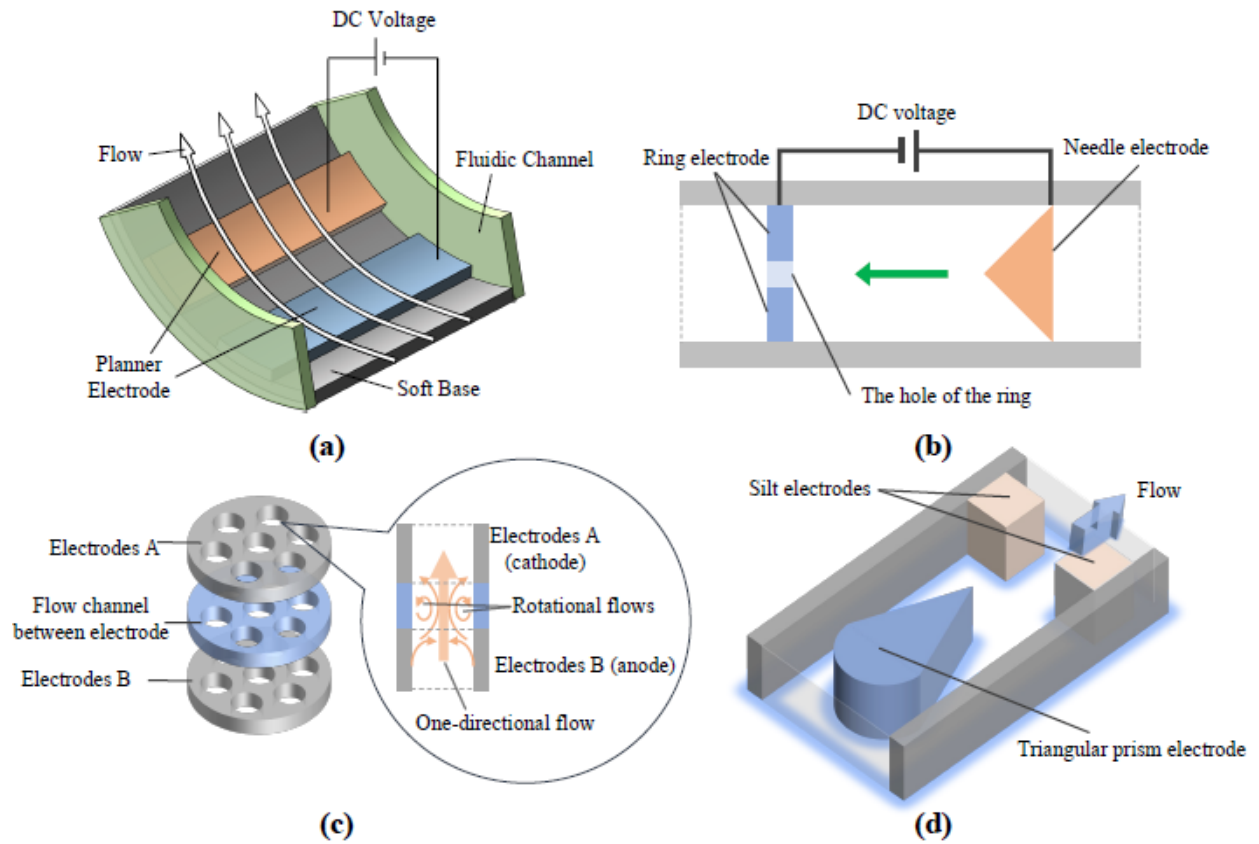


Figure 4. Schematic of functional fluidic EHD pump with various electrode types. (a) Planar electrodes [38]. (b) Needle-to-ring electrodes [48]. (c) Disk electrodes [49]. (d) Triangular prism-to-silt electrodes [17,39,50].

6.3 Wm/cm² [51] while needle-to-ring electrode pairs and TPSE are 111 Wm/cm² [52] and 17.5 Wm/cm² [53]. Thin planar electrodes and TPSE generally use photomask patterning, which is easy to reproduce, but needle ring electrodes are mainly assembled manually, with low reproducibility [54]. Moreover, thin planar electrodes and TPSE are fabricated with batches and are easy to integrate. However, needle ring electrodes are individually manufactured and hard to integrate.

Different electrode shapes can affect conduction pumping properties such as static pressure, flow rate and efficiency [58]. The flow and pressure of an EHD pump increase as the applied voltage increases. The consumption of the pump is on the order of mW. The flow and pressure of the EHD functional fluidic pump depend on the pattern of the electrodes. Compared with needle ring and thin planar electrodes, triangular prism and silt electrode pair electrode patterns are widely used due to their high output power density, and high compatibility with Micro-Electro-Mechanical System processes [39]. The material of the electrode can affect the performance of the pump as well. For example, using parallel planar electrodes and HFE-7100 as the working fluid, the same design using copper electrodes requires more than twice the voltage to produce the same performance [55].

The base material of EHD pump can be hard or soft. Hard material includes silicon and glass [67]. Soft material contains PTFE, PET and PP. Rigid EHD pumps installed with rigid bases are used to drive the actuators, while soft EHD pumps loaded with flexible bases power the actuators and the soft parts of the bodies [68]. EHD pumps with flexible bases can achieve states such as bending and twisting.

Table 2. Summarized material and geometry of functional fluidic EHD pumps in recent years.

Year	Author	Electrode material	Base material	Electrode geometry
2010	Yu et al. [55]	Copper, silver and gold	Silicon	Planner
2011	Seyed-Yagoobi et al. [56,57]	Stainless steel	PTFE	Disk
2013	Kano and Nishina [58]	Cr/Au	Glass	Planner
2014	Patel and Seyed-Yagoobi [59]	Stainless steel	PTFE	Disk
2016	Russel et al. [60]	Au	Glass	Planner
2019	Nagaoka et al. [61]	Tungsten and brass	Glass	TPSEs and needle-to-ring
2019	Tsukiji et al. [49]	Copper	-	Disk
2019, 2020	Mao et al. [17,39,50]	Ni/Au	Glass	TPSEs
2020	Seki et al. [62]	Copper	PET	Planner
2020	Mao et al. [48]	Tungsten and brass	Glass	Needle-to-ring
2020	Vasilkov et al. [63]	Aluminum	PET	Ring
2020	O'Connor and Seyed-Yagoobi [36]	-	-	Helical
2020	Blanc et al. [64]	Copper	PTFE	Disk
2020	Murakami et al. [65]	Copper	PP	Planner
2022	Mao et al. [66]	Copper	PP	Planner

The selection of base material, electrode material and geometry of functional fluidic EHD pumps in recent years is summarized in Table 2.

Electrode materials such as aluminum, copper, titanium, and steel are commonly corroded by corona [72,73]. Noll et al. performed ionization tests using germanium and silicon needles to overcome corrosion effects [74]. Sometimes it is also possible to apply a corrosion-resistant material to the electrode surface [75];

EHD gas pumps mainly use the electrode pairs like wire-(rod/ring/plate/mesh), mesh-(rod/ring), and needle-(plate/ring). Figure 5 shows several representative electrode pairs. Moreover, most studies choose acrylic and glass as the material for the discharge chamber.

Electrode polarity, number of electrodes, and orientation of electrodes affect the flow of working gas in an EHD pump. Zhang and Lai [76] tried configuring 28 emitter electrodes in a square channel. Increasing the number of emitter electrodes, the electric field tends to become more uniform, but there is also a limit to the volume flow that an EHD gas pump can produce. After adding the secondary emitter electrode by Chang et al. [77], the secondary electrode can effectively increase the volume flow generated by the single primary electrode. However, its performance depends on the number of secondary electrodes added and the gap distance between primary and secondary electrodes. Another way to increase the volume flow rate is to use new electrode configurations, such as needle array-to-mesh

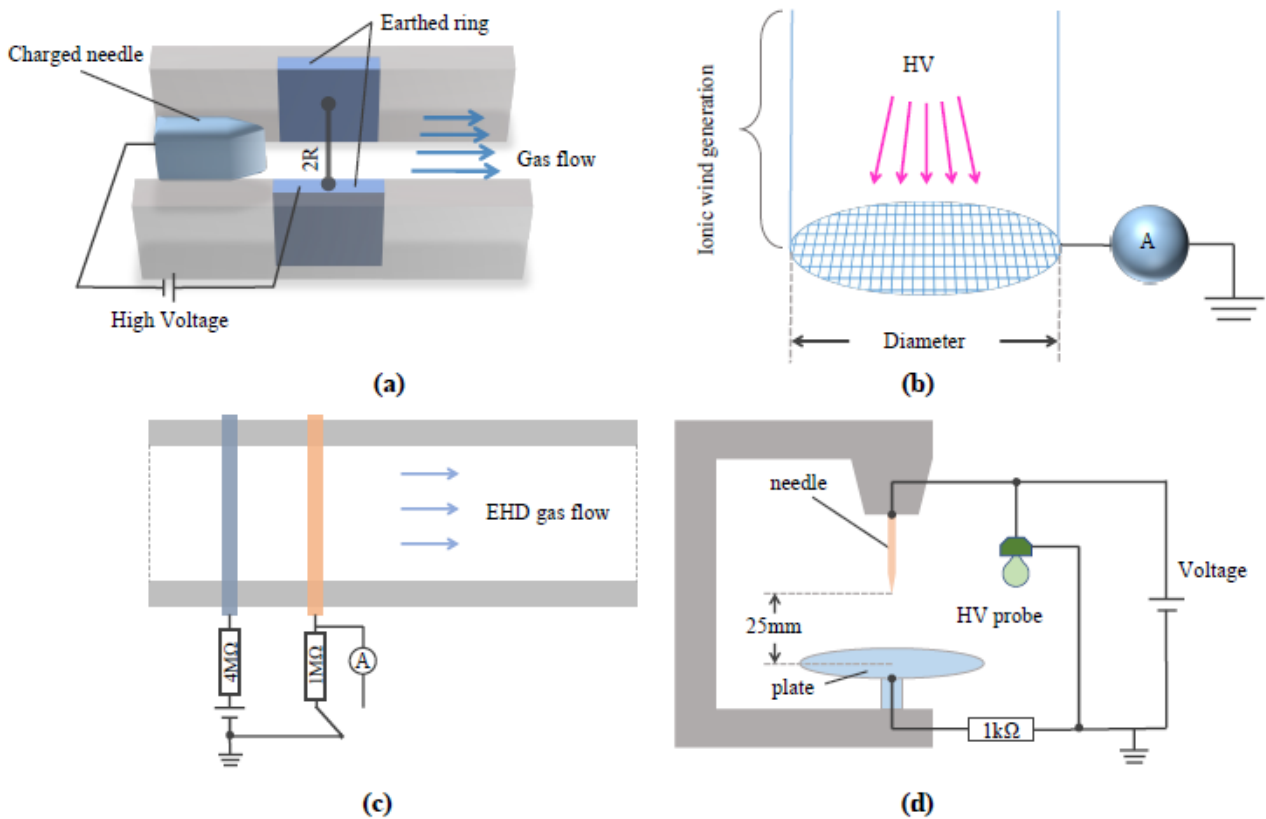


Figure 5. Schematic of EHD gas pump with various electrode types. (a) Needle-ring electrodes [69]. (b) Mesh-ring electrodes [4]. (c) Wire-rod electrodes [70]. (d) Needle-plate electrodes [71].

[78,79] and wire array-to-mesh [27]. While these new electrode configurations generally result in higher volumetric flow rates, some inconvenience to maintenance may occur in the application. Moreover, multi-stage EHD pumps [80,81] are more efficient than simply increasing the applied voltage of a single-stage pump if the flow distance is expected to be extended [82]. Investigated connecting multiple corona wind turbines in series to extend the EHD-induced flow over longer distances and confirmed that additional stages could increase the volumetric flow produced by a single individual stage [83].

The selection of base material, electrode material, and geometry of EHD gas pumps in recent years' research are summarized in Table 3.

5. Working medium

To operate EHD pumps, the working medium must be dielectric fluid. Furthermore, free charges need to exist in the fluid and establish an electric field. In a corona discharge, free charges can be generated in the air by breaking down neutral air molecules in the ionization zone near the emitter electrode. With the application of a high electric field, the generated ions or electrons are repelled by the emitter electrode and migrate towards the collector electrode by Coulomb force. During transport, collisions between charged particles and neutral air molecules can create pairs of ions or electrons.

To select a suitable working medium for an EHD pump, several factors should be considered:

Table 3. Summarized material and geometry of EHD gas pumps in recent years.

Year	Author	Electrode material	Discharge chamber material	Electrode geometry	Interelectrode gap [mm]
2006	Rickard et al. [69]	Copper and steel	Acrylic	Needle-ring	12.5
2008	Moreau and Touchard [4]	-	Plexiglas	Mesh-ring	5, 10, 15, 20
2011	Takeuchi et al. [70]	-	Acrylic	Wire-rod	13
2015	Birhane et al. [82]	Copper	Acrylic	Ring-wire	20, 50
2015	Quan et al. [84]	Stainless-steel	Glass	Mesh-rod	-
2016	Mizeraczyk et al. [85]	Stainless-steel	Acrylic	Needle-plate	25
2018	Moreau et al. [71]	Stainless-steel	-	Needle-plate	25
2019	Gao et al. [86]	Stainless-steel	Glass	Mesh-rod	-
2020	Qu et al. [87]	Tungsten and stainless	Acrylic	Needle-ring	6, 11, 16, 21, 26
2020	Chang et al. [77]	Copper	Acrylic	Ring	15, 20
2022	Rubinetti et al. [88]	Stainless-steel	Acrylic glass	Mesh-wire	50
2022	Yang et al. [89]	Stainless-steel	Acrylic glass	Mesh-wire	10
2022	Li et al. [90]	Tungsten, copper	Acrylic	Plate-wire	5

1. Conductivity: The working medium must be a dielectric material, otherwise the EHD phenomenon will not occur [6,91]. For example, to achieve a stable pulsed jet mode of ejection in [92], the electrical conductivity of inks should not exceed 10^{-5} S/m.
2. Viscosity: The working medium should have a low viscosity in order to minimize energy loss due to friction [6,93].
3. Corrosion: The working medium should be compatible with the materials of the pump, as certain fluids can cause corrosion or other damage to the pump components [94,95].
4. Temperature: The working medium should be able to withstand the temperature range of the application, and not cause any thermal changes or decomposition in the fluid [96].

5.1. Functional fluidic EHD pump

The working fluid is confined between the micropatterned electrodes. When the electrodes are charged, conduction occurs due to the positive and negative ions produced by the dissociation of liquid molecules in a state of a high electric field. The charged surface attracts counterions and repels co-ions (on the dielectric liquid side), forming a heterogeneous charge layer away from the double layer. If an electric field with a component of the electrode plates is applied, Coulomb forces will be exerted on these mobile ions, and the electromigration of the heterogeneous charge layer drags the bulk fluid through viscous interactions. The working medium of functional fluidic EHD pump used in recent years are summarized in Table 4. HFE-7100, HFE-7200, HFE-7300, and dibutyl decanedioate (DBD)

Table 4. Working medium adoption of functional fluidic EHD pumps in recent years.

Year	Author	Working medium
2007	Lee et al. [97]	HFE-7100
2010	Yu et al. [55]	HFE-7100
2011	Seyed-Yagoobi et al. [56,57]	HCFC-123
2013	Kano and Nishina [58]	HFE-7100
2014	Patel and Seyed-Yagoobi [59]	HCFC-123
2016	Russel et al. [60]	HFE-7100
2019	Nagaoka et al. [61]	FF-1EHA2
2018	Tsukiji et al. [98]	HFE-7100
2019	Tsukiji et al. [49]	HFE-7300
2019	Mao et al. [17]	DBD and HFE-7200
2019, 2020	Mao et al. [39,50]	DBD
2020	Seki et al. [62]	HFE-7300
2020	Mao et al. [48]	FF-1EHA2 and FF-101EHA2
2020	Vasilkov et al. [63]	GK-1700 Transformer oil
2020	O'Connor and Seyed-Yagoobi [36]	HFE-7100
2020	Blanc et al. [64]	HFE-7000, 7100, 7200, 7300, 7500 and Acetone
2020	Murakami et al. [65]	HFE-7300
2022	Mao et al. [66]	HFE-7300

were popularly used as the working fluid in many studies. Their specific parameters are shown in Table 5 [58].

Impurities on the electrode surface strongly influence the current flowing through the dielectric liquid because the impurities appear as ions. In addition, the pressure generated by the Coulomb force is greatly affected by impurities. Therefore, in order to remove impurities, the electrodes need to be cleaned.

5.2. EHD gas pump

Different from functional fluidic EHD pumps, the working mediums of EHD gas pumps are gas.

The electrical characteristics of surface discharges are compassionate as a function of different atmospheric parameters such as ambient gas humidity, pressure temperature [104]. More details can be found in [105]. To summarize, some trends can be given as follows:

1. When the relative air humidity increases, the discharge stability decreases [106];

Table 5. HFE-7100 and HFE-7300 properties.

Property	HFE-7100 [99,100]	HFE-7200[101,102]	HFE-7300 [99,103]	DBD [17]
Chemical formula	$C_5H_3F_9O$	$C_2F_9OC_2H_5$	$C_7H_3F_{13}O$	$C_{18}H_{34}O_4$
Kinematic Viscosity [cSt]	0.38	0.61	0.71	-
Dielectric constant @ 1kHz	7.4	7.3	6.1	4.54
Liquid mass density [g/cm ³]	1.51	1.43	1.67	0.94
Dielectric Strength Range, 0.1" gap [kV]	>25	>25	>25	-
Electrical conductivity [S/m]	-	67×10^{-9}	-	5.6×10^{-9}

Table 6. Some dielectric gas properties (Atmospheric pressure)

Gas	Formula	Breakdown voltages (300K) [kV/cm]	Density (273.15K) [g/L]
Air [110,111]	Mixture	30	1.2
Argon [112,113]	Ar	20	1.78
Nitrogen [112,114]	N_2	40.1	1.25
R134a [115,116]	$C_2H_2F_4$	31	-

2. Pressure plays a fundamental role on discharge below 60°C while temperature has no effect [107];
3. The surface of the dielectric wall will greatly affect the electrical characteristics of the discharge [108];
4. Airflow alters the physical mechanism if discharged in free airflow and significantly limits the transition from glow to arc [109].

HFE-7100, HFE-7200, HFE-7300 and dibutyl decanedioate (DBD) were widely used as the working gas in many studies. Their specific parameters are shown in Table 6. In addition, the working medium of of EHD gas pump used in recent years is summarized in Table 7.

6. Recent progress

The top ten journals that currently accept studies on the research topic of EHD pumps are depicted in Figure 6 [131]. The data reveals that the majority of the research results are disseminated in journals within the fields of electrical science, mechanical science, and thermodynamics.

Due to recent developments in microelectronics, functional fluidic EHD pumps have attracted great attention from many researchers in soft actuator technology. Additionally, EHD air pumps are considered a viable replacement for conventional fans or pumps in some applications, and can be used for electronics cooling, microfluidics device and biology.

Table 7. Working medium adoption of EHD gas pumps in recent years.

Year	Author	Working medium
2003	Feng and Seyed-Yagoobi [117]	R134a
2011	Takeuchi et al. [70]	Air
2014	Nangle-Smith and Cotton [118]	R134a
2015	Dinani et al. [119]	Air
2015	Birhane et al. [82]	Air
2016	Mizeraczyk et al. [85]	Air
2018	Van Doremaele et al. [120]	Helium
2018	Moreau et al. [71]	Air
2018	Granados and Victor [121]	Argon, Nitrogen, Oxygen
2018	Nangle et al. [122]	R134a
2019	Reiser et al. [123]	Argon
2019	Gao et al. [86]	R113
2020	Chi et al. [124]	Nitrogen
2020	Calvo et al. [125]	Argon
2020	Polat and Izli [126]	Air
2022	Calvo et al. [127]	Argon, Xenon
2022	Dima et al. [128]	Nitrogen
2022	Hassan and Mohammad [129]	Nitrogen
2022	Li et al. [90]	Air
2022	Singh et al. [130]	R134a

Moreover, EHD air pumps also have applications in flow control and drying enhancement [132–135], but this paper does not introduce them in detail. Furthermore, with the recent successful demonstration of the flight of an EHD propulsion aircraft by Xu et al. [136], there has been increasing excitement and enthusiasm for the study of EHD technology.

6.1. Soft robotics

Functional fluidic EHD pumps have been widely used in driving actuators. The mechanism uses a high electrical voltage to induce dynamic motion in a fluid medium, converting electrical energy into a mechanical output. EHD pumps are generally quieter and smaller than high-pressure gas-driven soft robots such as [138–140]. For present applications in soft pumps, the EHD using the ion-drag working mode is the primary type because of high flow rate and relatively simple design [141,142]. In 2019, A popular soft fluid EHD pump was the soft stretchable pump proposed by Cacucciolo et al. [68].

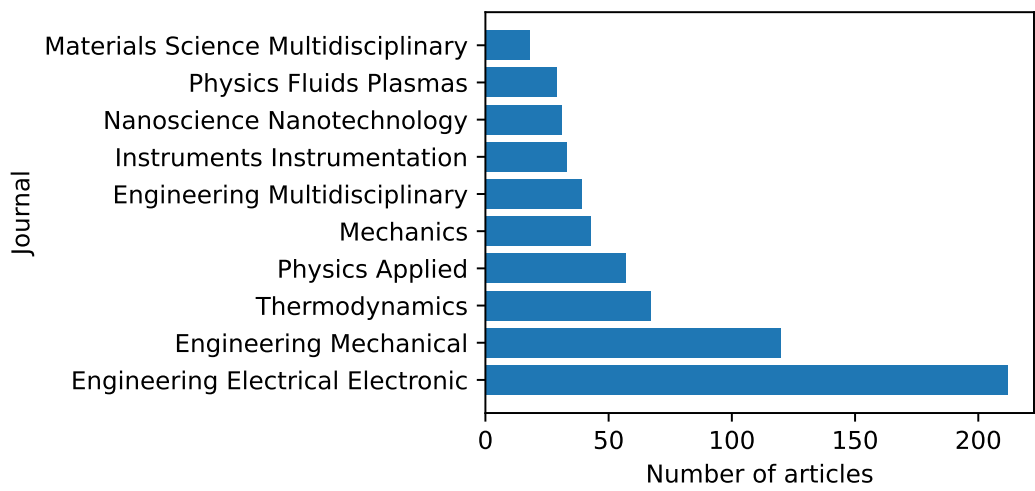


Figure 6. Distribution of accepted journals.

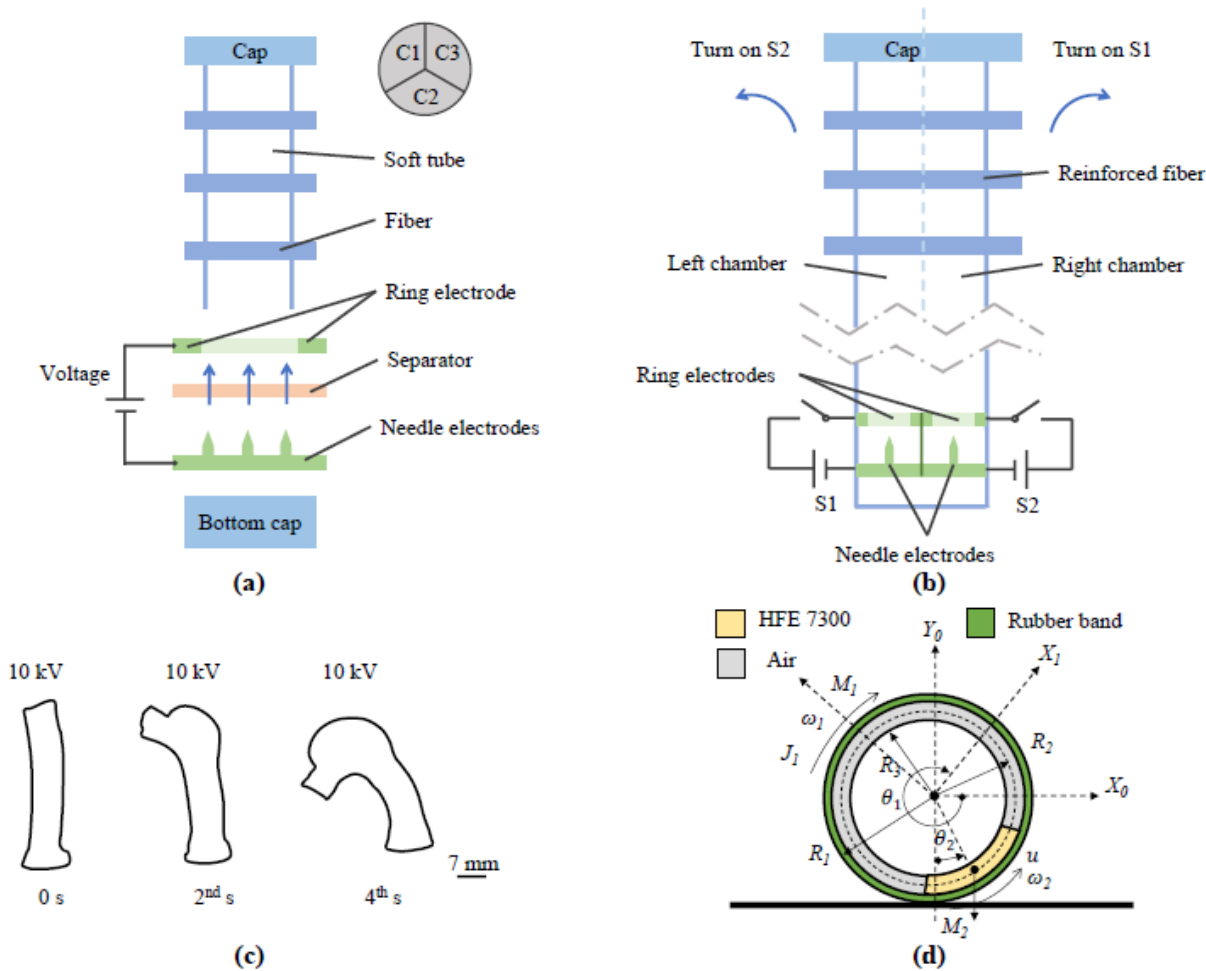


Figure 7. Soft robots driven by EHD pumps. (a) Soft fiber-reinforced bending finger [48]. (b) Soft finger with bidirectional motion [61] (c) Eccentric actuator [137]. (d) Fluidic rolling robot [66]

Cacucciolo et al. have designed and developed four generations of stretchable pumps. The first generation circuit consisted of five tilting capacitors spaced 1 mm apart. It operates on the EHD conduction pump principle. The second generation is a scaled-down version of the first generation, with half the channel size, half the electrode gap, and 43 tilting capacitors. The third generation relies on a charge injection mechanism and thus exhibits a different electrode layout: two series of comb planner electrodes face each other. The fourth generation has the same geometry as the third generation. However, the electrode material has been replaced by commercial silver ink because using silver particles as the conductive material can solve the performance degradation of carbon-based electrodes. In this structure, Two pairs of comb planner electrodes are responsible for ionizing the liquid molecules and moving the ionized molecules from left to right.

Recently, many soft actuators have been inspired by this design. A soft fiber-reinforced bending finger (Figure 7 (a)) was fabricated by Mao et al., and one chamber of the soft finger expands with the internal pressure generated by the pump, while the other two chambers, which act as containers for the working medium, contract, eventually causing the finger to bend [48]. Then, this finger-type actuator realized bidirectional motion by Nagaoka et al (Figure 7 (b)). [61]. Moreover, Mao et al. (Figure 7 (c)) proposed an eccentric actuator, which can bend as the applied voltage increases.[137]. Recently, a novel rolling robot (Figure 7 (d)) was designed consisting of a flexible EHD pump and a layer of natural latex, and the robot can roll as the working dielectric oscillates using a high-voltage circuit [66]. Apart from this, Thongking et al. implemented object grabbing using soft robotic gripper [143] and Mao et al. designed a droplet sorter driven by a functional fluidic pump [144]. The functional fluidic pumps provide the basis for many soft robot designs because they are soft and work quietly, but their performance is insufficient for many high-power applications.

6.2. Cooling device

Many researchers, Yabe et al. [148], Singh et al. [149], Bryan and Seyed-Yagoobi [150], and Cotton [151] have studied the effect of DC electric fields on thermal convection. They found that the heat transfer enhancement and pressure drop penalty increased with the increasing applied voltage, and the maximum is limited by the breakdown voltage. Depending on the geometry and electrode configuration, the voltage drop loss due to EHD can fluctuate widely (between 2 and 15 times). Moreover, Feng et al. described the effective management of liquid flow distribution between two branch lines using an EHD conduction pump at total mass flux rates of 100 and 200 kg/m²s [152]. Furthermore, Vasilkov et al. discovered that Onsager’s theory can be applied to field enhancement by simulating the enhancement of heat transfer and dissociation in relation to the EHD process [153]. Heat transfer enhancements in the range of 200-300% are typical [118].

EHD cooling devices are designed in various shapes. O’Connor et al. have used a comb and circular-shaped electrodes (Figure 8 (a)) and made the pump produce significant flow rates with and without bending [145]. Zeng et al. used EHD gas pumps with needle electrode strips (Figure 8 (b)) to investigate the effects of the arrangement of the needle electrodes, the structure of the mesh electrodes, the gap between the needle tip and the mesh, and the distance on the output speed and power consumption of the ion air pump [146]. The optimized ion air pump can reduce the surface temperature of the 200W power heat source by more than 30°C. Tien et al. tested effectiveness in maintaining and increasing volumetric flow and reducing power requirements using multiple single-stage EHD air pumps (Figure 8 (c)) [147]. Ramadhan et al. proposed a new cooling system design that can be used in consumer electronic products such as notebook computers using EHD pumps (Figure 8 (d)) [78].

In addition, multi-phase flow is interested by many researchers. For example, Pearson and Seyed-Yagoobi created a configuration of pumping in a radial direction, which minimized the distance the working fluid had to travel [154], and Patel et al. was success-

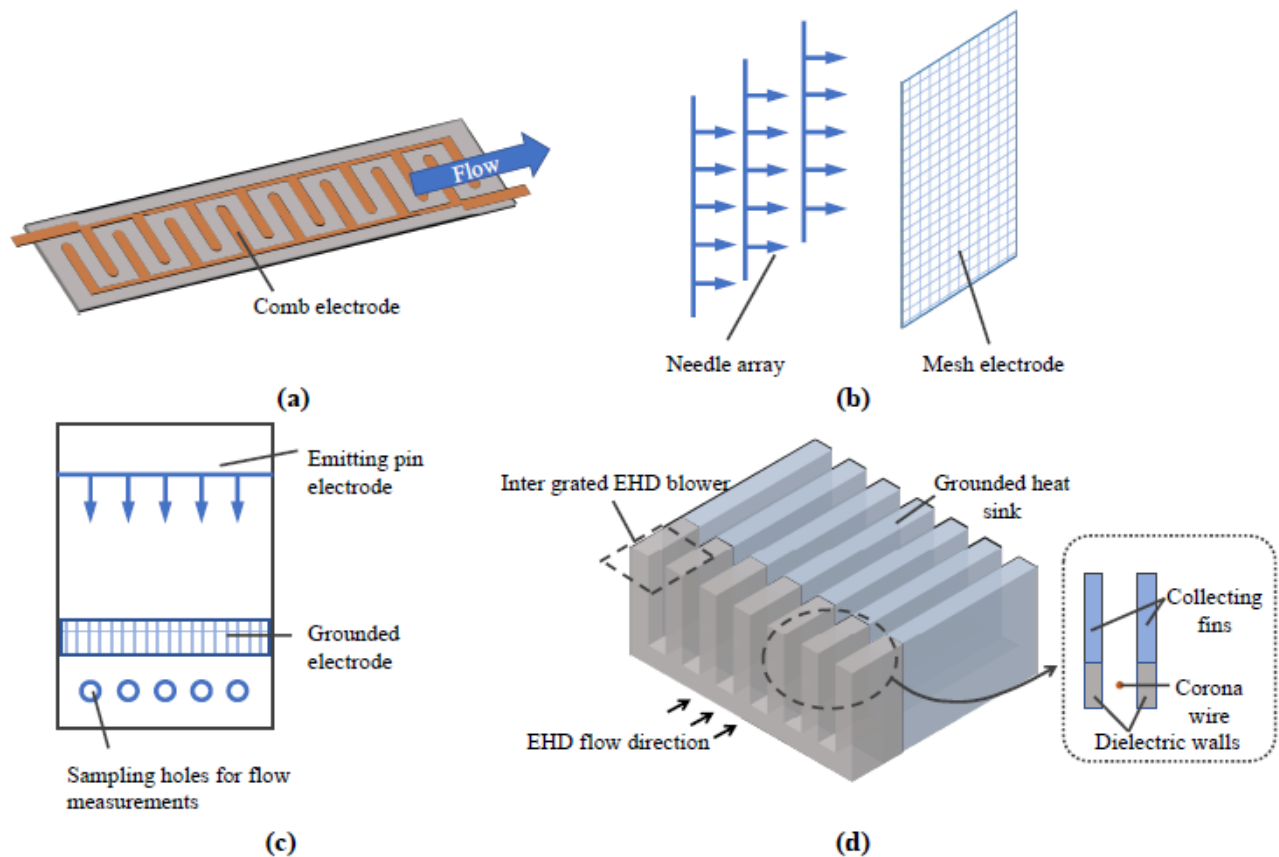


Figure 8. Cooling device. (a) Pump produce significant flow rates with and without bending [145] (b) Air pump for multi parameters testing [146] (c) Multiple single-stage EHD air pumps [147] (d) Notebook computers cooling system [78]

ful in utilizing EHD pumps for electrowetting of heaters during film flow boiling under microgravity conditions [155].

EHD gas pumps can be used for thermal management because of the potential to remove heat from high-density flux heat sources [43] and no mechanical parts are involved during operation. In addition, it is essential to determine the inlet design parameters of the EHD pump, such as the nature of the working medium, and the pump size, which directly affects the heat transfer performance. For example, Blanc et al. [156] experimented with functional fluidic EHD pumps for heat pipe solutions for the thermal management of embedded missiles. O'Connor et al. focused on electrical equipment cooling and proposed the possibility of being incorporated into flexible electronics [145]. Moreover, Nishikawara and Yagoobi provided the pumping performance of a micropump with three pairs of perforated electrodes designed to be fabricated and integrated into a high heat flux evaporator embedded in an electronics cooling system [157]. Recent studies have demonstrated the possibility of functional EHD pumps to provide cooling support for military, aerospace, and consumer electronics.

6.3. Future research

In the realm of EHD pumps, there exist a number of limitations that must be taken into account during the design and implementation process. These include: the small-scale nature of the pumps, the tendency to operate optimally with low-viscosity fluids [93] and low flow rates, the requirement for dielectric fluids and susceptibility to corrosion in harsh environments [72,95]. Despite these limitations, ongoing research efforts aim to address

and overcome these challenges, ultimately leading to improved design and performance of EHD pumps.

There are numerous research opportunities that could enhance the capabilities and applications of EHD pumps in the future. These include the creation of microscale EHD pumps, studying multiphase flow, improving efficiency, high-temperature operation, biomedical applications, and mathematical modeling.

The miniaturization of EHD pumps could open new avenues for use in small-scale devices and microfluidic systems [158]. Research into multiphase fluid pumping could broaden the range of materials that can be pumped with EHD pumps [159]. Efforts to improve efficiency through new electrode configurations and materials could reduce energy consumption and operational costs. High-temperature EHD pumping research could open up new possibilities in industries such as power generation and aerospace [130,160]. Biomedical applications, such as drug delivery [161] and cell separation [162], could be possible with EHD pumps.

In addition, mathematical modeling and simulation can help optimize the performance and efficiency of EHD pumps. Machine learning can be a powerful tool in EHD pump research for modeling, optimization and control. Through machine learning algorithms, researchers can create more precise mathematical models of EHD pumps and optimize performance by determining the optimal operating conditions and the best electrode configurations and materials [47]. Machine learning can also be used to identify and diagnose problems with the pumps and schedule maintenance accordingly [46]. Additionally, machine learning can assist in the development of control strategies, such as adaptive control, that can enhance the performance of EHD pumps [163]. By integrating machine learning with computational tools in EHD pump research, more efficient and reliable EHD pumps can be developed for various industrial applications.

7. Conclusion

This article reviews the latest developments in functional fluidic and gas EHD pump and summarizes the selection of pump structures, electrodes, and working medium in recent studies. EHD pumps are rapidly developing and have significant research potential in multiple disciplines. Industrially, EHD pumps have practical applications in various industries, such as robotics, aerospace, and electronics, and has the potential to develop in the consumer market. The recent research on practical devices based on EHD pumps has focused on soft robotics design, electronics cooling and microfluidics. The authors are optimistic about this technology’s future in soft robotics applications.

Author Contributions: Y.P. contributed to review literature and write the draft paper. D.L. helped edit the tables, formulas and illustrations. X.Y. and Z.Ma. contributed to literature collection, concept development of this review. Z.Mao. contributed to grant applications and article revisions.

Conflicts of Interest: The authors declare no conflict of interest.

Abbreviations

The following abbreviations are used in this manuscript:

DBD	Dibutyl decanedioate
ECF	Electro-conjugate fluid
PET	Polyethylene terephthalate
PP	Polypropylene
PTFE	Polytetrafluoroethylene
TPSEs	Triangular prism and slit electrode pairs

References

1. Cabeo, N. *Philosophia magnetica*; Apud F. Succium, 1629.

2. Wilson, B. *A Treatise on Electricity: The Second Edition*. By Benjamin Wilson, FRS; C. Davis in Holbourn, and R. Dodsley in Pallmall, 1752.

3. Robinson, M. Movement of air in the electric wind of the corona discharge. *Transactions of the American Institute of Electrical Engineers, Part I: Communication and Electronics* **1961**, *80*, 143–150. 449
4. Moreau, E.; Touchard, G. Enhancing the mechanical efficiency of electric wind in corona discharges. *Journal of Electrostatics* **2008**, *66*, 39–44. 450
5. June, M.S.; Kribs, J.; Lyons, K.M. Measuring efficiency of positive and negative ionic wind devices for comparison to fans and blowers. *Journal of Electrostatics* **2011**, *69*, 345–350. 451
6. Crowley, J.M.; Wright, G.S.; Chato, J.C. Selecting a working fluid to increase the efficiency and flow rate of an EHD pump. *IEEE Transactions on Industry Applications* **1990**, *26*, 42–49. 452
7. Sharbaugh, A.H.; Walker, G.W. The design and evaluation of an ion-drag dielectric pump to enhance cooling in a small oil-filled transformer. *IEEE Transactions on Industry Applications* **1985**, pp. 950–955. 453
8. Bologa, M.; Kozhevnikov, I.; Kozhukhari, I. Multistage electrohydrodynamical pump. In Proceedings of the 2000 Annual Report Conference on Electrical Insulation and Dielectric Phenomena (Cat. No. 00CH37132). IEEE, 2000, Vol. 1, pp. 57–60. 454
9. Kojevnikov, I.; Motorin, O.; Bologa, M.; Kojevnikova, A. Optimization of the electrohydrodynamic pump. In Proceedings of the Annual Report Conference on Electrical Insulation and Dielectric Phenomena. IEEE, 2002, pp. 204–207. 455
10. KANO, I.; MIZUOCHI, K.; TAKAHASHI, I. Micro-electrohydrodynamic pump by dielectric fluid: Improvement for performance of pressure using cylindrical electrodes. In Proceedings of the Proceedings of the JFPS International Symposium on Fluid Power. The Japan Fluid Power System Society, 2005, Vol. 2005, pp. 575–579. 456
11. Kano, I.; Takahashi, I. Improvement for pressure performance of micro-EHD pump with an arrangement of thin cylindrical electrodes. *JSME International Journal Series B Fluids and Thermal Engineering* **2006**, *49*, 748–754. 457
12. Vázquez, P.; Talmor, M.; Seyed-Yagoobi, J.; Traoré, P.; Yazdani, M. In-depth description of electrohydrodynamic conduction pumping of dielectric liquids: Physical model and regime analysis. *Physics of Fluids* **2019**, *31*, 113601. 458
13. Atten, P.; Seyed-Yagoobi, J. Electrohydrodynamically induced dielectric liquid flow through pure conduction in point/plane geometry. *IEEE Transactions on Dielectrics and Electrical Insulation* **2003**, *10*, 27–36. 459
14. Onsager, L. Deviations from Ohm's law in weak electrolytes. *The Journal of chemical physics* **1934**, *2*, 599–615. 460
15. Castellanos, A. *Electrohydrodynamics*; Vol. 380, Springer Science & Business Media, 1998. 461
16. Castellanos, A.; Pontiga, F. Generalised Thomson-Onsager model for charge injection into dielectric liquids. In Proceedings of the Proceedings of 1995 Conference on Electrical Insulation and Dielectric Phenomena. IEEE, 1995, pp. 616–620. 462
17. Mao, Z.; Yoshida, K.; Kim, J.w. Developing O/O (oil-in-oil) droplet generators on a chip by using ECF (electro-conjugate fluid) micropumps. *Sensors and Actuators B: Chemical* **2019**, *296*, 126669. 463
18. Feng, Y.; Seyed-Yagoobi, J. Understanding of electrohydrodynamic conduction pumping phenomenon. *Physics of fluids* **2004**, *16*, 2432–2441. 464
19. Morrison, R.; Hopstock, D. The distribution of current in wire-to-cylinder corona. *Journal of Electrostatics* **1979**, *6*, 349–360. 465
20. Temam, R. *Navier-Stokes equations: theory and numerical analysis*; Vol. 343, American Mathematical Soc., 2001. 466
21. Melcher, J.R. *Continuum electromechanics*; Vol. 2, MIT press Cambridge, 1981. 467
22. Felici, N. DC conduction in liquid dielectrics (Part II), electrohydrodynamic phenomena. *Direct current* **1972**, *2*, 147–165. 468
23. Kuroboshi, Y.; Takemura, K.; Edamura, K. Understanding of electro-conjugate fluid flow with dibutyl decanedioate using numerical simulation—Calculating ion mobility using molecular dynamics simulation. *Sensors and Actuators B: Chemical* **2018**, *255*, 448–453. 469
24. Bockris, J.; Reddy, A.; Gamboa-Aldeco, M.; Peter, L. Comprehensive Modern Electrochemistry: Modern Electrochemistry, in 3 Volumes: Volume 1 Ionics, 1998, 767 pages, Volume 2A Fundamentals of Electrochemistry, 2000, 763 pages, Volume 2B Electrochemistry in Chemistry, Engineering, Biology and Environmental Science, 2000, 514 pages. *Platinum Metals Review* **2002**, *46*, 15–17. 470
25. Kirby, B.J. *Micro-and nanoscale fluid mechanics: transport in microfluidic devices*; Cambridge university press, 2010. 471
26. Jewell-Larsen, N.E.; Karpov, S.V.; Krichtafovitch, I.A.; Jayanty, V.; Hsu, C.P.; Mamishev, A.V. Modeling of corona-induced electrohydrodynamic flow with COMSOL multiphysics. In Proceedings of the Proceedings ESA Annual Meeting on Electrostatics, Minneapolis, Minnesota, 2008, pp. 17–19. 472
27. Fylladitakis, E.D.; Moronis, A.X.; Kioussis, K. Design of a prototype EHD air pump for electronic chip cooling applications. *Plasma Science and Technology* **2014**, *16*, 491. 473
28. Ongkodjojo Ong, A.; Abramson, A.R.; Tien, N.C. Electrohydrodynamic microfabricated ionic wind pumps for thermal management applications. *Journal of heat transfer* **2014**, 136. 474
29. Chirkov, V.; Stishkov, Y.K.; Vasilkov, S. Characteristics of electrohydrodynamic pump of the dissociation type: Low and high voltage ranges. *IEEE Transactions on Dielectrics and Electrical Insulation* **2015**, *22*, 2709–2717. 475
30. Luo, K.; Wu, J.; Yi, H.L.; Tan, H.P. Lattice Boltzmann model for Coulomb-driven flows in dielectric liquids. *Physical Review E* **2016**, *93*, 023309. 476
31. Yang, L.; Talmor, M.; Shaw, B.C.; Minchev, K.S.; Jiang, C.; Seyed-Yagoobi, J. Flow distribution control in meso scale via electrohydrodynamic conduction pumping. *IEEE Transactions on Industry Applications* **2016**, *53*, 1431–1438. 477
32. Kuwajima, Y.; Maeda, S.; Shigemune, H. Analysis of EHD pump with planer electrodes using FEM simulation. In Proceedings of the 2017 International Symposium on Micro-NanoMechatronics and Human Science (MHS). IEEE, 2017, pp. 1–3. 478
33. Sato, T.; Yamanishi, Y.; Cacucciolo, V.; Kuwajima, Y.; Shigemune, H.; Cianchetti, M.; Laschi, C.; Maeda, S. Electrohydrodynamic conduction pump with asymmetrical electrode structures in the microchannels. *Chemistry Letters* **2017**, *46*, 950–952. 479

34. Ramadhan, A.A.; Kapur, N.; Summers, J.L.; Thompson, H. Performance and flow characteristics of miniature EHD air blowers for thermal management applications. *Journal of Electrostatics* **2018**, *93*, 31–42. 508

35. Adamiak, K. Two-species modeling of electrohydrodynamic pump based on surface dielectric barrier discharge. *Journal of Electrostatics* **2020**, *106*, 103470. 509

36. O'Connor, N.; Yagoobi, J. An Innovative EHD Conduction Pumping Design for Swirl Flow Generation. In Proceedings of the 2021 IEEE Industry Applications Society Annual Meeting (IAS). IEEE, 2021, pp. 1–6. 510

37. Nourdanesh, N.; Hossainpour, S.; Adamiak, K. Numerical simulation and optimization of natural convection heat transfer enhancement in solar collectors using electrohydrodynamic conduction pump. *Applied Thermal Engineering* **2020**, *180*, 115825. 511

38. Mao, Z.; Iizuka, T.; Maeda, S. Bidirectional electrohydrodynamic pump with high symmetrical performance and its application to a tube actuator. *Sensors and Actuators A: Physical* **2021**, *332*, 113168. 512

39. Mao, Z.; Yoshida, K.; Kim, J.w. Active sorting of droplets by using an ECF (Electro-conjugate Fluid) micropump. *Sensors and Actuators A: Physical* **2020**, *303*, 111702. 513

40. Talmor, M.; Seyed-Yagoobi, J. Numerical study of micro-scale EHD conduction pumping: The effect of pump orientation and flow inertia on heterocharge layer morphology and flow distribution control. *Journal of Electrostatics* **2021**, *111*, 103548. 514

41. Wang, L.; Wei, Z.; Li, T.; Chai, Z.; Shi, B. A lattice Boltzmann modelling of electrohydrodynamic conduction phenomenon in dielectric liquids. *Applied Mathematical Modelling* **2021**, *95*, 361–378. 515

42. Monayem H. Mazumder, A.; Robin, S.A.; Wood, M. Performance of a Two Stage Electrohydrodynamic Gas Pump With Different Polarities. In Proceedings of the ASME International Mechanical Engineering Congress and Exposition. American Society of Mechanical Engineers, 2021, Vol. 85666, p. V010T10A015. 516

43. Selvakumar, R.D.; Zhonglin, D.; Wu, J. Heat transfer intensification by EHD conduction pumping for electronic cooling applications. *International Journal of Heat and Fluid Flow* **2022**, *95*, 108972. 517

44. Mazumder, A.M.H. Emitting Electrodes Effect on the Enhancement of Heat Transfer by a Two Stage Electrohydrodynamic Gas Pump. *IEEE Transactions on Industry Applications* **2022**. 518

45. Mazumder, A.M.H.; Lai, F.C. Numerical Analysis of Flows Generated by a Two-Stage EHD Gas Pump with Different Electrode Orientations. In Proceedings of the AIAA AVIATION 2022 Forum, 2022, p. 3986. 519

46. Wang, J.; Dong, T.; Cheng, Y.; Yan, W.C. Machine Learning Assisted Spraying Pattern Recognition for Electrohydrodynamic Atomization System. *Industrial & Engineering Chemistry Research* **2022**. 520

47. Hess, N.; Shang, L. Development of a Machine Learning Model for Elastohydrodynamic Pressure Prediction in Journal Bearings. *Journal of Tribology* **2022**, *144*, 081603. 521

48. Mao, Z.; Nagaoka, T.; Yokota, S.; Kim, J.w. Soft fiber-reinforced bending finger with three chambers actuated by ECF (electro-conjugate fluid) pumps. *Sensors and Actuators A: Physical* **2020**, *310*, 112034. 522

49. TSUKIJI, T.; HAMADA, K.; SHIMIZU, T. A Pump using EHD Fluid. *JFPS International Journal of Fluid Power System* **2019**, *11*, 43–48. 523

50. Mao, Z.; Yoshida, K.; Kim, J.w. A droplet-generator-on-a-chip actuated by ECF (electro-conjugate fluid) micropumps. *Microfluidics and Nanofluidics* **2019**, *23*, 1–12. 524

51. Yokota, S. High-integration micromotor using electro-conjugate fluid (ECF). *Journal of Robotics and Mechatronics* **2005**, *17*, 142–148. 525

52. Raghavan, R.V.; Qin, J.; Yeo, L.Y.; Friend, J.R.; Takemura, K.; Yokota, S.; Edamura, K. Electrokinetic actuation of low conductivity dielectric liquids. *Sensors and Actuators B: Chemical* **2009**, *140*, 287–294. 526

53. Seo, W.S.; Yoshida, K.; Yokota, S.; Edamura, K. A high performance planar pump using electro-conjugate fluid with improved electrode patterns. *Sensors and Actuators A: Physical* **2007**, *134*, 606–614. 527

54. Kim, J.w.; Yamada, Y.; Yokota, S. Micro ECF (electro-conjugate fluid) hydraulic power sources based on the modular design of TPSEs (triangular prism and slit electrode pairs). *The International Journal of Advanced Manufacturing Technology* **2020**, *106*, 627–639. 528

55. Yu, H.; Yu, J.; Ma, C. Design, fabrication and experimental research for an electrohydrodynamic micropump. *Science China Technological Sciences* **2010**, *53*, 2839–2845. 529

56. Pearson, M.R.; Seyed-Yagoobi, J. Experimental study of EHD conduction pumping at the meso-and micro-scale. *Journal of Electrostatics* **2011**, *69*, 479–485. 530

57. Patel, V.K.; Seyed-Yagoobi, J. Dielectric fluid flow generation in meso-tubes with micro-scale electrohydrodynamic conduction pumping. In Proceedings of the 2011 IEEE International Conference on Dielectric Liquids. IEEE, 2011, pp. 1–4. 531

58. Kano, I.; Nishina, T. Effect of electrode arrangements on EHD conduction pumping. *IEEE Transactions on Industry Applications* **2013**, *49*, 679–684. 532

59. Patel, V.K.; Seyed-Yagoobi, J. Long-term performance evaluation of microscale two-phase heat transport device driven by EHD conduction. *IEEE Transactions on Industry Applications* **2014**, *50*, 3011–3016. 533

60. Russel, M.; Selvaganapathy, P.; Ching, C. Ion drag electrohydrodynamic (EHD) micro-pumps under a pulsed voltage. *Journal of electrostatics* **2016**, *82*, 48–54. 534

61. Nagaoka, T.; Mao, Z.; Takemura, K.; Yokota, S.; Kim, J.w. ECF (electro-conjugate fluid) finger with bidirectional motion and its application to a flexible hand. *Smart Materials and Structures* **2019**, *28*, 025032. 535

62. Seki, Y.; Kuwajima, Y.; Shigemune, H.; Yamada, Y.; Maeda, S. Optimization of the electrode arrangement and reliable fabrication of flexible ehd pumps. *Journal of Robotics and Mechatronics* **2020**, *32*, 939–946. 536

63. Vasilkov, S.; Poluektova, K.; Stishkov, Y.K. Experimental and numerical study of an electrohydrodynamic pump operating due to the field-enhanced dissociation near a dielectric barrier. *Physics of Fluids* **2020**, *32*, 107102. 566
64. Blanc, L.; Parrain, F.; Chaillot, A.; Woytasik, M.; Maire, O.; Bosseboeuf, A. Characterization of mobility of charged dissociated species in dielectric fluids for EHD pumping microsystems. In Proceedings of the 2020 Symposium on Design, Test, Integration & Packaging of MEMS and MOEMS (DTIP). IEEE, 2020, pp. 1–6. 567
65. Murakami, T.; Kuwajima, Y.; Wiranata, A.; Minaminosono, A.; Shigemune, H.; Mao, Z.; Maeda, S. A DIY fabrication approach for ultra-thin focus-tunable liquid lens using electrohydrodynamic pump. *Micromachines* **2021**, *12*, 1452. 568
66. Mao, Z.; Asai, Y.; Yamanoi, A.; Seki, Y.; Wiranata, A.; Minaminosono, A. Fluidic rolling robot using voltage-driven oscillating liquid. *Smart Materials and Structures* **2022**, *31*, 105006. 569
67. Mao, Z.; Yoshida, K.; Kim, J.w. Releasing large-area SU-8 structures without using any sacrificial layers. *Microelectronic Engineering* **2019**, *212*, 53–60. 570
68. Cacucciolo, V.; Shintake, J.; Kuwajima, Y.; Maeda, S.; Floreano, D.; Shea, H. Stretchable pumps for soft machines. *Nature* **2019**, *572*, 516–519. 571
69. Rickard, M.; Dunn-Rankin, D.; Weinberg, F.; Carleton, F. Maximizing ion-driven gas flows. *Journal of Electrostatics* **2006**, *64*, 368–376. 572
70. Takeuchi, N.; Yasuoka, K.; Chang, J.S. Wire-rod type electrohydrodynamic gas pumps with and without insulation cover over corona wire. *IEEE Transactions on Dielectrics and Electrical Insulation* **2011**, *18*, 801–808. 573
71. Moreau, E.; Audier, P.; Benard, N. Ionic wind produced by positive and negative corona discharges in air. *Journal of Electrostatics* **2018**, *93*, 85–96. 574
72. Le, N.; Labbe, J. Corrosion by corona discharges: determination of corrosion products by vibrational spectroscopy. In Proceedings of the Proceedings of the 13th Meeting of the Franco-British Group on Electrical Discharges, Glasgow, 1983. 575
73. Mao, Z.; Yoshida, K.; Kim, J.w. Fast packaging by a partially-crosslinked SU-8 adhesive tape for microfluidic sensors and actuators. *Sensors and Actuators A: Physical* **2019**, *289*, 77–86. 576
74. Noll, C.G.; Lawless, P.A. Comparison of germanium and silicon needles as emitter electrodes for air ionizers. *Journal of electrostatics* **1998**, *44*, 221–238. 577
75. El-Bahy, M.M.; Abou El-Ata, M.A. Onset voltage of negative corona on dielectric-coated electrodes in air. *Journal of Physics D: Applied Physics* **2005**, *38*, 3403. 578
76. Zhang, J.; Lai, F. Effect of emitting electrode number on the performance of EHD gas pump in a rectangular channel. *Journal of Electrostatics* **2011**, *69*, 486–493. 579
77. Chang, Y.; Peng, J.; Lin, S.; Lai, F. Flow induced by an EHD gas pump with secondary emitting electrodes. *Journal of Electrostatics* **2020**, *105*, 103438. 580
78. Ramadhan, A.A.; Kapur, N.; Summers, J.; Thompson, H. Numerical development of EHD cooling systems for laptop applications. *Applied Thermal Engineering* **2018**, *139*, 144–156. 581
79. Fylladitakis, E.D.; Moronis, A.X.; Kioulos, K.N. Experimental evaluation of a needle-to-grid EHD pump prototype for semiconductor cooling applications. *Int. J. Circuits, Syst. Signal Process* **2014**, *8*, 337–42. 582
80. Kim, C.; Park, D.; Noh, K.; Hwang, J. Velocity and energy conversion efficiency characteristics of ionic wind generator in a multistage configuration. *Journal of Electrostatics* **2010**, *68*, 36–41. 583
81. Qiu, W.; Xia, L.; Tan, X.; Yang, L. The velocity characteristics of a serial-staged EHD gas pump in air. *IEEE Transactions on plasma science* **2010**, *38*, 2848–2853. 584
82. Birhane, Y.; Lin, S.; Lai, F. Flow characteristics of a single stage EHD gas pump in circular tube. *Journal of Electrostatics* **2015**, *76*, 8–17. 585
83. Birhane, Y.T.; Lin, S.C.; Lai, F.C. Flow characteristics of a two-stage EHD gas pump in a circular pipe. *IEEE Transactions on Industry Applications* **2017**, *53*, 2461–2470. 586
84. Quan, X.; Gao, M.; Cheng, P.; Li, J. An experimental investigation of pool boiling heat transfer on smooth/rib surfaces under an electric field. *International Journal of Heat and Mass Transfer* **2015**, *85*, 595–608. 587
85. Mizeraczyk, J.; Berendt, A.; Podlinski, J. Temporal and spatial evolution of EHD particle flow onset in air in a needle-to-plate negative DC corona discharge. *Journal of Physics D: Applied Physics* **2016**, *49*, 205203. 588
86. Gao, M.; Zhang, L.s.; Zhang, D.; Zhang, L.x. Experimental study on the enhancement of free convection heat transfer under the action of an electric field. *Experimental Thermal and Fluid Science* **2019**, *104*, 9–14. 589
87. Qu, J.; Zhang, J.; Li, M.; Tao, W. Heat dissipation of electronic components by ionic wind from multi-needle electrodes discharge: Experimental and multi-physical analysis. *International Journal of Heat and Mass Transfer* **2020**, *163*, 120406. 590
88. Rubinetti, D.; Iranshahi, K.; Onwude, D.; Nicolai, B.M.; Xie, L.; Defraeye, T. Electrohydrodynamic air amplifier for low-energy airflow generation-experimental proof-of-concept **2022**. 591
89. Yang, W.; Zhang, M.; Li, C.; Wang, Z.; Xiao, M.; Li, J.; Li, D.; Zheng, W. Influence of Magnetic Field on Corona Discharge Characteristics under Different Humidity Conditions. In Proceedings of the 2022 IEEE 3rd China International Youth Conference on Electrical Engineering (CIYCEE). IEEE, 2022, pp. 1–7. 592
90. Li, Z.s.; Wang, J.; Cai, R.j.; Wang, J. Heat dissipation performance improvement of a solid-state fan using copper foams as collecting electrode. *International Journal of Heat and Mass Transfer* **2023**, *202*, 123730. 593

91. Kojevnikov, I.; Motorin, O.; Bologa, M.; Kozhukhar, I. The effect of electrical field parameters, medium properties and interelectrode gap geometry on the EHD pump characteristics. In Proceedings of the 2001 Annual Report Conference on Electrical Insulation and Dielectric Phenomena (Cat. No. 01CH37225). IEEE, 2001, pp. 532–535.
92. Kim, Y.J.; Son, S.; An, K.; et al. High aspect ratio EHD printing with high viscosity ink ejection. In Proceedings of the Technical Proceedings of the 2012 NSTI Nanotechnology Conference and Expo, NSTI-Nanotech 2012, 2012, pp. 267–270.
93. Seyed-Yagoobi, J. Electrohydrodynamic pumping of dielectric liquids. *Journal of Electrostatics* **2005**, *63*, 861–869.
94. Bologa, M.; Kozhevnikov, I. Effect of a dielectric liquid's electrization on the characteristics of an electrohydrodynamic pump. *Surface Engineering and Applied Electrochemistry* **2011**, *47*, 232–234.
95. Sfaira, M.; Srhiri, A.; Takenouti, H.; Ficquelmont-Loïzos, M.; Bachir, A.B.; Khalakhil, M. Corrosion of mild steel in low conductive media simulating natural waters. *Journal of applied electrochemistry* **2001**, *31*, 537–546.
96. Jafari, M.; Farrokhi, N.; Esmaeilzadeh, E. Effects of working temperature and fluid physical properties on heat transfer enhancement in conduction pumping: An experimental study. *International Journal of Thermal Sciences* **2020**, *156*, 106471.
97. Lee, C.; Robinson, A.; Ching, C. Development of EHD ion-drag micropump for microscale electronics cooling. In Proceedings of the 2007 13th International Workshop on Thermal Investigation of ICs and Systems (THERMINIC). IEEE, 2007, pp. 48–53.
98. Tsukiji, T.; Tajima, T.; Suzuki, R. Application of the EHD flow to a pump. *Proc. 4th World Congr. Mech., Chem. Mater. Eng.(MCM'18)* **2018**, pp. 16–18.
99. 3M Electronics Markets Materials Division. *Heat Transfer Applications using 3M™ Novec™ Engineered Fluids*, 2033.
100. 3M Electronics Markets Materials Division. *3M™ Novec™ 7100 Engineered Fluid*, 2009.
101. Sajjad, U.; Sadeghianjahromi, A.; Ali, H.M.; Wang, C.C. Enhanced pool boiling of dielectric and highly wetting liquids—a review on enhancement mechanisms. *International Communications in Heat and Mass Transfer* **2020**, *119*, 104950.
102. Abe, H.; Imai, Y.; Tokunaga, N.; Yamashita, Y.; Sasaki, Y. Highly efficient electrohydrodynamic pumping: molecular isomer effect of dielectric liquids, and surface states of electrodes. *ACS applied materials & interfaces* **2015**, *7*, 24492–24500.
103. 3M Electronics Markets Materials Division. *3M™ Novec™ 7300 Engineered Fluid*, 2009.
104. Mao, Z.; Zhao, J.; Xuan, W.; Wang, W.; Luo, J.; Xie, J. Distilling determination of water content in hydraulic oil with a ZnO/glass surface acoustic wave device. *Microsystem Technologies* **2017**, *23*, 1841–1845.
105. Moreau, E. Application des plasmas non thermiques aux contrôles des écoulements **2004**.
106. Léger, L.; Moreau, E.; Touchard, G.G. Effect of a DC corona electrical discharge on the airflow along a flat plate. *IEEE Transactions on Industry Applications* **2002**, *38*, 1478–1485.
107. Moreau, E.; Artana, G.; Touchard, G. Surface corona discharge along an insulating flat plate in air applied to electrohydrodynamically airflow control: electrical properties. In Proceedings of the Conference series-Institute of Physics. Philadelphia; Institute of Physics; 1999, 2004, Vol. 178, pp. 285–290.
108. Moreau, E.; Labergue, A.; Touchard, G. DC and pulsed surface corona discharge along a dielectric flat plate in air: Electrical properties and discharge-induced ionic wind. *Journal of Advanced Oxidation Technologies* **2005**, *8*, 241–247.
109. Moreau, E.; Léger, L.; Touchard, G. Effect of a DC surface-corona discharge on a flat plate boundary layer for air flow velocity up to 25 m/s. *Journal of electrostatics* **2006**, *64*, 215–225.
110. Hogg, M.; Timoshkin, I.; Macgregor, S.; Wilson, M.; Given, M.; Wang, T. Electrical breakdown of short non-uniform air gaps. In Proceedings of the 2013 19th IEEE Pulsed Power Conference (PPC). IEEE, 2013, pp. 1–4.
111. Ulazia, A.; Sáenz, J.; Ibarra-Berastegi, G.; González-Rojí, S.J.; Carreno-Madinabeitia, S. Global estimations of wind energy potential considering seasonal air density changes. *Energy* **2019**, *187*, 115938.
112. Abdel-kader, M.E.; Gaber, W.H.; Ebrahim, F.A.; Abd Al-Halim, M.A. Characterization of the electrical breakdown for DC discharge in Ar-He gas mixture. *Vacuum* **2019**, *169*, 108922.
113. Amsler, C.; Boccone, V.; Büchler, A.; Chandrasekharan, R.; Regenfus, C.; Rochet, J. Luminescence quenching of the triplet excimer state by air traces in gaseous argon. *Journal of Instrumentation* **2008**, *3*, P02001.
114. Martin, J.L.M.; Veran, Y.; Guelorget, O.; Pham, D. Shrimp rearing: stocking density, growth, impact on sediment, waste output and their relationships studied through the nitrogen budget in rearing ponds. *Aquaculture* **1998**, *164*, 135–149.
115. Lavrenchenko, G.; Ruvinskij, G.Y.; Iljushenko, S.; Kanaev, V. Thermophysical properties of refrigerant R134a. *International journal of refrigeration* **1992**, *15*, 386–392.
116. Meurer, C.; Pietsch, G.; Haacke, M. Electrical properties of CFC-and HCFC-substitutes. *International journal of refrigeration* **2001**, *24*, 171–175.
117. Feng, Y.; Seyed-Yagoobi, J. Mechanism of annular two-phase flow heat transfer enhancement and pressure drop penalty in the presence of a radial electric field—turbulence analysis. *J. Heat Transfer* **2003**, *125*, 478–486.
118. Nangle-Smith, S.; Cotton, J. EHD-based load controllers for R134a convective boiling heat exchangers. *Applied energy* **2014**, *134*, 125–132.
119. Dinani, S.T.; Hamdami, N.; Shahedi, M.; Havet, M. Quality assessment of mushroom slices dried by hot air combined with an electrohydrodynamic (EHD) drying system. *food and bioproducts processing* **2015**, *94*, 572–580.
120. Van Doremaele, E.; Kondeti, V.; Bruggeman, P. Effect of plasma on gas flow and air concentration in the effluent of a pulsed cold atmospheric pressure helium plasma jet. *Plasma Sources Science and Technology* **2018**, *27*, 095006.
121. Granados Fernandez, V.H. Modelling and simulation of plasma thrusters for electric propulsion technologies. PhD thesis, 2018.

122. Nangle-Smith, S.; Cotton, J. A mechanistic approach to developing two phase flow pattern transition maps for two-phase dielectric fluids subject to high voltage polarization. *International Journal of Heat and Mass Transfer* **2018**, *127*, 1233–1247. 682
123. Reiser, A.; Lindén, M.; Rohner, P.; Marchand, A.; Galinski, H.; Sologubenko, A.S.; Wheeler, J.M.; Zenobi, R.; Poulikakos, D.; Spolenak, R. Multi-metal electrohydrodynamic redox 3D printing at the submicron scale. *Nature communications* **2019**, *10*, 1–8. 683
124. Chi, X.; Zhang, X.; Li, Z.; Yuan, Z.; Zhu, L.; Zhang, F.; Yang, J. Fabrication of Microfluidic Chips Based on an EHD-Assisted Direct Printing Method. *Sensors* **2020**, *20*, 1559. 684
125. Calvo, E.; Pinheiro, M.; Sa, P. Optimizing an EHD cylindrical plasma thruster. In Proceedings of the APS Annual Gaseous Electronics Meeting Abstracts, 2020, pp. MW4–003. 685
126. Polat, A.; Izli, N. Drying characteristics and quality evaluation of ‘Ankara’pear dried by electrohydrodynamic-hot air (EHD) method. *Food Control* **2022**, *134*, 108774. 686
127. Calvo, E.M.; Pinheiro, M.J.; Sá, P.A. Modeling of Electrohydrodynamic (EHD) Plasma Thrusters: Optimization of Physical and Geometrical Parameters. *Applied Sciences* **2022**, *12*, 1637. 687
128. Dima, P.; Gulbinas, G.; Stubbe, P.R.; Mendes, A.C.; Chronakis, I.S. Electrohydrodynamic drying of probiotics. *Innovative Food Science & Emerging Technologies* **2022**, *82*, 103201. 688
129. Hassan, M.F. Numerical and Experimental Analysis of an Elastohydrodynamic Seal For Gases **2022**. 689
130. Singh, D.; Tangellapalli, S.; Kukreja, R. Performance Investigation of the Ejector Humidification Dehumidification (EHD) Cycle for Fresh Water and Cooling Generation. In *Recent Advances in Sustainable Environment*; Springer, 2023; pp. 357–367. 690
131. Web of Science. <http://www.webofscience.com>. Accessed: 2023-01-17. 691
132. Moreau, E. Airflow control by non-thermal plasma actuators. *Journal of physics D: applied physics* **2007**, *40*, 605. 692
133. Corke, T.C.; Enloe, C.L.; Wilkinson, S.P. Dielectric barrier discharge plasma actuators for flow control. *Annual review of fluid mechanics* **2010**, *42*, 505–529. 693
134. Benard, N.; Moreau, E. Electrical and mechanical characteristics of surface AC dielectric barrier discharge plasma actuators applied to airflow control. *Experiments in Fluids* **2014**, *55*, 1–43. 694
135. Kriegseis, J.; Simon, B.; Grundmann, S. Towards in-flight applications? A review on dielectric barrier discharge-based boundary-layer control. *Applied Mechanics Reviews* **2016**, *68*. 695
136. Xu, H.; He, Y.; Strobel, K.L.; Gilmore, C.K.; Kelley, S.P.; Hennick, C.C.; Sebastian, T.; Woolston, M.R.; Perreault, D.J.; Barrett, S.R. Flight of an aeroplane with solid-state propulsion. *Nature* **2018**, *563*, 532–535. 696
137. Mao, Z.b.; Asai, Y.; Wiranata, A.; Kong, D.q.; Man, J. Eccentric actuator driven by stacked electrohydrodynamic pumps. *Journal of Zhejiang University-SCIENCE A* **2022**, *23*, 329–334. 697
138. Nakagawa, K.; Sakai, Y.; Funabara, Y.; Doki, S. Turning a Functional Cloth Into an Actuator by Combining Thread-Like Thin Artificial Muscles and Embroidery Techniques. *IEEE Robotics and Automation Letters* **2022**, *7*, 5827–5833. 698
139. Funabara, Y. Flexible fabric actuator realizing 3D movements like human body surface for wearable devices. In Proceedings of the 2018 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS). IEEE, 2018, pp. 6992–6997. 699
140. Peng, Y.; Yamaguchi, H.; Funabara, Y.; Doki, S. Modeling Fabric-type Actuator Using Point Clouds by Deep Learning. *IEEE Access* **2022**. 700
141. Mao, Z.; Shimamoto, G.; Maeda, S. Conical frustum gel driven by the Marangoni effect for a motor without a stator. *Colloids and Surfaces A: Physicochemical and Engineering Aspects* **2021**, *608*, 125561. 701
142. Mao, Z.; Kuroki, M.; Otsuka, Y.; Maeda, S. Contraction waves in self-oscillating polymer gels. *Extreme Mechanics Letters* **2020**, *39*, 100830. 702
143. Thongking, W.; Wiranata, A.; Minaminosono, A.; Mao, Z.; Maeda, S. Soft robotic gripper based on multi-layers of dielectric elastomer actuators. *Journal of Robotics and Mechatronics* **2021**, *33*, 968–974. 703
144. Mao, Z.; Yoshida, K.; Kim, J.W. Droplet sorter using a cantilever actuated by electro-conjugate fluid micropumps. In Proceedings of the 2019 23rd International Conference on Mechatronics Technology (ICMT). IEEE, 2019, pp. 1–4. 704
145. O'Connor, N.J.; Castaneda, A.J.; Christidis, P.N.; Vayas Tobar, N.; Talmor, M.; Yagoobi, J. Experimental study of flexible electrohydrodynamic conduction pumping for electronics cooling. *Journal of Electronic Packaging* **2020**, *142*. 705
146. Zeng, M.; Zhang, J.; Wang, S.; Qu, Z. Analysis of a two-stage ionic wind pump with multiple needle-to-mesh electrodes for cooling electronics. *Applied Thermal Engineering* **2021**, *185*, 116340. 706
147. Tien, C.; Lin, S.; Lai, F. EHD gas pump in a square channel with electrodes mounted on one wall. *Journal of Electrostatics* **2020**, *107*, 103482. 707
148. Yabe, A.; Taketani, T.; Maki, H.; Takahashi, K.; Nakadai, Y. Experimental study of electrohydrodynamically(EHD) enhanced evaporator for nonazeotropic mixtures. In Proceedings of the ASHRAE Winter Meeting, Anaheim, CA, USA, 01/25-29/92, 1992, pp. 455–460. 708
149. Singh, A.; Ohadi, M.M.; Dessiatoun, S. EHD enhancement of in-tube condensation heat transfer of alternate refrigerant R-134a in smooth and microfin tubes. *ASHRAE Transactions* **1997**, *103*, 813–823. 709
150. Bryan, J.; Seyed-Yagoobi, J. Influence of flow regime, heat flux, and mass flux on electrohydrodynamically enhanced convective boiling. *J. Heat Transfer* **2001**, *123*, 355–367. 710
151. Cotton, J.S. Mechanisms of electrohydrodynamic (EHD) flow and heat transfer in horizontal convective boiling channels. **2003**. 711
152. Feng, Y.; Seyed-Yagoobi, J. Control of liquid flow distribution utilizing EHD conduction pumping mechanism. *IEEE Transactions on Industry Applications* **2006**, *42*, 369–377. 712

153. Vasilkov, S.; Chirkov, V.; Stishkov, Y.K. Electrohydrodynamic flow caused by field-enhanced dissociation solely. *Physics of Fluids* **2017**, *29*, 063601. 741

154. Pearson, M.R.; Seyed-Yagoobi, J. Experimental study of linear and radial two-phase heat transport devices driven by electrohydrodynamic conduction pumping. *Journal of Heat Transfer* **2015**, 137. 742

155. Patel, V.K.; Seyed-Yagoobi, J.; Robinson, F.; Didion, J.R. Effect of Gravity on Electrohydrodynamic Conduction Driven Liquid Film Flow Boiling. *Journal of Thermophysics and Heat Transfer* **2016**, *30*, 429–437. 743

156. Blanc, L.; Parrain, F.; Chaillot, A.; Woytasik, M.; Maire, O.; Bosseboeuf, A. New Solution for Thermal Management of Electronic Using Electro-Hydro-Dynamic (EHD) Pump in Heat Pipe. In Proceedings of the 2018 24rd International Workshop on Thermal Investigations of ICs and Systems (THERMINIC). IEEE, 2018, pp. 1–6. 744

157. Nishikawara, M.; Yagoobi, J. Experimental study of electrohydrodynamic conduction pumping embedded in micro-scale evaporator. In Proceedings of the 2020 IEEE Industry Applications Society Annual Meeting. IEEE, 2020, pp. 1–4. 745

158. Yang, W.; Cheng, X.; Guo, Z.; Sun, Q.; Wang, J.; Wang, C. Design, fabrication and applications of flexible RFID antennas based on printed electronic materials and technologies. *Journal of Materials Chemistry C* **2023**. 746

159. Narváez-Muñoz, C.; Hashemi, M.R.; Ryzhakov, P.B.; Pons-Prats, J. An enriched finite element/level-set model for two-phase electrohydrodynamic simulations. *Physics of Fluids* **2023**, *35*, 012004. 747

160. Wang, Y.; Cheng, K.; Dang, C.; Wang, C.; Qin, J.; Huang, H. Performance and experimental investigation for a novel heat storage based thermoelectric harvester for hypersonic vehicles. *Energy* **2023**, *263*, 125885. 748

161. Odularu, A.T. Basic Principles of Electrospinning, Mechanisms, Nanofibre Production, and Anticancer Drug Delivery. *Journal of Chemistry* **2022**, 2022. 749

162. Tao, Y.; Liu, W.; Ge, Z.; Yao, B.; Ren, Y. Alternating-current nonlinear electrokinetics in microfluidic insulator-decorated bipolar electrochemistry. *Physics of Fluids* **2022**, *34*, 112002. 750

163. Das, T.; Biswas, A.; Roy, S.S. Modeling of Inkjet-Based Micro-additive Manufacturing Process Performance Using Deep Learning Algorithms. In *Recent Trends in Product Design and Intelligent Manufacturing Systems*; Springer, 2023; pp. 709–717. 751

752

753

754

755

756

757

758

759

760

761

762

763