

Article

Not peer-reviewed version

---

# A Railway Track Extraction Method Based on Improved DeepLabV3+

---

[Yanbin Weng](#)<sup>\*</sup>, [Zuochuang Li](#)<sup>\*</sup>, Xiahu Chen, Jing He, Fengnian Liu, Xiaobin Huang, Hua Yang

Posted Date: 13 July 2023

doi: 10.20944/preprints202307.0912.v1

Keywords: Deep Learning; MobileNetV3; Morphological algorithm; Railway extraction; Aerial Imagery



Preprints.org is a free multidiscipline platform providing preprint service that is dedicated to making early versions of research outputs permanently available and citable. Preprints posted at Preprints.org appear in Web of Science, Crossref, Google Scholar, Scilit, Europe PMC.

Copyright: This is an open access article distributed under the Creative Commons Attribution License which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

## Article

# A Railway Track Extraction Method Based on Improved DeepLabV3+

Yanbin Weng <sup>1,\*</sup>, Zuochuang Li <sup>1,\*</sup>, Xiahu Chen <sup>1,2</sup>, Jing He <sup>1</sup>, Fengnian Liu <sup>1</sup>, Xiaobin Huang <sup>1</sup> and Hua Yang <sup>1</sup>

<sup>1</sup> Hunan University of Technology, Tianyuan District, Zhuzhou 412007, Hunan Province, China; wengyb@hut.edu.cn(Y.W.); 466904647@qq.com(Z.L.); 30728921@qq.com(X.C.); hejing@hut.edu.cn(J.H.); 836354185@qq.com(F.L.); 2499354024@qq.com(X.H.); 1096781874@qq.com(H.Y.)

<sup>2</sup> Zhuzhou Taichang Electronic Information Technology Co., Ltd, Zhuzhou 412007, Hunan Province, China; 30728921@qq.com(X.C.)

\* Correspondence: wengyb@hut.edu.cn(Y.W.); 466904647@qq.com(Z.L.)

**Abstract:** Extracting railway tracks is crucial for creating electronic railway maps. Traditional methods require significant manual labor and resources, while existing neural networks have limitations in efficiency and precision. To address these challenges, a railway track extraction method using an improved DeepLabV3+ model is proposed, which incorporates several key enhancements. Firstly, the encoder part of the method utilizes the lightweight network MobileNetV3 as the backbone extraction network for DeepLabV3+. Secondly, the decoder part adopts the lightweight universal upsampling operator CARAFE for upsampling. Lastly, to address any potential extraction errors, morphological algorithms are applied to optimize the extraction results. Additionally, a dedicated railway track segmentation dataset is created to train and evaluate the proposed method. The experimental results demonstrate that the model achieves impressive performance on the railway track segmentation dataset and DeepGlobe dataset. The MIoU scores are 88.93% and 84.72%, with Recall values of 89.02% and 86.96%. Moreover, the overall accuracy stands at 97.69% and 94.84%. The algorithm's operation time is about 5% lower in comparison to the original network. Furthermore, the morphological algorithm effectively eliminates errors like holes and spots. These findings indicate the model's accuracy, efficiency, and the enhancement brought by the morphological algorithm in error elimination.

**Keywords:** deep learning; MobileNetV3; morphological algorithm; railway extraction; aerial imagery

## 1. Introduction

Railway transportation plays a vital role in China's economic development and serves as a fundamental component of its transportation system. Extracting railway tracks is essential for creating railway electronic maps, ensuring smooth railway operations, and safeguarding people's lives and property. Traditionally, drawing railway track maps involved processing satellite positioning data, which required extensive expertise and involved a substantial workload [1–3]. However, with the availability of remote sensing images and UAV aerial images [4], deep learning methods can now be applied to extract railway tracks and generate railway electronic maps, offering convenience and efficiency in this process.

The process of extracting railway tracks and roads shares several similarities. Traditional methods for obtaining railway or road information involve setting specific conditions based on texture, spectral, and geometric features. These conditions are then used to extract deeper features and acquire the desired information. For road extraction, Xiao Chi et al. [5] proposed using road color features to obtain initial road segments, which were further refined using a region merging algorithm to achieve complete road information. Shi W et al. [6] introduced a general adaptive neighborhood approach to perform spectrum-space classification, effectively distinguishing road regions from non-road regions. Xiaoyu Liu et al. [7] utilized grid approximation and adaptive filtering parameter calculation, combined with the spatial distribution characteristics of roads, to extract roads through

clustering fitting and other techniques. Lingran Kong et al. [8] constructed feature points based on the spectral characteristics of road areas, connecting them to form an initial road network. Various constraints were then added, and the road centerline was extracted by maximizing the Posterior probability criterion. These studies demonstrate different approaches to extract road information using a combination of color features, spatial analysis, adaptive methods, and probabilistic criteria. Similarly, railway track extraction methods employ comparable principles to analyze relevant features and obtain accurate railway track information.

Traditional extraction methods for railway tracks often rely on researchers possessing significant prior knowledge. However, these methods face challenges in distinguishing features that share similar characteristics. For instance, rivers and railways may exhibit similar geometric features, and buildings and railways may have comparable spectral features. Consequently, traditional extraction methods are prone to inaccuracies and lack robustness when confronted with such complexities. As a result, these methods are not well-suited for the intricate environments found in modern cities.

In recent years, deep learning has experienced rapid advancements and found widespread applications in various fields, including facial expression recognition [10], lane detection [9], railway foreign body detection, track defect detection, catenary detection, and road extraction [11]. Convolutional Neural Networks (CNNs), as a classical deep learning architecture, have significantly contributed to road segmentation research. Zuoming She et al. [12] proposed a CNN model for road extraction, optimizing extracted data to obtain comprehensive road features. Jiguang Dai et al. [13] introduced a method based on multi-scale CNNs for road extraction in remote sensing images. They employed a sub-image training model and incorporated residual connections to address resolution reduction and gradient disappearance issues during the extraction process. Zhang X et al. [14] developed an FCN network utilizing a spatially consistent integration algorithm to determine loss function weights for extracting road regions. Xiangwen Kong et al. [15] introduced an SM-Unet semantic segmentation network with a stripe pooling module to enhance road extraction performance. Hao Qi et al. [16] proposed the MBv2-DPPM model, considering both segmentation accuracy and speed. However, this model still exhibits some errors, such as convex points and spots. Overall, the rapid development of deep learning technology has significantly improved road segmentation and extraction tasks, but some challenges persist, such as handling complex road structures and enhancing accuracy in challenging scenarios.

Compared to traditional extraction methods, deep learning-based extraction methods offer several advantages. They require less prior knowledge and workload for researchers, and the overall process is relatively straightforward. This makes deep learning methods more suitable for handling the complexities of modern urban environments. While the accuracy of deep learning-based extraction methods has been improved through extensive research by scholars, there are still certain challenges. Deep networks often have a large number of layers and parameters, which can lead to inefficiencies in network performance. Additionally, the pixel-level nature of deep learning extraction may result in the presence of spots, holes, or breakpoints in the final extraction results.

The paper presents several contributions to address the challenges in deep learning-based extraction methods:

- **Segmentation Dataset:** A railway track segmentation dataset is established, consisting of 7,892 original images and their corresponding label images. These images are collected from aerial shots of railway UAVs in various stations in China, capturing different environmental conditions and railway track information.
- **Improved DeepLabV3+ Model:** The paper proposes an enhanced DeepLabV3+ network model. It replaces the original backbone network with a lightweight MobileNetV3 network module, which helps mitigate the efficiency issues caused by the deep network hierarchy and large parameter quantity. Additionally, the bilinear upsampling module is replaced with CARAFE, improving both extraction process time and accuracy.
- **Morphological Algorithm Optimization:** The paper introduces an optimization method using morphological algorithms. After obtaining initial extraction results from the improved model, a combination of morphological operations, such as erosion and expansion, is applied to eliminate

potential errors like spots and holes. This optimization process enhances the accuracy of railway track extraction.

The remaining sections of the manuscript are organized as follows: The methodology flow and network structure employed in this study are presented in Section 2. The experimental data, experimental environment, and evaluation metrics are introduced in Section 3. The experimental process is outlined and the obtained results are presented in Section 4. A comprehensive discussion of the results obtained in this study is provided in Section 5. Finally, the overall conclusions are presented in Section 6.

## 2. Materials and Methods

In this section, we present an exposition of the methodology flow and network architecture employed in this study, providing a comprehensive account of the key components involved. The subsequent elucidation aims to facilitate a deeper understanding of the underlying processes and techniques utilized in this research endeavor.

### 2.1. Algorithm Flow

This study is divided into five main stages: data acquisition, data preprocessing, trajectory extraction, morphological optimization, and calculation evaluation index. In the data acquisition stage, aerial images captured by orbital UAVs in various domestic stations are selected. These images encompass different weather conditions and terrains, providing a diverse dataset for analysis. During the data preprocessing stage, corresponding labels are created for the original images. The dataset is then divided into training, test, and validation sets using a specific proportion. The training set is further augmented to increase its size and enhance the model's learning capability. In the Railway track segmentation and extraction stage, the prepared dataset is fed into the improved network proposed in this paper for training. The network is trained to optimize its weights, and these optimized weights are utilized to extract binary images of the railway tracks from the original images. The morphological optimization stage involves applying morphological binary operations to refine the extracted railway track images obtained in the previous stage. This process helps eliminate defects such as holes and spots in the extraction results, improving the overall quality of the extracted tracks. Finally, in the calculation of the evaluation index stage, common semantic segmentation evaluation metrics are employed to assess the quality of the results. Metrics such as MIOU, recall, and accuracy are calculated to evaluate the performance of the railway track extraction and segmentation method. Overall, the study follows a systematic approach, starting from data acquisition and preprocessing, progressing to railway track segmentation and extraction using the improved network, morphological optimization, and finally evaluating the results using standard evaluation metrics. The method flow of this article is shown in Figure 1.

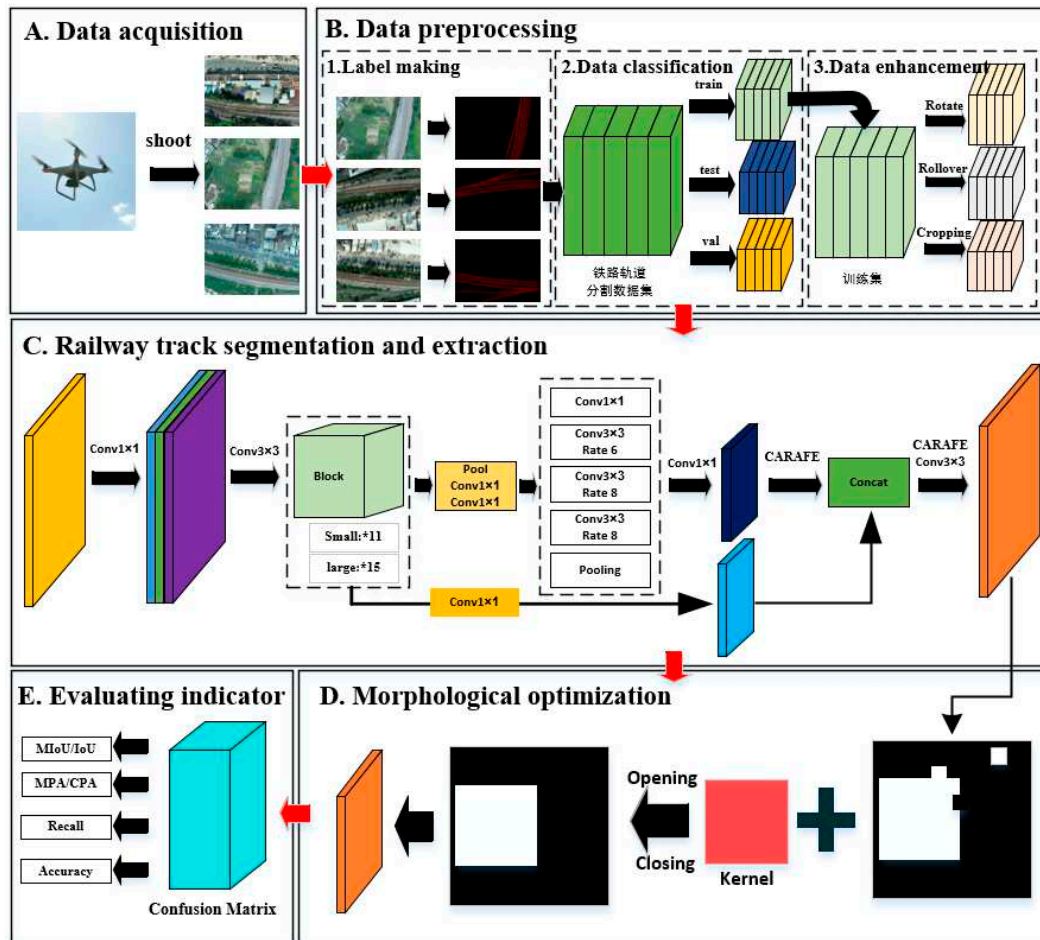


Figure 1. Flowchart of the algorithm proposed in this article.

## 2.2. Improved DeepLabv3+ network structure

In the original DeepLabv3+ model, the encoder structure utilizes DeepLabv3 [17], while the decoder replaces the direct 16x bilinear upsampling used in DeepLabv3 with a specialized upsampling module. The decoder is responsible for processing, fusing, and upsampling the input features from the encoder, ultimately generating the extraction result [18]. While this approach addresses the drawback of missing details in direct 16x bilinear upsampling, it also the upsampling module in the decoder introduces additional computational complexity, resulting in decreased efficiency during the extraction process. Despite these modifications, the enhancement in extraction accuracy is not substantial.

To address these challenges, this paper introduces an improved DeepLabv3+ model. The encoder incorporates the lightweight MobileNetV3 [19] network, proposed by Google, as the backbone network for initial feature extraction. Subsequently, the ASPP (Atrous Spatial Pyramid Pooling) module is employed to consider context information and fuse features from different receptive fields. In the decoder, both lower-level and higher-level semantic features generated by the encoder are utilized. The lower-level semantic features undergo a 1x1 convolution to increase their dimension, while the higher-level semantic features are upsampled using a 4x CARAFE (Content-Aware ReAssembly of FEatures) module. The two sets of features are then fused, followed by two consecutive 3x3 convolutions. A final 4-fold CARAFE upsampling is performed to obtain the initial extraction results. However, the initial extraction results may still contain imperfections such as spots, voids, bumps, or pits. To improve the completeness of the extraction results, the morphological processing technique is applied to optimize the initial extraction results. This processing helps eliminate these imperfections and enhance the overall quality of the extraction. Figure 2 illustrates

the proposed structure of the improved DeepLabv3+ network, showcasing the flow and components of the model.

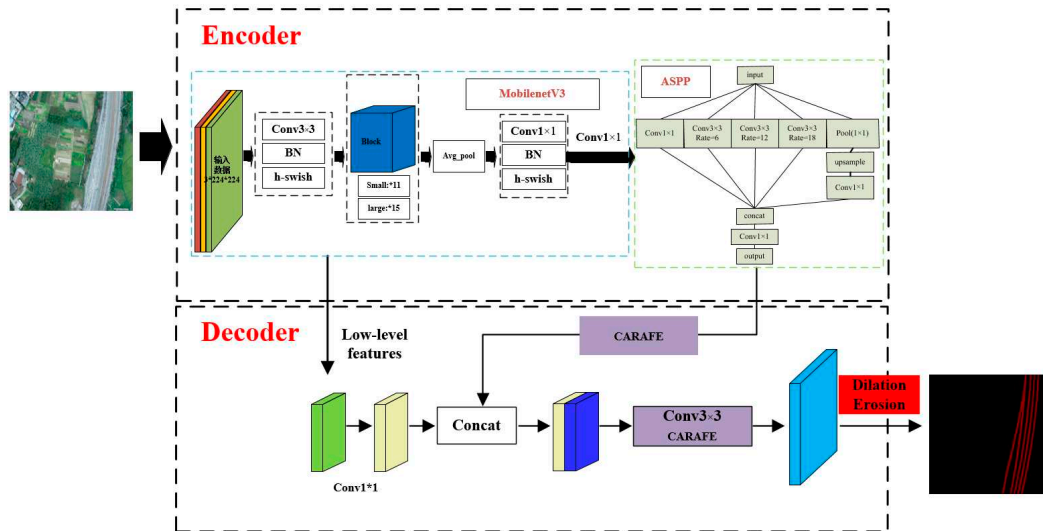


Figure 2. Improved DeepLabv3+ network structure diagram

The process of railway track extraction in this paper consists of three stages: the training stage, the extraction stage, and the optimization stage. In the training phase, pre-trained weights are utilized to expedite the convergence of the model. The loss function is then applied to calculate the error between the predicted output and the ground truth labels. This loss value serves as a feedback signal that is used to adjust the weight values of each layer in the network through back-propagation facilitated by the optimizer. Multiple iterations of training are performed until the loss value reaches its minimum and stops decreasing. At this point, the predicted values closely resemble the real values, and the model weights are considered optimal. The model training results thus achieve the best performance. Moving on to the extraction stage, the input image is processed sequentially with each layer's features based on the trained weights. The various semantic features extracted from each layer are then fused and upsampled in the decoder section of the model. This process ultimately yields the preliminary extraction results, which represent the initial segmentation of the railway track. In the optimization stage, the preliminary extraction results undergo morphological operations such as erosion, dilation, opening, and closing. These operations are employed to rectify possible errors and enhance the completeness of the results. By applying these morphological operations, more accurate and comprehensive extraction results are obtained.

### 2.3. Mobilenetv3 network


MobileNetV3 is the latest lightweight network proposed by Google. It offers several advantages, including fewer parameters, lower computation requirements, and reduced time consumption. In MobileNetV3, the convolution kernel of the first layer has been modified from 32 to 16, further reducing time consumption without compromising accuracy. In MobileNetV2 [20], the Swish function replaced the ReLU function, resulting in a significant improvement in accuracy. However, the computation and derivation of the Swish activation function and other non-linear functions were more complex, leading to increased time burden. To address these limitations, MobileNetV3 introduces the h-swish function as the activation function. The h-swish function is similar to ReLU6 but offers easier calculations. The expression for the h-swish activation function is as follows:

$$h-swish(x) = x \frac{ReLU6(x+3)}{6} \quad (1)$$

The performance of a nonlinear activation function can vary based on the depth of the network layer. Generally, the h-swish function tends to perform better as the number of network layers

increases. Therefore, in the MobileNetV3 structure, the h-swish activation function is used exclusively in the first and subsequent layers of the network. This approach leverages the strengths of the h-swish function, such as its computational efficiency and ability to maintain high accuracy. However, as the depth of the network increases, other factors, such as the complexity of the task and the characteristics of the data, may come into play. To optimize the overall performance of the network, it is common to employ different activation functions in different layers based on specific requirements and performance characteristics. By selectively applying the h-swish activation function to the initial layers of MobileNetV3, the trade-off between accuracy and computational efficiency is effectively managed.

In MobileNetV3, the core of the network is the Block structure, which incorporates the channel attention mechanism [21] and updates the activation function. This module enables explicit modeling of interdependencies between channels and adaptive recalibration of channel-level characteristic responses. When the Block structure in MobileNetV3 is activated, the input feature matrix undergoes processing through  $1 \times 1$  convolution and  $3 \times 3$  convolution. It is then passed to the attention module for further processing. The channel attention module pools each channel of the input feature matrix, transforming it into a vector using two fully connected layers. In the first fully connected layer, the number of channels is reduced to  $1/4$  of the input feature, while the number of channels remains unchanged in the second fully connected layer. The output vector from the attention module represents the weight relationships among different channel features in the preceding input feature matrix. This weight signifies the importance of each channel feature, with higher weights assigned to more significant features. The Block structure of MobileNetV3 is illustrated in Figure 3.

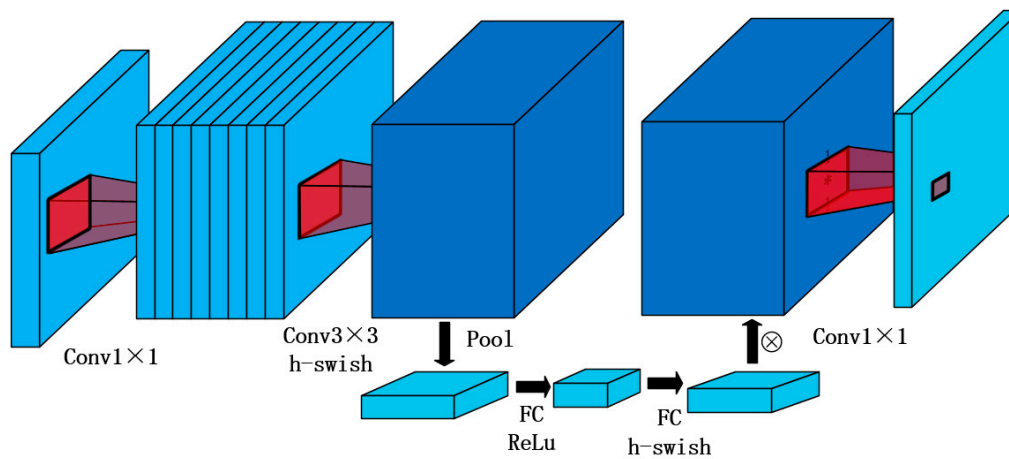

**Figure 3.** Block structure of MobileNetV3.

Utilizing the channel attention module to calculate feature channel weights can introduce additional time consumption to the overall model. The conventional channel attention module employs the sigmoid activation function with an exponent, which demands significant computational resources. Moreover, during backpropagation, there is a risk of vanishing gradients. To address these concerns, MobileNetV3 employs the h-sigmoid function as the activation function in the attention module. This choice helps to mitigate the additional computational burden. By using the h-sigmoid function, MobileNetV3 reduces the computational overhead while still effectively modeling the channel weights within the attention module. The expression of the h-sigmoid activation function is as follows:

$$f(x) = \begin{cases} 1, & (x > 3) \\ \frac{x}{6} + 0.5, & (3 \geq x \geq -3) \\ 0, & (x < -3) \end{cases} \quad (2)$$


## 2.4. Morphological algorithm

The morphology algorithm is an image processing technique that relies on lattice theory and topology. It consists of four fundamental operations: erosion, dilation, opening, and closing. Opening and closing operations are composite operations that combine erosion and dilation [22].

At the core of the morphology algorithm is a convolution kernel-like structure, which can be designed in a square or circular shape around a reference point, depending on the requirements. During the execution of the algorithm, this "kernel" moves systematically across the input binary image. By analyzing the pixel values, the algorithm determines the relationships between different parts of the image, allowing for an understanding of its structural characteristics. Subsequently, appropriate processing of the binary image can be performed based on this analysis.

The morphological erosion operation in the morphology algorithm involves finding the minimum value among the pixels in a specific area of a binary image. In the case of a binary input image consisting of values [0,1], the morphology algorithm's "kernel" traverses the image. If only pixel 0 or pixel 1 is present within the range of the kernel, no changes are made to that region. However, if both pixel 0 and pixel 1 are present within the kernel's range, the corresponding region in the binary image, centered around the reference point of the kernel, is assigned a value of 0. The operation's effect is demonstrated in Figure 4a. On the other hand, the morphological dilation algorithm performs a local maximum operation. It operates similarly to the erosion algorithm mentioned above, where regions with either pixel value 0 or pixel value 1 undergo no processing. However, if both pixel values 0 and 1 are present simultaneously, the binary image region centered around the reference point defined in the "kernel" is copied as pixel 1. The operation's effect is depicted in Figure 4b.

The open and close operations in the morphology algorithm are composite operations that combine erosion and dilation. The open operation involves applying erosion followed by dilation. This operation is effective in eliminating small spots and convex areas within a specified region, as depicted in Figure 4c. On the other hand, the close operation applies dilation first and then erosion. It is useful for filling in holes and depressions in the image, as illustrated in Figure 4d. In the context of the paper, the model first performs the open operation to eliminate spots and convex areas. This step helps remove small artifacts and irregularities. Then, the close operation is applied to connect fragmented structures and fill in any remaining holes or gaps, thereby achieving a more complete and refined image representation.

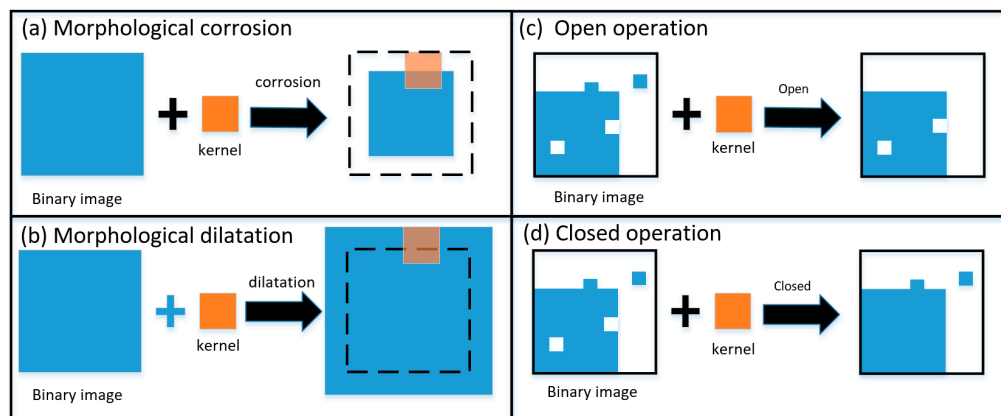

**Figure 4.** Schematic diagram of morphological algorithm effect.

## 2.5. Lightweight up sampling structure CARAFE

Bilinear upsampling is a widely used technique in semantic segmentation networks. It involves determining an upsampling kernel based on the pixel distribution within the input feature map space and applying the same upsampling operation across the entire feature map. However, this method has limitations, such as a small receptive field and a lack of consideration for content information in the feature map. To address these limitations, Wang J et al. [23] proposed a lightweight upsampling

operator called CARAFE. This operator automatically generates different upsampling kernels to handle various pixel information within the input feature map. CARAFE consists of two modules: the upsampling kernel prediction module and the feature recombination module. The upsampling kernel prediction module predicts the appropriate upsampling kernels based on the input feature map, taking into account its content information. The feature recombination module then utilizes the predicted kernels to recombine the feature maps, effectively capturing and preserving more detailed information during the upsampling process. By incorporating the CARAFE upsampling operator, the network can better adapt to the pixel information and content characteristics of the feature map, leading to improved performance in tasks such as semantic segmentation.

Taking the upsampling process of the advanced semantic features of the model in this article as an example. When the railway track segmentation data set is used for extraction, the input original image is  $512 \times 512 \times 3$ , that is, the size is  $512 \times 512$  and the number of channels is 3. The image is processed by the backbone network and ASPP module, and the output advanced feature map is  $32 \times 32 \times 256$ . In the upsampling kernel prediction module, the advanced feature graph output by decoder is first compressed by  $1 \times 1$  convolution channel to obtain a feature graph with a size of  $32 \times 32 \times 64$ . Then, according to the multiple of 4 times the upsampling, the compressed feature graph is re-encoded by  $3 \times 3$  convolution to obtain a feature graph with a number of channels of  $4^2 \times 5^2$ . Then dimension expansion is carried out to obtain  $4 \times 32 \times 4 \times 32 \times 5^2$  upsampled kernel. In the feature recombination module, a point with a size of  $5 \times 5$  is selected from the input feature map and the corresponding region of the point in the upper sampling kernel at the prediction point is dot product operation, and finally a feature map with a size of  $128 \times 128 \times 256$  is obtained. The working principle of the up-sampling module in this paper is shown in Figure 5.

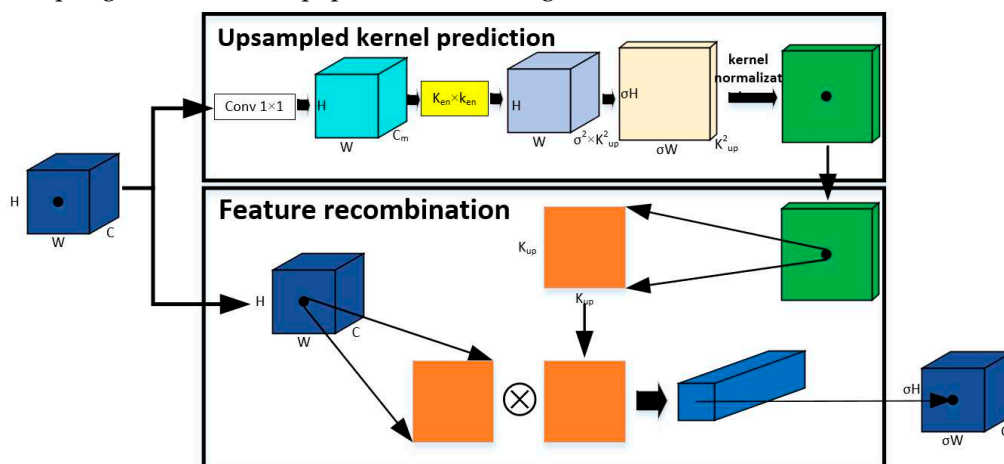


Figure 5. Working principle of upsampling module.


### 3. Experimental data and evaluation indexes

In this section, we present the experimental data, experimental setup, and evaluation metrics employed in this study, aiming to provide a comprehensive overview of the empirical aspects of our research.

#### 3.1. Experimental data

In this paper, the railway track segmentation dataset is created using UAV aerial images provided by a company. The dataset primarily consists of railway UAV aerial images captured in various railway stations in different cities in China, encompassing diverse railway environments. The original aerial images do not have corresponding label images, so it was necessary to manually annotate the label files using LabelMe software. The training set and test set were divided in a 9:1 ratio, with the test set serving as the validation set. The validation set was not separately partitioned. To prevent overfitting, improve model robustness, enhance model generalization, and address sample imbalance, several data augmentation techniques were employed on the training set. These

techniques included random cropping, rotation, horizontal flip, vertical flip, and center flip. Through these augmentation methods, the divided training set was enriched, resulting in a final training set consisting of 7,892 railway images along with their corresponding label images. In the railway label dataset used in this paper, the background pixel value is set as 0, while the target pixel value representing the railway track is set as 1. The original and labeled images are displayed in Figure 6.

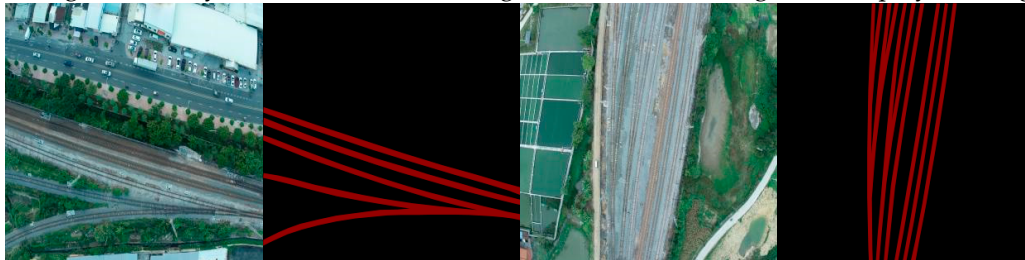

**Figure 6.** Original image and label image (Railway dataset).

The DeepGlobe dataset [24] was used as a public dataset in this paper, consisting of original images and label images. Specifically, 3,984 images were selected from this dataset. In the DeepGlobe dataset, the pixel values in the label images range from 0 to 255. However, for the model used in this paper, the label dataset requires pixel values to be in the range of 0 to 1. Therefore, preprocessing was performed on the DeepGlobe dataset. The preprocessing involved converting the regions in the label images with a pixel value of 255 to a pixel value of 1 using a binary image processing algorithm. This ensured consistency with the label dataset used in the model. Subsequently, the data images were divided into a training set and a test set, following a 9:1 ratio. The validation set was not separately divided. The images from the DeepGlobe dataset, along with their corresponding labels, are displayed in Figure 7.



**Figure 7.** Raw image and label image (Deepglobe dataset).

### 3.2. Experimental environment and parameter setting

The experimental environment for this paper was a Windows 10 system with a 64-bit operating system, an Intel i5 CPU, and an NVIDIA Tesla T4 graphics card. The model was implemented using Torch 1.2.0 and Python 3.7. During the training process, the initial learning rate was set to  $7e-3$ . To achieve high accuracy, the Stochastic Gradient Descent (SGD) optimizer was used. A weight decay of  $1e-4$  was applied to prevent overfitting. The model was trained for a total of 100 epochs, and the weights were saved every 5 epochs for further analysis and evaluation.

### 3.3. Evaluation index

The model presented in this paper is a semantic segmentation model. To assess its performance, several evaluation metrics were employed, including Intersection over Union (IoU) and Mean Intersection over Union (MIOU), Class Pixel Accuracy (CPA) and Mean Pixel Accuracy (MPA), Recall, and Accuracy. IoU measures the overlap between the predicted segmentation mask and the ground truth mask for each class, while MIOU computes the average IoU across all classes. CPA calculates the percentage of correctly classified pixels for each class, and MPA computes the average accuracy across all classes. Recall assesses the ability of the model to correctly identify positive instances, and Accuracy measures the overall accuracy of the model's predictions. By evaluating the model's

performance using these metrics, a comprehensive understanding of its merits and limitations can be obtained. The evaluation index formula is as follows:

$$IoU = \frac{TP}{TP+FN+FP} \quad (3)$$

$$MIoU = \frac{1}{N} \sum_{k=1}^N IoU_k \quad (4)$$

$$CPA = \frac{TP}{TP+FP} \quad (5)$$

$$MPA = \frac{1}{N} \sum_{k=1}^N CPA_k \quad (6)$$

$$Recall = \frac{TP}{TP+FN} \quad (7)$$

$$Accuracy = \frac{TP+TN}{TP+TN+FP+FN} \quad (8)$$

In the evaluation of the model, the following definitions are used: TP (True Positives) represents the cases where the model correctly predicts a positive instance and the label result is also positive. FP (False Positives) represents the cases where the model incorrectly predicts a positive instance, but the label result is negative. TN (True Negatives) represents the cases where the model correctly predicts a negative instance and the label result is also negative. FN (False Negatives) represents the cases where the model incorrectly predicts a negative instance, but the label result is positive.


#### 4. Results

In this section, we outline the experimental procedure employed in this study and present a comparative analysis of the experimental results.

##### 4.1. Visual analysis of loss function


To further evaluate the performance of the proposed railway track extraction method, the convergence process of the training loss functions for different models was visually analyzed on the DeepGlobe public dataset and the railway track segmentation dataset. The convergence rate and the minimum value reached by the loss function represent the performance of different semantic segmentation models. To eliminate any other interfering factors, the models used in the loss function visualization experiment in this paper all employed the same loss function, and the number of training iterations was set to 100. The networks compared in this experiment include U-Net and different backbone networks of the DeepLabv3+ model.

In the experiment using the railway track segmentation dataset, the U-Net network exhibits significant fluctuations in its loss iteration curve. The training loss continuously decreases, while the validation loss slightly increases after the initial decrease, eventually converging to the minimum loss value at around the 60th iteration. On the other hand, the DeepLabv3+ models with MobileNetV2 and Xception backbones show smaller fluctuations in their loss curves, converging to the minimum loss within 50 to 60 iterations. In this paper, the convergence curve of the model's loss function is relatively smooth, with both the training loss and validation loss converging rapidly. The lowest loss value is reached at around the 40th iteration. The loss function curve of railway track segmentation data set is shown in Figure 8.

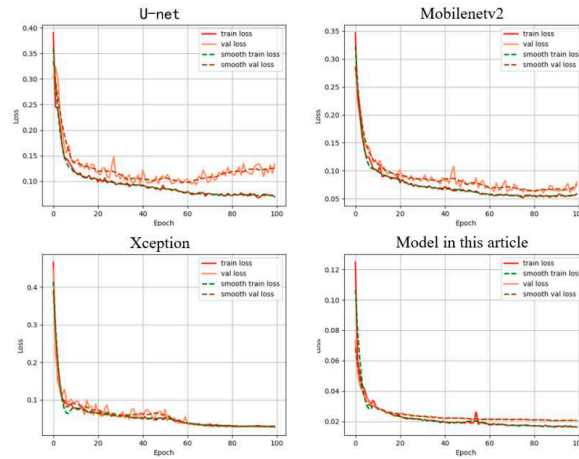

**Figure 8.** Convergence Comparison of Loss function of Railway Dataset.

The visualization experiments conducted on the DeepGlobe public dataset reveal several observations. In the U-Net model, the training loss decreases rapidly, but the validation loss converges at a slower pace. The MobileNetV2 backbone network model exhibits faster convergence speed, although the loss value remains relatively high. On the other hand, the Xception backbone network model shows the slowest convergence speed. In comparison to these models, the network proposed in this paper demonstrates improved convergence speed and achieves a lower final loss value. The public data set loss function curve is shown in Figure 9.

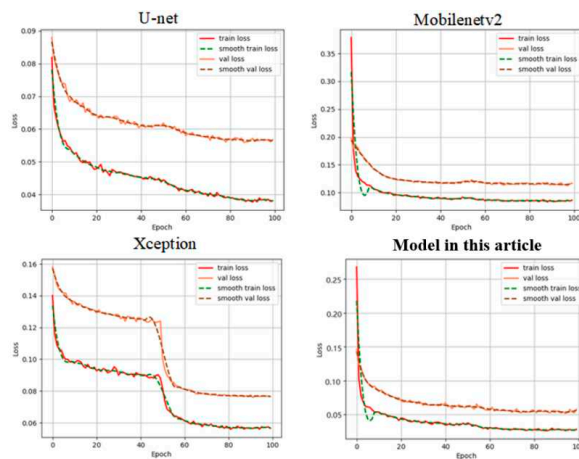

**Figure 9.** Convergence Comparison of Loss function of Common Dataset.

The visual curve of the loss function demonstrates that the proposed model exhibits faster convergence, a smoother loss curve, and a smaller convergence value. As a result, the railway track extraction model proposed in this paper showcases superior performance.

## 4.2. Comparative Experimental Analysis

### 4.2.1. Railway Dataset Experiment

To compare the overall accuracy of this algorithm with other algorithms, an evaluation was conducted using the railway track segmentation dataset. The evaluation metrics and runtime of the proposed model were compared with the U-Net semantic segmentation network [25], L-UNet network [26], DeepLabv3 model with ResNet backbone [27], and DeepLabv3+ network [28] using the improved MobileNetV2 backbone network with rectangular contrast. For ease of comparison, the prediction time was selected as a measure of the model's time difference, and 288 original images from the railway track segmentation dataset were used for prediction. It can be observed that the

DeepLabv3+ model with the MobileNetV2 backbone network achieves improved accuracy and lower prediction time compared to the U-Net network and DeepLabv3 network. This indicates that utilizing a lightweight backbone network, such as MobileNetV2, in the DeepLabv3+ model can significantly reduce the network's scale without compromising accuracy and reduce the overall runtime. Furthermore, in this paper, the MobileNetV3 backbone network was employed, which further enhances accuracy and reduces runtime by approximately 5% compared to MobileNetV2, before the morphological processing. Based on the above analysis, it can be concluded that the proposed method not only improves the accuracy of railway track extraction but also significantly reduces the overall running time. The comparison results are presented in Table 1.

**Table 1.** Comparison of evaluation indicators between this method and other models.

Model	IoU	MIoU	CPA	MPA	Recall	Accuracy	Times
Ning Y et al.[25]	63.41%	86.16%	74.94%	93.85%	86.52%	94.72%	96s
Miao X et al.[26]	65.22%	87.60%	76.71%	95.41%	87.01%	96.11%	80s
Ling H et al.[27]	64.13%	86.06%	75.53%	94.07%	86.62%	95.34%	72s
Yuejuan R et al.[28]	64.97%	86.87%	76.21%	94.90%	86.99%	95.96%	64s
<b>Proposed method</b>	<b>66.21%</b>	<b>88.93%</b>	<b>76.33%</b>	<b>95.51%</b>	<b>89.02%</b>	<b>97.69%</b>	<b>61s</b>

Despite the improvements made in the DeepLabv3+ model, there are still some imperfections in the extracted railway track area, such as holes, bumps, and spots. This is mainly due to the nature of semantic segmentation, which operates at a pixel level. In areas of the original image that are non-railway, there may be pixels that are similar or identical to those in the railway area, leading to segmentation errors. To further enhance the semantic segmentation results, morphological erosion and dilation operations can be employed. The open operation (erosion followed by dilation) helps to remove spots and bumps, while the close operation (dilation followed by erosion) can eliminate voids within the railway area without altering the overall shape. The effectiveness of these morphological operations depends on adjusting the size of the kernel in the algorithm to achieve optimal results. By applying these operations to the railway area, a complete and refined railway track can be obtained. Table 2 provides a comparison between the results obtained by the model proposed in this paper and other extraction models, highlighting the improvements achieved. The comparison between the model in this paper and other model extraction results is shown in Table 2.

**Table 2.** Comparison of extraction results between this article and other models.

Original	Ning Y et al.[25]	Miao X et al.[26]	Ling H et al.[27]	Yuejuan R et al.[28]	Proposed method	Label

#### 4.2.2. Deepglobe public data set model comparative experimental analysis

To assess the generalization ability of the proposed model, the same experiment was conducted on the DeepGlobe public dataset, which was preprocessed to enable semantic segmentation. Different models were trained on this dataset, and predictions were made on 398 raw images. The experimental


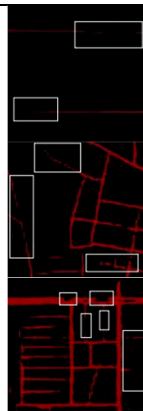
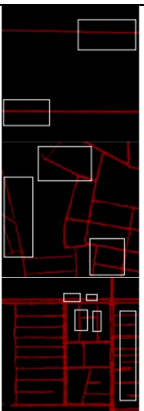
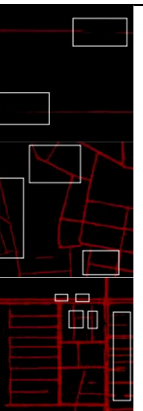
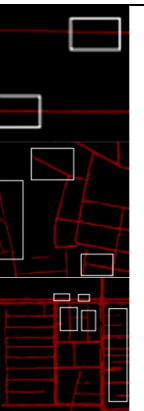
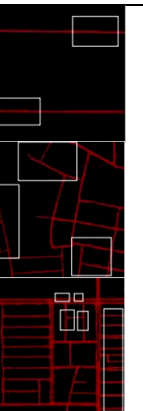

results demonstrate that, similar to the results obtained on the railway track segmentation dataset, the proposed model exhibits improved extraction accuracy compared to other models, along with reduced computational time. The comparison results of evaluation metrics and runtime are presented in Table 3.

**Table 3.** Comparison of evaluation indicators between this method and other models.

Model	IoU	MIoU	CPA	MPA	Recall	Accuracy	Times
Ning Y et al.[25]	61.66%	79.91%	72.57%	82.58%	84.35%	90.32%	132s
Miao X et al.[26]	63.98%	81.32%	74.92%	84.06%	85.77%	92.66%	110s
Ling H et al.[27]	61.96%	80.06%	73.24%	82.97%	84.90%	91.92%	98s
Yuejuan R et al.[28]	62.15%	82.35%	74.17%	83.95%	85.03%	93.81%	88s
<b>Proposed method</b>	<b>65.21%</b>	<b>84.72%</b>	<b>75.80%</b>	<b>86.60%</b>	<b>86.96%</b>	<b>94.84%</b>	<b>84s</b>

The public dataset contains road environments that are more complex, and as a result, the evaluation metrics have decreased to varying degrees compared to the railway track segmentation dataset. However, under the same conditions, the proposed model still exhibits improved extraction performance compared to other models. The road images extracted by the proposed model undergo further processing using a morphological algorithm, resulting in more complete road features. A comparison between the results of the proposed model after morphological processing and other models is presented in Table 4.

**Table 4.** Comparison of extraction results between this article and other models.

Original	Ning Y et al.[25]	Miao X et al.[26]	Ling H et al.[27]	Yuejuan R et al.[28]	Proposed method	Label
						

#### 4.3. Analysis of ablation experiment

In order to verify whether the enhanced DeepLabv3+ model proposed in this paper achieves improved accuracy and reduced runtime compared to the original model, ablation experiments were conducted on both the DeepGlobe public dataset and the railway track segmentation dataset.

The ablation experiments conducted in this paper primarily focused on examining the impacts of the MobileNetV3 backbone extraction network, MobileNetV2 backbone extraction network, CARAFE, and morphological algorithm on the accuracy and runtime of railway track extraction, while keeping other conditions constant. Initially, experiments were conducted using the MobileNetV2 backbone extraction network to evaluate the effects of CARAFE and the morphological algorithm on extraction accuracy and runtime. Subsequently, the same experimental operations were performed using the MobileNetV3 backbone extraction network.

The experimental results on the railway track segmentation dataset demonstrate that replacing the upsampling module with CARAFE leads to a slight improvement in accuracy and a reduction in runtime. Furthermore, the addition of the morphological algorithm further enhances accuracy but significantly increases the runtime. However, under identical conditions, the MobileNetV3 backbone extraction network proves to be more efficient and consumes less time compared to the MobileNetV2

extraction network. The comparison results of the ablation experiments on the railway track segmentation dataset are presented in Table 5.

**Table 5.** Railway Dataset Ablation Experiment.

<b>Mobilenetv2</b>	<b>Mobilenetv3</b>	<b>CARAFE</b>	<b>Morphological</b>	<b>Accuracy</b>	<b>Times</b>
√	×	×	×	93.57%	63s
√	×	√	×	93.91%	62s
√	×	√	√	96.15%	65s
×	√	×	×	94.71%	60s
×	√	√	×	95.07%	58s
×	√	√	√	<b>97.59%</b>	<b>61s</b>

The experimental results on the DeepGlobe public dataset exhibit similar trends to those observed on the railway track segmentation dataset. The incorporation of CARAFE and the morphology algorithms leads to an improvement in extraction accuracy to some extent, while the performance of the MobileNetV3 backbone surpasses that of MobileNetV2. The comparison results of the ablation experiments on the DeepGlobe public dataset are presented in Table 6.

**Table 6.** Deepglobal public dataset ablation experiment.

<b>Mobilenetv2</b>	<b>Mobilenetv3</b>	<b>CARAFE</b>	<b>Morphological</b>	<b>Accuracy</b>	<b>Times</b>
√	×	×	×	91.45%	88s
√	×	√	×	91.93%	86s
√	×	√	√	93.34%	90s
×	√	×	×	92.88%	83s
×	√	√	×	93.21%	82s
×	√	√	√	<b>94.84%</b>	<b>84s</b>

The results of the ablation experiments on the DeepGlobe public dataset and the railway track segmentation dataset demonstrate that the improved DeepLabv3+ model in this paper outperforms the model using the MobileNetV2 backbone extraction network in terms of accuracy while significantly reducing the runtime.

## 5. Discussion

Based on the experimental results, it is evident that the proposed method has significantly enhanced the accuracy of extraction while reducing the time consumption. This improvement can be attributed to the utilization of NAS (Neural Architecture Search) and NetAdapt algorithms in the MobileNetV3 network. In the NAS process, resource-constrained NAS is employed to search for the optimal network structure. MobileNetV3 divides the network structure into multiple independent blocks based on the bottleneck residual module and performs separate macro-level network structure searches for each block. This allows different blocks to utilize different macro structures, enhancing the flexibility and adaptability of the network. Additionally, the NetAdapt algorithm fine-tunes the structure of each layer. It generates new structures for specific network layers based on the network obtained from NAS search. The NetAdapt algorithm first tests whether the new structure can reduce latency and then assesses the corresponding model accuracy associated with the latency-reducing structure. This iterative process aims to significantly reduce the overall model's time consumption while improving the extraction accuracy.

Furthermore, the inclusion of the CARAFE module and morphology algorithm has a noticeable effect on improving the extraction accuracy, albeit at the cost of increased overall running time. The CARAFE module, a lightweight upsampling operator, takes into account the content information of the feature map while maintaining a low parameter count. This leads to shorter upsampling time and a slight improvement in accuracy. The morphology algorithm, on the other hand, assesses the validity of a region based on the pixel distribution within a binary image. If the number of pixel values

surrounding a particular region significantly exceeds the number of pixel values within the region, the pixel value of the region is modified, effectively eliminating spots and holes. Similar to the attention mechanism, incorporating the structure of the morphology algorithm also introduces additional computational overhead. In summary, the DeepLabv3+ model with the MobileNetV3 backbone extraction network in this paper achieves improved accuracy in railway track extraction, and the morphology algorithm proves to be effective in optimizing the extraction results. However, it is important to consider the trade-off between accuracy and computational efficiency due to the increased running time associated with the inclusion of CARAFE and the morphology algorithm.

## 6. Conclusions

This paper introduces an improved DeepLabv3+ model for railway track extraction. The study begins by creating a railway track segmentation dataset with diverse scenes using UAV aerial images from several domestic stations. Addressing the issue of low work efficiency caused by excessive layers in existing semantic segmentation networks, the proposed approach utilizes the lightweight MobileNetV3 network as the backbone network for the DeepLabv3+ model. Additionally, the CARAFE lightweight upsampling operator is employed for the decoder's upsampling component. This design achieves segmentation accuracy while reducing the scale of the semantic segmentation network and improving model efficiency. To address potential issues such as holes and spots in the initial extraction results, this paper incorporates a morphological algorithm to optimize the outcomes. By employing a combination of morphological erosion and dilation operations, the algorithm effectively eliminates these undesired artifacts. The proposed algorithm is evaluated using the railway track segmentation dataset and the DeepGlobe dataset, comparing it with common semantic segmentation networks. Experimental results demonstrate that the proposed model exhibits significantly improved accuracy while consuming less time.

Although this method has reduced the model's computational time to some extent, it necessitates morphological optimization of the extracted results, which adds a small amount of additional processing. Further optimization of the model is required to minimize time overhead even more, ensuring faster and more comprehensive extraction of railway tracks.

**Author Contributions:** Conceptualization, Y.B-W and Z.C-L; railway image acquisition, Y.B-W and X.H-C; data preprocessing, Z.C-L and X.B-H; formal analysis, X.H-C, J-H and F.N-L; funding acquisition, Y.B-W, J-H and F.N-L; writing—original draft preparation, Y.B-W and Z.C-L; experiment, Z.C-L; writing—review and editing, Y.B-W, Z.C-L, J-H and H-Y; paper revision, Y.B-W, Z.C-L and J-H. All authors have read and agreed to the published version of the manuscript.

**Funding:** This research was funded by National Key R&D Program of China (2021YFF0501101),

The National Natural Science Foundation of China(U1934219), and Hunan Provincial Natural Science Foundation(2021JJ50049, 2022JJ50067).

**Institutional Review Board Statement:** Not applicable

**Data Availability Statement:** Public data sets can be found at <http://deepglobe.org/index.html>. Other data in this study can be contacted by the corresponding author.

**Acknowledgments:** Firstly, the authors would like to express their gratitude for the financial support provided by the National Key Research and Development Program of China, the National Natural Science Foundation of China, and the Hunan Provincial Natural Science Foundation. Secondly, the authors would like to thank Zhuzhou Taichang Electronic Information Technology Co., Ltd for their invaluable data and technical assistance.

**Conflicts of Interest:** The authors declare no conflict of interest.

## References

1. Jiang Liu, Bogen Cai, Jian Wang, et al. Research on Algorithm of Electronic Track Map Data Reduction for Train Locating. *Journal of Railway Science*, 2011, 33(08), 73-79. [DOI:10.3969/j.issn.1001-8360.2011.08.013]

2. Zihui Zuo, Kaifeng Wang, Cong Xu, et al. Data Processing Method for Generating High-Precision Electronic Track Map. *China Railway Science* 2016, 37(04), 134-138. [DOI:10.3969/j.issn.1001-4632.2016.04.21]
3. Debiao Lu, Ziqi Wang, Jian Wang, et al. Research on Electronic Track Map Data Reduction Method for Novel Train Control System. *Journal of Railway Sciences* 2023, 45(04), 51-61. [DOI:10.3969/j.issn.1001-8360.2023.04.007]
4. Shang, J.; Wang, J.; Liu, S.; Wang, C.; Zheng, B. Small Target Detection Algorithm for UAV Aerial Photography Based on Improved YOLOv5s. *Electronics* 2023, 12, 2434. <https://doi.org/10.3390/electronics12112434>
5. Chi Xiao, Xiaoxia Tian. Research on Road Extraction Algorithm Based on Color Feature. *Modern Computer* 2022, 28(05), 98-102. [DOI: 10.3969/j.issn.1007-1423.2022.05.016]
6. Shi W, Miao Z, Debayle J. An Integrated Method for Urban Main-Road Centerline Extraction From Optical Remotely Sensed Imagery. *IEEE Transactions on Geoscience & Remote Sensing*, 2014, 52(6):3359-3372. [DOI: 10.1109/TGRS.2013.2272593]
7. Xiaoyu Liu, Juqing Zhang, Nian Liu, et al. Urban Road Extraction Based on Morphological Filtering and Trajectory Detection. *Progress in Laser and Optoelectronics*, 2022,59(10): 47-54. [DOI:10.3788/LOP202259.1001002]
8. Lingran Kong, Lizhi Liu, You Wu, et al. Feature Point Process Based Road Centerline Extraction from Remote Sensing Image. *Radio Engineering*, 2023, 53(2):12. [DOI:10.3969/j.issn.1003-3106.2023.02.011]
9. Laraib, U.; Shaukat, A.; Khan, R.A.; Mustansar, Z.; Akram, M.U.; Asgher, U. Recognition of Children's Facial Expressions Using Deep Learned Features. *Electronics* 2023, 12, 2416. <https://doi.org/10.3390/electronics12112416>
10. Liu, B.; Feng, L.; Zhao, Q.; Li, G.; Chen, Y. Improving the Accuracy of Lane Detection by Enhancing the Long-Range Dependence. *Electronics* 2023, 12, 2518. <https://doi.org/10.3390/electronics12112518>
11. Xinqin Li, Pengxiang Zhang, Tianyun Shi, et al. Research on Fault Diagnosis Method for High-speed Railway Signal Equipment Based on Deep Learning Integration. *Journal of Railway Science*, 2019,42(12):97-105. [DOI:10.3969/j.issn. 1001-8360. 2020. 12. 013]
12. Zuoming She, Yongzhi Shen, Jianhong Song, et al. Using the classical CNN network method to construct the automatic extraction model of remote sensing image of Guiyang road elements. *Bulletin of Surveying and Mapping*, 2023, No.553(04):177-182. [DOI:10.13474/j.cnki.11-2246.2023.0126]
13. Jiguang Dai , Yang Du, Guang Jin, et al. A Road Extraction Method Based on Multiscale Convolutional Neural Network. *Remote Sensing Information*, 2019,35(01):28-37. [DOI:10.3969/j.issn.1000-3177.2020.01.004]
14. Zhang X, Ma W, Li C, et al. Fully Convolutional Network-Based Ensemble Method for Road Extraction From Aerial Images. *IEEE Geoscience and Remote Sensing Letters*, 2019, PP(99):1-5. [DOI:10.1109/LGRS.2019.2953523]
15. Xiangwen Kong, Changying Wang, Shichao Zhang, et al. Application of Improved U-Net Network in Road Extraction from Remote Sensing Images. *Remote Sensing Information*, 2023,37(02):97-104. [DOI:10.3969/j.issn.1000-3177.2022.02.013]
16. Hao Qi, Yongting Li, Yongsheng Qi, et al. Research on Track and Obstacle Detection Based on New Lightweight Semantic Segmentation Network. *Journal of Railway Science*, 2019,45(02):58-66. [DOI:10.3969/j.issn.1001-8360.2023.02.006]
17. Chen L C; Papandreou G; Schroff F, et al. Rethinking Atrous Convolution for Semantic Image Segmentation. *arXiv preprint arXiv:1706.05587*, 2017. [DOI:10.48550/arXiv.1706.05587]
18. Chen L C, Zhu Y, Papandreou G, et al. Encoder-Decoder with Atrous Separable Convolution for Semantic Image Segmentation. *Springer, Cham*, 2018. [DOI:10.48550/arXiv.1802.02611]
19. Howard A.; Sandler M; Chu, G, et al. Searching for MobileNetV3. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 2019, 1314-1324. [DOI:10.1109/ICCV.2019.00140]
20. Sandler M; Howard A; Zhu M, et al. MobileNetV2: Inverted Residuals and Linear Bottlenecks. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2018, 4510-4520. [DOI:10.48550/arXiv.1801.04381]
21. Hu J, Shen L, Sun G. Squeeze-and-excitation Networks. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2018, 7132-7141. [DOI:10.1109/TPAMI.2019.2913372]
22. Dougherty E. *Mathematical Morphology in Image Processing*. CRC Press, 2018.

23. Wang J, Chen K, Xu R, et al. Carafe: Content-aware Reassembly of Features. In Proceedings of the IEEE/CVF International Conference on Computer Vision, 2019, 3007-3016. [DOI:10.48550/arXiv.1905.02188]
24. Demir I, Koperski K, Lindenbaum D, et al. DeepGlobe 2018: A Challenge to Parse the Earth through Satellite Images. In Proceedings of the 2018 IEEE/CVF Conference on Computer Vision and Pattern Recognition Workshops (CVPRW). IEEE, 2018. [DOI:10.48550/arXiv.1805.06561]
25. Ning Y, Sheng Jin. Research and Discussion on Road Extraction Using Deep Learning Network U-Net. Journal of Heilongjiang Hydraulic Engineering College, 2020,11(4):1-8. [DOI:10.13524/j.2095-008x.2020.04.045.]
26. Miao X, Yuanxiang Li, Juanjuan Zhong, et al. L-UNet:lightweight network for road extraction in cloud occlusion scene. Journal of Image and Graphics, 2021, 26(11): 2670-2679. [DOI:10.11834/jig.200461]
27. Ling H, Zhaohui Yang, Liangzhi Li, et al. Road Extraction of High Resolution Remote Sensing Imagery Based on Deeplab v3. Remote Sensing Information, 2021, 36(01): 22-28. [DOI:10.3969/j.issn.1000-3177.2021.01.004]
28. Yuejuan R, GE Xiaosan. An road synthesis extraction method of remote sensing image based on improved DeepLabV3+ network. Bulletin of Surveying and Mapping, 2022, 0(6): 55-61. [DOI:10.13474/j.cnki.11-2246.2022.0171]
29. Shi, Z.; Chen, M.; Wu, Z. Hyperspectral Image Classification Based on Dual-Scale Dense Network with Efficient Channel Attentional Feature Fusion. Electronics 2023, 12, 2991. [DOI:10.3390/electronics12132991]
30. Zhu, Z.; Qiu, L.; Wang, J.; Xiong, J.; Peng, H. Video Object Segmentation Using Multi-Scale Attention-Based Siamese Network. Electronics 2023, 12, 2890. [DOI:10.3390/electronics12132890]

**Disclaimer/Publisher's Note:** The statements, opinions and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of MDPI and/or the editor(s). MDPI and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions or products referred to in the content.