

Article

Not peer-reviewed version

Ballast-Supported Foundation Designs for DIY Low-Cost Open-Source Solar Photovoltaic Racking Systems

[Nicholas Vandewetering](#) , [Uzair Jamil](#) , [Joshua M. Pearce](#) *

Posted Date: 8 January 2024

doi: 10.20944/preprints202401.0616.v1

Keywords: open source; photovoltaic; racking; solar energy; biomaterials; wood; photovoltaic; mechanical design; balance of systems; renewable energy



Preprints.org is a free multidiscipline platform providing preprint service that is dedicated to making early versions of research outputs permanently available and citable. Preprints posted at Preprints.org appear in Web of Science, Crossref, Google Scholar, Scilit, Europe PMC.

Copyright: This is an open access article distributed under the Creative Commons Attribution License which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Article

Ballast-Supported Foundation Designs for DIY Low-Cost Open-Source Solar Photovoltaic Racking Systems

Nicholas Vandewetering ¹, Uzair Jamil ² and Joshua M. Pearce ^{3,4,*}

¹ Department of Civil & Environmental Engineering, Western University, London, ON, Canada; nvandew@uwo.ca

² Department of Mechanical & Materials Engineering, Western University, London, ON, Canada; ujamil@uwo.ca

³ Department of Electrical & Computer Engineering, Western University, London, ON, Canada;

⁴ Ivey School of Business, Western University, London, ON, Canada

* Correspondence: Thompson Engineering Building, 1151 Richmond St. N., London, ON, Canada N6A 3K7; joshua.pearce@uwo.ca

Abstract: Although solar photovoltaic (PV) system costs have declined, capital cost remains a barrier to widespread adoption. Do-it-yourself (DIY) system designs can decrease costs by about 50% by reducing labor costs, but if not attached to a building structure demand ground penetration for conventional footings. This is not technically and economically feasible at all sites. To overcome these challenges, this study details systems designed to eliminate drilling holes and pouring concrete. Two different designs for both fixed tilt and variable tilt PV racking are investigated to assess their structural integrity, constructability, and economic cost when fabricated with a ballast-supported foundation. The ballast-supported foundations are analyzed for eight such systems by proposing two separate ballast designs: one for single line of post systems, and one for double line of post systems built on a 4-kW basis. The results of the analysis found that both designs are slightly more expensive than typical in-ground concrete systems by 25%, but the overall DIY systems costs remain economically advantageous. Sensitivity analyses are conducted to show how modifications to the dimensions including clearances and distances between gabions influence the weight of the system and thus change the economic value of the design, so users can trade dimensional freedom for cost-savings, and vice versa. Overall, all the wood-based PV racking system designs provide users with cost-effective and easy DIY alternatives to conventional metal racking, and the novel ballast systems presented provide more versatility for PV systems installations.

Keywords: open source; photovoltaic; racking; solar energy; biomaterials; wood; photovoltaic; mechanical design; balance of systems; renewable energy

1. Introduction

The primary impediment to a solar photovoltaic (PV) powered society has been economics [1], but fortunately PV technology has enjoyed price declines for decades [2,3], so solar is now generally the lowest-cost electricity generation technology at both the small and large scales [4,5]. These new low costs and the fact that PV provides carbon-free electricity has enabled PV to be the most rapidly-expanding electricity source [6,7]. At this point PV is the dominant source of new power [8]. The PV industry continues to be primarily driven by large-scale centralized systems as that have been where energy policy is largely focused [9], but to achieve the U.N. 'Sustainable Energy for All' goals, it is clear that small-scale home-power PV systems can play a huge role [10,11]. These smaller systems can be both driven by the economic advantage for small prosumers to save money [12], but recent life cycle analysis also makes it clear that smaller systems are better for the environment [13]. Although even at the small-scale, PV is an economic benefit to the prosumer, the up-front investment for PV systems present an economic barrier to consumers in the developing [14,15] and developed economies [16,17].

Most of the PV system cost reductions at any scale are due to PV modules price drops, while price stagnation occurred in the balance of systems (BOS) costs (including racking, electronics, and wiring) [3,18,19]. For small-scale PV systems, racking costs are the mainly driven by proprietary and costly aluminum extrusion profiles [20]. For example, PV module prices are around US\$0.125/W [21] so the 3 modules for a 1kW PV system cost \$125 while a 3-module rack costs US\$459 [22], which is 3X the PV cost. More sophisticated racks cost even more as a 3-PV module pole mount rack costs US\$1,312 [23](9X the cost of the required PV modules).

The exorbitant costs of small-scale PV racks are an economic impediment for small-scale PV adoption as well as fast-growing areas of PV like agrivoltaics [24,25] for small-scale farmers [26,27]. Agrivoltaics is the combination of agriculture and PV on the same land to make solar electricity and grow food [28–33]. The solar PV racking structures used for agrivoltaics, generally increase the cost of racking as they are higher off the ground so they use more material [32,34], which again impedes the economics for small-scale PV prosumers. There is thus a critical need to reduce the capital costs of such racking systems.

One approach to reducing costs of small-scale PV systems, is to use do-it-yourself (DIY) development of open source technologies [35]. This approach is well developed and there are open source hardware designs for distributed production of PV racking of the following types of systems: 1) low-tilt angle PV racks for mobile arrays [36], 2) steel cable-based cross X-wire PV racking systems for flat commercial rooftops [37] and ground-mounted near the equator [38], 3) tensegrity-based solar PV racking [39], 4) after-market adaptations of conventional modules to allow for building integrated PV (BIPV) [40], 5) fixed-tilt ground mounted wood-based racks [41], 6) variable-tilt wood-based PV racks [42,43], 7) vertically-mounted (sign-based) wood PV racks [44], 8) fence-based PV for agrivoltaics on existing farm fencing [45], 9) aftermarket adaptation to make floatovoltaics (FPV) [46], 9) trellis-based agrivoltaics wood-based PV racks [47], 10) cable and pipe-based mobile photovoltaic racking [48], 11) cable based variable tilt racks [49] and 12) earth and shotcrete-based racking [50]. There are also many community-developed racking systems made from wood [51–54], wood and metal hybrid [55–58], metal temporary [59] and metal permanent [60,61] designs, but they have not been evaluated by either peer-review nor have they had professional engineering evaluations. There are several DIY kits available [62–65]. All of these PV racks not attached to buildings, however, involve ground penetration. Holes must be 1.2m into the ground to penetrate below the frost line and avoid heaving [66]. Typically, ground penetrating systems require renting an augur, which can cost over \$100 a day [67], or requires intensively shoveling, which may easily cost more than \$100 in labor costs based on the size of the system. In both cases even if labor costs are ignored the requirements of ground penetration provides barriers to adoption (e.g., renting the equipment can be expensive or shoveling can be too physically demanding in some soil types). In addition, concrete may take a day to solidify, and up to 28 days to reach its specified strength [68]. There is a need for open-source design adaptations that eliminate these barriers. No racking design, however, is available in the literature with the flexibility to mount in locations where ground penetrations were not technically feasible or too costly.

To fill this need, this study details a system designed to eliminate both drilling holes and pouring concrete into the ground for PV systems. Conventional concrete footings may be difficult or even impossible in northern regions as well as suboptimal for agrivoltaics where farmers generally do not want the soil disturbed. Two different designs are investigated in this study to assess their structural integrity, constructability, and cost when fabricated with a ballast-supported foundation. Three trellis systems, adopted from Jamil et al. [47], minimize the number of required posts and thus provides sufficient clearance for agrivoltaic purposes [69]. Variable tilt system adopted from Vandewetering et al. [42] and Jamil et al. [49] allows the user to convert physical labor into useful energy by changing the tilt angle based on the season. Overall, all these wooden PV racking systems provide users with cost-effective and easy DIY alternatives to conventional metal racking, and ballast systems would allow for much more versatility in the way these PV systems can be installed. This study will specifically analyze the ballast-supported foundations for such wood-based systems by proposing two separate ballast designs: one for single line of post systems, and one for double line of post

systems. Each type of ballast system is built on a 4-kW basis. The cost of each total system, along with the foundation costs are presented and compared to traditional ground penetrating concrete systems. Sensitivity analyses are conducted to show how modifications to the dimensions and weight of the system change the economic value of the design.

2. Materials and Methods

2.1. Renewable Materials Selection for Racking: Wood

Wood was selected as the primary building material based on its low cost, high availability, and ease of construction. Additionally, wood as a construction material for PV racking provides environmental advantages. Unlike other conventional materials, responsibly-sourced wood is sustainable [70], renewable, and comprised of approximately half carbon, which was recently taken from the atmosphere. Wood has a negative combined embodied energy and embodied carbon over alternative racking construction materials. Aluminum, which is the most common PV racking material, has over 5 times the embodied CO₂e/kg of wood, even with 31% recycled content [71]. Wood construction may thus also be eligible for carbon credits [72,73].

2.2. Material Properties

Construction grade pressure-treated lumber and hardware purchased from typical hardware stores is used for this design. Different grades and species of lumber can be used based on the cost and availability in any specific region. The National Design Specification for Wood Construction [74] provides structural capacities for lumber of all dimensions and species. In London, Ontario, grade No. 2 SPF lumber is the most commonly sold grade at typical hardware stores and is used for the design of these systems.

2.3. PV Racking Basic Design Parameters

Systems that can be built with a ballast foundation are broken down into two different categories: 1) systems with a single line of posts within an array, and 2) systems with two lines of posts within an array. The two ballast foundation designs are assessed by analyzing two different types of wood racking systems: the sloped T-shaped system, and the variable tilt system. Although all these systems serve different purposes, the foundations of all the single line of post systems have very similar foundation designs. The same is also the case for the double line of post systems. A breakdown of each system’s categorization is shown in **Table 1**.

Table 1. Categorization of single line of post systems and double line of post systems.

System Type	System	Reference
Single Line of Posts	Sloped T-Shaped System	Figure 1 [47]
	Inverse Y System	Figure 2 [47]
	T-Shaped System	Figure 3 [47]
	Swinging Vertical System	Figure 4 [44]
	Wire Rope System ¹	Figure 5 [49]
	Single-Spot Carport System ²	Figure 6 [75]
Double Line of Posts	Variable Tilt System ¹	Figure 7 [42]
	Fixed Tilt System	Figure 8 [41]

¹ Variable tilt angle system. ² Although this system has two lines of posts, it requires the single line of posts ballast foundation to allow vehicles to enter and exit under it.

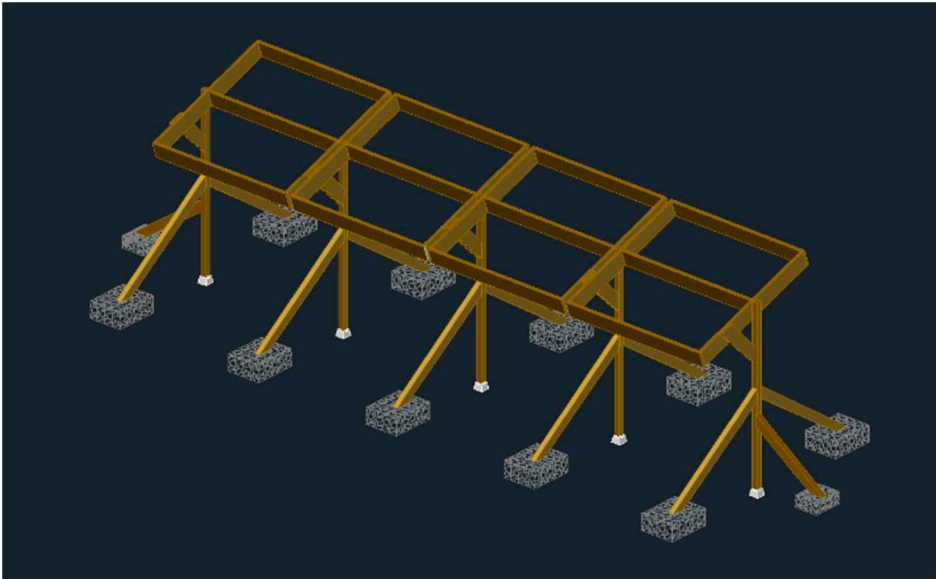


Figure 1. Sloped T-Shaped Ballast System.



Figure 2. Inverse Y Ballast System.

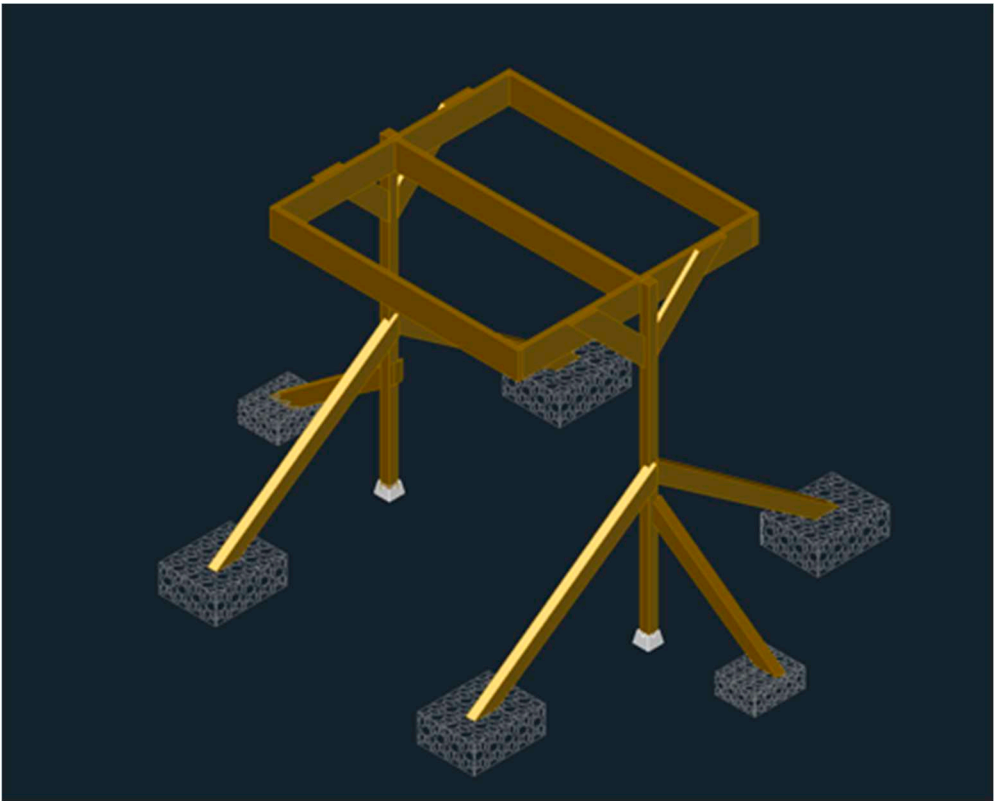


Figure 3. T-Shaped Ballast System.

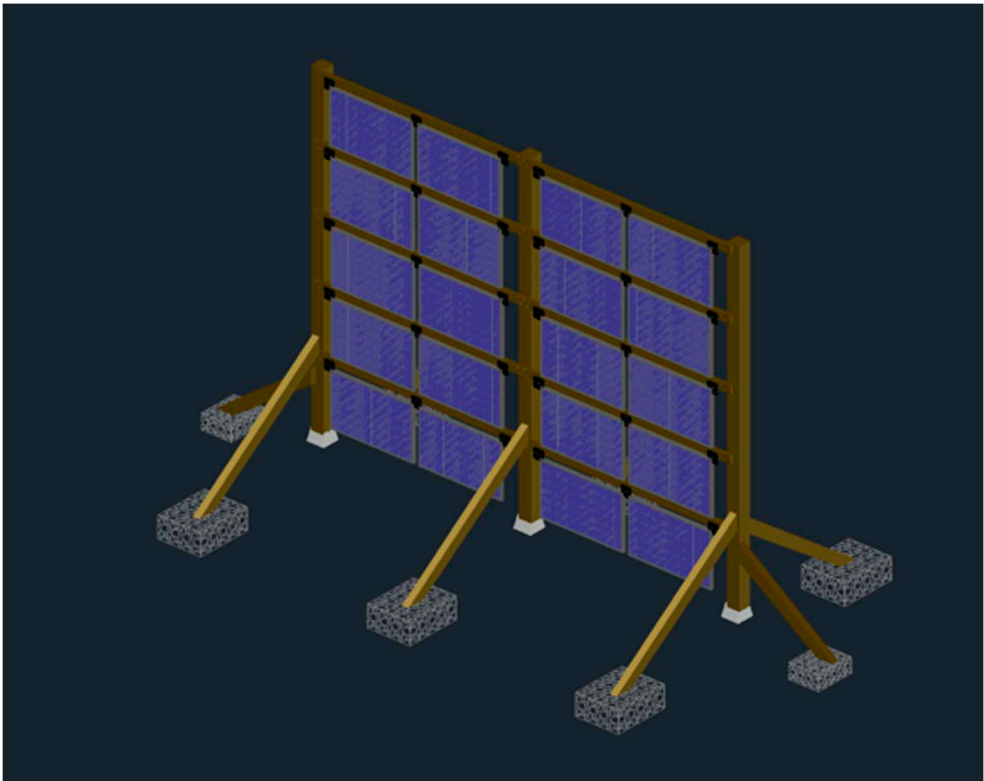


Figure 4. Swinging Vertical Ballast System.

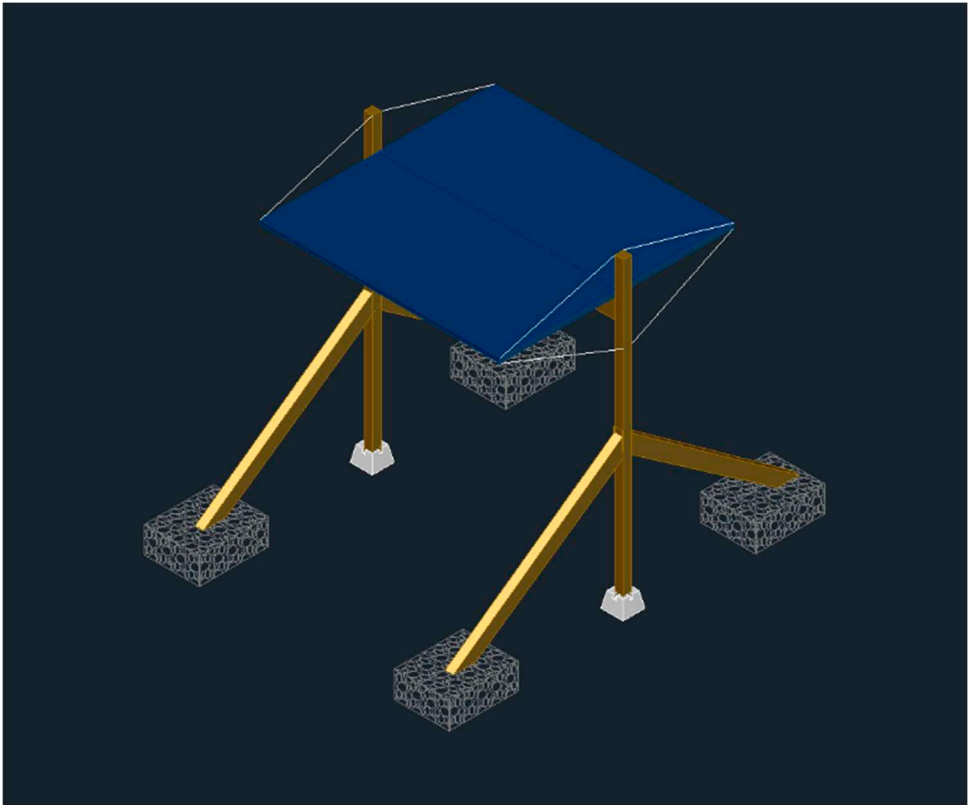


Figure 5. Wire Rope Ballast System.

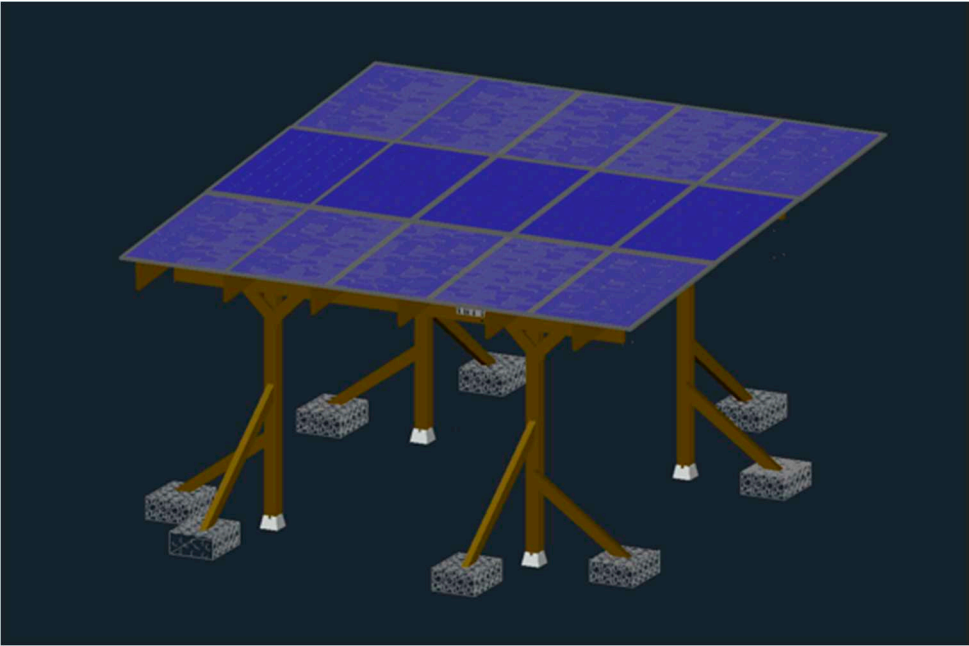


Figure 6. Single Spot Carport System.

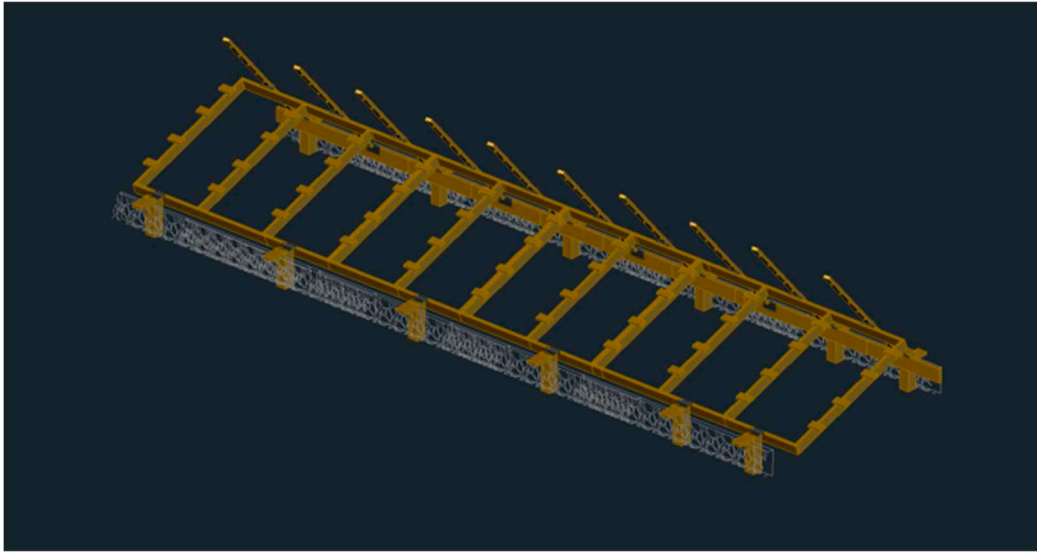


Figure 7. Variable Tilt Ballast System.

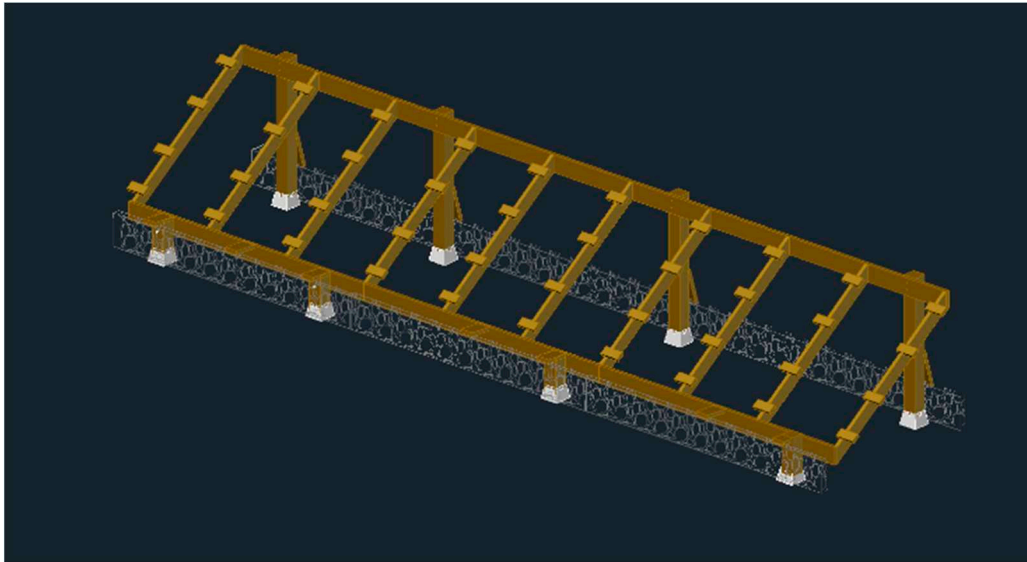


Figure 8. Fixed Tilt Ballast System.

The wooden ballast racking is designed to be widely applicable and accessible for users with many different needs. These systems can be designed for any desired clearance to allow for agricultural growth and equipment mobilization. As expected, the tradeoff to this is more clearance corresponds to more cost, so users can design a system to match their dimensional and economical constraints. Additionally, the systems can be built to any desired tilt angle to maximize the energy yield based on the geography. In this study as an example, 34° is the optimal tilt angle for London, Ontario [41], and is used for the design of these systems.

2.4. Design Analysis Assumptions

These systems are compliant with the National Building Code of Canada [66] for design loads of a structure to last at least 25 years, which conveniently matches the warranty and expected lifetime of many PV modules. The material properties of the wood used follow the values derived from the National Design Specification for Wood Construction [74].

Since the superstructure of these systems is inspired by the Vandewetering et al. [42] and Jamil et al. [47] designs, these ballast systems undertake the same design processes, and thus every component except for the footings will be designed the same way. Ballast systems take on the

challenge of not being supported by fixed concrete footings. Instead, the system is supported by concrete deck blocks resting on the ground, which provide adequate bearing, but are subject to rotation and even tip-over. Therefore, the weight of each gabion required to support the system from tipping-over is critical and thus is calculated. A gabion is taken from Italian gabbione meaning “big cage” is a cage or basket filled with rocks and is common in many types of landscaping and civil engineering projects.

2.5. Economic Analysis

The economic costs of these systems are obtained from local hardware stores and a local landscape supply company.

For the system to last the design life of 25 years, the foundations are required to withstand a worst-case wind force prescribed by National Building Code of Canada. Appendix A outlines how to calculate the weight of rocks required on both ends to resist the uplift induced from the wind force. SiteOne Supply is the supplier used for the building of these systems, which provides a cost per cubic yard for 2” river stone. The cost is converted into a cost per lb, using the density (lbs/cubic yard) provided on the website, and is then multiplied by the total number of lbs required for each basket. The total cost of rocks is presented by multiplying the cost per basket by the number of baskets required to hold a 4-kW system.

A comparison between single line of post systems and double line of post systems will be conducted by comparing the cost between the sloped T-shaped system and the variable tilt system. The bills of materials for the systems are also presented. Each system cost is based on a 4-kW system, where to total cost and the cost per W is provided. The total cost of the newly proposed ballast foundations is isolated and presented as well. In this study, the cost of ballast foundations is presented in three ways; 1) the total foundation cost, 2) the foundation cost as a percentage of the superstructure, and 3) the foundation cost as a percentage of the cost of a concrete foundation.

The amount of rocks required, and thus the foundation cost is highly variable based on the type of system, the location of the build, the desired vertical clearance, and the distance between the rock baskets. To account for this variability, a sensitivity analysis is provided to measure the effect of each of these variables on the final foundation cost. This includes a sensitivity for found rocks (e.g., some locations have abundant and free rocks available that can be used).

Furthermore, the final costs of these systems are subject to change based on the cost of lumber at the time of purchase, and where the material is being purchased [76]. A sensitivity analysis is provided on both commodity wood pricing and location to provide a range of final costs and costs per W of each system.

3. Results

3.1. Foundation Weight Requirements

Appendix A outlines how to calculate the weight of rocks required on both ends to resist the uplift induced from the wind force. For the sloped T-shaped system, the required weight per typical inside basket is 590 lbs. For the variable tilt system, the weight is 1,930 lbs per basket, or 193 lbs per m per side. SiteOne Supply charges \$70 per cubic yard, and states that 2-4” river stone has a typical density of 2,900 lbs per cubic yard [77]. This equates to a rate of \$0.024 per lb. The breakdown for the cost of rocks for these systems is provided in Table 2 and Table 3.

Table 2. Breakdown of the total cost of rocks for the sloped T-shaped ballast system.

Basket Type	Weight of Rocks Required per Basket [lbs]	Number of Baskets	Cost of Rocks per Basket [\$CAD]	Total Cost of Rocks [\$CAD]
Inside	590	6	14.16	113.28
Outside	295	4	7.08	56.64

Lateral	45	2	1.08	2.16
Total Cost of Rocks				\$172.08

¹ This system spans in multiples of two; thus, a six-parking-spot system is used for this analysis.

Table 3. Breakdown of the total cost of rocks for the variable tilt ballast system.

Basket Type	Weight of Rocks Required [lbs]	Number of Baskets	Cost of Rocks per Basket [\$CAD]	Total Cost of Rocks [\$CAD]
Continuous	1939	2	46.54	93.07
Lateral	45	2	1.08	2.16
Total Cost of Rocks				95.23

¹ This system spans in multiples of two; thus, a six-parking-spot system is used for this analysis.

3.2. T-Shaped Fixed-Tilt Rack

3.2.1. Bill of Materials (BOM)

The BOM of a 4 kW sloped T-shaped fixed-tilt design is shown in **Table 4** in Canadian dollars sourced from Copp’s Build-All [78], London, and SiteOne Supply [77], London.

Table 4. 4 kW sloped T-shaped system bill of materials.

Member Name	Piece ¹	Cost per Piece ²	Quantity	Cost [\$CAD]
Joists	2x10x8	\$24.92	15	\$373.80
Beams	2x10x8	\$24.92	10	\$249.20
Cross Braces	2x10x8	\$24.92	2	\$49.84
Posts	4x4x8	\$16.78	6	\$100.68
Outside Joist Connection	2x4 Fence Bracket	\$0.43	20	\$8.60
Cross Braces Connection	2x4 Fence Bracket	\$0.43	20	\$8.60
Middle Joist Connection	2x6 Joist Hanger	\$1.82	10	\$18.20
Beam to Post Connection	½” Carriage Bolt (10”)	\$5.37	6	\$32.22
Beam to Post Connection	½” Nut	\$0.79	6	\$4.74
Beam to Post Connection	½” Washer	\$0.80	6	\$4.80
Tension Based Connections	2-1/2” Brown Deck Screws	\$49.99	1	\$49.99
Shear Based Connections	1-1/2” Joist Hanger Nails	\$4.19	3 lbs	\$12.57
Diagonal From Post to Basket	2x6x8	\$12.60	6	\$75.60
Superstructure Cost				\$988.84
Post Block	4x4 Deck Block	\$10.45	6	\$62.70
Gabion Wire Basket	1” x 36” x 25’ Chicken Wire	\$37.99	2	\$75.98
Plywood on Gabion Basket	4x8x1/2” Plywood	\$71.95	1	\$71.95
Gabion Rocks	Large Riverstone (2+”)	\$172.08 ³	1	\$172.08
Foundation Cost				\$382.71
Total Cost				\$1,371.55
Cost/W				\$0.3429

¹ All lumber is to be pressure treated, and all hardware is to be hot dipped galvanized. ² All costs are in Canadian Dollars as of October 13, 2023, before tax. ³ Total amount from **Table 2**.

3.2.2. Sloped T-Shaped Fixed Tilt Assembly Instructions

The system requires at least 2 builders to install. The superstructure can be built in the same manner as outlined in Jamil et al. [47]. The posts can then be placed into the deck blocks. Space 2 posts far enough to fit in a frame, and temporarily brace the posts with diagonal members, such as unused 2x4s. This will ensure the posts are stable while installing the frame, and to ensure the temporary construction does not blow over while being built.

Rock baskets can now be formed and installed onto the posts. A piece of $\frac{1}{2}$ " pressure treated plywood is cut to the desired basket dimensions. In this case, 600mm x 600mm pieces were used. Then, chicken wire is wrapped around the plywood to and allow it to form into the shape of a basket with an opening on the top as shown in Figure 9. The basket must have a height in which rocks will not tumble out. Excess wire roll is cut with either tin snips or a metal grinder. Any openings in the chicken wire should be closed in by either tying the two ends of the wire together, or by connecting them with a loose metal tie.



Figure 9. Rock basket formed using plywood and chicken wire.

A 2x6 diagonal is now to the post and to the plywood. 2x6s are cut to the desired angle, such as 45 degrees, and a diagonal is connected to the middle of the plywood using two fence brackets as shown in Figure 10. This connection is duplicated for the post. If the chicken wire of the basket gets in the way of the diagonal connecting to the post, an opening is cut in the basket to allow the 2x6 to pass through.



Figure 10. Diagonal connecting to the post and the basket's plywood.

The contained rectangular basket of chicken wire is filled with a weight of rocks equal to the required design weight as calculated in Appendix A. The rocks should be 2" or greater in size so they cannot fall through the gaps of the chicken wire. A completed ballast foundation is shown in Figure 11. This process is repeated for each required basket.



Figure 11. Completed ballast foundation.

3.3. Variable Tilt Rack

3.3.1. Bill of Materials

The BOM of a 4 kW variable-tilt rack is shown in Table 5 in Canadian dollars sourced from Copp's Build-All, London, and SiteOne Supply, London.

Table 5. 4 kW variable tilt system bill of materials.

Member Name	Piece ¹	Cost per Piece ²	Quantity	Cost
Outside Joists	2x6x8	\$12.60	2	\$25.20
Inside Joists	2x8x8	\$18.87	9	\$169.83
Beams	2x8x10	\$23.58	8	\$188.64
Front Posts	4x4x10	\$20.99	4	\$83.96
Joist to Beam Connection	2x4 Fence Bracket	\$0.43	22	\$9.46
Back Supports	2x4x8	\$7.47	10	\$74.70
2x4 Hinges	8" Gate Hinges	\$16.99	10	\$169.70
4x4 to Beam Hinges	6" Gate Hinges	\$11.99	6	\$71.94
Beam to Post Connection	½" Carriage Bolt (6")	\$4.44	6	\$26.64
Beam to Post Connection	½" Nut	\$0.79	6	\$4.74
Beam to Post Connection	½" Washer	\$0.80	6	\$4.80
Tension Based Connections	2-1/2" Brown Deck Screws	\$49.99	1	\$49.99
Shear Based Connections	1-1/2" Joist Hanger Nails	\$4.19	3 lb	\$4.19
Superstructure Cost				\$883.79
Post Block	4x4 Deck Block	\$10.45	12	\$125.40
Gabion Wire Basket	1" x 36" x 25' Chicken Wire	\$37.99	3	\$113.97
Plywood on Gabion Basket	4x8x1/2" Plywood	\$71.95	1	\$71.95
Gabion Rocks	Large Riverstone (2+')	\$95.23 ³	1	\$95.23
Foundation Cost				\$406.55
Total Cost				\$1290.34
Cost/W				\$0.3226

¹ All lumber is to be pressure treated, and all hardware is to be hot dipped galvanized. ² All costs are in Canadian Dollars as of October 13, 2023, before tax. ³ Total amount from **Table 3**.

3.3.2. Variable Tilt Ballast System Assembly Instructions

Similar to the sloped T-shaped system, the variable tilt system requires at least 2 builders to install, and the superstructure can be built in the same manner as outlined in Vandewetering et al. [42]. For this design, the gabion baskets are installed throughout the length of the system with one continuous basket. Long strips of plywood can be used and can be butted together if they are connected with continuous chicken wire. Rocks should be equally spread throughout. If there is not enough length of chicken wire to make one continuous basket the whole way through, a second roll can be tied and secured to the first roll. The chicken wire is formed in the same manner as shown in Figure 9. The diagonals, which are now much shorter, are connected in the same way as detailed in Figure 10, but can be used with any scrap piece of lumber.

3.4. Economic Analysis

To compare the cost of ballast foundations to traditional foundations, the cost of concrete for each system scaled to 4 kW is provided in Table 6.

Table 6. Concrete foundation costs for a 4-kW system in \$CAD.

System	Number of Bags	Cost per Bag	Total Concrete Cost
T-shaped Fixed Tilt System	15	\$6.39	\$95.85
Variable Tilt System	24	\$6.39	\$153.36

A comparison of a system built on concrete foundations compared to a system built as a ballast foundation is provided in Table 7.

Table 7. Comparison between ballast foundation costs and typical concrete foundation costs.

System	With Ballast Foundation [\$/W]	With Concrete Foundation [\$/W]	Percentage Difference
T-shaped Fixed Tilt System	0.3429	0.2712	26.4%
Variable Tilt System	0.3226	0.2593	24.4%

Found materials could also be used to reduce the costs (e.g., in some areas rocks are abundant and free on site). In the case that the rocks can be acquired for free, a system comparison between free rocks and purchased rocks is shown in Table 8. As can be seen in Table 8 this drops the costs 8-14%.

Table 8. Comparison between systems with purchased rocks and systems with free rocks.

System	With Purchased Rocks [\$/W]	With Free Rocks [\$/W]	Percentage Difference
T-shaped Fixed Tilt System	0.3429	0.2999	14.3%
Variable Tilt System	0.3226	0.2988	7.9%

Each of these system's superstructure will reduce in cost per W if they are built larger in scale. This is because of the ratio of outside posts to inside posts. Outside posts carry the load for one-half section, while inside posts carry the load for two-half sections, which means a system consisting of more inside posts is economically more efficient. The cost benefit of scaling, however, does not apply to the ballast foundations. This is because these are proposed as a per linear m or per basket basis. Therefore, doubling the size of the system effectively doubles the cost of the foundation with little to no savings.

The wind load, calculated using the process outlined in the NBCC [66], is based on many parameters, one of them being the location of the system. Assuming all other factors are fixed, the 1-in-50-year wind pressure, q , linearly impacts the wind force on the modules, which linearly changes the weight of rocks required. A summary of the corresponding q values for locations throughout Canada, and the resulting cost of rocks required for each type of system is provided in Table 8 and Table 9. It is observed that there is minimal difference in foundation cost when installing a system in different in interior cities, but major increases occur when this system is built on a windy rural coast. In the extreme case, such as Cape Race, Newfoundland, where the wind load is more than double that of typical urban cities, this system becomes challenging.

Table 9. Single line of posts wind load sensitivity analysis.

System Type	Location	q [kPa]	Weight of Rocks per Basket [lbs]	Percentage Difference
Single Line of Posts	London, ON	0.47	590	-
	Toronto, ON	0.44	552	-6.4%
	Vancouver, BC	0.45	565	-4.2%
	Halifax, NS	0.58	728	+23.4%

Fort Nelson, BC	0.30	376	-36.3%
Cape Race, NL	1.05	1300	+120.3%

Table 10. Double line of posts wind load sensitivity analysis.

System Type	Location	q [kPa]	Weight of Rocks per basket [lbs]	Percentage Difference
Double Line of Posts	London, ON	0.47	1939	-
	Toronto, ON	0.44	1777	-8.3%
	Vancouver, BC	0.45	1820	-6.1%
	Halifax, NS	0.58	2514	+29.6%
	Fort Nelson, BC	0.30	1027	-47.0%
	Cape Race, NL	1.05	5033	+259.5%

As shown in Appendix A, the distance to the center of the modules, d , has a direct correlation to increasing the price. A summary of varying clearances and their respective cost is provided in Table 10 and Table 11. In single line of posts systems, the effect is linear, as in doubling the clearance requires double the weight of rocks. The impact is, however, magnified in the double line of posts system, as doubling the clearance actually results in the weight being multiplied by a factor of 2.62.

Table 11. Single line of posts vertical clearance sensitivity analysis.

System Type	Clearance [m]	Weight of Rocks per Basket [lbs]	Percentage Difference
Single Line of Posts	2.0	590	-
	1.0	295	-50%
	1.5	442	-25%
	2.5	738	+25%
	3.0	885	+50%

Table 12. Double line of posts vertical clearance sensitivity analysis.

System Type	Clearance [m]	Weight of Rocks per end [lbs]	Percentage Difference
Double Line of Posts	0.75	1939	-
	1.5	3385	+74.5%
	2.0	4349	+124.3%
	2.5	5312	+173.9%
	3.0	6276	+223.7%

The last factor that has an impact on the total weight of rocks required is the distance between the baskets of foundations. As shown in Appendix A calculations, the baskets serve as a couple moment counteracting the wind force, and thus, the farther apart they are, the less force is required to counteract. The effect of increasing or decreasing these distances is shown in Table 13 and Table 14. Single line post systems have a linear relationship, as doubling the distance cuts the weight of each basket in half, while the double line of post has varying results when the distance is modified.

Table 13. Single line of posts distance between baskets sensitivity analysis.

System Type	Distance between baskets [m]	Weight of Rocks per Basket [lbs]	Percentage Difference
Single Line of Posts	1.5	590	-

	1.0	944	-50.0%
	2.0	472	-25.0%
	2.5	378	+25.0%
	3.0	314	+50.0%

Table 14. Double line of posts distance between baskets sensitivity analysis.

System Type	Distance between baskets [m]	Weight of Rocks per Basket [lbs]	Percentage Difference
Double Line of Posts	2.0	1939	-
	1.0	2552	+31.2%
	1.5	2184	+12.6%
	2.5	1776	-8.4%
	3.0	1636	-15.6%

It should also be noted that hardware stores and suppliers may provide additional cost savings by purchasing in bulk. Furthermore, delivery charges for orders are typically a flat charge regardless of the order size, therefore it is in best interest to scale these systems as large as possible to minimize the delivery costs.

4. Discussion

4.1. Limitations

4.1.1. Preservatives

Although no wood is in contact with the ground in any of these systems, it is advised to purchase pressure treated lumber rated for ground contact. The higher the rating, the more preservative chemicals are in the wood, which provides a greater life expectancy but will typically cost more. In North America, typically one grade of ground contact pressure treated lumber, and one grade of in-ground rated posts are exclusively sold. If a non-treated system was used, the system cost is roughly 60% of the cost of a treated system but will not have nearly the same life expectancy and is therefore not recommended. A treated wood solar rack can last the lifetime common to the PV warranties of 25 years if installed in accordance with the manufacturer’s instructions [79]. Since the posts are supported on concrete deck blocks, the system is not in direct contact with the ground, making it comparable to typical in-ground concrete foundation systems. Particular care, however, should be taken if the build is in a high wood deterioration zone. The Forestry Chronicle provides a decay hazard map that presents high hazards of decay in British Colombia for example [80]. Treated wood must be disposed of properly once it comes to the end of its service life, which currently usually means taking it to a landfill or transfer station as it should not be burned. Future work should be conducted to create an environmentally benign method of recycling this wood such as low temperature pyrolysis [81].

4.1.2. Wood Species Alternatives

If using pressure treated lumber is not preferred, there are species that offer natural decay resistance. White cedar and western red cedar are commonly sold as alternatives in the North for roughly 2.5 times the cost of pressure treated lumber. Cedar has a slightly higher structural capacity compared to SPF pressure treated lumber [74], and may have a longer life expectancy.

4.1.3. Soil Conditions

The problem that arises with installing the system exclusively on the ground is the problems that come with the properties of the topsoil. Topsoil is typically a weak material subject to local

settlements. Additionally, since wooden racking systems are much lighter than the metal counterparts, the system can be subject to frost heave and result in local uplifts at certain footings. If the land that these systems are installed on consists of soft soils and organic topsoil, it is advised to bear the deck blocks on a pad of gravel to provide drainage and minimize settlement and frost heave [82].

4.1.4. Uneven Land

If larger systems are built which span long distances, it can be expected that the ground level on one end of the system may not match the other. If the change in grade is dramatic, this can result in an unserviceable system. This issue may be resolved in two different ways; the land can either be cut and filled to provide an even grade, or the much less labor intensive and more cost-effective alternative is to rest the deck blocks on lower ground and install longer posts to offset the difference. It should be noted that longer lengths, typically limited to 16', are more costly, and require reanalyzing the post's structural capacity. Therefore, it is advised to plan to install these systems on the most even grade of land possible or to break the systems into smaller sections to minimize these issues.

4.1.5. Construction Staging

Since this system is built above the ground, there is a significant lack of stability in the system up until the rock foundations are installed. This may result in premature mid-construction failures, even from mild breezes of wind. To prevent this failure from occurring, extra lumber, such as scrap 2x4s, should be used as temporary lateral bracing until construction is complete. Although using 2x4s for temporary use can be seen as an additional cost, this significantly outweighs the additional cost associated with replacing a failed structure, receiving fines from authorities, and from injuring a builder. Temporary diagonal members attached between each post prevents the system tipping over and can globally stabilize the system to also make installation much easier.

4.2. Wood price sensitivity

Open-source wood-based PV rack provides substantial savings in Canada, but the benefit in building a system in other countries depends on the lumber availability in each region [76]. The system is highly sensitive to the price of lumber, which recently has been volatile because of the COVID-19 pandemic. Supply shortages from 2020-2022 resulted in major price fluctuations shown in Figure 12. The market has caught up since then, however, and is beginning to reach equilibrium once again now that prices are approaching the prior 20-year average.



Figure 12. Lumber prices [USD] in the U.S. over the last decade [83].

Although roof mounted PV systems require professional engineering stamps and building permits to install, these ground mounted systems do not require these. Racking only requires a professional engineer's stamped approval if the racking is not CSA approved [84]. In the case of this system, all wood used is marked and graded as SPF No.2 grade, which indicates CSA's approval for structural use. The design complies with National Research Council's National Building Code of Canada, which works together with CSA, and the National Design Specification for Wood Construction, which follows CSA O86:19 Engineering design in wood.

Most municipalities, such as the City of Toronto, do not require building permits for ground mounted PV systems of any size, and thus plans and calculations do not need to be stamped and signed by a registered engineer [85]. Some municipalities, such as the City of Waterloo, specify that building permits are not required such that the system is not connected to water or heating resources [86]. Very few municipalities, such as the city of London, only require a work permit if excavation is required, or if scaffolding and cranes are used [87]. In all cases, these ground mounted PV systems are an exceptional alternative to roof-mounted systems because they avoid a lot of the red-tape and costs associated with tying to an existing structure. This allows costs to remain low, construction to be completed quickly, and PV systems to remain a feasible option as a DIY alternative.

For agrivoltaic applications, the use of pressure-treated lumber can pose the threat of introducing toxic chemicals into the vegetation. Historically, pressure-treated lumber contained chromated copper arsenate to protect the wood from rotting, which caused major health and environmental concerns, but has been discontinued and replaced with copper azole preservative since 2004 [88]. Copper azole is a much safer alternative because it removes exposure from chromium and arsenic, and copper is already abundant in soil and groundwater; however, high doses of copper can result in severe liver and kidney damage [89].

Therefore, if this system is in close contact with vegetation, it is highly advised to prevent pressure-treated lumber from contacting the soil. The designs here can be made to avoid contact with the soil. In addition, natural alternatives such as cedar lumber can be used, but the cost is approximately 2.5 times that of pressure treated. The best solution to eliminate soil contact completely is to place an additional layer of rocks under the rock baskets to ensure no pressure-treated plywood is in close contact with the soil.

5. Future Work

In some regions, wind loads can be substantial and thus the weight of rocks required to support the system may be too large and labor-intensive. Therefore, a rotating alternative can be built that is designed to fail after a certain wind speed and begin spinning the modules. Shear blocks, pins or other component couplings may be installed on the system to support the frame and fix it at a desired tilt-angle. Then, once a 1-in-100-year wind speed occurs, the shear blocks breaks, and the frame may begin to spin. This will allow the foundations to be designed for a much lower wind-speed, thus much less weight of rocks, while still being able to stand up to virtually any wind speed. In addition, other sources of ballast can be investigated including designs that can use soil or sand, as well as waste materials like mine tailings, stamp sand [90] or waste-plastic sand composites [91,92].

Most ballast systems are used for roof-mounted racks [93–97]. Although these systems would be built in the same manner as ground mounted systems, these designs require building permits and structural engineering stamps as they now impose an additional load on a building. Innovations have been made to help minimize the wind load and thus the weight of ballasts [98,99], but installing solar on rooftops can increase the wind load on the roof by a factor of two based on the tilt angle and location [100]. Currently, there is no simplified method of assessing the feasibility of installing ballast systems on standardized structural systems for roof tops, and structural approval is done on a building-by-building basis, and can cost from CAD\$900 [101] to CAD\$5000 or more per rooftop. Future work should be conducted to eliminate the need for case-by-case engineering approval of PV ballast systems so that newly built rooftops can automatically be built with PV, and existing standardized rooftops can implement PV such that they surpass a specific structural condition.

6. Conclusions

Ballast systems, although posing some challenges, prove to be a viable racking alternative especially when drilling holes into the ground is not possible or economically prohibitive. Rock basket weights can easily be calculated to build a system to last 25 years that is compliant with building code standards and is scalable to systems of any size. Two designs were proposed to accommodate systems with a single line of posts, and systems with two lines of posts. For 4 kW systems, single and double line of posts systems were priced at just over \$0.34/W and \$0.32/W, respectively. Ballast foundation systems cost 24-26% more than typical in-ground concrete foundations but remove the need to rent an auger or hire laborers to shovel multiple post holes. Where rocks can be acquired for free, users can see system savings of 14.3% for single line of post systems, and 7.9% for double line of post systems. The location of the system build has a large influence on the weight of rocks required due to the wind speed each location experiences. Ballast systems are shown to remain economical in most locations in Canada but may not be practical to build on windy coasts where over 5000 lbs of rocks per basket may be required. Dimensional variables, such as the system clearance, and distance between rock baskets also have a significant impact on the required weight of rocks, and it is recommended that users consider this to find a balance between their dimensional constraints and their weight constraints. Future investigation is to be conducted to assess the potential of ballast systems with rotating frames to substantially reduce the basket weights and thus provide more opportunities for DIY photovoltaic builds.

7. OSHA Certification in Place of Patents

Upon acceptance, the designs will be OSHA certified, and the number will be added here.

Author Contributions: Conceptualization, J.M.P.; methodology, N.V. U.J.; software, N.V.; validation, N.V., U.J.; formal analysis, J.M.P., N.V., U.J.; investigation, N.V.; resources, J.M.P.; data curation, N.V.; writing—original draft preparation J.M.P., N.V., U.J.; writing—review and editing, J.M.P., N.V., U.J.; visualization, N.V., U.J.; supervision, J.M.P.; funding acquisition, J.M.P.

Funding: This research was funded by the Thompson Endowment.

Data Availability Statement: Data will be made available upon request.

Conflicts of Interest: The authors declare no conflict of interest. The funders had no role in the design of the study; in the collection, analyses, or interpretation of data; in the writing of the manuscript, or in the decision to publish the results.

Appendix A. Foundation Design Load Calculations

Since the design of these systems are similar to those from Vandewetering et al. [42] and Jamil et al. [47], the structural analysis and wood selection process can be replicated. The foundation designs of the ballast designs are unique, and the weight of rocks required can vary based on the system tilt angle, the height above the ground and the location wind speed.

Calculating the wind load applied to the structure follows the same procedure as described in Vandewetering et. al. If the wind pressure, q , is not readily tabulated, it can be calculated using the wind pressure equation (A1) shown below,

$$q = \frac{1}{2} \rho V^2 \quad (A1)$$

Where ρ is the density of air, and V is the 1-in-50-year wind speed. NBCC suggests taking a ρ value of 1.29 kg/m³ [56].

Once a wind load is calculated, it can be broken into individual point loads to assess the required weight for each rock basket. The point load, F , for either an interior or exterior basket is calculated using Equation A2 and Equation A3 below. It should be noted that point loads on the inside of the system will have double the tributary area of the point loads of the outside, so outside point loads

will be half the value, meaning that the rock baskets on the outside only must be half the weight of those on the inside.

$$F_{Int} = Wind\ Load * Module\ Area \quad (A2)$$

$$F_{Ext} = Wind\ Load * \frac{Module\ Area}{2} \quad (A3)$$

For the two line of post systems, the rock baskets are continuous and are not separated, but the weight is still assessed on a per module area basis.

F is applied perpendicular to the face of the modules. This point load can be broken into two components, one component providing a lateral force, and another providing a downwards/uplift force. These components are calculated using Equations A4 and A5.

$$F_{Up/Down} = F \sin(\theta) \quad (A4)$$

$$F_{Lateral} = F \cos(\theta) \quad (A5)$$

Where θ is the tilt angle of the modules. The system must now be checked to ensure it doesn't fail from sliding, and overturning.

Appendix B. Single Line of Post Foundation Design Weight Calculations

Sliding

Although it should not typically govern the design of the rock baskets, the system must be checked to ensure the lateral load does not push the system forward. The lateral load, $F \cos(\theta)$, must be resisted by the frictional force as shown in Figure 13, which is calculated using A6 below.

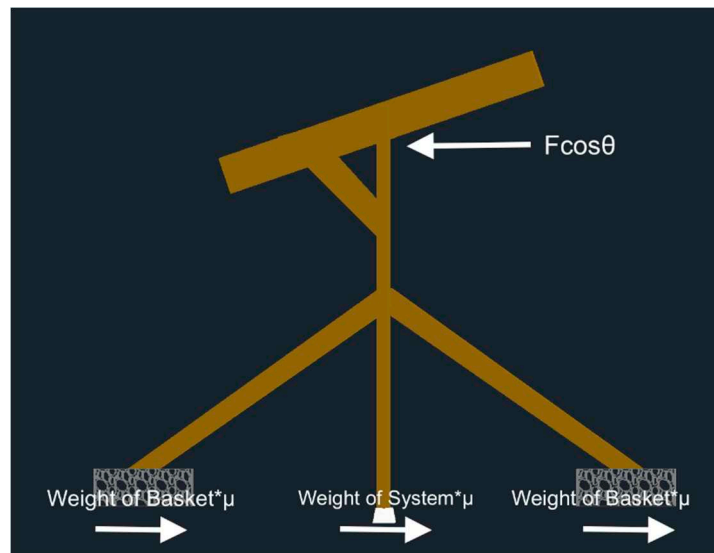


Figure 13. Sloped T-shaped sliding free body diagram.

$$F_{Friction} = (2\ Weight_{Basket}\mu + Weight_{System}\mu) \quad (A6)$$

Where μ is the coefficient of static friction. The coefficient is based on the type of soil the system bears on, and can be selected using the minimum value found on StructX.com [102].

Overturning

The overturning of the system about the post footing will typically govern the required weight of the rock baskets. The compressive load of the rocks is assumed to be sufficient to carry any load from the rack. Overturning is assessed by providing the system with a resisting moment, M_r to the factored moment induced by the wind load, M_f . The free body diagram of the system is provided in Figure 14.

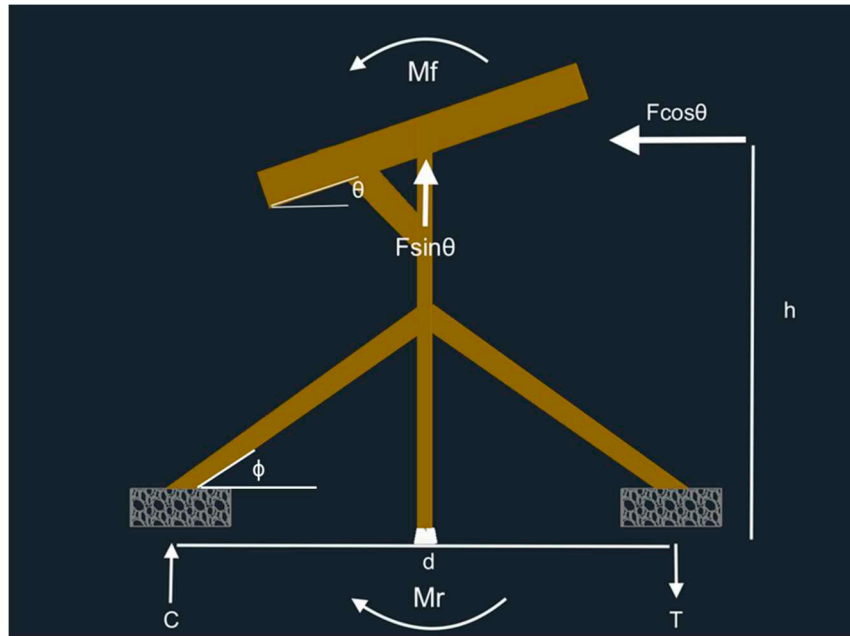


Figure 14. Sloped T-shaped overturning free body diagram.

Since the system will have a smooth transfer from the rocks to the wooden diagonals, the tensile resistance force is equal to the weight of the rocks in a basket. The wind load can be converted into an equivalent applied bending moment, M_f , calculated using Equation A7.

$$M_f = F \cos \theta h \quad (\text{A7})$$

This moment is counteracted by the resisting moment created from the rocks, M_r , thus M_r and M_f are equal. On one side, the rocks will provide a compressive force, C , and on the other side, the rocks will provide a tensile force, T . These forces must be equal and opposite, and therefore are couple forces to create a couple moment. These forces are calculated using Equation A8.

$$T \text{ or } C = M_r / d \quad (\text{A8})$$

It is assumed the rocks have enough capacity to carry the compressive force, as the system will always fail via overturning before the rocks will ever crush under the applied load. Therefore, the compressive resistance of the rocks can be neglected. The tensile force, T , is what is required for design, and is simply equal to the weight of the rocks.

Although the uplift force, $F \sin(\theta)$, does not contribute to the overturning moment because it acts upon the centroid of the system, it increases the tensile force required to keep the system down. Each rock basket will hold down half of the uplift force. The net amount of weight per basket required is finally calculated using Equation A9.

$$T = \frac{F \cos \theta h}{d} + \frac{F \sin \theta}{2} \quad (\text{A9})$$

For the sloped T-shaped system in London, Ontario, typical interior rock baskets require a weight of at least 590 lbs, and outside baskets require 295 lbs of rocks.

Diagonal Design

The diagonals connected from the post to the basket should be checked to ensure that they do not experience a tensile failure or a compressive failure. The tensile/compressive force that these members experience are calculated using Equation A10.

$$Tf \text{ or } Cf = \frac{T \text{ or } C}{\sin \phi} \quad (\text{A10})$$

Where ϕ is the angle of the diagonal as shown in **Figure 14**. The tensile capacity for wooden members is outlined in Jamil et al. [47], and it should be ensured that a member with capacity greater than the force demand is selected.

Since these members are rather slender and have a far unsupported length, the buckling capacity is checked using the Euler buckling Equation A11 with the moment of inertia upon the weak axis, I_{weak} , found in Equation A12.

$$C_{buckling} = \frac{\pi^2 EI_{weak}}{L^2} \quad (\text{A11})$$

$$\text{where } I_{weak} = \frac{1}{12} hb^3 \quad (\text{A12})$$

Global-Lateral Foundation Design

The system must also be designed to resist the lateral wind loads as shown in the free body diagram in **Figure 15**. The same sliding and overturning checks must be used for this case, however the weight of rocks required will be must smaller as there is now a much smaller wind area acting on a much deeper section.

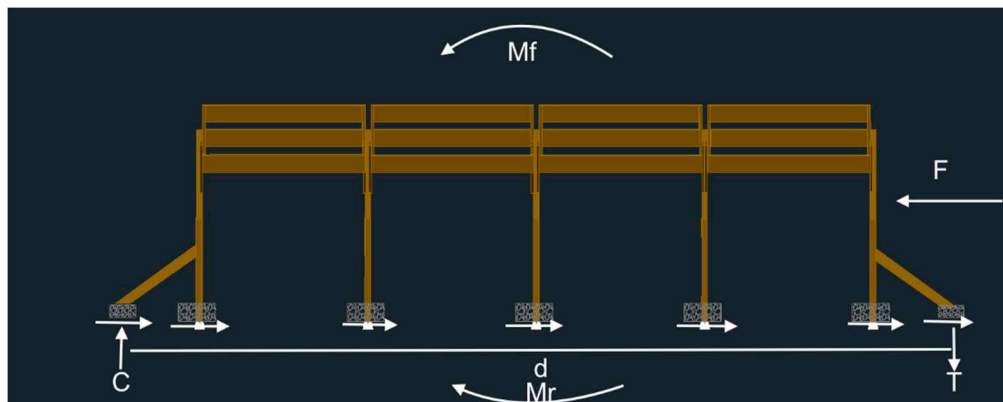


Figure 15. Sloped T-shaped global-lateral free-body diagram.

This design process is replicable for any of the single line of post designs.

For vertical rotating systems, the modules are free to swing as the wind attacks them. Therefore, the stress induced on the system only results from wind attacking the wood structure, and inertia forces from swinging modules. The loads acting on the system are assessed in Vandewetering et al., and the weight of rocks is calculated in a similar manner. Solving for T, the weight of rocks required for a system in London, Ontario is 590 lbs per typical inside basket.

Appendix C. Double Line of Posts Foundation Design Calculations

For the double line of posts systems, the sliding check is the same as the single line of post check. The overturning design is slightly different from the single line of post process because the uplift

force now contributes additional moment because it is no longer concentrated at the tipping point, and the self-weight of the system counteracts overturning. The free-body diagram of this system is shown in Figure 16, where O represents the tipping point at the post base.

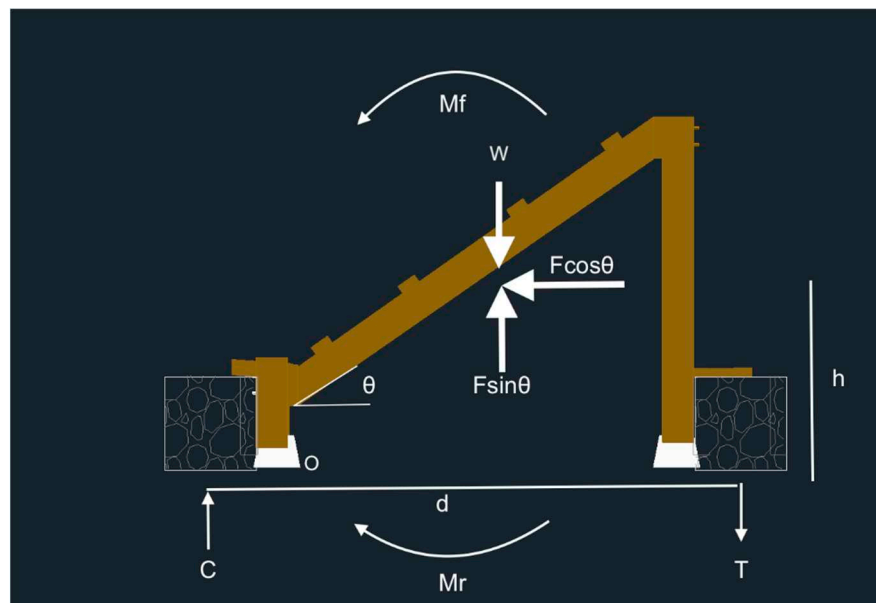


Figure 16. Variable tilt system free-body diagram.

The moment from the own weight, M_{ow} , is equal to the weight of the system times the distance from the tipping point to the center of the system. The uplift moment is calculated using the same distance since this force acts at the same location. The uplift moment is added to M_f and the own weight moment subtracts from it. The design of this system now uses the same equations and process as outlined in the single line of post design.

The weight of rocks is solved in the same manner as the single line of post systems, but now as a per module basis. The total amount of weight required per side is calculated by multiplying the weight per module by the number of modules.

References

1. Karakaya, E.; Sriwannawit, P. Barriers to the Adoption of Photovoltaic Systems: The State of the Art. *Renew. Sustain. Energy Rev.* **2015**, *49*, 60–66, doi:10.1016/j.rser.2015.04.058.
2. Fu, R.; Feldman, D.J.; Margolis, R.M. US Solar Photovoltaic System Cost Benchmark: Q1 2018 2018.
3. Matasci, S. Solar Panel Cost: Avg. Solar Panel Prices by State in 2019: EnergySage. *Sol. News EnergySage* **2019**.
4. Dudley, D. *Renewable Energy Will Be Consistently Cheaper Than Fossil Fuels By 2020*; Forbes, 2019;
5. Solar Industry Research Data | SEIA Available online: <https://www.seia.org/solar-industry-research-data> (accessed on 2 January 2024).
6. Solar Industry Research Data Available Online.
7. Vaughan, A. Time to Shine: Solar Power Is Fastest-Growing Source of New Energy. *The Guardian* **2017**.
8. Barbose, G.L.; Darghouth, N.R.; LaCommare, K.H.; Millstein, D.; Rand, J. Tracking the Sun: Installed Price Trends for Distributed Photovoltaic Systems in the United States-2018 Edition 2018.
9. IEA Solar PV – Renewables 2020 – Analysis Available online: <https://www.iea.org/reports/renewables-2020/solar-pv> (accessed on 18 October 2023).
10. Levin, T.; Thomas, V.M. Can Developing Countries Leapfrog the Centralized Electrification Paradigm? *Energy Sustain. Dev.* **2016**, *31*, 97–107.

11. Chakrabarty, S.; Islam, T. Financial Viability and Eco-Efficiency of the Solar Home Systems (SHS) in Bangladesh. *Energy* **2011**, *36*, 4821–4827, doi:10.1016/j.energy.2011.05.016.
12. Lang, T.; Ammann, D.; Girod, B. Profitability in Absence of Subsidies: A Techno-Economic Analysis of Rooftop Photovoltaic Self-Consumption in Residential and Commercial Buildings. *Renew. Energy* **2016**, *87*, 77–87.
13. Roy, R.; Pearce, J.M. Is Small or Big Solar Better for the Environment? Comparative Life Cycle Assessment of Solar Photovoltaic Rooftop vs. Ground-Mounted Systems. *Int. J. Life Cycle Assess.* **2023**, doi:10.1007/s11367-023-02254-x.
14. Agenbroad, J.; Carlin, K.; Ernst, K.; Doig, S. Minigrids in the Money: Six Ways to Reduce Minigrid Costs by 60% for Rural Electrification. *Rocky Mt. Inst.* **2018**.
15. Szabó, S.; Pinedo Pascua, I.; Puig, D.; Moner-Girona, M.; Negre, M.; Huld, T.; Mulugetta, Y.; Kougiass, I.; Szabó, L.; Kammen, D. Mapping of Affordability Levels for Photovoltaic-Based Electricity Generation in the Solar Belt of Sub-Saharan Africa, East Asia and South Asia. *Sci. Rep.* **2021**, *11*, 3226, doi:10.1038/s41598-021-82638-x.
16. Awan, A.B. Optimization and Techno-Economic Assessment of Rooftop Photovoltaic System. *J. Renew. Sustain. Energy* **2019**, *11*, 033501, doi:10.1063/1.5080551.
17. Wang, P.; Yu, P.; Huang, L.; Zhang, Y. An Integrated Technical, Economic, and Environmental Framework for Evaluating the Rooftop Photovoltaic Potential of Old Residential Buildings. *J. Environ. Manage.* **2022**, *317*, 115296, doi:10.1016/j.jenvman.2022.115296.
18. Fthenakis, V.; Alsema, E. Photovoltaics Energy Payback Times, Greenhouse Gas Emissions and External Costs: 2004–Early 2005 Status. *Prog. Photovolt. Res. Appl.* **2006**, *14*, 275–280.
19. Feldman, D.; Barbose, G.; Margolis, R.; Bolinger, M.; Chung, D.; Fu, R.; Seel, J.; Davidson, C.; Darghouth, N.; Wiser, R. Photovoltaic System Pricing Trends: Historical, Recent, and Near-Term Projections 2015 Edition 2015.
20. Feldman, D.; Barbose, G.; Margolis, R.; Wiser, R.; Darghouth, N.; Goodrich, A. Photovoltaic (PV) Pricing Trends: Historical, Recent, and Near-Term Projections, Sunshot 2012.
21. PVinsights PVinsights Available online: <http://pvinsights.com/>.
22. Tamarack Solar Products Tamarack Solar Top of Pole Mounts Available online: <https://www.altestore.com/store/solar-panel-mounts/top-of-pole-mounts-for-solar-panels/tamarack-solar-top-of-pole-mounts-6072-cell-solar-panels-p40745/> (accessed on 29 June 2023).
23. TPM3 Pole Mount for Three 60/72 Cell Solar Modules - Modern Outpost, Available online: <https://www.modernoutpost.com/product/tpm3-pole-mount-for-three-60-72-cell-solar-modules/> (accessed on 2 January 2024).
24. Precedence Research Agrivoltaics Market Is Expected to Increase at a 12.15% of CAGR by 2030 Available online: <https://www.precedenceresearch.com/press-release/agrivoltaics-market> (accessed on 23 August 2023).
25. International Energy Agency Solar Available online: <https://www.iea.org/energy-system/renewables/solar-pv> (accessed on 23 August 2023).
26. Mahto, R.; Sharma, D.; John, R.; Putcha, C. Agrivoltaics: A Climate-Smart Agriculture Approach for Indian Farmers. *Land* **2021**, *10*, 1277, doi:10.3390/land10111277.
27. Feuerbacher, A.; Herrmann, T.; Neuenfeldt, S.; Laub, M.; Gocht, A. Estimating the Economics and Adoption Potential of Agrivoltaics in Germany Using a Farm-Level Bottom-up Approach. *Renew. Sustain. Energy Rev.* **2022**, *168*, 112784, doi:10.1016/j.rser.2022.112784.

28. Dupraz, C.; Marrou, H.; Talbot, G.; Dufour, L.; Nogier, A.; Ferard, Y. Combining Solar Photovoltaic Panels and Food Crops for Optimising Land Use: Towards New Agrivoltaic Schemes. *Renew Energy* **2011**, *36*, 2725–2732, doi:10.1016/j.renene.2011.03.005.
29. Guerin, T.F. Impacts and Opportunities from Large-Scale Solar Photovoltaic (PV) Electricity Generation on Agricultural Production. *Environ. Qual. Manag.* **2019**, *28*, 7–14, doi:10.1002/tqem.21629.
30. Valle, B.; Simonneau, T.; Sourd, F.; Pechier, P.; Hamard, P.; Frisson, T.; Ryckewaert, M.; Christophe, A. Increasing the Total Productivity of a Land by Combining Mobile Photovoltaic Panels and Food Crops. *Appl. Energy* **2017**, *206*, 1495–1507, doi:10.1016/j.apenergy.2017.09.113.
31. Mavani, D.D.; Chauhan, P.M.; Joshi, V. Beauty of Agrivoltaic System Regarding Double Utilization of Same Piece of Land for Generation of Electricity & Food Production. **2019**, *10*.
32. Sekiyama, T.; Nagashima, A. Solar Sharing for Both Food and Clean Energy Production: Performance of Agrivoltaic Systems for Corn, A Typical Shade-Intolerant Crop. *Environments* **2019**, *6*, 65, doi:10.3390/environments6060065.
33. Agostini, A.; Colauzzi, M.; Amaducci, S. Innovative Agrivoltaic Systems to Produce Sustainable Energy: An Economic and Environmental Assessment. *Appl. Energy* **2021**, *281*, 116102, doi:10.1016/j.apenergy.2020.116102.
34. Daniels, T.L. The Development of Utility-Scale Solar Projects on US Agricultural Land: Opportunities and Obstacles. *Socio-Ecol. Pract. Res.* **2023**, doi:10.1007/s42532-023-00139-9.
35. Grafman, L. *To Catch the Sun: Inspiring Stories of Communities Coming Together to Harness Their Own Solar Energy, and How You Can Do It Too!*; Humboldt State University Press: Arcata, 2021; ISBN 978-1-947112-62-9.
36. Wittbrodt, B.; Laureto, J.; Tymrak, B.; Pearce, J.M. Distributed Manufacturing with 3-D Printing: A Case Study of Recreational Vehicle Solar Photovoltaic Mounting Systems. *J. Frugal Innov.* **2015**, *1*, 1, doi:10.1186/s40669-014-0001-z.
37. Wittbrodt, B.T.; Pearce, J.M. Total U.S. Cost Evaluation of Low-Weight Tension-Based Photovoltaic Flat-Roof Mounted Racking. *Sol. Energy* **2015**, *117*, 89–98, doi:10.1016/j.solener.2015.04.026.
38. Wittbrodt, B.; Pearce, J.M. 3-D Printing Solar Photovoltaic Racking in Developing World. *Energy Sustain. Dev.* **2017**, *36*, 1–5, doi:10.1016/j.esd.2016.08.001.
39. Arefeen, S.; Dallas, T. Low-Cost Racking for Solar Photovoltaic Systems with Renewable Tensegrity Structures. *Sol. Energy* **2021**, *224*, 798–807, doi:10.1016/j.solener.2021.06.020.
40. Pearce, J.M.; Meldrum, J.; Osborne, N. Design of Post-Consumer Modification of Standard Solar Modules to Form Large-Area Building-Integrated Photovoltaic Roof Slates. *Designs* **2017**, *1*, 9, doi:10.3390/designs1020009.
41. Vandewetering, N.; Hayibo, K.S.; Pearce, J.M. Impacts of Location on Designs and Economics of DIY Low-Cost Fixed-Tilt Open Source Wood Solar Photovoltaic Racking. *Designs* **2022**, *6*, 41, doi:10.3390/designs6030041.
42. Vandewetering, N.; Hayibo, K.S.; Pearce, J.M. Open-Source Design and Economics of Manual Variable-Tilt Angle DIY Wood-Based Solar Photovoltaic Racking System. *Designs* **2022**, *6*, 54, doi:10.3390/designs6030054.
43. nlinventor Ground Mounted Solar Panels With Adjustable Angles Available online: <https://www.instructables.com/Ground-Mounted-Solar-Panels-With-Adjustable-Angles/> (accessed on 2 January 2024).
44. Vandewetering, N.; Hayibo, K.S.; Pearce, J.M. Open-Source Vertical Swinging Wood-Based Solar Photovoltaic Racking Systems. *Designs* **2023**, *7*, 34, doi:10.3390/designs7020034.

45. Masna, S.; Morse, S.M.; Hayibo, K.S.; Pearce, J.M. The Potential for Fencing to Be Used as Low-Cost Solar Photovoltaic Racking. *Sol. Energy* **2023**, *253*, 30–46, doi:10.1016/j.solener.2023.02.018.
46. Mayville, P.; Patil, N.V.; Pearce, J.M. Distributed Manufacturing of after Market Flexible Floating Photovoltaic Modules. *Sustain. Energy Technol. Assess.* **2020**, *42*, 100830, doi:10.1016/j.seta.2020.100830.
47. Jamil, U.; Vandewetering, N.; Pearce, J.M. Solar Photovoltaic Wood Racking Mechanical Design for Trellis-Based Agrivoltaics. *PLOS ONE* **2023**, *18*, e0294682, doi:10.1371/journal.pone.0294682.
48. Franz, J.; Morse, S.; Pearce, J.M. Low-Cost Pole and Wire Photovoltaic Racking. *Energy Sustain. Dev.* **2022**, *68*, 501–511, doi:10.1016/j.esd.2022.05.007.
49. Wood and Cable-Based Variable Tilt Stilt-Mounted Solar Photovoltaic Racking System[v1] | Preprints.Org Available online: <https://www.preprints.org/manuscript/202312.0086/v1> (accessed on 27 December 2023).
50. Hollman, M.R.; Pearce, J.M. Geographic Potential of Shotcrete Photovoltaic Racking: Direct and Low-Concentration Cases. *Sol. Energy* **2021**, *216*, 386–395, doi:10.1016/j.solener.2021.01.051.
51. DIY Ground Mounted Solar Array Available online: <https://www.mobile-solarpower.com/ground-mount-solar-array.html> (accessed on 2 January 2024).
52. UnpluggedTexan How to Build a DIY Ground Mount Solar Panel Rack Available online: <https://www.youtube.com/watch?v=BKYSW4zRyVg> (accessed on 2 January 2024).
53. DIY SOLAR PANEL GROUND MOUNTING Available online: <https://signaturesolar.com/solar-news/diy-solar-panel-ground-mounting/> (accessed on 2 January 2024).
54. Country View Acres Building Our First Solar Array. Easy, Low Cost Solar Ground Mount. Available online: https://www.youtube.com/watch?v=EZEg7Hdoz_E (accessed on 2 January 2024).
55. Martin Johnson - Off Grid Living How to Build the Ultimate DIY Solar Panel Ground Mount Available online: <https://www.youtube.com/watch?v=7t4hGBWltxM> (accessed on 2 January 2024).
56. BuilditSolar DIY PV System -- Building the Mounts Available online: <https://www.builditsolar.com/Projects/PV/EnphasePV/Mounts.htm> (accessed on 2 January 2024).
57. Everyday Solar Best DIY Solar Ground Mount | Complete Assembly Available online: <https://www.youtube.com/watch?v=IgeaQs1OUtE> (accessed on 2 January 2024).
58. Country Living Experience: A Homesteading Journey Finally An Affordable Solar Panel Ground Mount! Installation DIY EG4 Available online: <https://www.youtube.com/watch?v=RX6kdvptl6s> (accessed on 2 January 2024).
59. Solano, E. How to Build a DIY Solar Panel Ground Mount - Tinktube Available online: <https://tinktube.com/free-plans/diy-solar-panel-ground-mount/> (accessed on 2 January 2024).
60. Poz, D. Building A DIY Solar Array Ground Mount (Part 1) Available online: <https://www.youtube.com/watch?app=desktop&v=tc-wgpGfbtA> (accessed on 2 January 2024).
61. Iduna's Orchard DIY Solar Ground Mount (Simple, Cheap!) Available online: https://www.youtube.com/watch?v=6R8_HE2xt8g (accessed on 2 January 2024).
62. Sirois, É. 10 DIY Solar Panel Rack Ideas - Tinktube Available online: <https://tinktube.com/diy-ideas/diy-solar-panel-rack-ideas/> (accessed on 2 January 2024).
63. 30 Solar Panel Ground Mounting Kit IronRidge Available online: <https://sunwatts.com/30-solar-panel-ground-mounting-kit-ironridge/> (accessed on 5 January 2024).
64. Solar Panels Ground Mount - DIY KIT- 4.62kW. *Prairie Sun Sol.*
65. Ground Mount Solar Panel Kits for Sale | GoGreenSolar Available online: <https://www.gogreensolar.com/collections/ground-mount-solar-panel-kits> (accessed on 5 January 2024).

66. Canada, N.R.C. National Building Code of Canada 2015 Available online: <https://nrc.canada.ca/en/certifications-evaluations-standards/codes-canada/codes-canada-publications/national-building-code-canada-2015> (accessed on 17 February 2022).
67. 2 Man Auger Rental | The Home Depot Canada Available online: <https://www.homedepot.ca/en/home/tool-and-vehicle-rental/p.2-man-auger.08822.html> (accessed on 27 December 2023).
68. Concrete Compressive Strength Variation with Time Available online: <https://theconstructor.org/concrete/concrete-compressive-strength-variation-with-time/5933/> (accessed on 27 December 2023).
69. Mamun, M.A.A.; Dargusch, P.; Wadley, D.; Zulkarnain, N.A.; Aziz, A.A. A Review of Research on Agrivoltaic Systems. *Renew. Sustain. Energy Rev.* **2022**, *161*, 112351, doi:10.1016/j.rser.2022.112351.
70. Lehmann, S. Sustainable Construction for Urban Infill Development Using Engineered Massive Wood Panel Systems. *Sustainability* **2012**, *4*, 2707–2742, doi:10.3390/su4102707.
71. Embodied Carbon Footprint Database Available online: <https://circularecology.com/embodied-carbon-footprint-database.html> (accessed on 2 January 2024).
72. Hildebrandt, J.; Hagemann, N.; Thrän, D. The Contribution of Wood-Based Construction Materials for Leveraging a Low Carbon Building Sector in Europe. *Sustain. Cities Soc.* **2017**, *34*, 405–418, doi:10.1016/j.scs.2017.06.013.
73. Salazar, J.; Meil, J. Prospects for Carbon-Neutral Housing: The Influence of Greater Wood Use on the Carbon Footprint of a Single-Family Residence. *J. Clean. Prod.* **2009**, *17*, 1563–1571, doi:10.1016/j.jclepro.2009.06.006.
74. 2018 NDS Available online: <https://awc.org/publications/2018-nds/> (accessed on 8 March 2022).
75. Vandewetering, N.; Hayibo, K.S.; Pearce, J.M. Open-Source Photovoltaic—Electrical Vehicle Carport Designs. *Technologies* **2022**, *10*, 114, doi:10.3390/technologies10060114.
76. Rana, S.; Vandewetering, N.; Powell, J.; Ariza, J.Á.; Pearce, J.M. Geographical Dependence of Open Hardware Optimization: Case Study of Solar Photovoltaic Racking. *Technologies* **2023**, *11*, 62, doi:10.3390/technologies11020062.
77. SiteOne Stone Centre — Delivering Landscape Supplies in London, Ontario Available online: <https://www.east.siteone.ca/> (accessed on 14 December 2023).
78. Copp's Buildall - London's Local Hardware & Building Supply Specialists Available online: <https://www.coppsbuildall.com/?store=4> (accessed on 14 December 2023).
79. Adpearance, I. What You Need to Know About Pressure Treated Wood | AIFP | PDX, OR Available online: <https://www.lumber.com/blog/what-you-need-to-know-about-pressure-treated-wood> (accessed on 17 February 2022).
80. Setliff, E.C. Wood Decay Hazard in Canada Based on Scheffer's Climate Index Formula. *For. Chron.* **1986**, *62*, 456–459, doi:10.5558/tfc62456-5.
81. Helsen, L.; Bulck, E.; Hery, J.-S. Total Recycling of CCA Treated Wood Waste by Low-Temperature Pyrolysis. *Waste Manag.* **1998**, *18*, 571–578, doi:10.1016/S0956-053X(98)00148-2.
82. Frost Heave Prevention or How to Stop Frost Heaving Available online: <https://www.ecohome.net/guides/3628/what-causes-frost-heave-read-here-how-to-prevent-and-fix-frost-heaving/> (accessed on 27 December 2023).
83. Lumber - 2022 Data - 1978-2021 Historical - 2023 Forecast - Price - Quote - Chart Available online: <https://tradingeconomics.com/commodity/lumber> (accessed on 26 July 2022).
84. Municipal Climate Change Action Centre in Alberta Available online: <https://mccac.ca/> (accessed on 2 January 2024).

85. Toronto, C. of Solar Permitting & Regulations Available online: <https://www.toronto.ca/services-payments/water-environment/net-zero-homes-buildings/solar-to/solar/> (accessed on 27 November 2023).
86. Solar Panels Available online: <https://www.waterloo.ca/en/living/solar-panels.aspx> (accessed on 27 November 2023).
87. Building Permits | City of London Available online: <https://london.ca/living-london/building-renovating/building-permits> (accessed on 29 November 2023).
88. US EPA, O. Overview of Wood Preservative Chemicals Available online: <https://www.epa.gov/ingredients-used-pesticide-products/overview-wood-preservative-chemicals> (accessed on 28 May 2022).
89. Haywood, S. The Effect of Excess Dietary Copper on the Liver and Kidney of the Male Rat. *J. Comp. Pathol.* **1980**, *90*, 217–232, doi:10.1016/0021-9975(80)90058-4.
90. Rasmussen, T.; Fraser, R.; Lemberg, D.S.; Regis, R. Mapping Stamp Sand Dynamics: Gay, Michigan. *J. Gt. Lakes Res.* **2002**, *28*, 276–284, doi:10.1016/S0380-1330(02)70583-2.
91. Kumi-Larbi Jnr, A.; Galpin, R.; Manjula, S.; Lenkiewicz, Z.; Cheeseman, C. Reuse of Waste Plastics in Developing Countries: Properties of Waste Plastic-Sand Composites. *Waste Biomass Valorization* **2022**, *13*, 3821–3834, doi:10.1007/s12649-022-01708-x.
92. Seghiri, M.; Boutoutaou, D.; Kriker, A.; Hachani, M.I. The Possibility of Making a Composite Material from Waste Plastic. *Energy Procedia* **2017**, *119*, 163–169, doi:10.1016/j.egypro.2017.07.065.
93. Kern, E.C. *Ballast-Mounted PV Arrays: Phase 2 Final Report*; Ascension Technology, Inc., Lincoln, MA (US), 2000;
94. Fanney, A.H.; Weise, E.R.; Henderson, K.R. Measured Impact of a Rooftop Photovoltaic System. *J. Sol. Energy Eng.* **2003**, *125*, 245–250, doi:10.1115/1.1591799.
95. Peek, R.T. *Innovative Ballasted Flat Roof Solar PV Racking System*; Cascade Engineering, Grand Rapids, MI (United States), 2014;
96. Wills, R.; Milke, J.A.; Royle, S.; Steranka, K. *Best Practices for Commercial Roof-Mounted Photovoltaic System Installation*; Springer, 2015; ISBN 978-1-4939-2883-5.
97. Franklin, D.E. Mounting Your Solar Photovoltaic (PV) System.
98. Peek, R.T. *Innovative Ballasted Flat Roof Solar PV Racking System*; Cascade Engineering, Grand Rapids, MI (United States), 2014;
99. Roecker, C. NEW MOUNTING SYSTEMS FOR PV ON BUILDINGS. **2000**.
100. Alrawashdeh, H.; Stathopoulos, T. Wind Loads on Solar Panels Mounted on Flat Roofs: Effect of Geometric Scale. *J. Wind Eng. Ind. Aerodyn.* **2020**, *206*, 104339, doi:10.1016/j.jweia.2020.104339.
101. P.Eng Stamped Structural Roof Assessment - Structural Roof Load Assessment | Solar Roof Installation Permitting Service Available online: <https://solarpowerstore.ca/products/p-eng-stamped-structural-roof-assessment> (accessed on 4 January 2024).
102. Friction Coefficients - Slab on Grade Available online: https://structx.com/Material_Properties_007.html (accessed on 27 December 2023).

Disclaimer/Publisher's Note: The statements, opinions and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of MDPI and/or the editor(s). MDPI and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions or products referred to in the content.