

Article

Not peer-reviewed version

Validation of a Mid-fidelity Numerical Approach for Wind Turbine Aerodynamics Characterization

[Alberto Savino](#) , [Andrea Ferreri](#) , [Alex Zanotti](#) *

Posted Date: 21 March 2024

doi: 10.20944/preprints202402.0747.v2

Keywords: Wind Turbine; Aerodynamics; Vortex Particle Method; Computational Fluid Dynamics



Preprints.org is a free multidiscipline platform providing preprint service that is dedicated to making early versions of research outputs permanently available and citable. Preprints posted at Preprints.org appear in Web of Science, Crossref, Google Scholar, Scilit, Europe PMC.

Copyright: This is an open access article distributed under the Creative Commons Attribution License which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Disclaimer/Publisher's Note: The statements, opinions, and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of MDPI and/or the editor(s). MDPI and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions, or products referred to in the content.

Article

Validation of a Mid-fidelity Numerical Approach for Wind Turbine Aerodynamics Characterization

Alberto Savino , Andrea Ferreri and Alex Zanotti *

Politecnico di Milano, Dipartimento di Scienze e Tecnologie Aerospaziali, via La Masa 34, 20156 Milan, Italy

* Correspondence: alex.zanotti@polimi.it.com

Abstract: This work is aimed at investigating the capabilities and limits of the mid-fidelity numerical solver DUST for the evaluation of wind turbines aerodynamic performance. In particular, this study was conducted by analysing the benchmarks NREL-5 MW and Phase VI wind turbines, widely investigated in literature by from experimental and numerical activities. The work started by simulating simpler configuration of the NREL-5 MW turbine to progressively integrate complexities such as shaft tilt, cone effects and yawed inflow conditions, offering a detailed portrayal of their collective impact on turbine performance. A particular focus was then given to the evaluation of aerodynamic responses from the tower and nacelle, as well as aerodynamic behavior in yawed inflow condition, crucial for optimizing farm layouts. In the second phase, the work was focused on NREL Phase VI turbine due to the availability of experimental data on this benchmark case. Comparison of DUST simulations results with both experimental data and high-fidelity CFD tools shows the robustness and adaptability of this mid-fidelity solver for this applications, thus opening a new scenario for the use of such mid-fidelity tools for the preliminary design of novel wind turbines configurations or complex environments as wind farms, characterised by robust interactional aerodynamics.

Keywords: wind turbine; aerodynamics; vortex particle method; computational fluid dynamics

1. Introduction

In recent years, the challenge to develop sustainable ways to produce energy has made the interest in wind energy to grow with a high rate. This challenge has been accompanied by an evolution in the methods used evaluate the aerodynamic performance of wind turbines, representing a key-factor for the development of more effective solutions in this field. These methods vary widely in complexity and fidelity, each serving different needs within the industry. To evaluate the aerodynamic performance of wind turbines previous research studies were mainly directed on experiments considering both wind tunnel [1] or wind field measurements. Although the aerodynamics of the wind turbine is extremely complicated, accurate measurements are still essential in wind energy research field even if they require a substantial economical effort. Nevertheless, numerical methods have shown in recent years to be a valid and cheaper alternative to calculate accurately wind turbine aerodynamic performance. Indeed, numerical methods offer a different degree of fidelity based on their mathematical formulation and the computational effort required.

Starting from lower order numerical methods widely used for wind turbines study, blade element momentum (BEM) theory [2] represents a two-dimensional method suitable to provide a fast estimation of aerodynamic forces on rotating blades. However, BEM method does not consider span-wise flow features on the blade and cannot capture the fine details related to boundary layer modelling. Moreover, this method relies on empirical functions to reproduce dynamic stall effects or blade tip loss due to compressibility [3]. Thus, BEM method, while computationally efficient are limited in accuracy, particularly for the simulations of complex flow conditions characterised by interactional aerodynamics or when stall phenomena occurs. On the other hand, Computational Fluid Dynamics (CFD) methods based on Navier-Stokes equations solvers provide more comprehensive and accurate results in wind turbines application, thanks to an effective modelling of blades boundary layer and of a physical representation of their wakes[4]. In particular, a great effort was spent on the use of high-fidelity commercial CFD software for wind turbine system applications, as shown for examples by the works

by Rezaeiha et al. [5,6]. Moreover, several works in literature use uncertainty quantification methods in order to evaluate error propagation in high-fidelity CFD numerical simulations, as shown for examples in [7,8]. The trade-off for the increasing accuracy is a significant increase in computational resources and time effort, making CFD less practical for early-stage design and more suited for final validation and detailed analysis of wind turbine applications.

Mid-fidelity numerical methods, widely investigated in recent years particularly for rotary wings applications, strike a balance between computational efficiency and accuracy. These methods, mainly based on Vortex Particle Method (VPM) for wake modelling [9,10], showed to be promising to provide a more accurate representation of both aerodynamic loads and interactional flow physics of wind turbines at a quite lower computational costs with respect to high-fidelity CFD. Thus, these tools can be considered quite interesting to be used for the preliminary design phase of wind turbines configurations or complex environments as wind farms, characterised by robust interactional aerodynamics. Indeed, several mid-fidelity aerodynamic codes were developed in recent years to support the design process of rotary wing applications. Just to cite few examples, DLR developed UPM [11], an unsteady panel and free-wake code originally intended for aeroacoustic simulations of helicopters but recently applied on arbitrary complex configurations as compound rotorcraft [12]. Moreover, GENeral Unsteady Vortex Particle (GENUVP) software, based on a panel method coupled with a VPM solver, was developed at the National Technical University of Athens (NTUA) for both aerodynamic and aeroacoustic simulations of rotary wing applications, from helicopters to wind turbines [13].

Starting from a collaboration with Airbus, Politecnico di Milano developed the mid-fidelity aerodynamic solver DUST implementing a robust formulation of different aerodynamic elements from lifting lines to surface panels. This numerical solver, based on the use of VPM for wake modelling was thoroughly validated against experiments and high fidelity CFD over several rotorcraft configurations with increasing complexity [14–17] and now represents one of the most mature mid-fidelity solvers widely used both from academics and industry, particularly for the preliminary design of multi-rotors architectures in aeronautics. Thus, the present work is aimed to provide a thorough validation of DUST solver for a different challenge, i.e. aerodynamics characterisation of wind turbines. The validation of DUST within this work will consist of a meticulous comparison of aerodynamic load and response predictions with those from high-fidelity CFD codes and experimental standards. With this aim, two benchmark test cases widely investigated in wind energy field were selected.

The first benchmark is the NREL (National Renewable Energy Laboratory) offshore 5MW baseline wind turbine (NREL-5MW). It was developed as a theoretical framework for validating turbine models [18] and was extensively validated using the NREL BEM model FAST [19]. Indeed, due to the fact that all details of the geometry and airfoil properties of the turbine are publicly available, this three blades turbine, in an upwind, horizontal axis configuration was widely investigated in literature. URANS simulations of the NREL-5MW were performed in [20–22]. Then, particular interest was given to the study of wake prediction, as shown in [23–25]. This wind turbine reference was also used as a good benchmark to validate Fluid Structure Interaction tool chains, as shown in [26–30].

The second benchmark used in this work is represented by NREL Unsteady Aerodynamics Experiment Phase VI ('NREL Phase VI'), performed on a 20kW, 10m diameter, two-bladed rotor wind turbine in the NASA Ames Research Center wind tunnel [1]. The main purpose of the tests were to acquire measurements on the aerodynamic and structural response of a horizontal axis wind turbine. Many researchers have performed simulations of the NREL Phase VI experiment for validation of their solvers. Sorensen et al. [31] and Langer Moller et Al. [32] used a RANS simulation to predict loading and force coefficients, while in Hsu *et al.* [33] fluid-structure interaction simulations were performed with stabilized multiscale methods on this test case.

The specific goals of the present work were therefore to corroborate the accuracy of DUST against high-fidelity simulations for the NREL-5MW wind turbine, with a particular emphasis on the impact of principal wind turbine parameters such as rotor shaft tilt, rotor cone angle, yawed inflow and blade-tower interaction. Moreover, DUST simulations were also performed for the NREL Phase VI

small wind turbine to confirm the code's robustness by comparison with experimental data, focusing on the code's ability to accurately forecast performance metrics particularly focused on high yawed conditions. Generally, this research aims to establish the foundation for broader application of mid-fidelity codes in wind energy, particularly during iterative design and analysis phases requiring a proper balance between computational swiftness and accuracy.

2. DUST software

The mid-fidelity open-source software DUST¹ has been developed by Politecnico di Milano since 2017 for the simulation of the interactional aerodynamics of rotorcraft and unconventional aircraft configurations [34]. The code is released under the open-source MIT license. The capabilities of the code have been quite extended in recent years and DUST has been also coupled to the open-source multibody solver MBDyn [35], also developed at Politecnico di Milano, enabling to perform aeroelastic analysis of complete rotorcraft configurations. The mathematical formulation of DUST relies on an integral boundary element formulation of the aerodynamic problem and VPM of the wakes. This choice naturally fits the Helmholtz decomposition of the velocity field from a mathematical point of view and avoids the numerical instabilities occurring with connected models of the wake. A model can be composed of several components, connected to user-defined reference frames, whose position and motion can be defined in a hierarchical way. Different aerodynamic elements allow for different levels of fidelity in the model, ranging from lifting line elements to zero-thickness lifting surfaces and surface panels for thick solid bodies.

Since the VPM is a grid-free Lagrangian approach that models the free vorticity of wakes, a DUST model needs only surface meshes eliminating the need for a volume mesh of the flow surrounding the object being studied. This approach enables a robust representation of the interacting wakes generated by lifting surfaces and bodies, as is typically seen in rotary-wing vehicle applications. A DUST model can be made up of multiple components that use different aerodynamic elements, offering varying levels of accuracy in the model ranging from lifting line elements [36,37] to vortex lattices and surface panels [38].

The lifting line (LL) element used in DUST is a one-dimensional model that represents thin, slender lifting bodies. The element considers the sectional aerodynamic coefficients of lift, drag, and pitching moment calculated on the base on the local angle of attack, the local Reynolds number and the local Mach number. By taking into account the airfoil's camber and thickness, as well as the effects of viscosity and compressibility, the model is able to accurately calculate aerodynamic loads. However, since the problem is stated in explicit form, numerical instability may occur during aerodynamic or aeroelastic analysis.

The vortex lattice (VL) method offers a discrete representation of the average surface of thin lifting bodies by modeling them as a sheet of vortex rings with an intensity of Γ . This is equivalent to a piecewise-uniform surface doublet distribution. While the VL method accounts for compressibility effects by applying a Prandtl-Glauert correction to the loads, it cannot capture the non-linear behavior of aerodynamic loads. To ensure numerical stability, the VL element utilizes a fully implicit numerical scheme. The non-linear vortex lattice element (NL-VL) has been implemented in order combine a surface discretisation with the capability of LL to use an aerodynamic database to introduce viscous corrections. This hybrid element formulated according to an implicit method allows a higher robustness in terms of accuracy and numerical stability. Further details about the formulations of this quite novel element can be found in [39].

The surface panels (SP) are formulated as a Morino-like problem [40] in implicit form. This allows the SP element to accurately describe the real shape of the component by applying non-penetration

¹ www.dust.polimi.it

boundary conditions in the physical position. However, the SP element is not able to capture the non-linear effects on aerodynamic loads.

The reader is referred to [34] for a complete mathematical formulation of the code.

3. Numerical Models

3.1. NREL-5 MW Configuration

The first test case considered is the NREL-5 MW offshore wind turbine. It is a three bladed horizontal axis utility scale turbine with a rotor diameter $D=126$ m developed by Jonkman *et al.* [18]. This is a widely used test case for aerodynamics and aeroelasticity research as all details of the turbine geometry and of the operating conditions are public, which is not the case for large scale commercial turbines. NREL-5 MW machine is a purely theoretical wind turbine and therefore no experimental data is available to validate simulations. However, the extensive simulations conducted on this test case lend substantial credibility to its applicability for this study. A summary of the turbine's essential features is presented in Table 1 and illustrated in Figure 1.

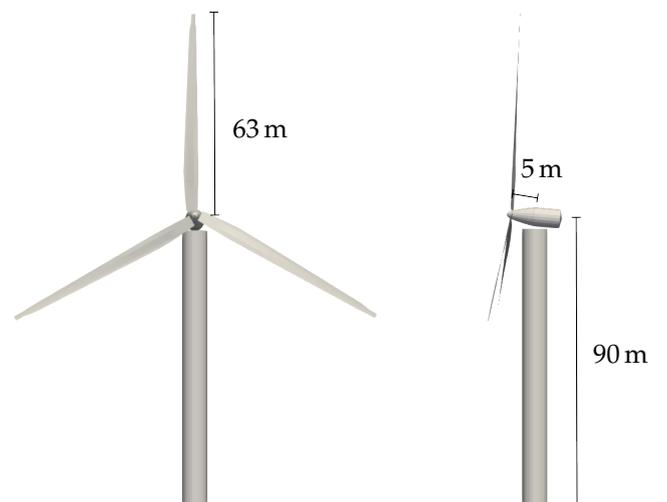


Figure 1. Main geometrical quantities of the NREL-5 MW MW wind turbine.

Table 1. Summary of the NREL-5 MW MW wind turbine properties.

| | |
|--|--|
| IEC Class/Category | I/B |
| Rated Power | 5 MW |
| Rotor Orientation | Upwind |
| Configuration | 3 Blades |
| Control | Variable Speed, Collective Pitch |
| Drivetrain | High Speed, Multiple Stage Gearbox |
| Rotor Diameter D | 126 m |
| Hub Diameter | 3 m |
| Hub Height | 90 m |
| Cut-In / Rated / Cut-Out Windspeed | 3 m s^{-1} / 11.4 m s^{-1} / 25 m s^{-1} |
| Cut-In, Rated Rotor Speed | 6.9 rpm / 12.1 rpm |
| Rated Tip Speed | 80 m s^{-1} |
| Overhang | 5 m |
| Shaft Tilt, α_T / Precone, α_C | 5° / 2.5° |

The blade includes two non-lifting cylindrical segments and a combination of five DU airfoils and one NACA airfoil distributed over 18 spanwise sections. Specifications regarding the airfoil positioning, chord lengths and angles of twist used to build DUST numerical model are detailed in Table 2.

Table 2. Summary of the main properties of the NREL-5 MW MW wind turbine blade.

| Node | Span [m] | Chord [m] | Twist, β [°] | Airfoil |
|------|----------|-----------|--------------------|----------------|
| 1 | 0 | 3.542 | 13.308 | Cylinder 1 |
| 2 | 1.37 | 3.542 | 13.308 | Cylinder 1 |
| 3 | 4.10 | 3.854 | 13.308 | Cylinder 1 |
| 4 | 6.83 | 4.167 | 13.308 | Cylinder 2 |
| 5 | 10.25 | 4.557 | 13.308 | DU 99-W-405LM |
| 6 | 14.35 | 4.652 | 11.480 | DU 99-W-350LM |
| 7 | 18.45 | 4.458 | 10.162 | DU 99-W-350LM |
| 8 | 22.55 | 4.249 | 9.011 | DU 97-W-300LM |
| 9 | 26.65 | 4.007 | 7.795 | DU 91-W2-250LM |
| 10 | 30.75 | 3.748 | 6.544 | DU 91-W2-250LM |
| 11 | 34.85 | 3.502 | 5.361 | DU 93-W-210LM |
| 12 | 38.95 | 3.256 | 4.188 | DU 93-W-210LM |
| 13 | 43.05 | 3.010 | 3.125 | NACA 63-618 |
| 14 | 47.15 | 2.764 | 2.319 | NACA 63-618 |
| 15 | 51.25 | 2.518 | 1.526 | NACA 63-618 |
| 16 | 54.67 | 2.313 | 0.863 | NACA 63-618 |
| 17 | 57.40 | 2.086 | 0.370 | NACA 63-618 |
| 18 | 60.13 | 1.419 | 0.106 | NACA 63-618 |
| 19 | 61.50 | 1.419 | 0.106 | NACA 63-618 |

The hub of the NREL-5 MW wind turbine is positioned 5 m upwind from the tower's centerline and elevated 90 m above the ground in an undeflected state. This configuration aligns with the vertical distance from the tower top to the hub height, set at 2.4 m. Consequently, the yaw bearing's elevation above ground or mean sea level (MSL) is established at 87.6 m.

The wind turbine configuration and parameters used in DUST simulations for the NREL-5 MW wind turbine are listed in Table 3. A total of four rotor configurations are explored, each addressing different aspects of rotor and wind turbine performance. Configurations C1, C3, and C4 are assessed under direct rated inflow conditions, whereas configuration C2 is evaluated with a yaw inflow angle up to 30°. Finally, to investigate the blade tower interaction, a full wind turbine configuration was considered, dealing with C4 case rotor modelling.

Table 3. Simulation parameters of the NREL-5 MW wind turbine.

| Configuration | Blade cone, α_C | Shaft tilt, α_T | Yaw angle, γ [°] | Pitch Angle, θ [°] |
|---------------|------------------------|------------------------|-------------------------|---------------------------|
| C1 | 0° | 0° | 0 | 0 |
| C2 | 0° | 0° | [10, 20, 30] | 0 |
| C3 | 2.5° | 0° | 0 | 0 |
| C4 | 2.5° | 5° | 0 | 0 |

Thus, DUST numerical model of this wind turbine includes blades, tower, hub and nacelle. The tower and the nacelle surface are modelled using surface panels (SP), particularly 2700 elements for the tower and 600 elements for the nacelle. Two different models of the blades are built using both lifting lines (LL) and non-linear vortex lattices (NL-VL). Both aerodynamic elements require input tables containing the aerodynamic coefficients of two-dimensional airfoils to introduce the viscous corrections on the load obtained with the potential solution. The airloads tables are obtained by XFOIL [41] simulations performed before the stall region, i.e. for a range of angle of attack between -15° and 15° . Airfoil aerodynamic coefficients in the angle of attack range between -180° and 180°) are obtained

through the Viterna method [42]. The selection of the time-step discretisation of the simulations over the rotor revolution and of the spatial spanwise discretisation of the blades was dictated by the will to balance computational efficiency with the fidelity of load pattern capture, thus serving the dual aims of computational economy and detailed aerodynamic characterization. Indeed, one of the main goal of the activity is to evaluate DUST proficiency in capturing the fundamental aerodynamic phenomena pertinent to wind turbine simulations and to ensure that the tool remains computationally economical. Indeed, the scope of the present work is to show the capability of the tool to be used for the preliminary design of novel wind turbine concepts or multiple rotors configurations as wind farms. As a matter of fact, the requirement of this work was to perform all the simulations using a commercial laptop. With this aim, the validity of the parameters choice was verified by comparison with high-fidelity CFD results by Dose [26] for the C1 configuration. Figure 2 shows DUST simulations results of the NREL-5 MW wind turbine obtained with a discretisation of 75 elements along span-wise direction and 72 time-steps per revolution for a total duration of the simulation of 50 s, corresponding to about 10 rotor revolutions. In particular, DUST simulations results are reported for both LL and NL-VL elements with same span-wise discretisation but different chord-wise elements for the latter method. A convergence of integral loads can be observed for DUST simulations after 30 seconds corresponding almost to 8 revolutions. A good correlation in terms of aerodynamic power between CFD and DUST results, considering both LL and NL-VL elements is obtained. A quite good agreement was found in terms of aerodynamic thrust considering particularly NL-VL elements, while LL elements seems to slightly under-predict the CFD thrust output. In particular, the sensitivity analysis to chord-wise discretisation shown in Figure 2 leads to the choice of 5 elements for all the simulations performed on NREL-5 MW wind turbine in this work. Generally, the good accuracy observed with respect to CFD for the calculation of integral loads confirms the suitability of the time and spatial discretisation selected for DUST simulations of this wind turbine.

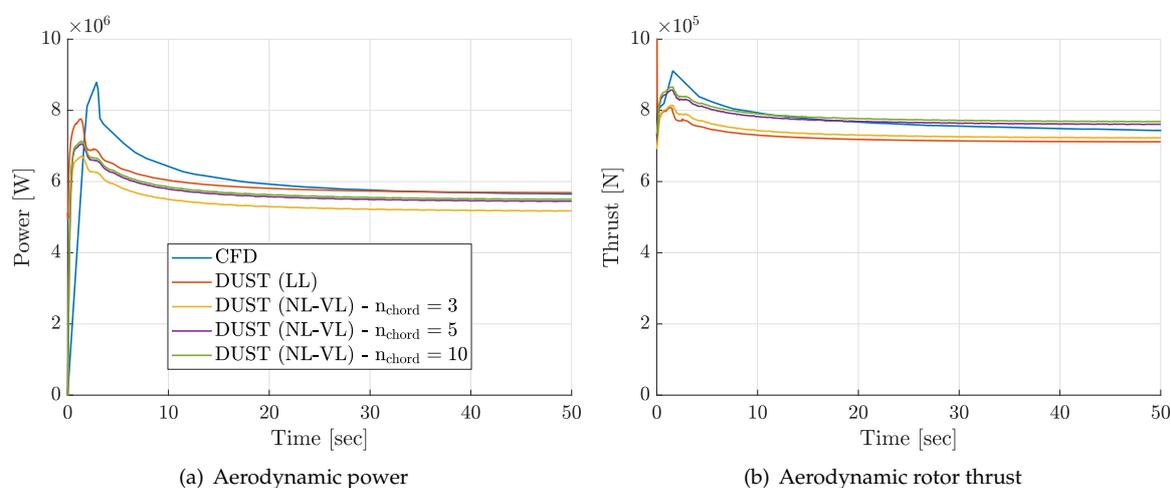


Figure 2. Comparison of the aerodynamic power and thrust computed by DUST and CFD by Dose *et al.* [26] for NREL-5 MW wind turbine in C1 configuration; $V_{\infty} = 11.4 \text{ m s}^{-1}$.

Figure 3 shows the mesh of the complete DUST numerical model of the NREL-5 MW wind turbine.



Figure 3. Mesh of the NREL-5 MW wind turbine built for DUST simulations (blades modelled with NLVL with $n_{\text{chord}} = 5$).

3.2. NREL Phase VI Configuration

The second test case considered is the NREL Unsteady Aerodynamics Experiment (UAE) Phase VI wind turbine [43] tested at NASA Ames wind tunnel. A summary of the turbine's essential features is presented in Table 4.

Table 4. Summary of the NREL Phase VI wind turbine properties.


| | |
|--|--|
| Rated Power | 19.8 kW |
| Rotor Orientation | Upwind |
| Configuration | 2 Blades |
| Control | Stall |
| Rotor Diameter D | 10.058 m |
| Hub Diameter | 1.116 m |
| Hub Height | 12.192 m |
| Cut-In / Rated / Cut-Out Windspeed | $5 \text{ m s}^{-1} / 10 \text{ m s}^{-1} / 25 \text{ m s}^{-1}$ |
| Cut-In, Rated Rotor Speed | 71.9 rpm / 80 rpm |
| Rated Tip Speed | 42 m s^{-1} |
| Overhang | 1.401 m |
| Shaft Tilt, α_T / Precone, α_C | $0^\circ / 0^\circ, 3.4^\circ, 18^\circ$ |

The rotor blades use the NREL S809 airfoil and the relative specifications regarding the chord and twist distributions are detailed in Table 5.

Table 5. Summary of the main properties of the NREL Phase VI wind turbine blade.

| Node | Span [m] | Chord [m] | Twist β [°] | Airfoil |
|------|----------|-----------|-------------------|-----------|
| 1 | 0.508 | 0.218 | 0.0 | Cylinder |
| 2 | 1.510 | 0.711 | 14.292 | NREL S809 |
| 3 | 2.343 | 0.627 | 4.715 | NREL S809 |
| 4 | 3.185 | 0.542 | 1.115 | NREL S809 |
| 5 | 4.023 | 0.457 | -0.381 | NREL S809 |
| 6 | 4.780 | 0.381 | -1.469 | NREL S809 |
| 7 | 5.029 | 0.355 | -1.815 | NREL S809 |


The hub of the NREL Phase VI wind turbine is positioned 1.5 m upwind from the tower's centerline and elevated 11.5 m above the ground in an undeflected state. The base and tip diameter of the tower are respectively 0.61 m and 0.41 m. The model of the NREL Phase VI wind turbine is shown in Figure 4. DUST numerical model includes the rotor and the tower-nacelle assembly in order to be consistent for the comparison with experimental results. The tower and the nacelle are modelled by surface panels, respectively using 2700 and 600 elements. For the present test case DUST numerical model of the blades are built using NL-VL elements only. Following the same approach considered for the previous wind turbine, the selection of the number of time-steps and span-wise elements discretisation was validated by comparison with experimental results, now available for this wind turbine. DUST simulations results obtained by discretising each blade with 50 elements along the span-wise direction and varying the chord-wise elements distribution are compared in Figure 5 with experimental thrust and torque measured in [1] and CFD data [32]. Wind turbine loads representation evaluated by DUST, plotted as function of the number of revolutions, highlights the bumps related to the 2 blades passages in front of the pylon and shows a converged behaviour after almost 4 rotor revolutions. DUST numerical model presents a quite good accuracy with experimental data for thrust and slightly underestimates the torque, showing a weak sensitivity with respect to chord-wise element discretisation. Thus, as done for the previous wind turbine, a discretisation of 5 elements in chord was considered as a good trade-off and therefore used for all the simulations performed on this wind turbine in this work.

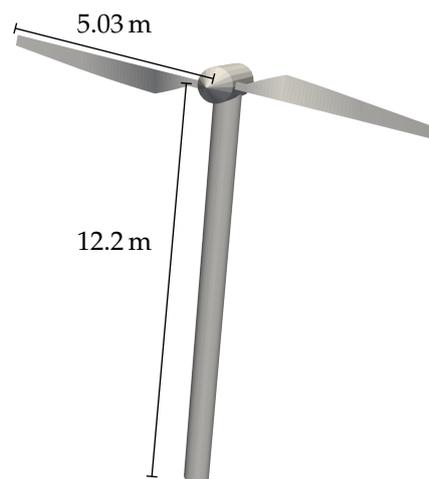**Figure 4.** NREL Phase VI model.

The wind turbine configuration and parameters used in DUST simulations for the NREL Phase VI wind turbine are listed in Table 6. In particular, simulations considers the full model with blade pitch at 3° windward and different yaw angles.

Table 6. Simulations parameters of the NREL Phase VI wind turbine.

| Configuration | Tip Blade Pitch, θ [°] | Yaw angle, γ [°] | Velocity, V_∞ [m/s] |
|---------------|-------------------------------|-------------------------|----------------------------|
| Full Model | 3 | 0, 30, 45, 60 | 7 |

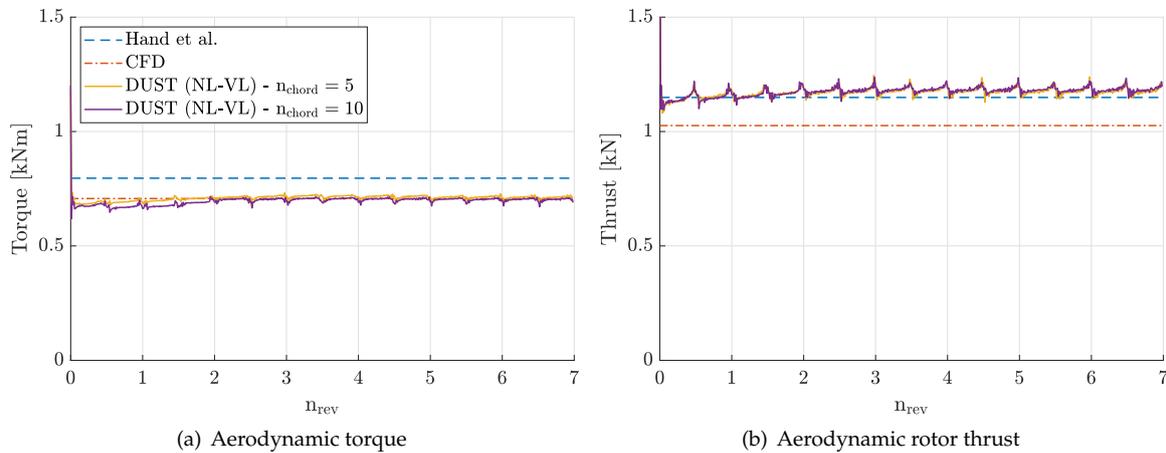**Figure 5.** Comparison of the aerodynamic power and thrust computed by DUST, CFD by [32] and experimental results from [1] NREL Phase VI wind turbine; $V_\infty = 7 \text{ m s}^{-1}$.

4. Results and Discussion

4.1. NREL-5 MW Wind Turbine

The first step of the validation process involves simulating the simplest configuration of the wind turbine C1 at rated conditions, not taking into account neither the shaft tilt angle α_T nor blade cone angle α_C . DUST results are compared to the ones obtained with high-fidelity numerical simulation conducted by Dose *et al.* [26] using RANS approach and by Leng *et al.* [44].

Figure 6 shows the comparison of the normal and tangential sectional forces acting along the normalised spanwise coordinate of the blade computed by DUST NL-VL model and high fidelity CFD simulation by Dose *et al.* [26]. The normal force density comparison illustrated in Fig. 6(a) exhibits a close alignment between DUST and high fidelity CFD data along almost the majority of the blade span. However, near the blade tip DUST slightly underestimate the normal force. This behaviour is expected as wing tip are characterized by a more complex flow regime where three-dimensional phenomena and tip vortices generation typically leads to significant viscous effects and separated flow regions, which can not be accurately captured by DUST mid-fidelity approach. Tangential force density comparison depicted in Fig. 6(b) shows an underestimation of DUST computation before the first 30% of blade span and a slight overestimation in the central spanwise region. High-fidelity CFD model, however, shows a more pronounced decrease in tangential force towards the blade tip with respect to DUST results. Generally speaking, the behaviour of the sectional force comparison confirms the capability of DUST to competently reproduces the general force distribution along the blade span.

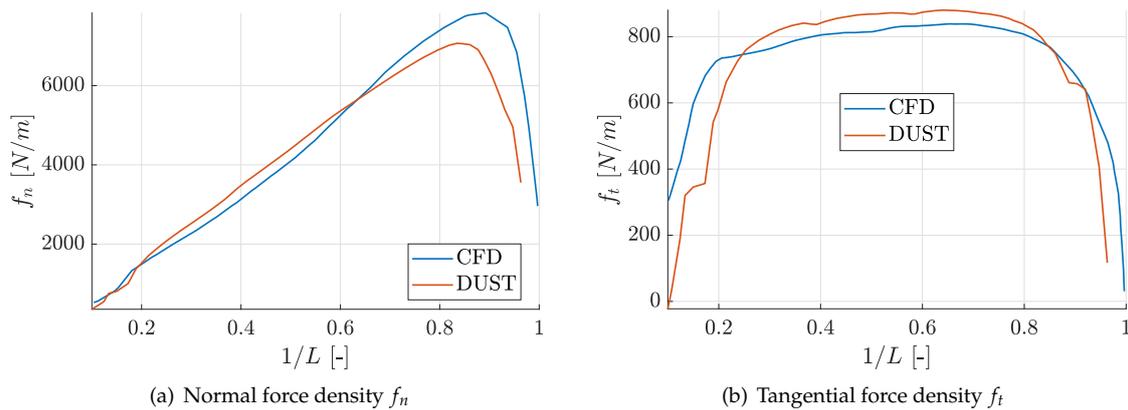


Figure 6. Blade sectional force comparison computed by DUST (NL-VL) and CFD by Dose *et al.* [26] for NREL-5MW wind turbine in C1 configuration; $V_\infty = 11.4 \text{ m s}^{-1}$.

The performance of a wind turbine are significantly affected by the wind turbine wake, then a crucial step for DUST validation is the ability to correctly capture the wake development and its main features in terms of velocity field. Then, the deficit of the axial velocity in the wake calculated by DUST is compared with the high-fidelity simulation by [45], considering 4 stream wise position located at different distances x downstream from the rotor plane. Velocity profiles comparison is shown in Figure 7 as function of z , representing the distance from the shaft axis parallel to the rotor plane.

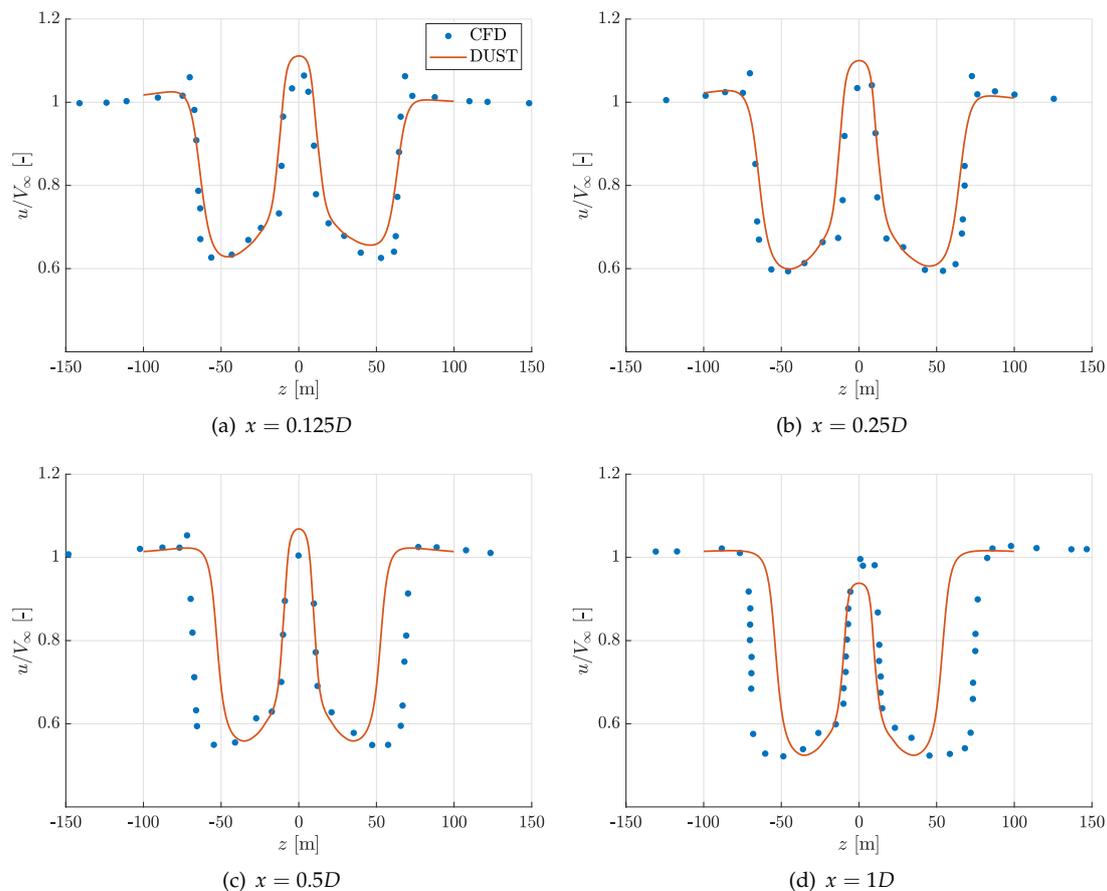


Figure 7. Comparison of the axial velocity distributions at different downstream locations computed by DUST and CFD by Fan *et al.* [45] for NREL-5MW wind turbine in C1 configuration; $V_\infty = 11.4 \text{ m s}^{-1}$.

A quite good agreement was found between axial velocity profiles in the wake of the wind turbine, particularly near to the rotor disk, i.e. $x = 0.125D$ and $x = 0.25D$. Some discrepancies were found at higher distances where CFD results show a slightly larger extension of the wake, probably due to numerical diffusion. Generally, Figure 8 illustrates the wake structure computed by DUST shown as an iso-surface of the vortex Q-criterion. Readers are referred to results reported in [45] to appreciate DUST capability to capture the behaviour of the wake structure computed by CFD.

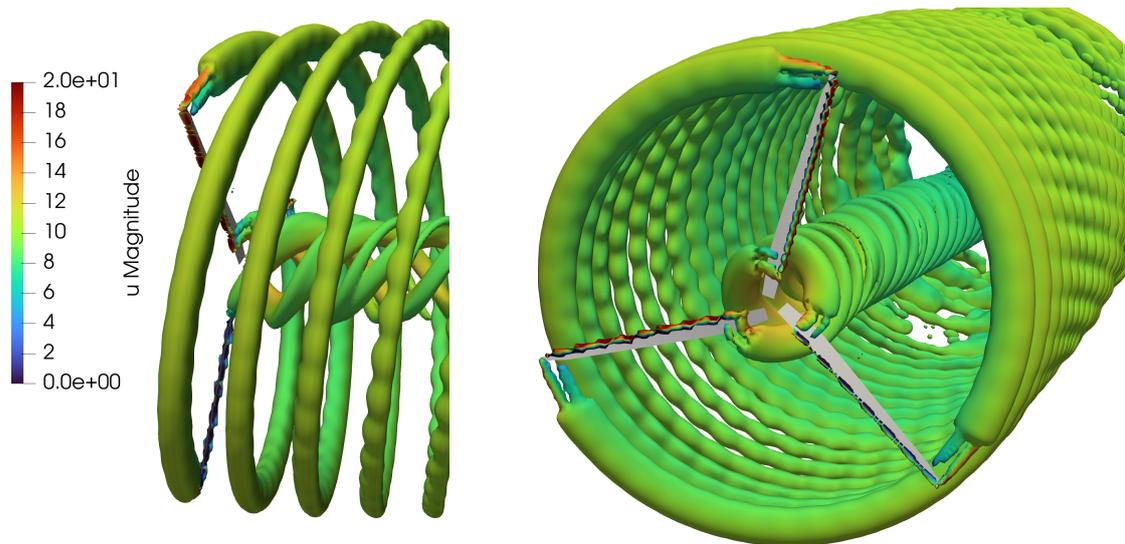


Figure 8. Instantaneous iso-surface for the vortex criterion Q coloured by the velocity magnitude calculated by DUST for NREL-5 MW wind turbine in C1 configuration; $V_\infty = 11.4 \text{ m s}^{-1}$.

The influence of blade cone angle α_C and shaft tilt angle α_T on the aerodynamic performance under rated inflow conditions is now explored by comparing results obtained with DUST and high-fidelity CFD by Dose *et al.* [26] over C1, C3 and C4 cases. Generally, the sensitivity of integral loads to cone and tilt angles variations is minimal. Indeed, adding a blade cone angle a slight increase of the rotor power is observed. On the other hand, introducing a shaft tilt slightly reduces rotor power and thrust. In particular, the integral power and thrust on the rotor are compared in Table 7. Both DUST models provide values quite similar to high-fidelity CFD findings. A difference below 2% is found for power evaluation with both LL and NL-VL elements, while thrust evaluation obtained by DUST with NL-VL is in quite good agreement with CFD. An underestimation of rotor thrust of about 8% is found for LL DUST model with respect to CFD.

Table 7. Comparison of integral rotor power and thrust computed by DUST and high-fidelity CFD by Dose *et al.* [26]; $V_\infty = 11.4 \text{ m s}^{-1}$.

| Configuration | DUST LL | | DUST NL-VL | | CFD | |
|---------------|------------|-------------|------------|-------------|------------|-------------|
| | Power [MW] | Thrust [kN] | Power [MW] | Thrust [kN] | Power [MW] | Thrust [kN] |
| C1 | 5.591 | 712.0 | 5.402 | 778.1 | 5.491 | 771.4 |
| C3 | 5.620 | 713.1 | 5.452 | 771.3 | 5.551 | 772.2 |
| C4 | 5.551 | 701.3 | 5.449 | 770.1 | 5.459 | 768.6 |

Case C4 enabled to provide an insight of the effects of varying freestream velocity, thanks to high-fidelity CFD results from Sørensen and Johansen [20], Lin *et al.* [21], Wu and Nguyen [22]. Figure 9 compares the computed power and thrust as function of wind speeds. Generally, both DUST models capture the behaviour of power and thrust curves evaluated by CFD, thus confirming the capability

to model correctly the effects of wind inflow on rotor performance. In particular, LL elements model tends to slightly overestimate power production below the rated wind speed, while NL-VL elements model slightly overestimates rotor power above the rated speed. Now considering thrust evaluation, LL elements model tends to underestimate CFD high-fidelity data along the entire velocity spectrum, while a quite better agreement is obtained with NL-VL elements model.

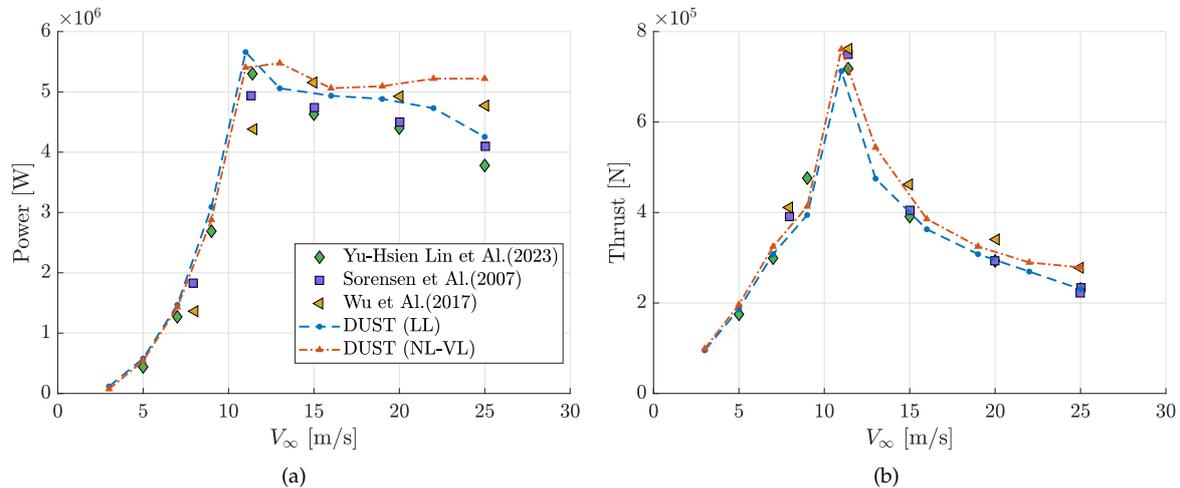


Figure 9. Comparison of integral rotor power and thrust computed by DUST and high-fidelity CFD by Sørensen and Johansen [20], Lin *et al.* [21], Wu and Nguyen [22] as function of inflow wind speeds for NREL-5 MW wind turbine in C4 configuration.

Different yawed configurations are then investigated. At first, a yaw angle $\gamma = 30^\circ$ is considered to assess the integral and the sectional parameters with respect to high fidelity CFD simulation by Dose *et al.* [26]. Then, other two yaw angles configurations are considered, respectively $\gamma = 10^\circ, 20^\circ$ to be compared with the LES study by yaw [24]. Table 8 compares the integral rotor power and thrust computed for C2 configuration with $\gamma = 30^\circ$ where errors in terms of power and thrust with respect to CFD by Dose *et al.* [26] are below 10% for LL model and below 5% for NL-VL model. Compared to the axial flow condition case, power and thrust outputs decrease in accordance to CFD evaluation by Dose *et al.* [26]. Results by Dose *et al.* [26] are based on blade resolving CFD method, so dynamic stall effects occurring particularly in yawed conditions are implicitly included. On the other hand, no dynamic stall models are considered in DUST formulation.

Table 8. Comparison of integral rotor power and thrust computed by DUST and high-fidelity CFD by Dose *et al.* [26] for configuration C2 with 30° yaw; $V_\infty = 11.4 \text{ m s}^{-1}$.

| Configuration | Power [MW] | Thrust [kN] |
|---------------|------------|-------------|
| CFD | 4.24 | 673.7 |
| DUST (LL) | 4.15 | 631 |
| DUST (NL-VL) | 4.13 | 683 |

In order to quantify the local effect on blades subjected to yawed inflow, sectional normal and tangential forces are compared at three different spanwise coordinates in Figure 10 as function of blade azimuthal angle ψ in the last computed revolution. DUST tends to calculate higher normal and tangential force densities up to 60% of the span coordinate, while a slightly lower normal force density is found near the blade tip compared to the high-fidelity CFD results. Nevertheless, generally the global behaviour of the sectional forces acting on blades are captured by DUST representation also in yawed condition.

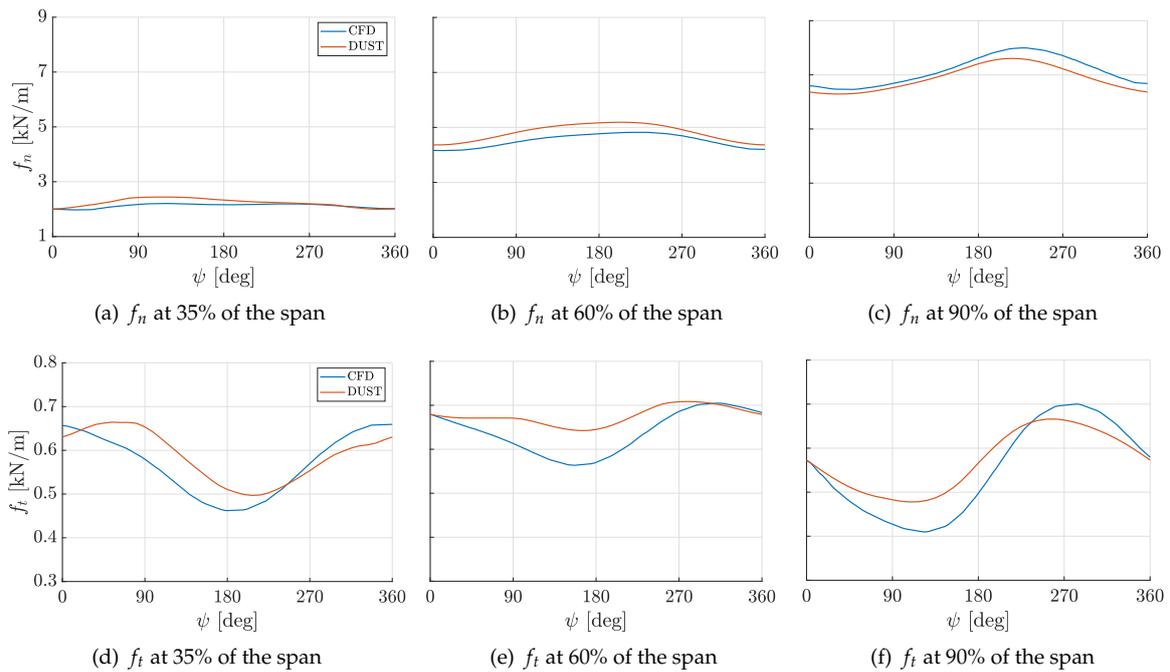


Figure 10. Blade sectional force comparison computed by DUST (NL-VL) and CFD by Dose *et al.* [26] for NREL-5 MW wind turbine in configuration C2 at $V_\infty = 11.4 \text{ m s}^{-1}$ with 30° yaw. At $\psi = 0^\circ$, the tracked blade points vertically up.

Another important feature to better understand the capability to capture the wind turbine wake behaviour for yawed configuration is the study of the evolution of the wake center-lines and the associated skew angles. The wake center-lines is an imaginary line that runs through the middle of the wake, marking the trajectory of the region with the highest velocity deficit caused by the wind turbine and represents the path that the wake follows downstream the turbine. This line can be calculated as the integral of the velocity deficit on a wake section perpendicular to the flow direction divided by the area of that section [46]. This method gives an average value that accounts for the different velocities across the entire wake area, providing a singular measure of the wake's strength. The skew angles, instead, gives a more quantitative analysis of the wake center trajectories. Skew angle χ is the angular measure between the position vector \vec{p} extending from the rotor disk midpoint and the normal vector to the rotor disc, as shown in Figure 11 and defined in Eq. 1. Figure 12 shows the skew angles behaviour calculated by DUST compared with LES results by Kim and Lee [25], for yawed conditions ranging from $\gamma = 0^\circ$ to $\gamma = 30^\circ$. The comparison shows how DUST is capable to evaluate correctly the wake center line evolution and the corresponding skew angles that change with respect to yaw angle and show a peak around $x/D = 2$.

$$\chi(x) = \cos^{-1} \left(\frac{\vec{p}(x) \cdot \vec{n}}{\|\vec{p}(x)\| \|\vec{n}\|} \right) \quad (1)$$

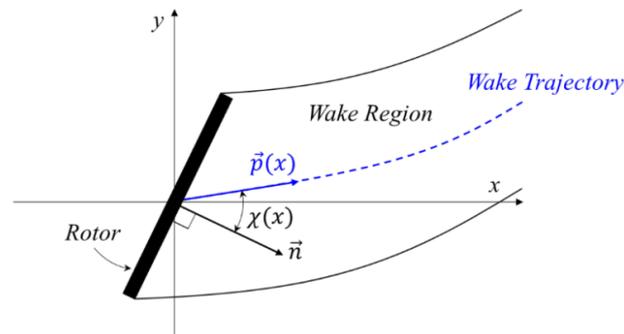


Figure 11. Skew angle (χ) representation, from [25].

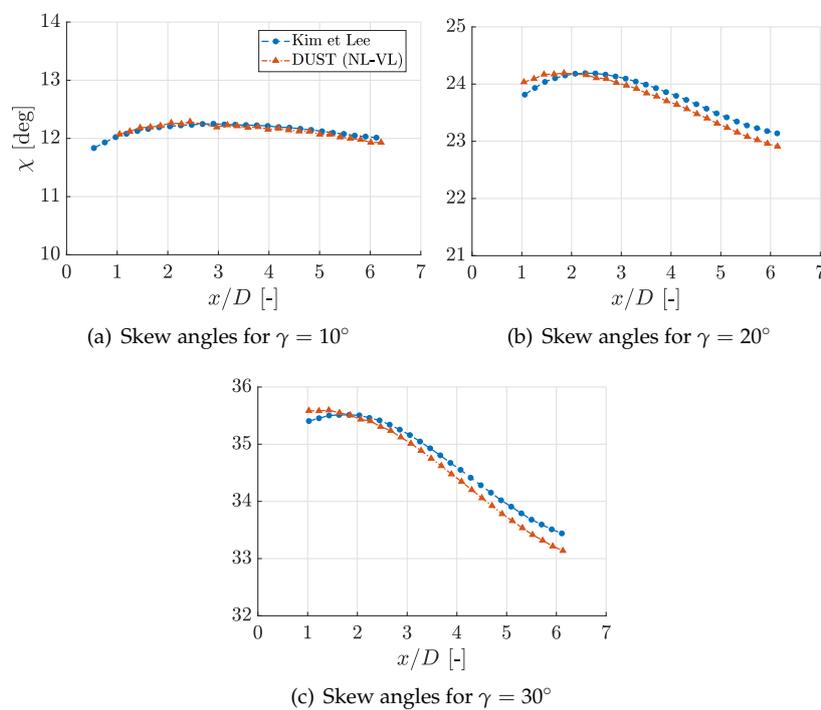


Figure 12. Comparison of the skew angles for $\gamma = 10^\circ, 20^\circ, 30^\circ$ with the results obtained by Kim and Lee [25]; $V_\infty = 9 \text{ m s}^{-1}$.

A more general evaluation of DUST capabilities to capture wind turbine wake is provided by the visualization of the flow fields. Figure 13 and 14 show the contours of the averaged and instantaneous streamwise velocity computed by DUST (NL-VL) at different yaw angles. This flow field representation highlights the capability of DUST to evaluate the evolution and deflection of the wakes occurring at yawed conditions, as well as the highly unsteady behaviour of the flow fields in these conditions. If compared with LES results by Kim and Lee [25], the global behaviour of the flow field is captured but the speed of deformation of the sectional shape of the wakes computed by DUST is higher. Indeed, the coherence of the wake shape is lost at a lower distance from the rotor disk with respect to LES computation by Kim and Lee [25], as shown by the contours of the averaged streamwise velocity on transversal planes shown in Figure 15.

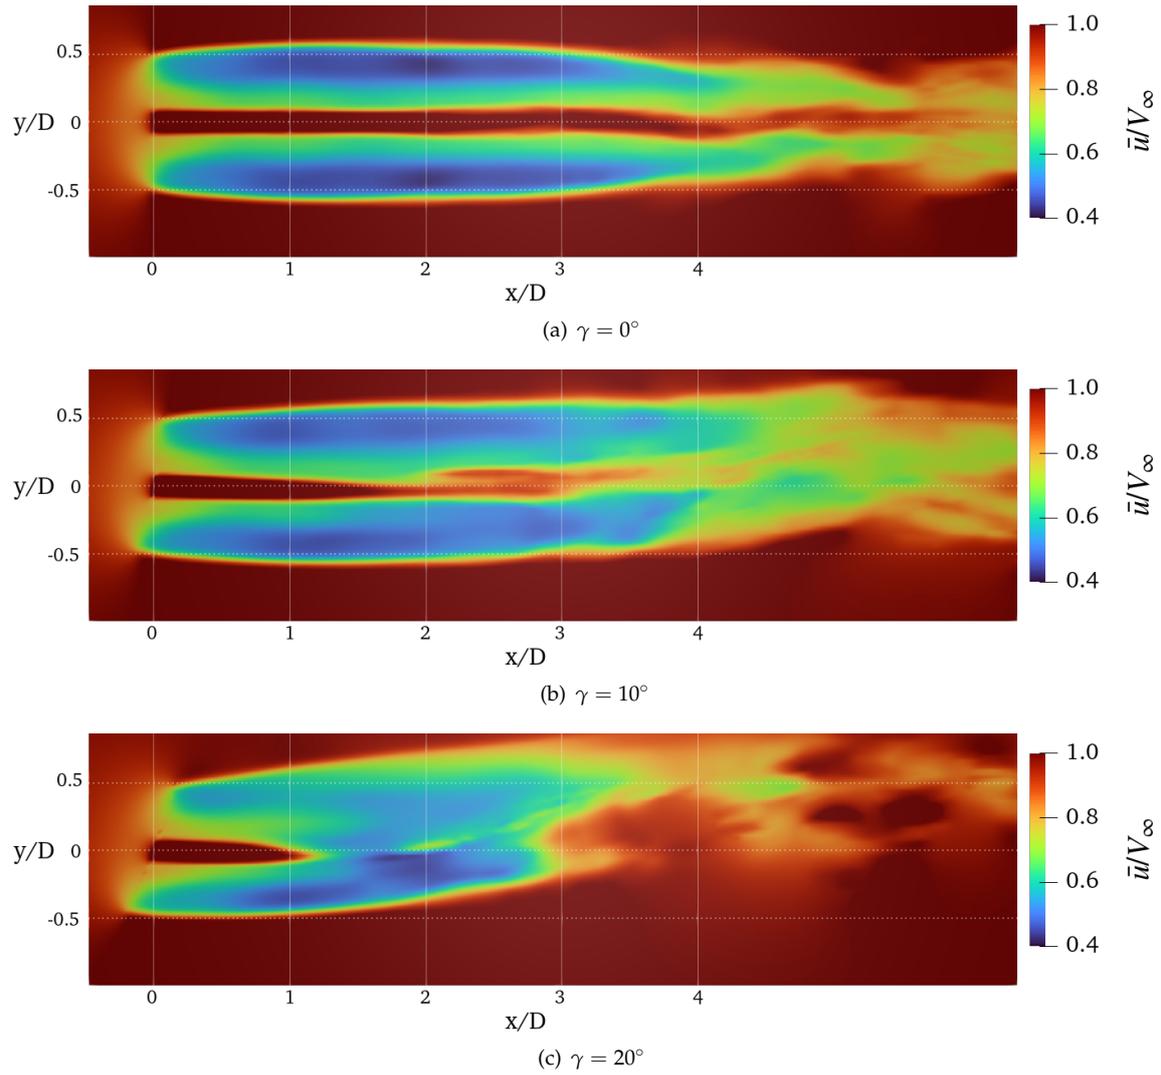


Figure 13. Contours of the averaged streamwise velocity, \bar{u}/V_∞ , computed by DUST (NL-VL) on longitudinal planes for NREL-5 MW wind turbine at $V_\infty = 9 \text{ m s}^{-1}$ with different yaw angles.

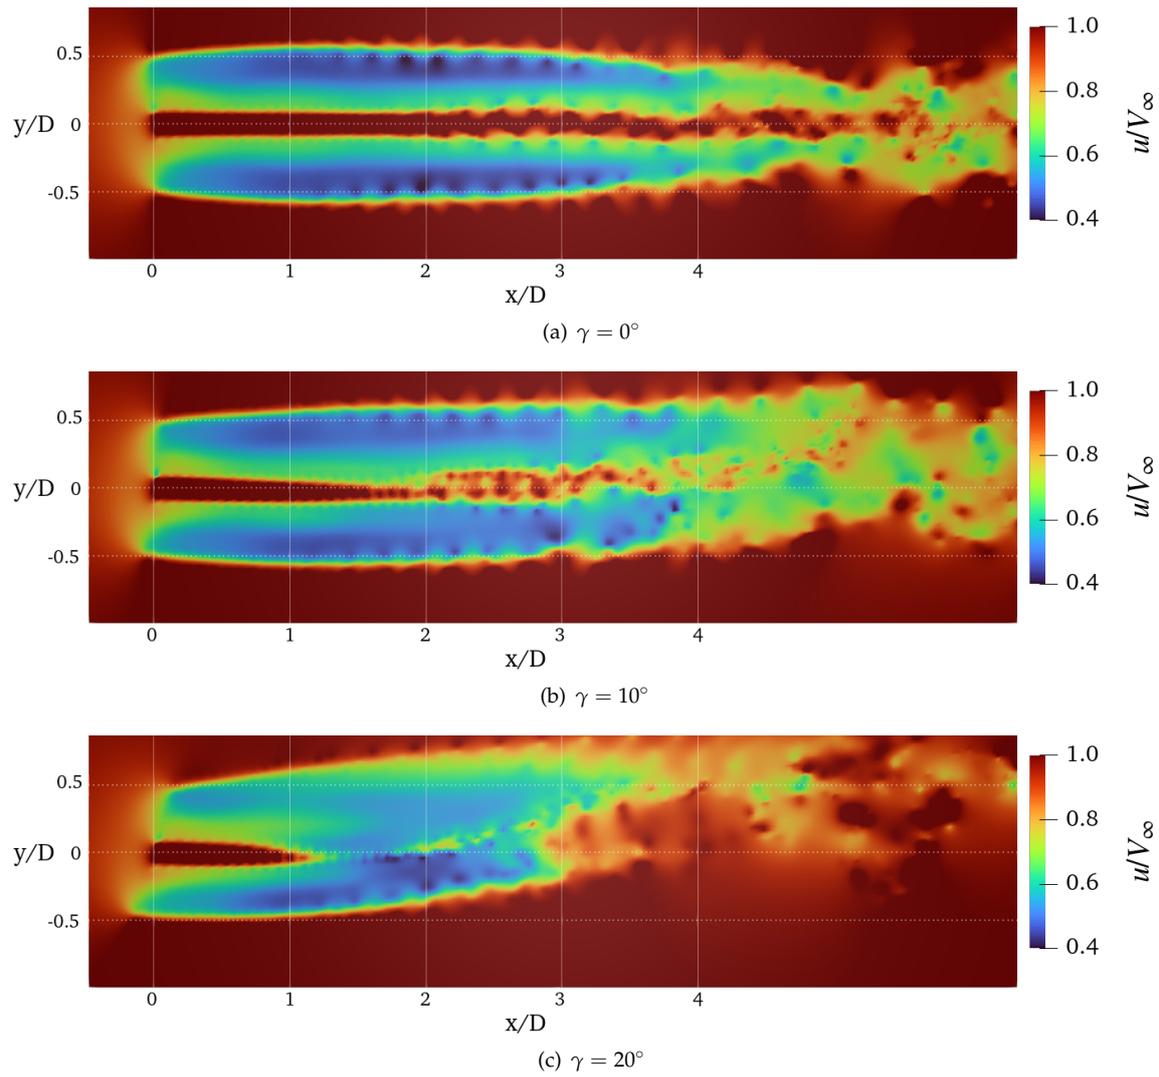


Figure 14. Contours of the instantaneous streamwise velocity, \bar{u}/V_∞ , computed by DUST (NL-VL) on longitudinal planes for NREL-5 MW wind turbine at $V_\infty = 9 \text{ m s}^{-1}$ with different yaw angles.

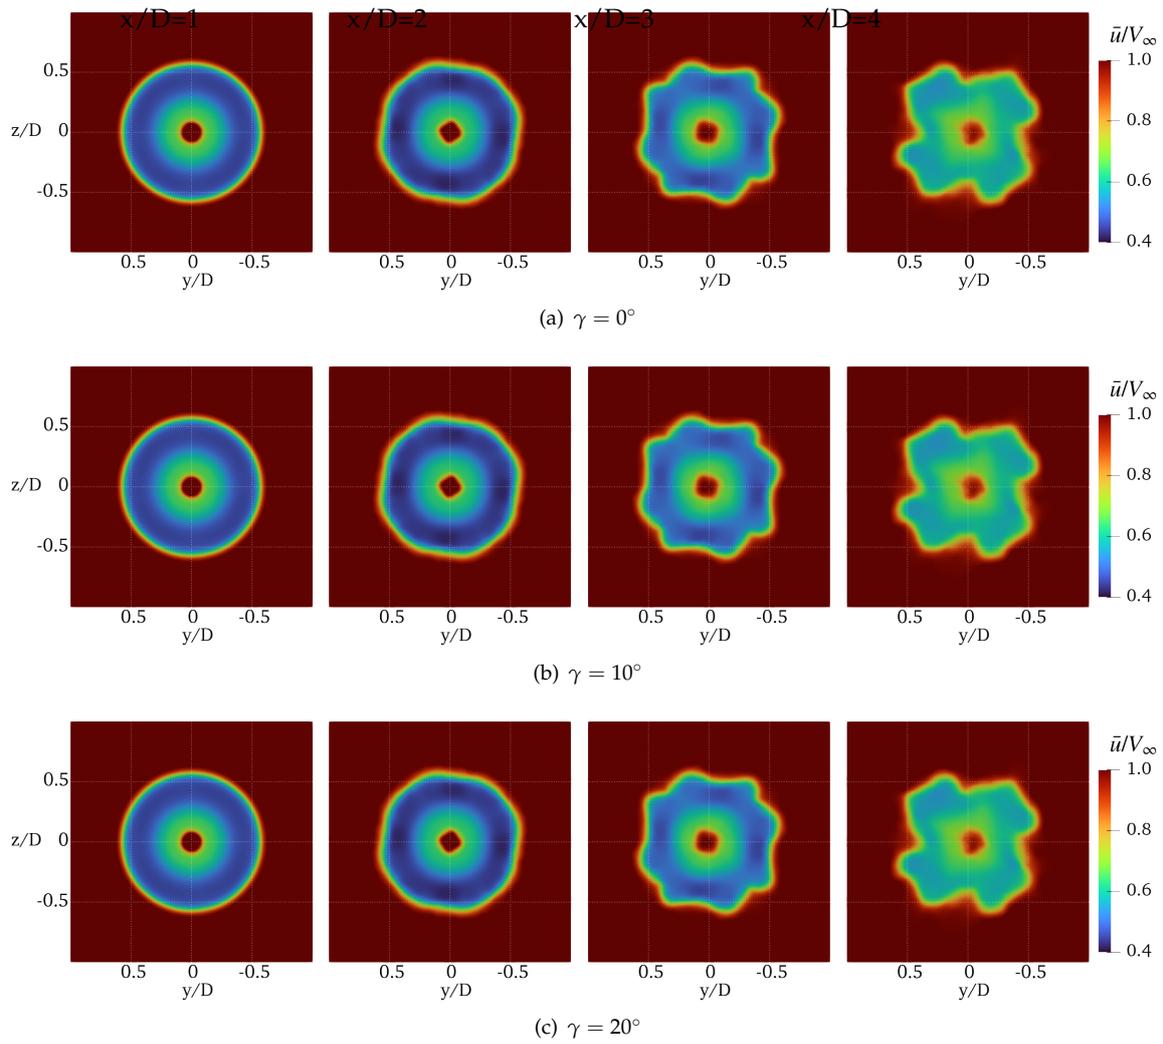


Figure 15. Contours of the averaged streamwise velocity, \bar{u}/V_∞ , computed by DUST (NL-VL) on transversal planes for NREL-5 MW wind turbine at $V_\infty = 9 \text{ m s}^{-1}$ with different yaw angles.

The final configuration considered deals with the complete case equipped with tower and nacelle for C4 rotor condition. Figure 8 illustrates a visualisation of wake structure computed by DUST for the complete wind turbine shown as an iso-surface of the vortex Q-criterion.

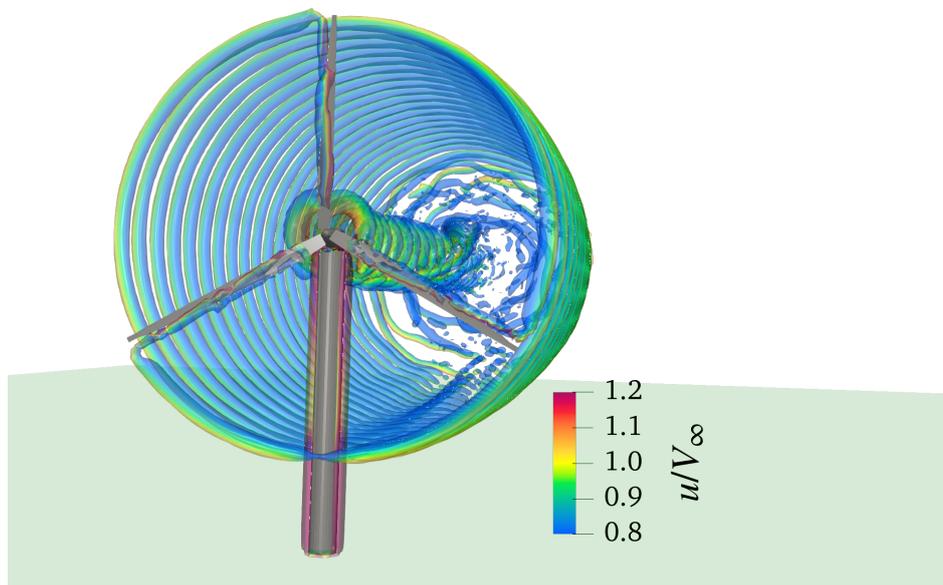


Figure 16. Instantaneous flow field computed by DUST for the full turbine configuration: iso-surface of Q-Criterion colored by adimensional free-stream velocity.

As done before, DUST simulations results using both LL and NL-VL models are compared with the high fidelity CFD calculation by Yu and Kwon [30] and Lin *et al.* [21]. The results in terms of integral loads comparison are presented in Table 9 for single rotor and full wind turbine.

Table 9. Comparison of integral rotor power and thrust computed by DUST and high-fidelity CFD at $V_\infty = 11.4 \text{ m s}^{-1}$ by Lin *et al.* [21] for configuration C4.

| Configuration | DUST LL | | DUST NL-VL | | CFD | |
|---------------|------------|-------------|------------|-------------|------------|-------------|
| | Power [MW] | Thrust [kN] | Power [MW] | Thrust [kN] | Power [MW] | Thrust [kN] |
| Single Rotor | 5.673 | 713.6 | 5.402 | 761.0 | 5.431 | 734.5 |
| Full Turbine | 5.560 | 709.5 | 5.193 | 745.7 | 5.091 | 694.7 |

The introduction of nacelle and tower provides a reduction of the rotor performance for both power and thrust. This behaviour is captured by DUST simulations, thus showing the capability to reproduce interactional effects between rotor wake and tower, as done by CFD. In particular, NL-VL model shows integral values in quite good agreement with high-fidelity CFD [21] as evaluated differences are below than 5% for both power and thrust.

4.2. NREL Phase VI

The second part of the validation deals with the NREL Phase VI wind turbine and was focused in particular of the analysis of highly yawed conditions for 7 m/s freestream velocity. Firstly, an overview of rotor thrust and torque computed by DUST at zero yaw is given in Table 10 and compared with experiments by Hand *et al.* [1] and high-fidelity CFD data by Langer-Moller *et al.* [32].

Table 10. Rotor loads comparison for full NREL Phase VI wind turbine at 7 m/s and zero yaw with high-fidelity CFD results from [32] and experimental results from [1].

| | DUST - NLVL | CFD | Exp. Mean | Exp. max | Exp. min |
|-------------|-------------|------|-----------|----------|----------|
| Thrust [N] | 1177 | 1026 | 1149 | 1188 | 1076 |
| Torque [Nm] | 712 | 707 | 796 | 822 | 727 |

A good agreement of the integral loads values are found for DUST simulations for the complete wind turbine model, as thrust is near to the mean experimental value, while torque is slightly underestimated similarly to CFD. A detailed insight on loads behaviour is provided by the time history of the single blade aerodynamic torque evaluated on the last computed revolution, compared with experiments and CFD [33] in Figure 17. Results distinctly illustrate DUST capability to reproduce time evolution of the blade torque observed by experiments and particularly the bump occurring as a blade passes in front of the tower around azimuthal angle of 180° .

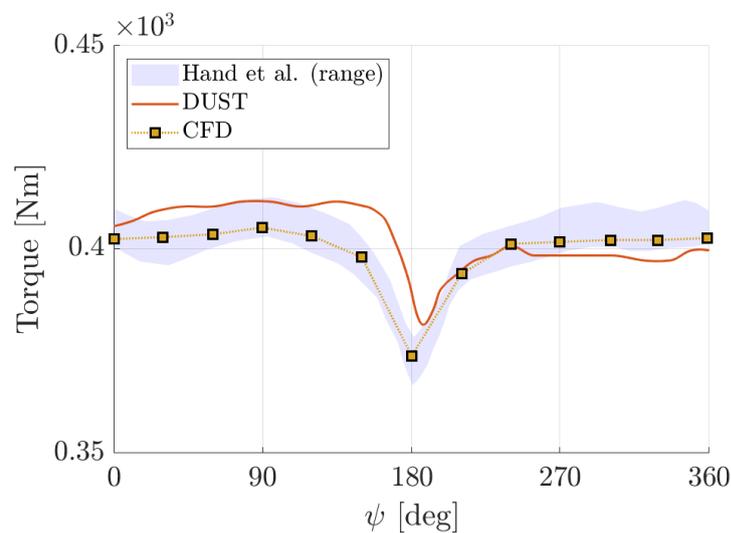


Figure 17. Comparison of the time history of the single blade aerodynamic torque over a full revolution compared with high-fidelity results from [33] and experimental results from [1] at $V_\infty = 7 \text{ m s}^{-1}$. The standard deviation of the experimental load is reported as a banded region.

Now, the attention is focused on the evaluation of loads for yawed conditions. Thus, blade sectional normal and tangential force are compared respectively in Figure 18 and Figure 19 for different yaw angles. In particular, DUST results are compared with NREL measurements [1] and with numerical results obtained by RANS simulations [47] and by a non-linear vortex lattice method NVLM described in [48].

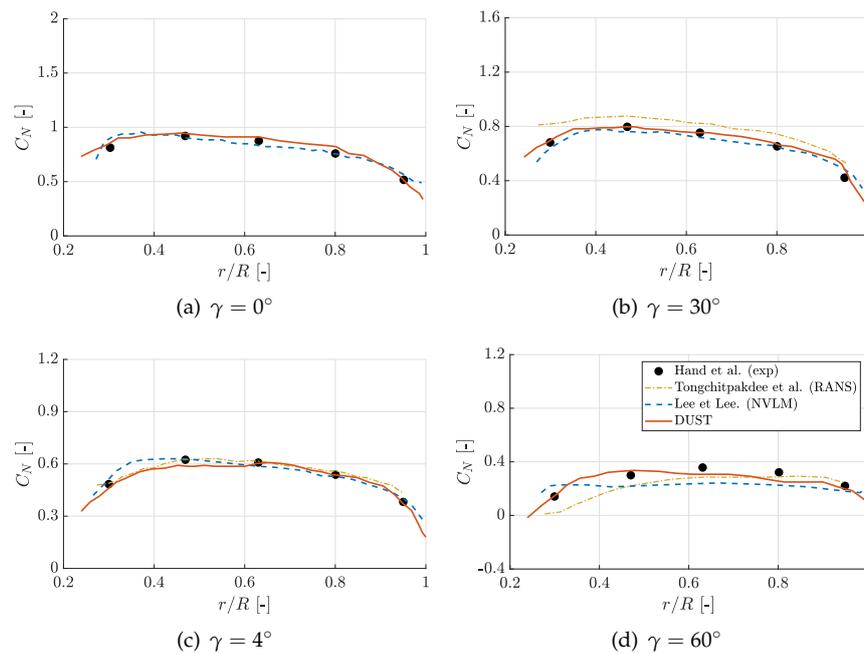


Figure 18. Averaged normal force coefficient densities for different yaw angles compared with the NREL measurement data [1] and numerical results using RANS [47] and non-linear vortex lattice method NVLM [48].

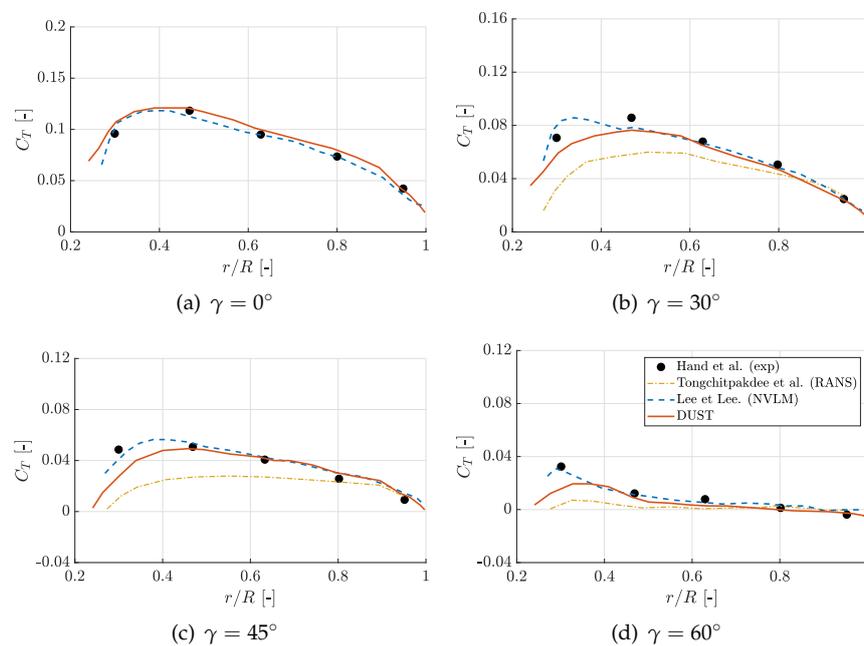


Figure 19. Averaged tangential force coefficient densities for different yaw angles compared with the NREL measurement data [1] and numerical results using RANS [47] and non-linear vortex lattice method NVLM [48].

The trends of the normal sectional forces computed by DUST resembles the experimental data for the considered yawed angles, just showing a slight downward offset with respect to the mean experimental values at $\gamma = 60^\circ$, similarly to what found by both RANS and NVLM approach used as comparison. Concerning tangential force density, a quite good agreement with experiments and NVLM approach results [47] is obtained particularly at $\gamma = 0^\circ$. Some discrepancies are observed

at higher yaw angles in the inner blade region, where also RANS approach shows larger error with respect to experiments. On the other hand, a quite good agreement with both experimental and numerical data are also found for higher yaw angles in the outer half region of the blade. Generally, the sectional loads values obtained by DUST resemble an accuracy comparable with the similar NVLM method used in [48] and somewhere higher than the one obtained by high-fidelity CFD, thus further confirming the promising capability of DUST mid-fidelity approach for the evaluation of wind turbine aerodynamic performance also under deeply yawed conditions.

Finally, a representation of the wind turbine wakes under the different considered yawed conditions is shown in Figure 20 by means of iso-surfaces of Q-criterion coloured by non-dimensional axial velocity component contours. To impose the yaw rotation, the entire turbine was rotated as done during the wind tunnel tests, assuming the flow always directed from left to right. This comparison shows the capability of DUST to evaluate the coherent vortical structure of the wind turbine wake as well as their deflection related to the different yawed conditions.

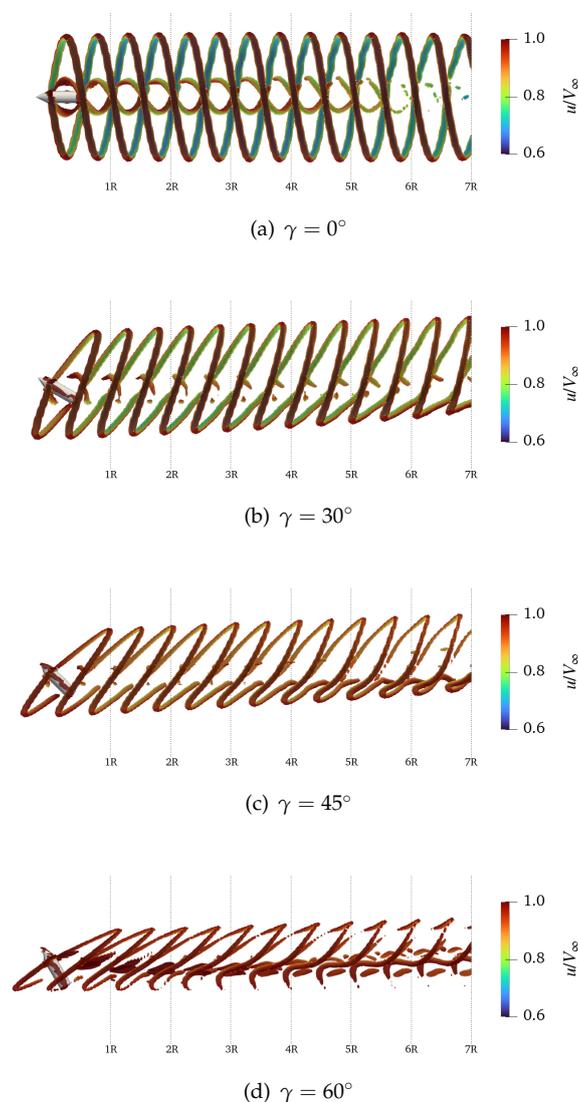


Figure 20. Comparison of the iso-surfaces of Q-criterion coloured by non-dimensional axial velocity component contours for NREL Phase VI wind turbine at 7 m/s at different yaw.

5. Conclusions

The present activity was aimed to the validation of the mid-fidelity numerical solver DUST for the evaluation of wind turbine aerodynamics. This study involved the numerical modelling of two wind turbines widely investigated in literature for numerical tools validation purpose. A thorough comparison of DUST simulations results with both experimental and high-fidelity CFD data showed the limits and capabilities of the mid-fidelity solver to reproduce loads and flow field characteristics in different operating conditions including high yaw angles.

In particular, the study of the NREL-5 MW indicates that DUST is capable to provide a quite good degree of accuracy with respect to high-fidelity CFD for the computation on integral loads, showing errors always below 10%. In particular, the non-linear vortex lattice method implemented in DUST showed higher fidelity with respect to lifting line method, particularly at higher inflow speeds. A similar accuracy in terms of integral loads is found in yawed conditions even if the local comparison of force density along blade span indicates some appreciable discrepancies with respect to CFD, particularly for the tangential component. Concerning the reproduction of the wind turbine wake, DUST shows a global good evaluation of wake evolution and trajectory also under yawed conditions. Nevertheless, quantitative comparison shows a better representation of the near field, while higher discrepancies are found further from the rotor disk where deformation of the sectional shape of the wake is higher with respect to LES representation, particularly under yawed condition.

Thanks to the availability of experimental results, the study of NREL Phase VI wind turbine provides a quite strong evaluation of DUST capabilities particularly focused on the analysis of loads under yawed conditions. The integral loads computed with DUST are quite in agreement with both experimental and CFD data. A more detailed insight on the blade force densities along span showed a general agreement between DUST and numerical approaches characterised by different degrees of fidelity, particularly for normal force component. Higher discrepancies with experiments are found for the tangential components particularly on the inner region of the blade.

Generally, the outcomes of the present work encourage the use of DUST mid-fidelity approach for the preliminary aerodynamic design of wind turbine configurations requiring a huge number of simulations that could be performed with a quite lower computational effort with respect to high fidelity CFD. In particular, the capability of this VPM-based solver to reproduce interactional flow physics mechanisms of rotary wing machines opens a new scenario for the use of mid-fidelity solvers in the design phase of wind farms.

Author Contributions: Conceptualization, A.S. and A.Z.; methodology, A.S. and A.Z.; software, A.S. and A.F.; validation, A.S., A.F. and A.Z.; formal analysis, A.S. and A.F.; investigation, A.S. and A.F.; resources, A.S. and A.Z.; data curation, A.S. and A.F.; writing—original draft preparation, A.S. and A.F.; writing—review and editing, A.S. and A.Z.; visualization, A.S. and A.F.; supervision, A.S. and A.Z.; project administration, A.Z.; funding acquisition, A.Z. All authors have read and agreed to the published version of the manuscript.

Funding: This research received no external funding.

Data Availability Statement: Data would be available on request to authors.

Conflicts of Interest: The authors declare no conflicts of interest.

Abbreviations

The following abbreviations are used in this manuscript:

| | |
|--------------|--------------------------------------|
| x | streamwise coordinate |
| y | transverse coordinate |
| z | vertical coordinate normal to ground |
| u | axial velocity component |
| V_{∞} | freestream velocity |
| LL | lifting line |

| | |
|------------|----------------------------------|
| $NL - VL$ | non-linear vortex lattice |
| R | Rotor radius |
| D | Rotor diameter |
| P | Aerodynamic Power |
| T | Aerodynamic Thrust |
| C_P | Power coefficient |
| C_T | Thrust coefficient |
| f_n | Normal force density |
| f_t | Tangential force density |
| $1/L$ | Normalized span |
| C_{f_n} | Normal force density coefficient |
| C_{f_t} | Tangential force density |
| Ω | Rotor speed |
| θ | Pitch Angle |
| α_T | Shaft Tilt angle |
| α_C | Rotor cone angle |
| ψ | Azimuth Angle |
| β | Twist Angle |
| γ | Yaw Angle |
| χ | Skew Angle |

References

1. Hand, M.M.; Simms, D.A.; Fingersh, L.J.; Jager, D.W.; Cotrell, J.R.; Schreck, S.; Larwood, S.M. Unsteady Aerodynamics Experiment Phase VI: Wind Tunnel Test Configurations and Available Data Campaigns **2001**. doi:10.2172/15000240.
2. Glauert, H., Airplane Propellers. In *Aerodynamic Theory: A General Review of Progress Under a Grant of the Guggenheim Fund for the Promotion of Aeronautics*; Springer Berlin Heidelberg: Berlin, Heidelberg, 1935; pp. 169–360. doi:10.1007/978-3-642-91487-4_3.
3. Hansen, M.; Sørensen, J.; Voutsinas, S.; Sørensen, N.; Madsen, H. State of the art in wind turbine aerodynamics and aeroelasticity. *Progress in Aerospace Sciences* **2006**, *42*, 285–330. <https://doi.org/10.1016/j.paerosci.2006.10.002>.
4. Alesbe, I.; Abdel-Maksoud, M.; Aljabair, S. Investigation of the Unsteady Flow Behaviour on a Wind Turbine Using a BEM and a RANSE Method. 2016.
5. Rezaeiha, A.; Micallef, D. CFD simulation of two tandem floating offshore wind turbines in surge motion. *Journal of Physics: Conference Series*. IOP Publishing, 2020, Vol. 1618, p. 052066.
6. Rezaeiha, A.; Kalkman, I.; Blocken, B. CFD simulation of a vertical axis wind turbine operating at a moderate tip speed ratio: Guidelines for minimum domain size and azimuthal increment. *Renewable Energy* **2017**, *107*, 373–385. doi:<https://doi.org/10.1016/j.renene.2017.02.006>.
7. Cravero, C.; De Domenico, D.; Marsano, D. Uncertainty Quantification Analysis of Exhaust Gas Plume in a Crosswind. *Energies* **2023**, *16*. doi:10.3390/en16083549.
8. Xia, L.; Zou, Z.J.; Wang, Z.H.; Zou, L.; Gao, H. Surrogate model based uncertainty quantification of CFD simulations of the viscous flow around a ship advancing in shallow water. *Ocean Engineering* **2021**, *234*, 109206. doi:<https://doi.org/10.1016/j.oceaneng.2021.109206>.
9. Cottet, G.H.; Koumoutsakos, P.D.; Petros, D.; others. *Vortex methods: theory and practice*; Cambridge University Press, 2000.
10. Winckelmans, G.S. Topics in vortex methods for the computation of three-and two-dimensional incompressible unsteady flows. PhD thesis, California Institute of Technology, 1989.
11. Yin, J.; Ahmed, S. Helicopter Main-Rotor/Tail-Rotor Interaction. *Journal of the American Helicopter Society* **2000**, *4*, 293–302.
12. Wentrup, M.; Yin, J.; Kunze, P.; Streit, T.; Wendisch, J.; Schwarz, T.; Pinacho, J.; K, K.; Fukari, R. An overview of DLR compound rotorcraft aerodynamics and aeroacoustics activities within the CleanSky2 NACOR Project. Proceedings of 74th AHS Annual Forum & Technology Display; , 2018.

13. Opoku, D.; Triantos, D.; Nitzsche, F.; Voutsinas, S. Rotorcraft Aerodynamic and Aeroacoustic Modelling using Vortex Particle Methods. Proceedings of the 23rd International Congress of Aeronautical Sciences, ICAS; , 2002.
14. Montagnani, D.; Tugnoli, M.; Fonte, F.; Zanotti, A.; Droandi, G.; Syal, M. Mid-Fidelity Analysis of Unsteady Interactional Aerodynamics of Complex VTOL Configurations. 45th European Rotorcraft Forum, Sept. 2019, Warsaw, Poland, 2019.
15. Zanotti, A.; Algarotti, D. Aerodynamic interaction between tandem overlapping propellers in eVTOL airplane mode flight condition. *Aerospace Science and Technology* **2022**, *124*, 107518. <https://doi.org/10.1016/j.ast.2022.107518>.
16. Droandi, G.; Syal, M.; Bower, G. Analysis of the Interactional Aerodynamics of the Vahana eVTOL Using a Medium Fidelity Open Source Tool. Proceedings of the VFS Aeromechanics for Advanced Vertical Flight Technical Meeting; AHS International, , 2020.
17. Piccinini, R. Rotor-rotor aerodynamic interactions for eVTOL aircraft configurations. Master's thesis, Politecnico di Milano, 2020.
18. Jonkman, J.; Butterfield, S.; Musial, W.; Scott, G. Definition of a 5-MW Reference Wind Turbine for Offshore System Development **2009**. doi:10.2172/947422.
19. Jonkman, J.M.; Buhl, Jr, M.L. FAST User's Guide - Updated August 2005 **2005**. doi:10.2172/15020796.
20. Sørensen, N.; Johansen, J. UPWIND, Aerodynamics and aeroelasticity Rotor aerodynamics in atmospheric shear flow **2023**.
21. Lin, Y.H.; Chen, H.K.; Wu, K.Y. Prediction of aerodynamic performance of NREL offshore 5-MW baseline wind turbine considering power loss at varying wind speeds. *Wind Energy* **2023**, *26*, 493–515, [<https://onlinelibrary.wiley.com/doi/pdf/10.1002/we.2812>]. doi:<https://doi.org/10.1002/we.2812>.
22. Wu, C.H.K.; Nguyen, V.T. Aerodynamic simulations of offshore floating wind turbine in platform-induced pitching motion. *Wind Energy* **2017**, *20*, 835–858, [<https://onlinelibrary.wiley.com/doi/pdf/10.1002/we.2066>]. doi:<https://doi.org/10.1002/we.2066>.
23. Rahimi, H.; Hartvelt, M.; Peinke, J.; Schepers, J.G. Investigation of the current yaw engineering models for simulation of wind turbines in BEM and comparison with CFD and experiment. *Journal of Physics: Conference Series*. IOP Publishing, 2016, Vol. 753, p. 022016.
24. Aerodynamics of Horizontal Axis Wind Turbines. In *Wind Energy Handbook*; John Wiley & Sons, Ltd, 2011; chapter 3, pp. 39–136, <https://doi.org/10.1002/9781119992714.ch3>.
25. Kim, H.; Lee, S. Large Eddy Simulation of Yawed Wind Turbine Wake Deformation. *Energies* **2022**, *15*. doi:10.3390/en15176125.
26. Dose, B.; Rahimi, H.; Herráez, I.; Stoevesandt, B.; Peinke, J. Fluid-structure coupled computations of the NREL 5MW wind turbine by means of CFD. *Renewable Energy* **2018**, *129*, 591–605. <https://doi.org/10.1016/j.renene.2018.05.064>.
27. Hsu, M.C.; Bazilevs, Y. Fluid—Structure Interaction Modeling of Wind Turbines: Simulating the Full Machine. *Comput. Mech.* **2012**, *50*, 821–833. doi:10.1007/s00466-012-0772-0.
28. Leng, J.; Gao, Z.; Wu, M.C.; Guo, T.; Li, Y. A fluid–structure interaction model for large wind turbines based on flexible multibody dynamics and actuator line method. *Journal of Fluids and Structures* **2023**, *118*, 103857. doi:<https://doi.org/10.1016/j.jfluidstructs.2023.103857>.
29. Imiela, M.; Wienke, F., Towards Multidisciplinary Wind Turbine Design using High-Fidelity Methods. In *33rd Wind Energy Symposium*; [<https://arc.aiaa.org/doi/pdf/10.2514/6.2015-1462>]. doi:10.2514/6.2015-1462.
30. Yu, D.O.; Kwon, O.J. Predicting wind turbine blade loads and aeroelastic response using a coupled CFD–CSD method. *Renewable Energy* **2014**, *70*, 184–196. Special issue on aerodynamics of offshore wind energy systems and wakes, doi:<https://doi.org/10.1016/j.renene.2014.03.033>.
31. Sørensen, N.N.; Michelsen, J.A.; Schreck, S. Navier–Stokes predictions of the NREL phase VI rotor in the NASA Ames 80 ft × 120 ft wind tunnel. *Wind Energy* **2002**, *5*, 151–169, <https://doi.org/10.1002/we.64>.
32. Länger-Möller, A.; Löwe, J.; Kessler, R. Investigation of the NREL phase VI experiment with the incompressible CFD solver THETA. *Wind Energy* **2017**, *20*, 1529–1549, <https://doi.org/10.1002/we.2107>.
33. Hsu, M.C.; Akkerman, I.; Bazilevs, Y. Finite element simulation of wind turbine aerodynamics: validation study using NREL Phase VI experiment. *Wind Energy* **2014**, *17*, 461–481, <https://doi.org/10.1002/we.1599>.
34. Tugnoli, M.; Montagnani, D.; Syal, M.; Droandi, G.; Zanotti, A. Mid-fidelity approach to aerodynamic simulations of unconventional VTOL aircraft configurations. *Aerospace Science and Technology* **2021**, *115*, 106804.

35. Savino, A.; Cocco, A.; Zanotti, A.; Tugnoli, M.; Masarati, P.; Muscarello, V. Coupling mid-fidelity aerodynamics and multibody dynamics for the aeroelastic analysis of rotary-wing vehicles. *Energies* **2021**, *14*, 6979.
36. Gallay, S.; Laurendeau, E. Nonlinear generalized lifting-line coupling algorithms for pre/poststall flows. *AIAA Journal* **2015**, *53*, 1784–1792.
37. Piszkin, S.T.; Levinsky, E. Nonlinear lifting line theory for predicting stalling instabilities on wings of moderate aspect ratio. Technical report, GENERAL DYNAMICS SAN DIEGO CA CONVAIR DIV, 1976.
38. Morino, L.; Kuot, C.C. Subsonic potential aerodynamics for complex configurations: a general theory. *AIAA Journal* **1974**, *12*, 191–197.
39. Cocco, A.; Colli, A.; Savino, A.; Masarati, P.; Zanotti, A.; others. A non-linear unsteady vortex lattice method for aeroelastic rotor loads evaluation. 48th European Rotorcraft Forum (ERF 2022), 2022, pp. 1–8.
40. Morino, L.; Kuot, C.C. Subsonic Potential Aerodynamics for Complex Configurations: A General Theory. *AIAA Journal* **1974**, *12*, 191–197. doi:10.2514/3.49191.
41. Drela, M. XFOIL: An Analysis and Design System for Low Reynolds Number Airfoils. Low Reynolds Number Aerodynamics; Mueller, T.J., Ed.; Springer Berlin Heidelberg: Berlin, Heidelberg, 1989; pp. 1–12.
42. Viterna, L.A.; Corrigan, R.D. Fixed pitch rotor performance of large horizontal axis wind turbines. 1982.
43. Hand, M.M.; Simms, D.A.; Fingersh, L.J.; Jager, D.W.; Cotrell, J.R.; Schreck, S.; Larwood, S.M. Unsteady Aerodynamics Experiment Phase VI: Wind Tunnel Test Configurations and Available Data Campaigns **2001**. doi:10.2172/15000240.
44. Leng, J.; Gao, Z.; Wu, M.C.; Guo, T.; Li, Y. A fluid-structure interaction model for large wind turbines based on flexible multibody dynamics and actuator line method. *Journal of Fluids and Structures* **2023**, *118*, 103857. doi:https://doi.org/10.1016/j.jfluidstructs.2023.103857.
45. Fan, Z.; Li, S.; Gao, Z.; Zhang, L.; Zheng, X.; Zhu, W.; Shen, W.; Sjolholm, M.; Mikkelsen, T.K.; Wang, T.; Li, Y. On the importance of wind turbine wake boundary to wind energy and environmental impact. *Energy Conversion and Management* **2023**, *277*, 116664. doi:https://doi.org/10.1016/j.enconman.2023.116664.
46. Bastankhah, M.; Porté-Agel, F. Wind tunnel study of the wind turbine interaction with a boundary-layer flow: Upwind region, turbine performance, and wake region. *Physics of Fluids* **2017**, *29*, 065105.
47. Tongchitpakdee, C.; Benjanirat, S.; Sankar, L.N. Numerical simulation of the aerodynamics of horizontal axis wind turbines under yawed flow conditions **2005**.
48. Lee, H.; Lee, D.J. Wake impact on aerodynamic characteristics of horizontal axis wind turbine under yawed flow conditions. *Renewable energy* **2019**, *136*, 383–392.

Disclaimer/Publisher’s Note: The statements, opinions and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of MDPI and/or the editor(s). MDPI and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions or products referred to in the content.