

Article

Not peer-reviewed version

Landsat-8/9 Atmospheric Correction Reliability Using Scene-Statistics

[David Groeneveld](#) ^{*}, Tim Ruggles, [Bo-Cai Gao](#)

Posted Date: 26 April 2024

doi: [10.20944/preprints202404.1745.v1](https://doi.org/10.20944/preprints202404.1745.v1)

Keywords: surface reflectance; retrieval; LaSRC; CMAC; scene statistics; near real-time; spectral diversity



Preprints.org is a free multidiscipline platform providing preprint service that is dedicated to making early versions of research outputs permanently available and citable. Preprints posted at Preprints.org appear in Web of Science, Crossref, Google Scholar, Scilit, Europe PMC.

Copyright: This is an open access article distributed under the Creative Commons Attribution License which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Disclaimer/Publisher's Note: The statements, opinions, and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of MDPI and/or the editor(s). MDPI and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions, or products referred to in the content.

Article

Landsat-8/9 Atmospheric Correction Reliability Using Scene-Statistics

David Groeneveld ^{1,*}, Tim Ruggles ¹ and Bo-Cai Gao ²

¹ Advanced Remote Sensing, Inc., Hartford, SD 57033, USA

² Remote Sensing Division, Naval Research Laboratory, Washington, DC 20375, USA; bo-cai.gao@nrl.navy.mil

* Correspondence: david@advancedremotesensing.com

Abstract: Smallsats are becoming the predominant electro-optical Earth observation (EO) imaging platforms. While atmospheric correction of smallsat data enhances its utility, an established pathway to do so may constrain accuracy and utility. The alternative, Closed-form Method for Atmospheric Correction (CMAC), developed for smallsat application provides surface reflectance derived solely from scene statistics. In a prior paper, CMAC closely agreed with Land Surface Reflectance Code (LaSRC) software for correction of the four VNIR bands of Landsat-8/9 images for conditions of low to moderate atmospheric effect over quasi-invariant warehouse-industrial targets. Those results were accepted as surrogate surface reflectance to support analysis of CMAC and LaSRC reliability for surface reflectance retrieval in two contrasting environments: shortgrass prairie and barren desert. Reliability was defined and tested through a null hypothesis: the same top-of-atmosphere reflectance under the same atmospheric condition will provide the same estimate of surface reflectance. Evaluated against the prior surrogate surface reflectance, the results found decreasing error with increasing wavelength for both methods. From 58 comparisons across the four bands, LaSRC average absolute error ranged from 0.59% (NIR) to 50.30% (blue). CMAC error was well constrained from 0.01% (NIR) to 0.98% (blue) sustaining the null hypothesis for reliability.

Keywords: surface reflectance; retrieval; LaSRC; CMAC; scene statistics; near real-time; spectral diversity

1. Introduction

Through smallsats, electro-optical Earth observation (EO) is rapidly expanding, enabled by advances in electronics, imaging sensors, data transmission and miniaturization of components. The resulting smallsat constellations provide rapid repeat imagery that are especially needed to better understand and manage the unprecedented planetary-scale threats from climate change. Perhaps the greatest challenge for all EO data application is that it is obtained through the atmosphere that variably corrupts the data. The solution is to correct the data to surface reflectance, a process that seeks to remove the atmospheric effect entirely resulting in clear images and restored digital signals. However, atmospheric correction is problematic for the many hundreds of EO smallsats without onboard equipment to calibrate sensor output permitting direct conversion to surface reflectance.

A proposed pathway for smallsat surface reflectance correction applies the Land Surface Reflectance Code (LaSRC) and cross calibration to the data of two research grade satellite platforms atmospherically corrected by LaSRC: Landsat-8/9 and Sentinel-2 A/B [1–3]. Such cross calibration can introduce uncertainty due to mismatched overpass timing and spectral responses between sensor platforms. LaSRC currently requires ancillary data to assess the degree of atmospheric effect on the day of the smallsat's image acquisition, both for calibration and application. This potentially adds another layer of uncertainty in operational surface reflectance retrieval due to any temporally mismatched image collection for the ancillary data. Ancillary data also delays image processing and output and may have coarser granularity that reduces spatial sensitivity. CMAC was formulated to avoid these sources of uncertainty.

The Closed-form Method for Atmospheric Correction (CMAC) was developed to deliver surface reflectance with no delay upon image download. Its development was prompted by a seminal observation of atmospherically driven reflectance changes. The novel CMAC pathway was tested against Sen2Cor for Sentinel-2 correction [1] and LaSRC for Landsat-8/9 correction [2]. Corrected Landsat data by LaSRC, L2A, are available only through Earth Explorer and represent the general current state of the art in surface reflectance retrieval. CMAC proved accurate and precise for higher levels of atmospheric effect estimated from each image's spectral data, alone. This present paper investigates an additional inquiry for CMAC application, whether the reliability of surface reflectance output from one area of interest (AOI) applies to all other environments, especially those with very different spectral characteristics. As a yardstick for this comparison, CMAC reliability is compared to the state-of-the-art LaSRC correction for the four visible and near infrared bands (VNIR) of Landsat-8/9.

The paucity of surface reflectance data is a challenge for evaluating atmospheric correction. A few such datasets exist but virtually never in time and space to support sustained, focused testing to compare methods, thus necessitating a workaround for investigating the reliability of atmospheric corrections. The workaround for this investigation relies upon a truism relative to atmospheric correction: correction accuracy is greatest for scenes taken through a "clean" atmosphere. This is partially because clean images require much less adjustment to achieve surface reflectance, but also because the engineering tolerances to accurately retrieve surface reflectance become tighter and the solution accuracy more critical as atmospheric effects increase. In the prior investigation [2], CMAC and LaSRC closely agreed on images acquired under relatively clean atmospheric conditions. These data were accepted as surrogate surface reflectance to provide a reference to construct the datasets to support this analysis.

This paper investigates (1) the reliability of CMAC to provide surface reflectance output for environments widely different from where CMAC was developed and calibrated, and (2) to evaluate the functionality of CMAC in relationship to the widely accepted state of the art, LaSRC. A null hypothesis was formulated to express atmospheric correction reliability: *Equivalent top-of-atmosphere reflectance from images of different environments collected under the same level of atmospheric effect, when atmospherically corrected, will yield equivalent surface reflectance (i.e., no difference)*. This hypothesis can be stated more simply as "the same input affected by the same conditions will yield the same output."

A point of continual reference in past papers that we use again here is application of image appearance that includes clarity and color balance of atmospherically corrected images [1,2]. Though a subjective interpretation, images that appear clear are logically closer to surface reflectance than those containing visible haze. Figure 1 is an example of an extremely hazy image portrayed as top-of-atmosphere reflectance (TOAR) and CMAC and LaSRC-corrected views and illustrates the importance of scene appearance for judging atmospheric correction. While the lack of surface reflectance groundtruth in appropriate time and at an appropriate scale can be problematic for cross checking the accuracy of retrieved surface reflectance, image appearance is useful as a qualitative guide for correction accuracy.



Figure 1. The quality of atmospheric correction can be judged by image clarity and color balance. Landsat 8 image of Kelowna, British Columbia, 8-08-2021: (a) uncorrected TOAR, (b) CMAC corrected, and (c) LaSRC corrected.

2. Materials and Methods

CMAC is a recently developed method intended for atmospheric correction of smallsat images. CMAC processing applies reflectance in two steps that first map and then reverse atmospheric effect spatially for each image. These steps and how they were developed are described in Appendix A and the interested reader can also consult previous journal papers [1,2] for additional information.

This investigation applies an earlier comparison of CMAC to LaSRC for 31 relatively clear Landsat-8 and 9 images of five AOIs of warehouse/industrial districts in Southern California (SoCal) known to have consistent surface reflectance [2]. In that analysis, the average cumulative distribution functions (CDFs) for these two disparate methods agreed to such a close extent that they plotted virtually atop one another (Figure 2). Those paired datasets are employed here as surrogate estimates of surface reflectance. By averaging and interpolating the values for CDF extractions from images of the 31-image cohort, datasets were constructed to assess CMAC and LaSRC output under the same atmospheric conditions from the same TOAR input from completely different environments than where these methods were in close agreement. The high dark-to-bright dynamic range of reflectance in the SoCal dataset is an important distinction because the AOIs selected for comparison of method reliability have extremely low dark to bright dynamic spectral range.

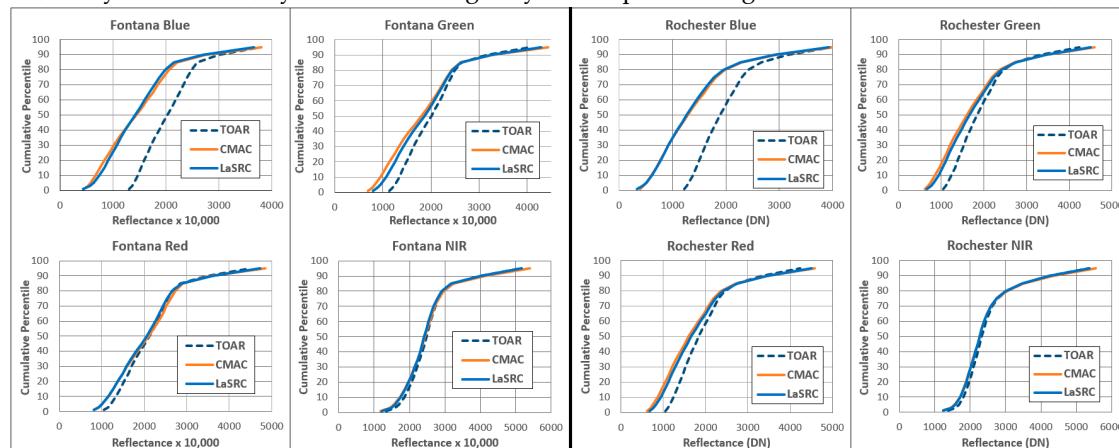


Figure 2. Bandwise reflectance CDFs for the four VNIR bands averaged for all 31 images of Landsat-8 and 9 of TOAR, CMAC and LaSRC treatments extracted from AOIs in two Southern California municipalities. The resulting curves show nearly complete agreement between CMAC and LaSRC. High dynamic spectral range, dark to bright, for each band is demonstrated by the wide range of extracted reflectance values.

Landsat-8 and 9 data were not considered separately given the close agreement of these paired satellites [4]. LaSRC applies a radiative transfer (RadTran) based workflow that is documented in readily attainable remote sensing literature that readers are urged to consult [5,6]. RadTran calculations account for the various reflectance, absorbance, transmittance, etc., components to estimate the amount of light, radiance, measured by the sensor.

Two locations were selected for analysis of method reliability, both with extremely low dark to bright dynamic spectral range very different from other areas where CMAC has been calibrated or applied. An AOI just west of Lake Newell, Alberta, Canada was chosen to represent shortgrass prairie, a vegetation cover occupying a band of semiarid climate that runs north to south for over 2000 km across the United States and Canada. A second site adjacent to the El Pinacate volcanic uplands in Sonora, Mexico represents profound desert of exposed sand with sparse, widespread shrubby trees constituting less than three percent cover within the AOI investigated; such profound deserts are found in significant proportions of South America, Asia, Africa and Australia. Shapefiles

were mapped to enclose homogeneous cover for both AOIs (Figure 3). A regional view from the 7-04-2022 Landsat-8 El Pinacate region in Appendix B provides a wider view of the TOAR, CMAC-corrected and LaSRC-corrected examples and further context for atmospheric correction over deserts with low dynamic spectral reflectance contrasting with adjacent areas surrounding the Gulf of California shore exhibiting high dynamic spectral reflectance.

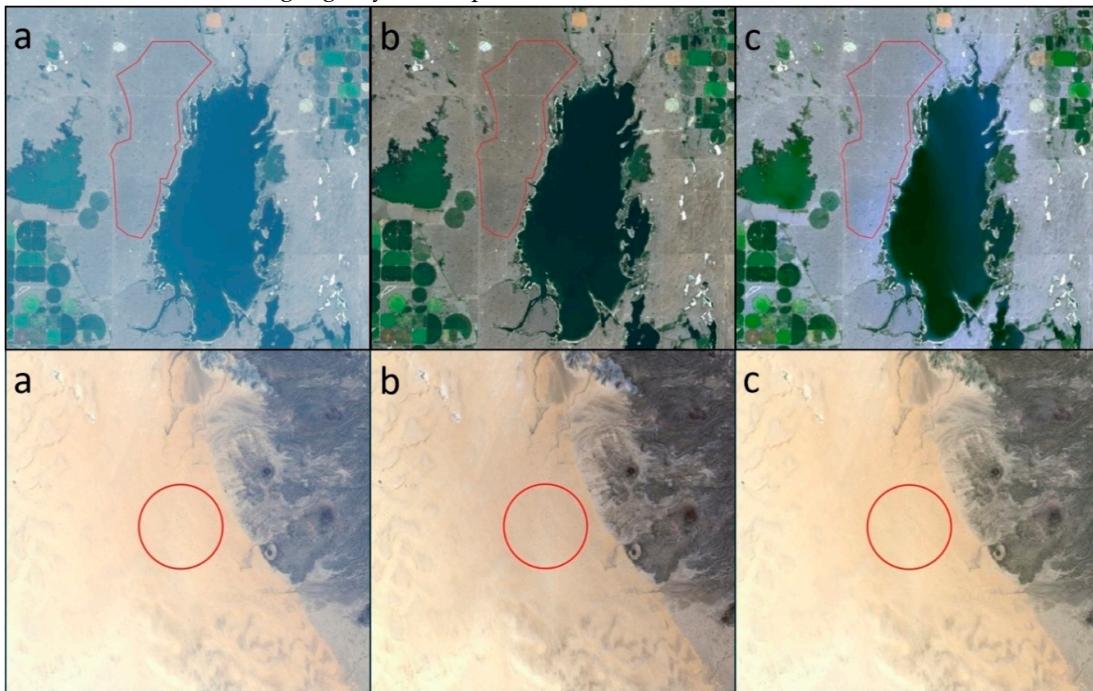


Figure 3. AOIs of Lake Newell (L8, 8-06-2023; top) and El Pinacate (L8, 7-04-2022; bottom) shown for three treatments: (a) TOAR; (b) CMAC; and (c) LaSRC. The area inside the Lake Newell AOI is 27.46 km² and 12.62 km² for the El Pinacate AOI.

Three Landsat-8 and 9 images were selected for each AOI from the Landsat archives and downloaded as both uncorrected and LaSRC-corrected versions from Earth Explorer (Table 1). These six images were corrected by CMAC v1.1L, and calibrated for Landsat-8/9 application; the same processing was also applied in the previous CMAC-to-LaSRC comparison [2]. The dataset to test the null hypothesis was constructed through back comparison to the SoCal datasets from AOIs with quasi-invariant reflectance where CMAC and LaSRC showed close agreement. Any of the five SoCal AOIs would work for this application because the 31 images were affected by relatively moderate atmospheric effect, and because these two disparate methods resulted in virtually the same corrected data distributions per AOI. Two were selected, Fontana and Rochester, whose reflectance distributions are shown in Figure 2. Since the true surface reflectance is unknown and there were slight differences between CMAC and LaSRC in the SoCal results, this analysis regarded the SoCal surface reflectance estimates as most appropriate for application per atmospheric correction method: CMAC for CMAC and LaSRC for LaSRC. This ensured that the choice of datasets did not bias the results. For these comparisons, Atm-I was applied to measure the atmospheric effect rather than the aerosol optical thickness ancillary data applied in LaSRC from the Moderate Resolution Imaging Spectroradiometer (MODIS) [3]; however, the LaSRC datasets downloaded from Earth Explorer were generated with the workflow that applies MODIS AOT for assessment of atmospheric effect [5,6].

Pixel values for the blue, green, red and NIR bands were extracted from within the AOI polygons shown in Figure 3 and exported to spreadsheets for analysis. Reflectance distributions from each image for three treatments (i.e., TOAR, corrected CMAC and LaSRC) were extracted and represented as CDFs in 21 percentiles from 1%, 3% and in 5-percentile steps between 5% and 95%. Data for the Rochester AOI was matched with the 8-14-2023 Lake Newell image to check for bias from selection

of the SoCal AOI, none was found in comparison to data for the Fontana AOI that was matched with the other five images (Table 1).

Table 1. Data for the six Landsat-8 and 9 images that were selected for this analysis.

AOI	Path/Row	Landsat	Image Date	Median Atm-I	Matched With	Match Atm-I Avg,
Lk Newell	040/025	L9	7-29-2023	924	Fontana	924
	040/026	L8	8-06-2023	1044	Fontana	1044
	040/027	L9	8-14-2023	920	Rochester	920
El Pinacate	038/038	L8	6-02-2022	965	Fontana	965
	038/039	L8	7-04-2022	965	Fontana	965
	038/040	L9	8-29-2022	983	Fontana	983

Construction of the dataset for testing the null hypothesis began by finding the Atm-I of multiple images of the SoCal datasets whose averages equaled the median Atm-I's from the images selected for Lake Newell and El Pinacate. The individual values of the 21 percentile steps for the distributions are arrayed in columns in the spreadsheets, one column per image, ranked by increasing Atm-I. This format facilitated averaging image values to support the comparisons by pairing the experimental image TOAR, CMAC and LaSRC values with the corresponding averaged values for the SoCal images.

Appendix C provides portions of the combined 7-29-2023 Lake Newell and Fontana datasets that were reformatted and annotated to support explanation of the workflow to identify values for the three defining properties of the null hypothesis: (1) Atm-I conditions in the SoCal dataset were selected whose averages equaled the experimental datasets, thereby achieving the same atmospheric conditions; (2) interpolation to identify the exact TOAR and its percentile position in each of the six experimental images to match the SoCal TOAR input for atmospheric correction; and (3) identifying the corresponding atmospherically corrected output values from the SoCal dataset for testing the null hypothesis. Interrelating the TOAR data and the surface reflectance calculated from it was accomplished within each dataset using their percentile positions. The 7-29-2023 Lake Newell spreadsheet contained in the Supplementary Materials can be compared to Appendix C to assist following the calculation workflow.

Error for the atmospherically corrected data was estimated by treating the Fontana and Rochester-corrected surface reflectance estimates as the standard to assess CMAC and LaSRC error: $\% \text{ error} = 100 \times (\text{value} - \text{standard})/\text{standard}$. This comparison was judged to be valid because the atmospheric correction results for the spectrally diverse SoCal AOIs were accepted as surrogate surface reflectance. “value” in this formula represents the Lake Newell and El Pinacate surface reflectance estimates.

This statistical distribution-based workflow was repeated for all four bands for each Lake Newell and El Pinacate image. In this manner, a series of common TOAR values, and the CMAC and LaSRC surface reflectances estimated from them, were interpolated from these two datasets.

3. Results

CDFs for the four bands of the three treatments of the three images per AOI afford a comprehensive look at the responses per correction method (Figure 4). The TOAR CDFs for Lake Newell illustrate diverse reflectance due to the vegetated shortgrass prairie in comparison to El Pinacate, where the reflectance remained consistent for the ground surface virtually devoid of perennial vegetation.

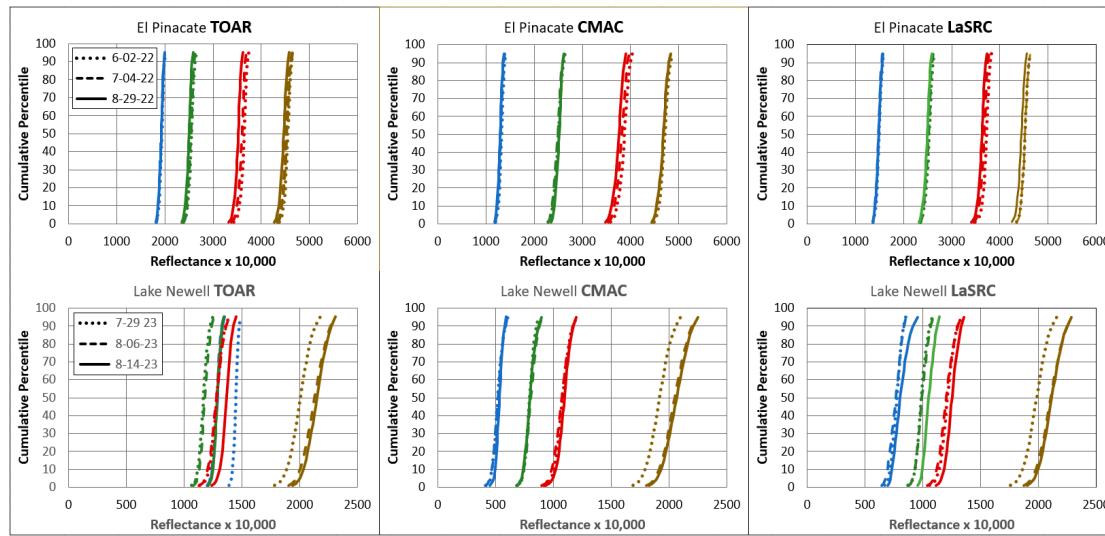


Figure 4. Extracted reflectance by treatment with dot, dash and solid patterns that identify each image evaluated by the two methods. Other than TOAR for Lake Newell, the bands in the graphs stack from left to right according to increasing wavelength. These AOIs have extremely low spectral dynamic range compared to Figure 2 and plot here as almost vertical lines.

The extremely low variability of the El Pinacate distributions in Figure 4 illustrates several trends. The CMAC-corrected bands have greater spacing and are positioned left of LaSRC. All three treatments portray red reflectance distributions as having less coherence.

The Lake Newell CMAC distributions are tighter than LaSRC. The unexpected discrepancy for NIR observed in the Lake Newell data was due to rain prior to the 8-14-2023 image that was investigated and confirmed as described in Appendix E. Lake Newell LaSRC CDFs for the highest atmospheric effect (8-06-2023, 1044 versus 920s for the other two dates) are displaced to the right. This discrepancy is an indication that the increase of Atm-I from 920s to 1044 resulted in under correction by LaSRC; an interpretation based on the fact that atmospheric correction reduces the brightening effect of backscatter by moving the CDFs to the left. Hence under correction results in the 8-06-2023 being displaced rightward in relation to the corrected images from 7-29-2023 and 8-14-2023. The CMAC corrections of the visible bands were unaffected by Atm-I and maintain consistency and close agreement as would be expected for the reflectance of midsummer shortgrass prairie when vegetation growth is essentially static.

Figure 5 presents the bandwise Lake Newell CDFs plotted with the surface reflectance points reconstructed from the SoCal AOIs identified through the workflow described earlier. For all bands, the reconstructed SoCal surface reflectance points of CMAC lie on the CDFs for Lake Newell. Many of the LaSRC points reconstructed in the same workflow, also lie on or close to the Lake Newell CDFs, partially corroborating that CMAC provides accurate surface reflectance estimates, though disagreeing with the LaSRC CDFs. Thus, for the Lake Newell comparisons, the null hypothesis that CMAC provides output equivalent to the surface reflectance surrogate dataset of SoCal is accepted. Judged by the data plots in Figure 5, any error between the SoCal and the Lake Newell datasets was slight.

In contrast to CMAC results, the points displayed for LaSRC reconstructed from the SoCal dataset TOAR values disagree with the Lake Newell reflectance distributions in all twelve graphic comparisons in Figure 5. The Lake Newell analysis was performed first. The analysis for the El Pinacate AOI was begun to verify the same relationships for a different environment, one of profound aridity and almost no vegetation cover.

El Pinacate data plotted in Figure 6 confirmed the results from the CMAC visible band in Figure 5 calculated from the shared SoCal TOAR reflectance values. Fontana CMAC surface reflectance estimates lie close to the CMAC El Pinacate surface reflectance distributions for blue, green, and red. The SoCal LaSRC points plotted closer to the CMAC distribution than to the LaSRC El Pinacate

distributions. Figure 6 LaSRC NIR points plot differently than for Lake Newell (Figure 5) instead essentially lying on the reflectance distribution for El Pinacate TOAR, indicating that virtually no correction for NIR occurred.

Error for surface reflectance estimation by CMAC and LaSRC was calculated by treating the surrogate SoCal reflectance values as true surface reflectance that are presented in Tables 2 and 3. For CMAC, the Lake Newell and El Pinacate surface reflectance estimates agree well with the SoCal surrogate true surface reflectance; CMAC error was low and almost evenly distributed between positive and negative values, hence unbiased. CMAC results were comparable between the Lake Newell and El Pinacate datasets. The average absolute value of CMAC surface reflectance error did not exceed 1% for the blue band that experienced the greatest error. The average absolute value of LaSRC error for the Lake Newell shortgrass prairie was severe, around 50% for the blue band. The error for LaSRC was lower for El Pinacate but still an order of magnitude greater than CMAC. Error for both CMAC and LaSRC decreased with increasing wavelength.

Sufficient data are presented in Supplementary Materials to allow the interested reader to reconstruct and verify the workflow and the results. These include averages, interpolations and error calculations and spreadsheets. Values derived through this analysis are summarized in tables within Appendix D. Spreadsheets and shapefiles of the Fontana and Rochester AOIs are provided along with spreadsheets and shapefiles for the Lake Newell and El Pinacate AOIs. Cloud-based image browsing, selection, and CMAC correction and download of Landsat-8/9 and Sentinel-2 VNIR bands can be accessed through a link in Supplementary Materials.

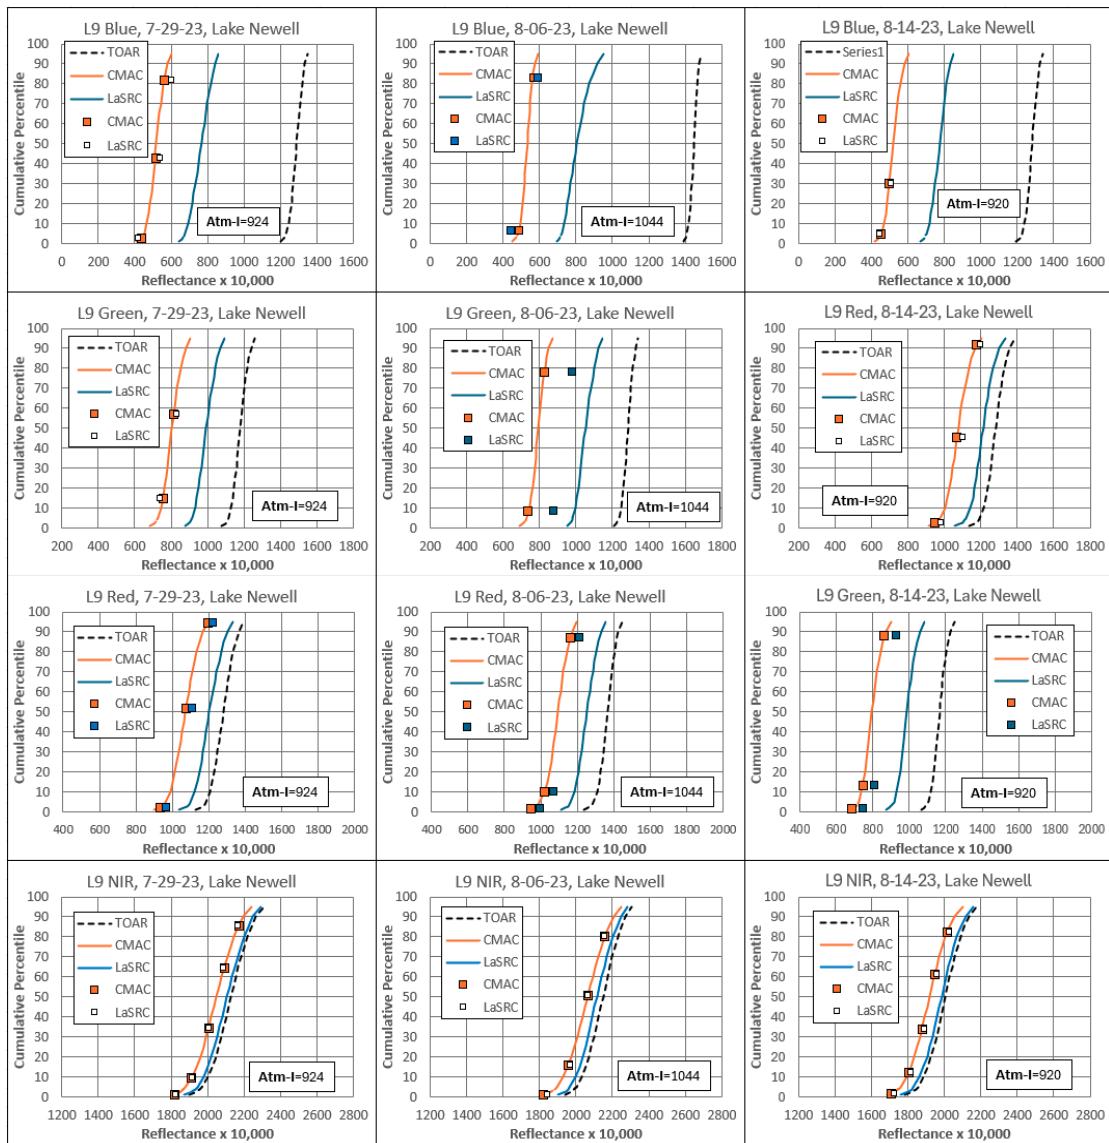


Figure 5. Lake Newell CDFs per band displayed with the points determined from the SoCal AOIs: Rochester (for 8-14-2023) and Fontana (for 7-29-2023 and 8-06-2023). The scaling of the x-axes is optimized to provide equivalent reflectance intervals for the same range per band. Where points overlap each other, the LaSRC SoCal points are depicted in white and of smaller size.

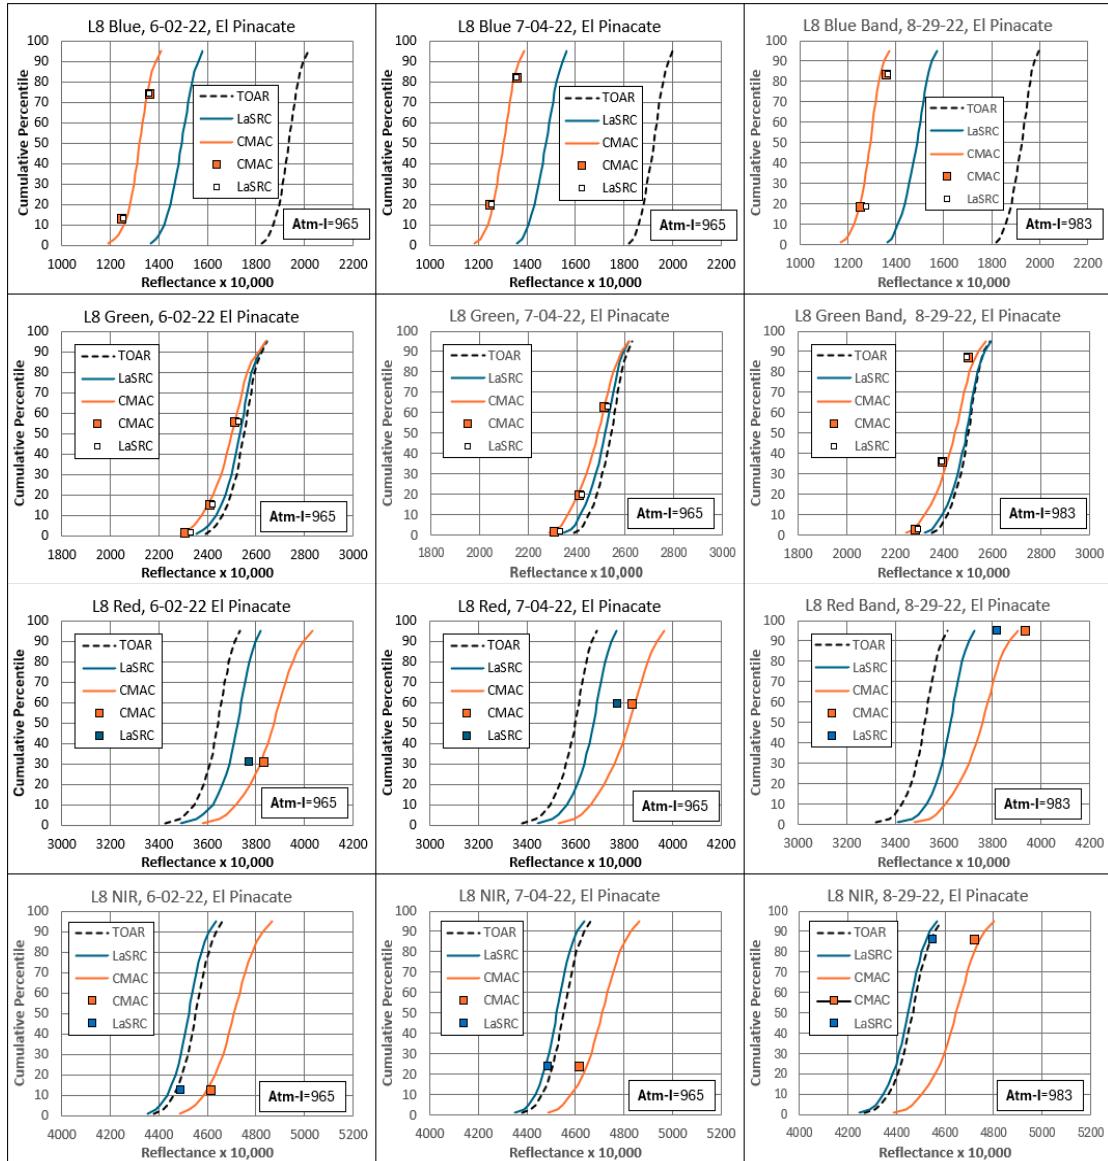


Figure 6. Per band El Pinacate CDFs displayed with the points reconstructed from the SoCal AOI of Fontana. The scaling of the x-axes is optimized to provide equivalent reflectance intervals for the same range per band. Where points overlap each other, the LaSRC SoCal points are depicted in white and of smaller size.

Table 2. Error calculated for surface reflectance estimation of three images of El Pinacate calculated from the average of absolute values. Each cell is the error in surface reflectance output from a TOAR input. This comparison included 21 individual comparisons across the four bands for each method.

El Pinacate	CMAC			Average	LaSRC			Average
	6-02-22	7-04-22	8-29-22	Abs. Value	6-02-22	7-04-22	8-29-22	Abs. Value
Blue	1.3%	1.0%	1.0%	0.98%	14.0%	13.9%	12.4%	
	-0.6%	-0.9%	-0.9%		12.3%	12.2%	12.1%	12.81%
	-0.4%	0.4%	-0.3%		1.3%	1.5%	2.5%	
Green	-0.3%	-0.3%	-1.0%	0.43%	1.3%	1.1%	3.3%	1.57%

	0.1%	0.1%	1.0%		0.5%	0.3%	2.4%	
Red	-0.3%	0.3%	-0.8%	0.46%	-2.1%	-2.2%	-2.5%	2.28%
NIR	-0.5%	0.0%	0.5%	0.31%	-1.0%	-0.1%	-0.6%	0.59%

Table 3. Error calculated for surface reflectance estimates for each band of three Lake Newell images. Overall averages were calculated from absolute values. Each cell is the error in surface reflectance output from a TOAR input. This comparison included 37 individual comparisons across the four bands for each method.

Lake Newell 1	CMAC			Average Abs. Value	LaSRC			Average Abs. Value
	7-29- 23	8-06- 23	8-14- 23		7-29- 23	8-06- 23	8-14- 23	
Blue	0.19%	-0.51%	1.10%	0.61%	58.8%	62.3%	59.7%	50.30%
	-1.29%	-0.68%	0.21%		40.11%	48.73%	46.82%	
	-0.32%	-	-		35.63%	-	-	
Green	-0.32%	0.26%	1.32%	0.37%	26.91%	12.57%	18.67%	17.14%
	-0.20%	-0.10%	-0.01%		20.36%	11.95%	16.19%	
	-	-	0.37%		-	-	13.30%	
Red	-0.06%	0.31%	0.71%	0.22%	10.83%	12.70%	11.35%	9.96%
	0.00%	0.33%	0.07%		8.50%	10.35%	9.54%	
	-0.07%	-0.20%	0.22%		8.36%	8.86%	9.19%	
NIR	-0.10%	0.19%	-0.04%	0.09%	3.10%	3.10%	3.14%	2.58%
	0.01%	-0.01%	-0.02%		3.09%	2.58%	3.11%	
	-0.03%	0.00%	-0.03%		2.74%	2.31%	2.92%	
	-0.02%	-0.37%	0.02%		2.68%	1.78%	2.68%	
	-0.54%		0.00%		2.84%		2.58%	

4. Discussion

The CMAC surface reflectance estimates for Lake Newell and El Pinacate were within 99% agreement with the CMAC SoCal surrogate surface reflectance estimates in all 58 TOAR-based comparisons across the four VNIR bands (agreement was calculated as 100% minus the % error). The strong agreement for CMAC results between datasets from widely diverse environments validates accuracy and reliability for CMAC processing and for its constituent assessment of atmospheric effect and conceptual model-derived workflow that reverses it. Further corroborating CMAC accuracy is the observation that the LaSRC surface reflectance in Figures 5 and 6 for Lake Newell and El Pinacate lie closer to the CMAC distributions than to the LaSRC distributions, in many cases plotting atop the CMAC SoCal points.

The CMAC data demonstrate accuracy independent of the dynamic spectral range (highest minus lowest reflectance values): the SoCal AOIs had extremely wide ranges of values (Figure 2) while the spectral ranges for Lake Newell and El Pinacate were extremely narrow (Figure 4). For the clear to moderately hazy conditions examined here, the null hypothesis is accepted: CMAC analyses produced the same surface reflectance estimates from the same TOAR input under the same atmospheric conditions despite differences in the two terrestrial environments examined.

The LaSRC analysis demonstrated surface reflectance estimates with average agreement as low as 50%; hence, the null hypothesis is rejected – LaSRC was not reliable for estimation of surface reflectance across the two environments. This discrepancy may be related to the low dynamic spectral range of the Lake Newell and El Pinacate locations; however, this issue is more complicated because

the same bandwise dynamic spectral ranges were comparable between these two experimental AOIs, but the degree of error for Lake Newell was about four times that of the El Pinacate error.

Atmospheric correction of satellite imagery by LaSRC, widely viewed as the state of the art in radiative transfer application for EO imagery is proposed as the basis for smallsat atmospheric correction through a cross calibration process with harmonized data from Landsat-8/9 and Sentinel-2 [3,7]. However, reliance upon LaSRC for smallsat applications can be expected to incorporate the same problems that reduce LaSRC accuracy. These problems will include loss of accuracy at higher levels of Atm-I that was found for LaSRC under conditions of increasing haze from wildfire [2] and from these results, lack of reliable accuracy hypothetically related to low spectral diversity environments.

CMAC is a unique pathway for atmospheric correction and its testing here and in the previous two journal papers has found that its performance was more accurate over a wider range of atmospheric effect than Sen2Cor and LaSRC. Rather than delaying surface reflectance output waiting for ancillary data, CMAC can process images immediately upon download from the satellite. Due to its robust and simple mathematical structure, CMAC can readily be calibrated for Smallsat application for any VNIR band combination due to its robust mathematical structure. CMAC will be adapted to correct data from hyperspectral sensors in a next-generation program that will include accurizing the Atm-I model, reliable overwater correction, and development/application of a calibration target and the technology to apply it under automation.

The greatest source of uncertainty in the CMAC workflow is for the measure of atmospheric effect, Atm-I. While Atm-I can be shown to be far more sensitive than the ancillary data currently in use by LaSRC from MODIS [2] it was generated by a static assumption of reflectance of a reference crop rather than actual reflectance measurements. The key to this upgrade is extensive groundtruth. Likewise, extensive groundtruth will also permit spectral modeling to isolate and remove the specular reflectance component of water surfaces that could yield accurate water-leaving reflectance. Though CMAC generally performs well over water, the overarching effect of image geometry has not yet been characterized.

Calibration is the key for application of surface reflectance retrieval. This step is presently done vicariously requiring the use of master images of Sentinel-2 compared to proxy images from smallsats. Even though these steps are automated, this program is inefficient because it requires visual assessment steps to assure accuracy. Vicarious calibration can be replaced by a workflow that employs a well-engineered, constructed, managed, and monitored calibration target. Such a target is expected to yield greater precision, accuracy and automation for CMAC calibration. The benefit of periodic automated calibration is that it allows detection and compensation of episodic in-orbit radiation-related sensor degradation. [8].

5. Conclusions

This investigation confirms that CMAC provides reliable surface reflectance retrieval for all environments. When judged by the appearance of many varied images, CMAC has accurately corrected all terrestrial environments, including deserts, arctic and alpine tundra, tropical and temperate forests, savannahs, grasslands, and farmland on six continents. CMAC has also produced excellent results over the ocean as can be seen in Appendix B, Figure B-3. Smallsats can be calibrated readily for direct application of CMAC without incorporating additional uncertainty of ancillary data.

6. Patents

Currently, one CMAC patent is granted. Two additional patent applications are pending before the US Patent Trade Office with one of these filed internationally through the Patent Cooperation Treaty (International Search Report - language approved as filed).

Supplementary Materials: The following supporting information can be downloaded at the website of this paper posted on Preprints.org: “live” Excel workbooks for Fontana, Rochester, El Pinacate and Lake Newell locations, Collations for Bandwise CDFs for the two experimental locations, and the shapefiles of these four locations to facilitate data extraction. Sentinel-2 and Landsat-8/9 images can be browsed, selected and corrected by the user at <https://strato.advancedremotesensing.com/app> (accessed on 21 April 2024).

Author Contributions: D.P.G., and T.A.R.; methodology, D.P.G. and T.A.R.; software, T.A.R. and D.P.G.; Formal analysis, D.P.G.; data curation, T.A.R. and D.P.G.; visualization, D.P.G. and B.-C.G.; original draft, D.P.G.; review and editing, D.P.G., T.A.R. and B.-C.G.; resources, D.P.G. and B.-C.G.; project administration, D.P.G. All authors have read and agreed to the published version of the manuscript.

Funding: This research was funded by the U.S. National Science Foundation Small Business Innovation Research program through grants #1840196 and #1950746.

Institutional Review Board Statement: Not applicable.

Informed Consent Statement: Not applicable.

Data Availability Statement: Please see Supplementary Materials for accessing the analyzed data, shapefiles for extraction of data and the Cloud-based site for test correction and download of Landsat-8/9 images.

Acknowledgments: We thank the Landsat programs for the steady stream of free, high-quality imagery and its excellent documentation and celebrate Landsat’s pathfinder role for imaging satellite technology. Our heartfelt thanks in memory of Dr. Thomas Loveland (dec. 13 May 2022), a central figure in Landsat applications, for his friendship, encouragement and insights early in our R&D process.

Conflicts of Interest: The authors declare no conflicts of interest.

Appendix A, Brief Description of CMAC Workflow

A.1 Atmospheric Effect Mapped as a Grayscale

The first CMAC step employs the spatially discrete spectral band statistics from the scene as input to a model that assesses atmospheric effect in images. The Atm-I model was developed using dense dark vegetation (DDV) measured by field spectrometry to establish a standard value for a ubiquitous index crop. This crop was identified and sampled under a wide range of atmospheric and surface cover conditions that resulted in a robust scene-based statistical model [1]. Application of the Atm-I model generates a grayscale map that expresses the degree of effect across the image as a numerical scalar for the correction needed to return each pixel’s TOAR to its original surface reflectance.

A.2 Reversing the Mapped Atmospheric Effect to Deliver Surface Reflectance

The second CMAC step reverses the atmospheric effect based upon a conceptual model derived from an observed phenomenon that initially prompted CMAC development. For a hazy and clear pair of TOAR images over an AOI whose surface reflectance has remained relatively consistent, their CDFs will vary systematically as shown in Figure A.1. Imposition of increasing aerosol causes the distributions to rotate counterclockwise, and for decreasing aerosol, clockwise. This observation prompted development of a conceptual model as the basis for reversal of atmospheric effect. To facilitate referencing this phenomenon, it was dubbed the “pinwheel effect.” This conceptualization was valuable only as a first step in formulating the CMAC approach for atmospheric correction.

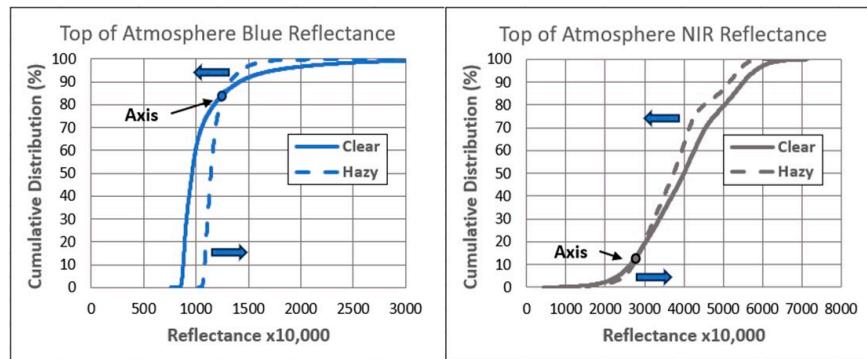


Figure A1. CDFs of two Sentinel-2 spectral bands extracted from an AOI with consistent surface reflectance across both image snapshots. Increasing. Arrows show the direction of CDF rotation from increasing haze. This effect occurs in all VNIR bands.

In the pinwheel effect, increasing dark reflectance in response to increasing haze is due to aerosol backscatter of light. The decrease of bright reflectance is due to attenuation from absorption and diffuse shading by aerosol particles. When viewed as CDFs, changing levels of haze cause the distribution to rotate around an axis point where scatter and attenuation balance and the value remains unchanged. Subsequent observation indicated that this axis point migrates rightward with increasing Atm-I. hypothetically due to forward scatter as a property of the target's brightness. Target brightness influences the magnitude of the reflected energy and its interaction with atmospheric aerosol. In the context of EO, this forward scatter is the illumination of aerosol from below that increases in proportion to ground target brightness. Forward scatter is still somewhat hypothetical and is the subject of ongoing focus; however, it may hold the key to detecting and reversing the effect of specular reflectance over water. The Atm-I model is sensitive to forward scatter and performs well to remove specular reflectance from water (Appendix B).

Application of data distributions was a key factor for development of CMAC, since atmospheric correction seeks to return the range of TOAR pixel values to surface reflectance. CDFs are a robust means to approach the atmospheric correction problem since individual pixel values could be correct in a distribution that is incorrect, but not vice versa. Additionally, the ranked position of any value within reflectance distributions remains the same through various treatments; hence mathematically translated values can be identified afterward by their percentile position in the distribution. This feature enabled finding equivalent properties for intercomparison of experimental data extracted from very different environments to test the null hypothesis.

The observed reflectance behavior of Figure A.1 was expressed as a graphic model by inversion and adjustment of the well-known empirical line method [9]. The resulting linear model in Figure A-2 has precedence in a 40-year-old paper by two prominent researchers (Figure A-3).

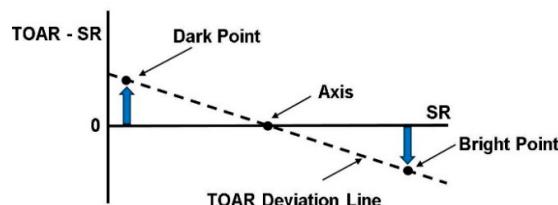


Figure A2. The CMAC conceptual model. Blue arrows indicate the rotational direction for increasing atmospheric effect. The dashed line represents all pixels, dark to bright, under one atmospheric effect for a single spectral band.

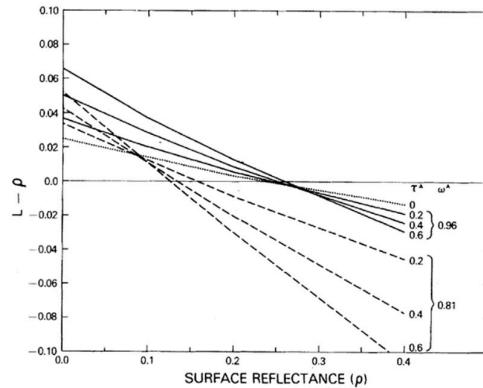


Figure A3. Figure 2 copied from Fraser and Kaufman, 1985 [10]. The solid lines represent common atmospheric aerosol and are equivalent to the dashed line in Figure 4., Dashed lines represent highly absorptive carbon particles to illustrate the importance of aerosol absorption upon reflectance.

The conceptual model of Figure 4 was translated into the CMAC Equation that reverses atmospheric effect for each pixel of an image (Equation 1). The pinwheel effect of Atm-I in Figure 2 is represented by the upward/downward blue arrows in Figure 4 that results in linear deviation of surface reflectance due to atmospheric effect. Slope and offset uniquely define any TOAR deviation line and are the parameters applied in Equation 1 to reverse atmospheric effect to retrieve surface reflectance. Slope and offset responses are unique for each sensor band and are determined through calibration. Presently, calibration is accomplished through image-to-image methods using a Sentinel-2 CMAC master calibration that was generated from several years of painstaking effort. Image-to-image calibration will eventually be replaced with a well-engineered and managed calibration target providing increased accuracy and precision so that data from one to several sensor overpasses can be applied in an automated process. Automated recalibration will guard against episodic radiation-induced sensor changes well-known to occur in orbit [11].

$$\text{Equation 1: } \text{SR} = (\text{TOAR} - \mathbf{b}) / (\mathbf{m} + 1)$$

where \mathbf{m} is slope and \mathbf{b} the offset of the TOAR deviation line.

Appendix B, El Pinacate Region Data Processed by CMAC and LaSRC for Visual Comparison

The 7-04-2022 Landsat-8 image displayed in TOAR, Atm-I and CMAC and LaSRC corrected views.

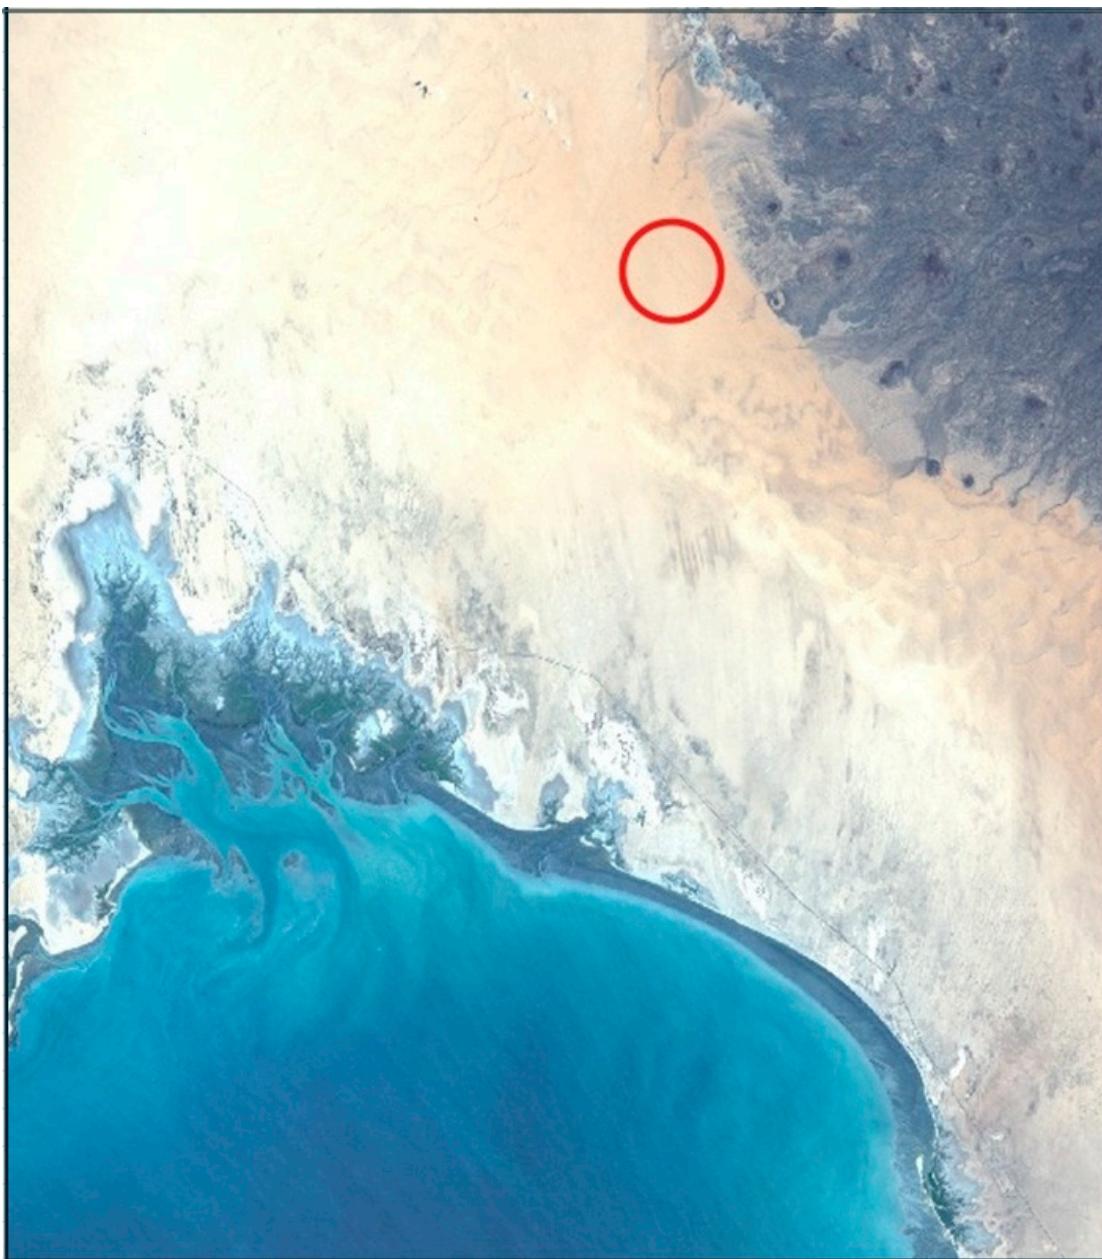


Figure B1. TOAR View. The moderate level of haze obscures ground features over the desert. Light colored features of the ocean result from a mix of entrained sediments in the water column and (hypothetically) from specular reflectance of the sky. This was influenced by wind, in evidence as streaks from the northwest.

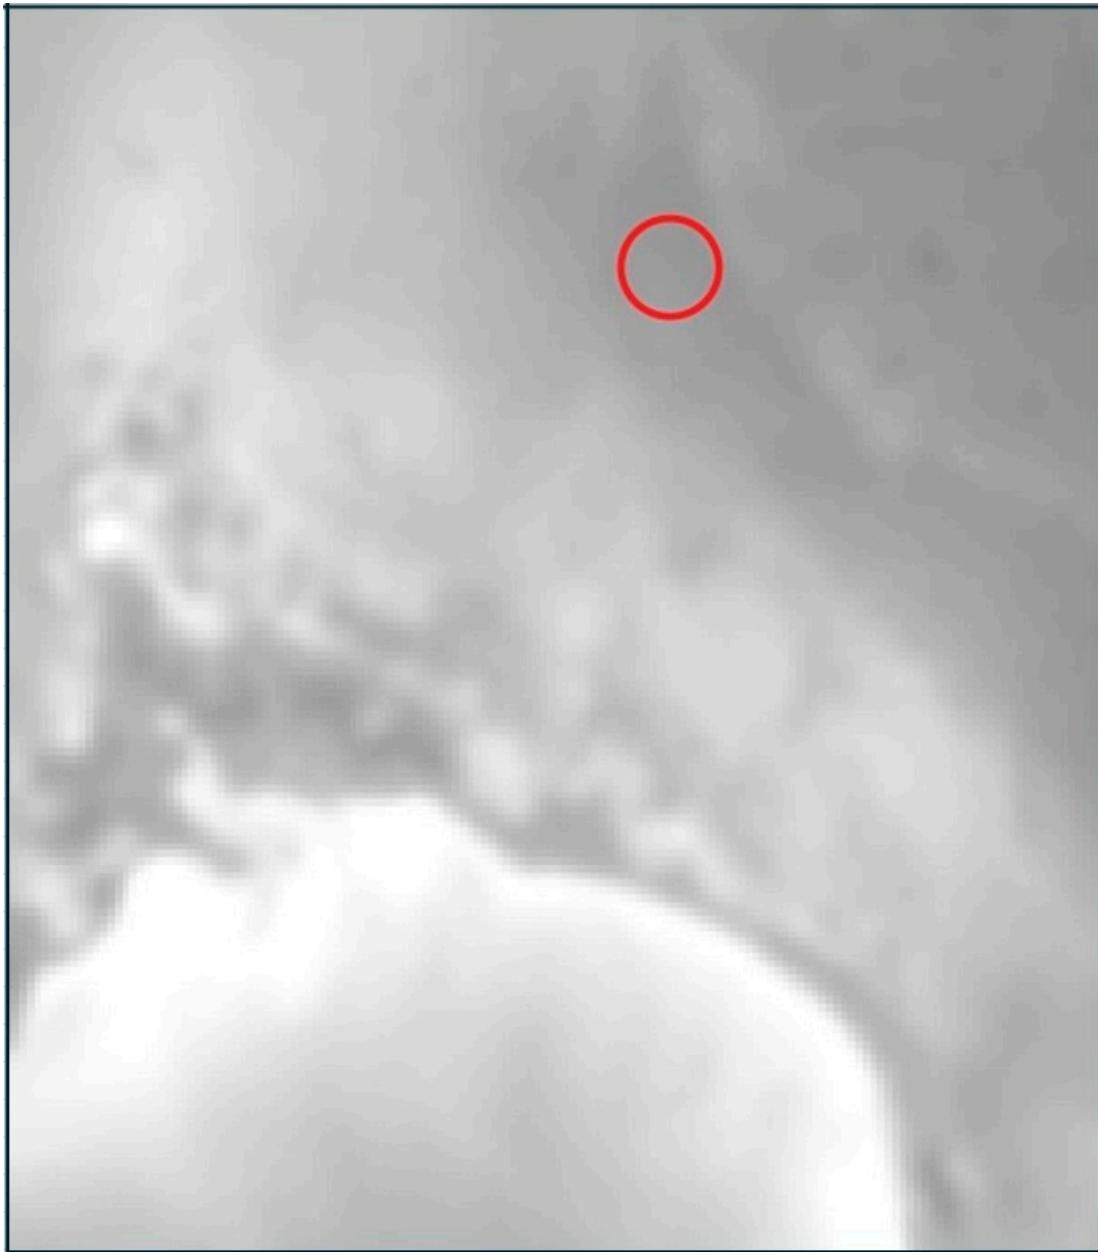


Figure B2. Atm-I Grayscale View. This atmospheric model output was applied to scale the degree of correction removing the atmospheric effect in the 7-04-2022 image: the brighter the response, the greater the correction. Of note is the brightness of the grayscale over the Sea of Corez hypothetically induced by specular reflectance. Atm-I is a statistical representation of the atmospheric effect and, as such, has lower resolution than the original image, hence the faint streaks from wind effects visible in the TOAR view are smeared in this view.



Figure B3. CMAC Corrected View. With specular reflectance largely removed from the TOAR view of the ocean, patterns of entrained sediments and green-tinted water are now visible. Terrestrial features of windblown dunes and the complex hydrology surrounding the bay are visible after CMAC processing that were indistinct in the TOAR view. Future research is expected to define a relationship for the atmospheric statistical model (Atm-I) measurement of specular reflectance to enable reliable atmospheric correction over water.

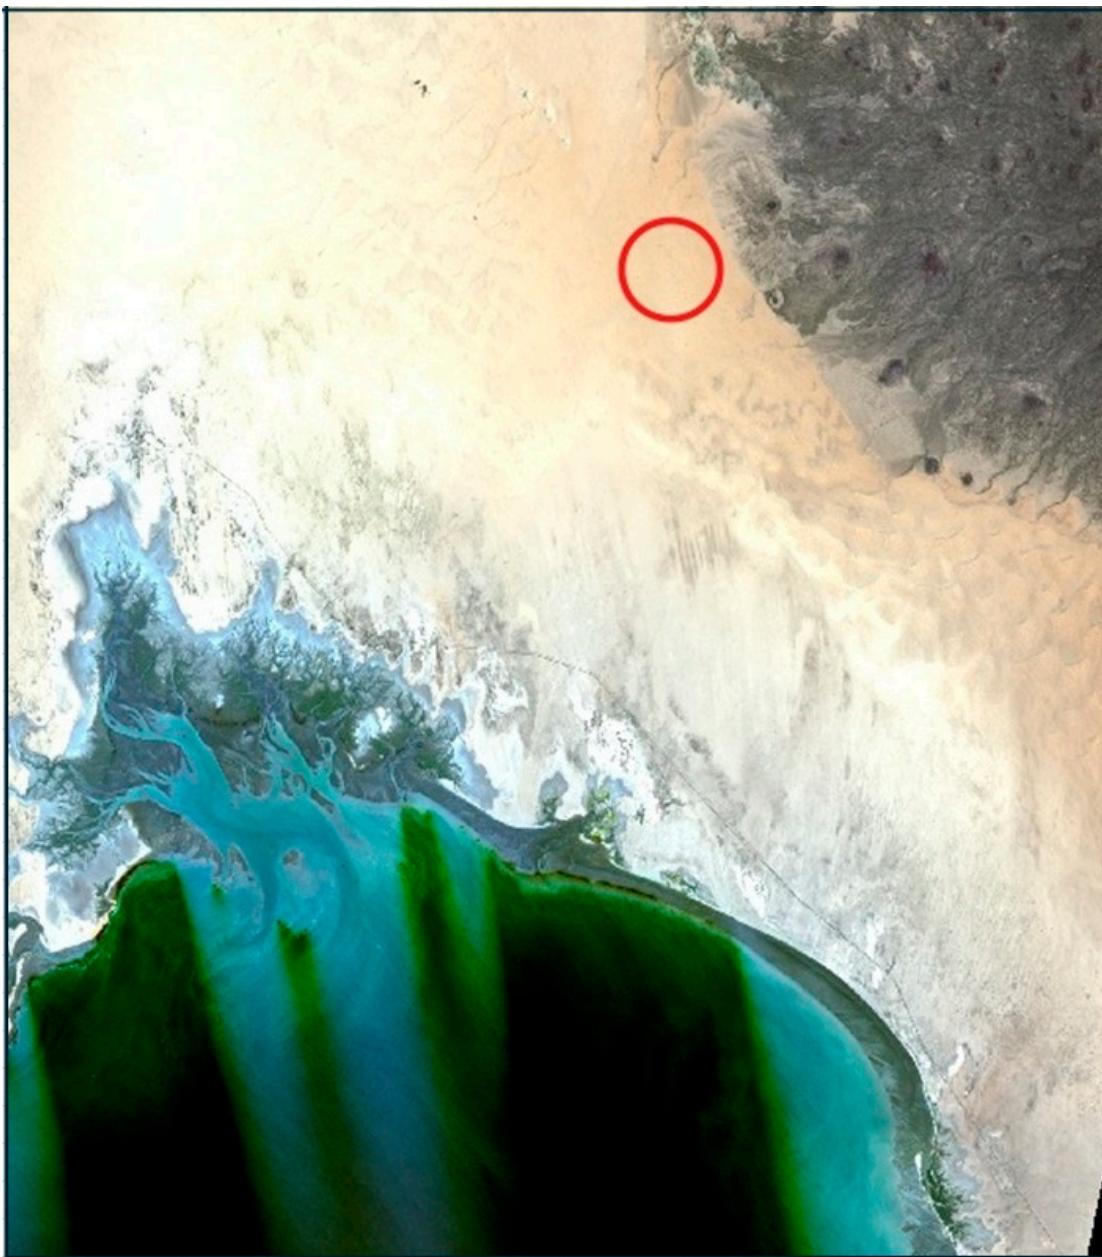


Figure 4. LaSRC corrected View. Like the CMAC correction, finer features of the image are visible after LaSRC correction. Image artifacts over the water are a common feature created by LaSRC correction. Such artifacts are also visible in the LaSRC view of Figure 1 (panel c).

Appendix C. Annotated Spreadsheet Explaining Dataset Construction

This annotated example spreadsheet shows the calculation workflow for comparison of extracted L8 blue band data. Note that the TOAR, CMAC, and LaSRC tables are stacked vertically in the original spreadsheet but rearranged here for ease of illustration. Tables of five images are from the Fontana AOI whose TOAR values correspond with the TOAR column for the Lake Newell AOI (shaded). Portions of the distribution are enclosed in boxes defining where the average TOAR of Fontana was found by interpolation of the Lake Newell distributions. The process began at **A** with selection of five sequential images of Fontana whose median Atm-I values were averaged and found to equal the median Atm-I of the Lake Newell AOI. The interpolations of the data in the shaded

column boxes were performed graphically in the original spreadsheets that are downloadable from supplementary materials.

Finding Equivalent TOAR and its CMAC and LaSRC output in L8 Blue Band 7-29-2023										
Atm-I	Fontana Atm-I					Avg				A
	919	920	921	926	932	924	Fontana L8/L9	Avg.	Cum. % TOAR	
1	1215	1218	1212	1227	1228	1220			1.03 1201	A
3	1272	1273	1277	1293	1296	1282			3.05 1223	
5	1309	1308	1315	1327	1341	1320			5.04 1232	
10	1399	1382	1394	1421	1407	1401			10.46 1246	
15	1479	1445	1459	1494	1472	1470			15.55 1254	
20	1546	1505	1522	1554	1540	1533			20.65 1261	
25	1615	1568	1591	1624	1611	1602			25.27 1266	
30	1686	1627	1661	1698	1689	1672			30.01 1271	
35	1766	1695	1741	1777	1774	1751			35.57 1276	
40	1843	1773	1828	1867	1852	1833			40.20 1280	
45	1939	1843	1914	1956	1934	1917			45.17 1284	
50	2036	1936	1995	2056	2022	2009			50.88 1289	
55	2122	2012	2069	2140	2107	2090			55.61 1293	
60	2204	2091	2148	2226	2182	2170			60.06 1297	
65	2287	2164	2227	2311	2240	2246			65.43 1302	
70	2367	2232	2302	2391	2302	2319			70.93 1307	
75	2448	2309	2382	2480	2378	2399			75.51 1312	
80	2519	2393	2463	2562	2477	2483			80.50 1318	
85	2665	2501	2580	2718	2582	2609			85.60 1325	
90	3182	2856	3182	3278	2792	3058			90.09 1333	
95	3974	3553	4007	4080	3731	3869			95.13 1347	

Cum. % CMAC	Fontana L8/L9					Avg.				Cum. % CMAC	Cum. % LaSRC	Fontana L8/L9	Avg.	Cum. % LaSRC
	1	439	435	428	442	431	435							
1	439	435	428	442	431	435				1.01 411				
3	511	504	514	526	518	515				3.03 440				
5	559	553	558	574	577	564				5.17 452				
10	670	642	658	689	666	665				10.50 468				
15	773	727	739	783	746	754				15.17 477				
20	858	804	822	862	838	837				20.30 485				
25	947	884	912	951	928	924				25.54 492				
30	1043	958	1002	1049	1031	1017				30.60 498				
35	1141	1046	1106	1147	1139	1116				35.74 504				
40	1239	1147	1217	1263	1239	1221				40.35 509				
45	1360	1238	1326	1380	1346	1330				45.19 514				
50	1486	1357	1431	1508	1460	1448				50.77 520				
55	1597	1455	1528	1615	1571	1553				55.40 525				
60	1699	1554	1627	1728	1670	1656				60.64 531				
65	1807	1651	1728	1837	1743	1753				65.56 537				
70	1909	1735	1825	1939	1822	1846				70.04 543				
75	2012	1835	1928	2054	1922	1950				75.00 550				
80	2103	1942	2032	2159	2051	2057				80.31 559				
85	2290	2080	2182	2361	2184	2219				85.24 569				
90	2945	2535	2947	3083	2451	2792				90.05 582				
95	3962	3429	4001	4111	3682	3837				95.10 604				

Appendix D, Summaries of Spreadsheet Statistics

Data tables for three images each of the El Pinacate and Lake Newell AOIs. Derivation of these data can be found in the spreadsheets available in Supplementary Materials. Column 2 presents the TOAR shared values in common among the SoCal, El Pinacate or Lake Newell datasets. Corresponding percentiles for these shared TOAR values are presented in the 3rd column. Interpolated reflectance values based upon shared TOAR are provided for SoCal CMAC (col. 4 and 5) and LaSRC (col. 7 and 8), are points plotted in Figures 5 and 6 and summarized in Tables 2 and 3 from col. 6 and 9.

Table D1. El Pinacate Statistics.

1	2	3	4	5	6	7	8	9
6-02-22	Common	El Pinacate	Fontana	El Pinacate	CMAC %	QIA	El Pinacate	LaSRC %
L8	TOAR	Percentile	CMAC	CMAC	Error	LaSRC	LaSRC	Error
Blue	1880	13.0%	1249	1266	1.3%	1256	1431	14.0%
	1964	74.1%	1361	1352	-0.6%	1361	1528	12.3%
Green	2399	1.5%	2308	2301	-0.3%	2333	2362	1.3%
	2482	15.0%	2412	2403	-0.4%	2424	2456	1.3%
	2559	55.8%	2511	2513	0.1%	2531	2542	0.5%
Red	3613	31.0%	3833	3822	-0.3%	3773	3693	-2.1%
NIR	4471	12.2%	4616	4595	-0.5%	4489	4442	-1.0%
7-04-22	Common	El Pinacate	Fontana	El Pinacate	CMAC %	Fontana	El Pinacate	LaSRC %
L8	TOAR	Percentile	CMAC	CMAC	Error	LaSRC	LaSRC	Error
Blue	1880	20.0%	1249	1262	1.0%	1256	1430	13.9%
	1964	82.0%	1361	1348	-0.9%	1361	1527	12.2%
Green	2399	1.8%	2308	2300	-0.4%	2333	2367	1.5%
	2482	19.6%	2412	2405	-0.3%	2424	2451	1.1%
	2559	62.9%	2511	2515	0.1%	2531	2538	0.3%
Red	3613	59.4%	3833	3844	0.3%	3773	3689	-2.2%
NIR	4466	23.6%	4616	4659	0.9%	4489	4485	-0.1%
8-29-22	Common	El Pinacate	Fontana	El Pinacate	CMAC %	QIA	El Pinacate	LaSRC %
L9	TOAR	Percentile	CMAC	CMAC	Error	LaSRC	LaSRC	Error
Blue	1880	19.0%	1249	1250	0.0%	1256	1435	12.4%
	1964	82.5%	1361	1335	-1.7%	1361	1533	12.1%
Green	2399	7.0%	2308	2304	-0.3%	2333	2377	2.5%
	2482	37.3%	2412	2418	1.0%	2424	2472	3.3%
	2559	87.0%	2511	2529	1.0%	2531	2558	2.4%
Red	3613	94.8%	3833	3902	-0.8%	3773	3726	-2.5%
NIR	4541	86.0%	4721	4743	0.5%	4551	4522	-0.6%

Table D2. Lake Newell Statistics (following page).

7-29-23 L9	TOA	Lk New.	Fo.	LN	C %	Fo.	LN	L %
	R	%	CMAC	CMAC	Error	LaSRC	LaSRC	Error
Blue	1220	2.6%	435	436	0.19%	418	664	58.79%
	1282	43.0%	515	508	-1.29%	540	756	40.11%
	1320	82.0%	564	562	-0.32%	605	821	35.63%


	1139	14.2%	758	755	-0.32%	742	941	26.91%
Green	1187	57.0%	816	814	-0.20%	833	1002	20.36%
	1087	2.3%	932	932	-0.06%	964	1069	10.83%
	1156	51.7%	1075	1075	0.00%	1111	1205	8.50%
Red	1282	94.5%	1197	1196	-0.07%	1225	1328	8.36%
	1812	1.4%	1819	1817	-0.10%	1826	1883	3.10%
	1913	9.8%	1913	1913	0.01%	1918	1977	3.09%
NIR	2001	34.4%	2006	2005	-0.03%	2009	2064	2.74%
	2088	64.3%	2091	2091	-0.02%	2090	2146	2.68%
	2243	85.5%	2171	2159	-0.54%	2167	2229	2.84%
8-06-23	TOA	Lk New.	Fo.	LN	C %	Fo.	LN	L %
L8	R	%	CMAC	CMAC	Error	LaSRC	LaSRC	Error
	1412	6.6%	488	485	-0.51%	446	725	62.31%
Blue	1470	82.7%	567	563	-0.68%	594	883	48.73%
	1245	8.7%	738	740	0.26%	881	992	12.57%
Green	1310	78.1%	827	826	-0.10%	980	1097	11.95%
	1249	1.5%	943	946	0.31%	997	1124	12.70%
	1308	10.3%	1018	1021	0.33%	1072	1183	10.35%
Red	1419	87.2%	1164	1162	-0.20%	1216	1324	8.86%
	1940	1.0%	1823	1827	0.19%	1845	1903	3.10%
	2056	15.9%	1959	1958	-0.01%	1971	2022	2.58%
NIR	2150	50.8%	2067	2067	0.00%	2069	2117	2.31%
	2230	80.1%	2159	2151	-0.37%	2156	2195	1.78%
8-14-23	TOA	Lk New.	Ro.	LN	C %	Ro.	LN	L %
L9	R	%	CMAC	CMAC	Error	LaSRC	LaSRC	Error
	1227	5.1%	450	455	1.10%	444	710	59.70%
Blue	1265	30.4%	498	499	0.21%	511	751	46.82%
	1078	1.8%	687	696	1.32%	748	888	18.67%
	1125	13.5%	746	746	-0.01%	808	939	16.19%
Green	1221	88.2%	862	865	0.37%	930	1053	13.30%
	1171	2.6%	948	955	0.71%	981	1093	11.35%
	1275	45.3%	1069	1070	0.07%	1100	1205	9.54%
Red	1369	91.7%	1177	1179	0.22%	1201	1312	9.19%
	1808	1.8%	1709	1708	-0.04%	1725	1780	3.14%
	1897	12.2%	1803	1803	-0.02%	1818	1874	3.11%
NIR	1967	34.0%	1878	1877	-0.03%	1890	1946	2.92%
	2032	61.1%	1947	1947	0.02%	1959	2012	2.68%
	2096	82.2%	2015	2015	0.00%	2025	2077	2.58%

Appendix E, Why the Disconnect for 8-14-23 NIR Band CDF?

Change detection confirmed rainfall between prior to 8-14-2023 visible as a darkened smear to the west of Lake Newell. Figure 5 provides a color reference for the 8-06-2023 image. This analysis was performed to confirm the validity of the extracted NIR values to explain why the 8-14 NIR results did not conform with the other two dates in Figure 4. The linear features that cross the area west of Lake Newell are gravel roads (confirmed on Google Earth) that drain rapidly and dry much quicker than the surrounding prairie. The prominence of these roads on the change detection image confirms that the darker area is not an atmospheric issue. Lakes appear black here because the TOAR reflectance was elevated due to haze (higher Atm-I) and are brighter on the 8-06-2023.

Steps in this image analysis were:

1. Subtract the 8-06-2023 NIR raster from the 8-14-2023 NIR raster. Minimum and maximum display values were selected to accentuate the display of wetter conditions guided by the magnitude of the differences visible for NIR in Figure 4.

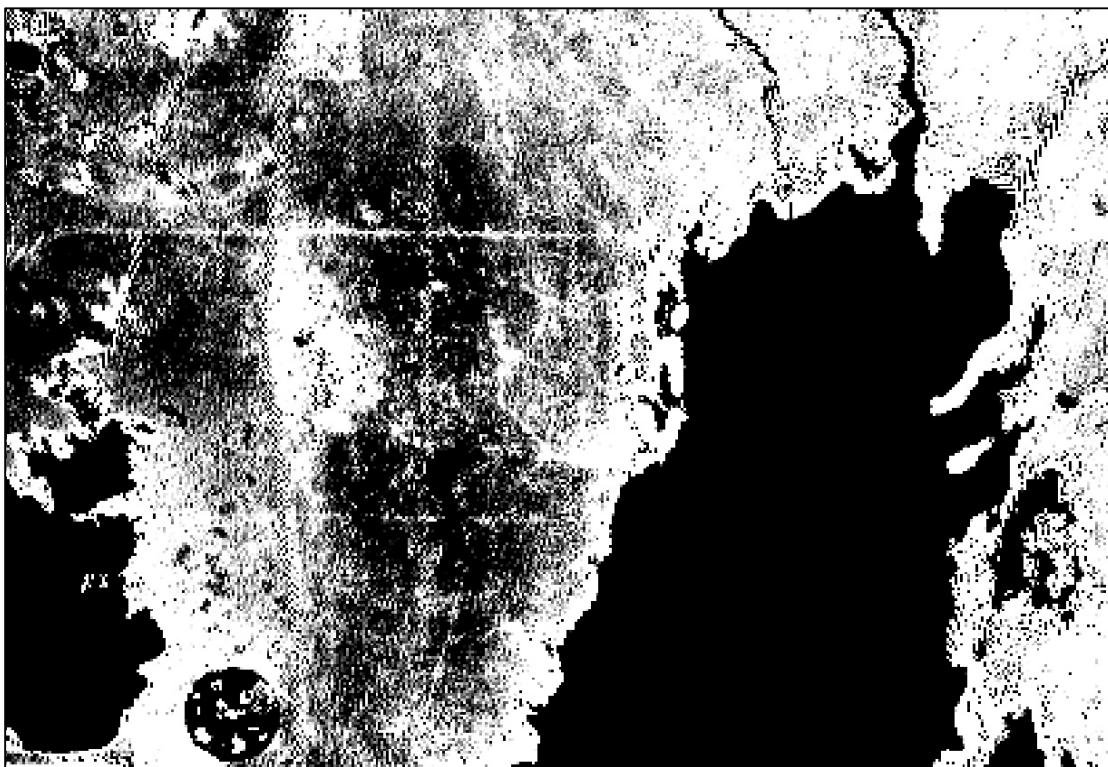

2. The resulting dark pattern was then compared against other variables across the AOI to ensure that this pattern was not explainable by some other image property – none were found.
3. The analysis supports the conclusion that the AOI received rainfall from a localized thunderstorm likely within several days prior to 8-14-2023.

References

1. Groeneveld, D.P.; Ruggles, T.A.; Gao, B.-C. Closed-Form Method for Atmospheric Correction (CMAC) of Smallsat Data Using Scene Statistics. *Appl. Sci.* 2023, 13, 6352. <https://doi.org/10.3390/app13106352> (accessed 16 April 2024).
2. Groeneveld, D.P.; Ruggles, T.A. An Algorithm Developed for Smallsats Accurately Retrieves Landsat Surface Reflectance Using Scene Statistics. *Appl. Sci.* 2023, 13, 12604. <https://doi.org/10.3390/app132312604> (accessed 16 April 2024).
3. Claverie, M.; Ju, J.; Masek, J. G.; Dungan, J. L.; Vermote, E. F.; Roger, J.-C.; Skakun, S. V.; Justice, C. The harmonized Landsat and Sentinel-2 surface reflectance data set. *Remote Sens. Environ.* **2018**, 219 pp. 145–161.

4. Gross, G.; Helder, D.; Begeman, C.; Leigh, L.; Kaewmanee, M. and Shah, R. Initial cross-calibration of Landsat 8 and 9 using the simultaneous underfly event. *Remote Sens.* **2022**, *Volume 14*, 2418. <https://doi.org/10.3390/rs14102418> (accessed 16 April 2024).
5. Landsat Mission. Landsat 8-9 Collection 2 Level 2 Science Product Guide. March 30, 2023. <https://www.usgs.gov/media/files/landsat-8-9-collection-2-level-2-science-product-guide> (accessed 16 April 2024).
6. Vermote, E.; Justice, C.; Claverie, M.; and Franch, B. Preliminary analysis of the performance of the Landsat 8/OLI land surface reflectance product. *Remote Sens. Env.* **2016**, *Volume 185*. <https://doi.org/10.1016/j.rse.2016.04.008> (accessed 16 April 2024).
7. Kington, J.; Collison, A. Scene level normalization and harmonization of Planet Dove imagery; 2022. Available online: <https://earth.esa.int/eogateway/missions/planetscope/objectives> (Accessed 16 April 2024).
8. Karpouzli, E.; Malthus, T. The empirical line method for the atmospheric correction of IKONOS imagery. *Int. J. Remote Sens.* **2003**, *24*, 1143–1150. <https://doi.org/10.1080/0143116021000026779> (accessed 16 April 2024).
9. Fraser, R.S.; Kaufman, Y.J. The relative importance of aerosol scattering and absorption in remote sensing. *IEEE Trans. Geosci. Remote Sens.* **1985**, *GE-23*, 625–633.
10. Kabir, S.; Leigh, L.; Helder, D. Vicarious methodologies to assess and improve the quality of optical remote sensing images: a critical review. *Remote Sens.* **2020**, *12*, 4029. <https://doi.org/10.3390/rs12244029> (accessed 16 April 2024).
11. Xapsos, M. The single event effects in the environment of space. PowerPoint for Texas A&M University Bootcamp. 2021NASA Goddard Space flight Center. 2020. Available online: <https://ntrs.nasa.gov/api/citations/20205011676/downloads/TAMUBootcampSEE.pdf>. (accessed 21 April 2024).

Disclaimer/Publisher's Note: The statements, opinions and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of MDPI and/or the editor(s). MDPI and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions or products referred to in the content.