

Facile Fabrication of Co-doped porous carbon from coal hydrogasification semi-coke for efficient microwave absorption

Yan-Fang Li ^{1,2,*}, Li-Fang Wang ¹, Shu-juan Gao ^{1,2}, Tan-Lai Yu ^{1,2}, Qi-Feng Li ³ and Jun-Wei Wang ^{3,*}

¹ Department of Chemical and Materials Engineering, Lyuliang University, Lvliang Shanxi 033001, China; liyanfang@llu.edu.cn (L.-Y.F.); llswlf@163.com (L.-F.W.); shujuangao@llu.edu.cn (S.-J.G.); 20171017@llu.edu.cn (T.-L.Y.)

² Institute of New Carbon-based Materials and Zero-carbon and Negative-carbon Technology, Lyuliang University, Lvliang Shanxi 033001, China;

³ Institute of Coal Chemistry, Chinese Academy of Sciences, Taiyuan Shanxi 033000, China; liqf@sxicc.ac.cn (Q.-F.L.)

* Correspondence: wangjw@sxicc.ac.cn (J.-W.W.)

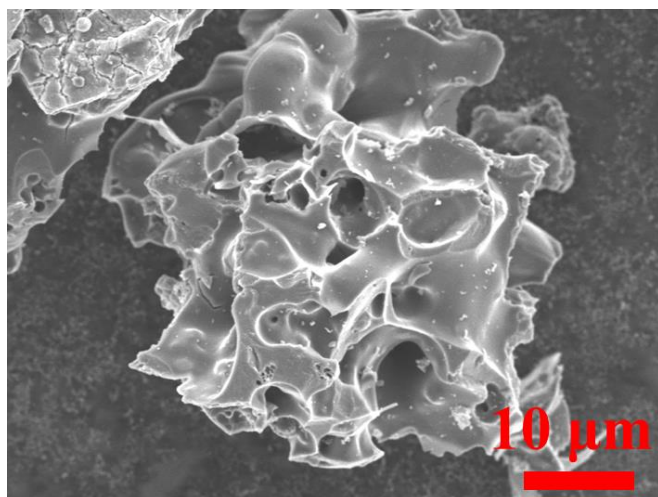


Figure S1. The SEM images of SC.

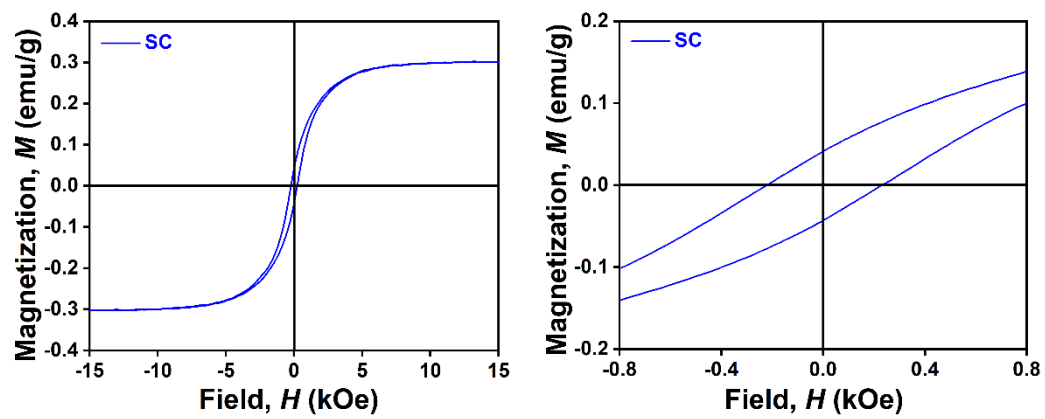


Figure S2. Magnetic hysteresis loops of SC.