Article

Not peer-reviewed version

About Stability of One System of Stochastic Difference Equations with Exponential Nonlinearity

Leonid Shaikhet *

Posted Date: 24 June 2025

doi: 10.20944/preprints202409.2043.v2

Keywords: nonlinear difference equations; positive equilibrium; stochastic perturbations; asymptotic mean square stability; stability in probability; linear matrix inequality (LMI); numerical simulations; MATLAB

Article

About Stability of One System of Stochastic Difference Equations with Exponential Nonlinearity

Leonid Shaikhet

Department of Mathematics, Ariel University, Ariel 40700, Israel; leonid.shaikhet@usa.net

Abstract

A system of two nonlinear difference equations under stochastic perturbations is considered. Nonlinearity of the exponential type in each equation of the system under consideration depends on all variables of the system. The stability in probability of a positive equilibrium of the system is studied via the general method of Lyapunov functionals construction and the method of linear matrix inequalities (LMIs). The obtained results are illustrated via examples and figures with the equilibrium and numerical simulation of the solution of the considered system of stochastic difference equations. The proposed research method can be applied to nonlinear systems of higher dimension and with other types of high-order nonlinearity, both for stochastic difference equations and for stochastic differential equations with delay.

Keywords: nonlinear difference equations; positive equilibrium; stochastic perturbations; asymptotic mean square stability; stability in probability; linear matrix inequality (LMI); numerical simulations; MATLAB

MSC: 39A30; 39A50

---

1. Introduction

Systems of both difference and differential equations with different forms of exponential nonlinearities are very popular in research and various applications (see, for instance, [1–12] and references therein), in particular, the model of Nicholson's blowflies [1] or Mosquito population equation [8].

Here, similarly to [10], the stability of the positive equilibrium of a system with exponential nonlinearity is investigated under stochastic perturbations via the general method of Lyapunov functionals construction [11,13–15] and the method of linear matrix inequalities (LMIs) [16–24]. However, unlike, for instance, [3,10], where the exponential nonlinearity in each equation depends on only one variable, here each equation exponentially depends on all variables of the system under consideration. The obtained results are illustrated via examples and figures with the equilibrium and numerical simulation of the solution of the considered system of difference equations. Numerical analysis of the considered LMIs is carried out using MATLAB.

Consider the system of two nonlinear difference equations

$$\begin{aligned} x_1(n+1) &= a_1 + b_1 x_1(n-1) + c_1 x_1(n-1) e^{-p_1 x_1(n) - q_1 x_2(n)}, \\ x_2(n+1) &= a_2 + b_2 x_2(n-1) + c_2 x_2(n-1) e^{-p_2 x_1(n) - q_2 x_2(n)}, \\ & n \in N = \{0, 1, \dots\}, \end{aligned} \tag{1}$$

with positive parameters, $b_i < 1$, and positive initial conditions $x_i(j) = \phi_i(j)$, $i = 1, 2$, $j \in N_0 = \{-1, 0\}$.

 doi:10.20944/preprints202409.2043.v2

1.1. Equilibrium

It is clear that the equilibrium (x_1, x_2) of the system (1) is defined by the system of two algebraic equations

$$\begin{aligned} x_1 &= a_1 + b_1 x_1 + c_1 x_1 e^{-p_1 x_1 - q_1 x_2}, \\ x_2 &= a_2 + b_2 x_2 + c_2 x_2 e^{-p_2 x_1 - q_2 x_2}. \end{aligned} \tag{2}$$

Presenting the first equation (2) in the form

$$e^{q_1 x_2}\left(1 - b_1 - \frac{a_1}{x_1}\right) = c_1 e^{-p_1 x_1} \tag{3}$$

and calculating the logarithm, we get

$$x_2 = f_1(x_1) := \frac{1}{q_1}\left(\ln c_1 - p_1 x_1 - \ln\left(1 - b_1 - \frac{a_1}{x_1}\right)\right), \quad x_1 > \frac{a_1}{1 - b_1}. \tag{4}$$

Similarly, from the second equation (2) we have

$$e^{p_2 x_1}\left(1 - b_2 - \frac{a_2}{x_2}\right) = c_2 e^{-q_2 x_2} \tag{5}$$

and

$$x_1 = \frac{1}{p_2}\left(\ln c_2 - q_2 x_2 - \ln\left(1 - b_2 - \frac{a_2}{x_2}\right)\right), \quad x_2 > \frac{a_2}{1 - b_2}. \tag{6}$$

It is clear that the function $x_2 = f_1(x_1)$ given by (4) is defined and positive if $x_1 \in (x_{1\,\min}, x_{1\,\max})$, where $x_{1\,\min} = \dfrac{a_1}{1 - b_1}$ and $x_{1\,\max}$ is a unique root of the equation

$$1 - b_1 - \frac{a_1}{x_1} = c_1 e^{-p_1 x_1}, \tag{7}$$

which follows from (3) by $x_2 = 0$.

Calculating the derivative in (4)

$$x_2' = \frac{1}{q_1}\left(-p_1 - \frac{a_1}{((1 - b_1)x_1 - a_1)x_1}\right) < 0,$$

it is easy to see that $x_2 = f_1(x_1)$ is strictly decreasing function. Moreover, $\lim\limits_{x_1 \to x_{1\,\min}} f_1(x_1) = +\infty$ and $f_1(x_{1\,\max}) = 0$.

Calculating the derivative of the function $x_2 = f_2(x_1)$, defined implicitly by (6), we have

$$p_2 = -\left(q_2 + \frac{a_2}{((1 - b_2)x_2 - a_2)x_2}\right)x_2' > 0,$$

i.e., $x_2' < 0$. It means that $x_2 = f_2(x_1)$ is strictly decreasing function for $x_1 \geq 0$. Moreover, $\lim\limits_{x_1 \to \infty} f_2(x_1) = \dfrac{a_2}{1 - b_2}$ and $x_2 = f_2(0)$ is a unique root of the equation

$$1 - b_2 - \frac{a_2}{x_2} = c_2 e^{-q_2 x_2}, \tag{8}$$

which follows from (5) by $x_1 = 0$. It is easy to see that the root x_2 of this equation satisfies the condition $x_2 > \dfrac{a_2}{1 - b_2}$.

It is clear that two strictly decreasing functions $x_2 = f_1(x_1)$ and $x_2 = f_2(x_1)$ have (see Figures 1 and 2) one common point, which is a solution of the system (2) and is the unique equilibrium (x_1^*, x_2^*) of the system (1).

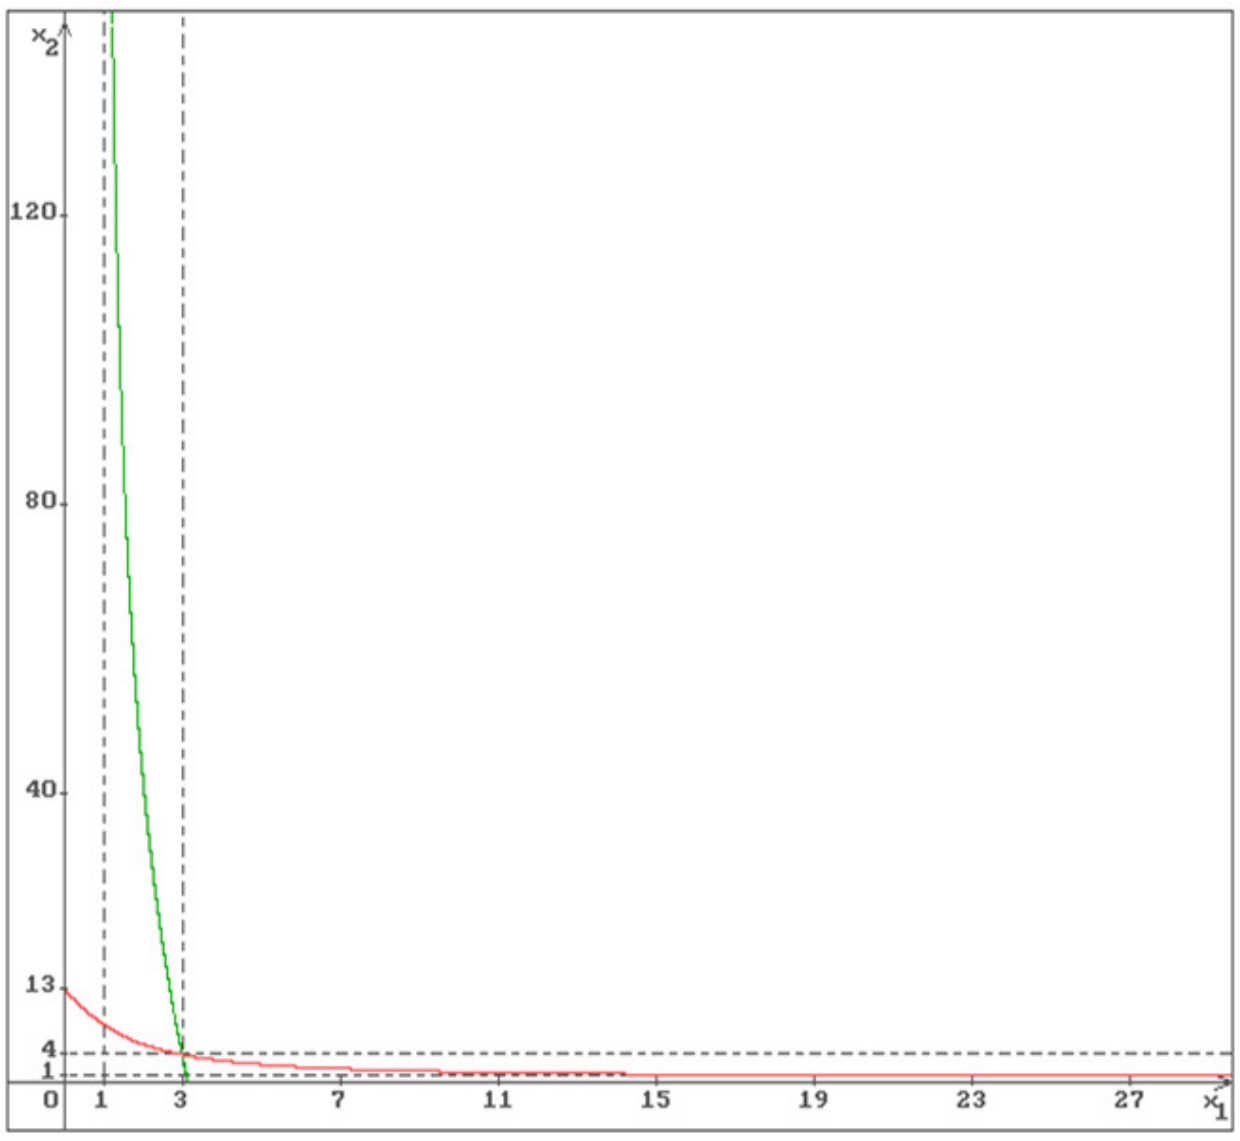

Figure 1. The graphs of the functions $x_2 = f_1(x_1)$ (green) and $x_2 = f_2(x_1)$ (red).

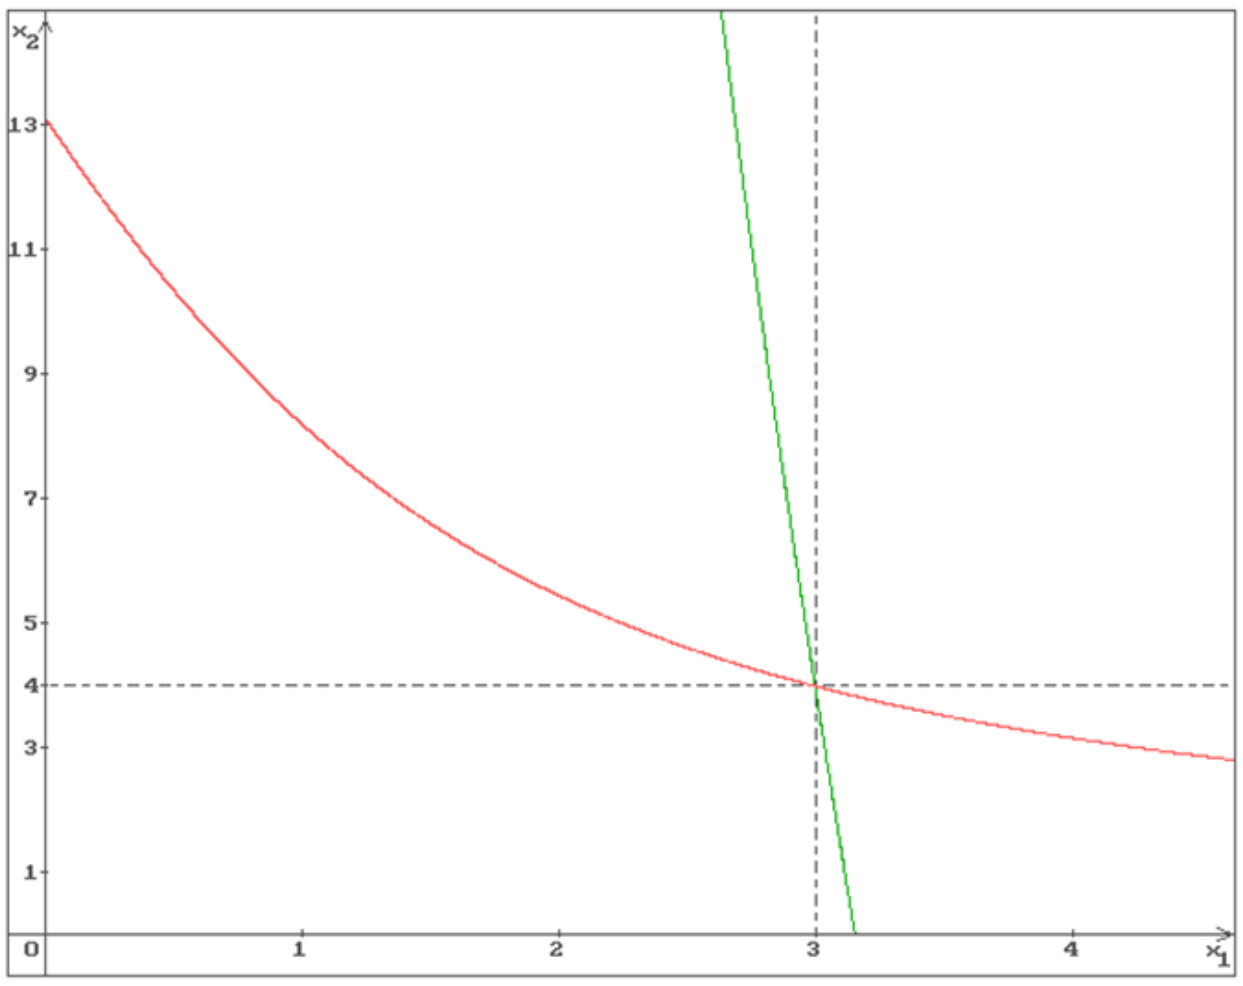

Figure 2. The intersection point of the graphs of the functions $x_2 = f_1(x_1)$ (green) and $x_2 = f_2(x_1)$ (red) is the equilibrium $(x_1^*, x_2^*) = (3, 4)$.

Remark 1. *The equilibrium (x_1^*, x_2^*) of the system (1) satisfies the conditions*

$$x_1^* \in \left(\frac{a_1}{1-b_1}, x_{1\,\max}\right), \quad x_2^* \in \left(\frac{a_2}{1-b_2}, x_{2\,\max}\right), \tag{9}$$

where $x_{1\,\max}$ and $x_{2\,\max}$ are roots of the equations (7) and (8) respectively.

Example 1. *Consider the system (1) with*

$$a_1 = 0.3, \ \ a_2 = 0.4, \ \ b_1 = 0.7, \ \ b_2 = 0.6, \ \ c_1 = 0.2810, \ \ c_2 = 0.4215, \ \ p_1 = p_2 = 0.1, \ \ q_1 = q_2 = 0.01.$$

Then the solution of the system (2) is $(x_1^*, x_2^*) = (3, 4)$, from (9) and (7), (8) it follows that $x_{1\,\min} = 1$, $x_{2\,\min} = 1$, $x_{1\,\max} = 3.156$, $x_{2\,\max} = 13.147$. In Figures 1 and 2 the graphs of the functions $x_2 = f_1(x_1)$ (green), $x_2 = f_2(x_1)$ (red) and the equilibrium (x_1^*, x_2^*) are shown.

In Figure 1 also the asymptotes $x_1 = \dfrac{a_1}{1-b_1} = 1$ and $x_2 = \dfrac{a_2}{1-b_2} = 1$ of the functions $f_1(x_1)$ and $f_2(x_1)$ respectively are shown.

2. Stochastic Perturbations and the System Transformation

Let $\{\Omega, \mathfrak{F}, \mathbf{P}\}$ be a basic probability space, $\mathfrak{F}_n \in \mathfrak{F}$, $n \in N$, be a nondecreasing family of sub-σ-algebras of $\mathfrak{F}$, i.e., $\mathfrak{F}_{n_1} \subset \mathfrak{F}_{n_2}$ for $n_1 < n_2$, $\mathbf{E}$ be the mathematical expectation with respect to the measure $\mathbf{P}$, $\xi_1(n)$ and $\xi_2(n)$, $n \in N$, be two mutually independent sequences with $\mathfrak{F}_n$-adapted mutually independent random values such that [11]

$$\mathbf{E}\xi_i(n) = 0, \quad \mathbf{E}\xi_i^2(n) = 1, \quad \mathbf{E}\xi_i(n)\xi_j(m) = 0 \quad \text{if} \quad i \neq j \quad \text{or} \quad n \neq m, \quad i,j = 1,2. \tag{10}$$

Let us assume that the system (1) is exposed to stochastic perturbations that are directly proportional to the deviation of the system state $(x_1(n), x_2(n))$ from the equilibrium (x_1^*, x_2^*). Then the system (1) takes the form

$$\begin{aligned} x_1(n+1) &= a_1 + b_1 x_1(n-1) + c_1 x_1(n-1) e^{-p_1 x_1(n) - q_1 x_2(n)} + \sigma_1 (x_1(n) - x_1^*) \xi_1(n+1), \\ x_2(n+1) &= a_2 + b_2 x_2(n-1) + c_2 x_2(n-1) e^{-p_2 x_1(n) - q_2 x_2(n)} + \sigma_2 (x_2(n) - x_2^*) \xi_2(n+1). \end{aligned} \tag{11}$$

Remark 2. *Note that the such type of stochastic perturbations was firstly proposed in [25] for a system of Ito's stochastic delay differential equations and was later used in many other works for both differential and difference equations (see, for instance, [11,15] and references therein). With this type of stochastic perturbations, the equilibrium of the original deterministic system remains also a solution of the stochastically perturbed system.*

Presenting the solution of the system (11) in the form $(x_1(n), x_2(n)) = (y_1(n) + x_1^*, y_2(n) + x_2^*)$, we get

$$\begin{aligned} y_1(n+1) + x_1^* &= a_1 + b_1(y_1(n-1) + x_1^*) \\ &\qquad + c_1(y_1(n-1) + x_1^*) e^{-p_1 y_1(n) - q_1 y_2(n)} e^{-p_1 x_1^* - q_1 x_2^*} + \sigma_1 y_1(n) \xi_1(n+1), \\ y_2(n+1) + x_2^* &= a_2 + b_2(y_2(n-1) + x_2^*) \\ &\qquad + c_2(y_2(n-1) + x_2^*) e^{-p_2 y_1(n) - q_2 y_2(n)} e^{-p_2 x_1^* - q_2 x_2^*} + \sigma_2 y_2(n) \xi_2(n+1). \end{aligned} \tag{12}$$

Using (2) with $(x_1, x_2) = (x_1^*, x_2^*)$, from the first equation (12) we have

$$\begin{aligned} y_1(n+1) &= a_1 + b_1 x_1^* - x_1^* + b_1 y_1(n-1) \\ &\qquad + c_1(y_1(n-1) + x_1^*) e^{-p_1 y_1(n) - q_1 y_2(n)} e^{-p_1 x_1^* - q_1 x_2^*} + \sigma_1 y_1(n) \xi_1(n+1) \\ &= b_1 y_1(n-1) - c_1 x_1^* e^{-p_1 x_1^* - q_1 x_2^*} \\ &\qquad + c_1(y_1(n-1) + x_1^*) e^{-p_1 y_1(n) - q_1 y_2(n)} e^{-p_1 x_1^* - q_1 x_2^*} + \sigma_1 y_1(n) \xi_1(n+1) \\ &= \left(b_1 + c_1 e^{-p_1 x_1^* - q_1 x_2^*} e^{-p_1 y_1(n) - q_1 y_2(n)}\right) y_1(n-1) \\ &\qquad - c_1 x_1^* e^{-p_1 x_1^* - q_1 x_2^*} \left(1 - e^{-p_1 y_1(n) - q_1 y_2(n)}\right) + \sigma_1 y_1(n) \xi_1(n+1). \end{aligned}$$

Similarly, for the second equation (12) we get

$$\begin{aligned} y_2(n+1) &= a_2 + b_2 x_2^* - x_2^* + b_2 y_2(n-1) \\ &\qquad + c_2(y_2(n-1) + x_2^*) e^{-p_2 y_1(n) - q_2 y_2(n)} e^{-p_2 x_1^* - q_2 x_2^*} + \sigma_2 y_2(n) \xi_2(n+1) \\ &= b_2 y_2(n-1) - c_2 y^* e^{-p_2 x_1^* - q_2 x_2^*} \\ &\qquad + c_2(y_2(n-1) + x_2^*) e^{-p_2 y_1(n) - q_2 y_2(n)} e^{-p_2 x_1^* - q_2 x_2^*} + \sigma_2 y_2(n) \xi_2(n+1) \\ &= \left(b_2 + c_2 e^{-p_2 x_1^* - q_2 x_2^*} e^{-p_2 y_1(n) - q_2 y_2(n)}\right) y_2(n-1) \\ &\qquad - c_2 x_2^* e^{-p_2 x_1^* - q_2 x_2^*} \left(1 - e^{-p_2 y_1(n) - q_2 y_2(n)}\right) + \sigma_2 y_2(n) \xi_2(n+1). \end{aligned}$$

 doi:10.20944/preprints202409.2043.v2

As a result we obtain the nonlinear system with the zero solution:

$$
\begin{aligned}
y_1(n+1) =& \left(b_1 + c_1 e^{-p_1 x_1^* - q_1 x_2^*} e^{-p_1 y_1(n) - q_1 y_2(n)}\right) y_1(n-1) \\
&- c_1 x_1^* e^{-p_1 x_1^* - q_1 x_2^*} \left(1 - e^{-p_1 y_1(n) - q_1 y_2(n)}\right) + \sigma_1 y_1(n) \xi_1(n+1), \\
y_2(n+1) =& \left(b_2 + c_2 e^{-p_2 x_1^* - q_2 x_2^*} e^{-p_2 y_1(n) - q_2 y_2(n)}\right) y_2(n-1) \\
&- c_2 x_2^* e^{-p_2 x_1^* - q_2 x_2^*} \left(1 - e^{-p_2 y_1(n) - q_2 y_2(n)}\right) + \sigma_2 y_2(n) \xi_2(n+1),
\end{aligned}
\tag{13}
$$

Remark 3. *Note that stability of the zero solution of the system (13) is equivalent to stability of the equilibrium (x_1^*, x_2^*) of the system (11).*

Using (2) and the linear approximation $e^{-x} = 1 - x + o(x)$, where $\lim\limits_{x \to 0} \frac{o(x)}{x} = 0$, we obtain the linear part of the system (13)

$$
\begin{aligned}
z_1(n+1) =& \left(1 - \frac{a_1}{x_1^*}\right) z_1(n-1) - ((1-b_1)x_1^* - a_1)(p_1 z_1(n) + q_1 z_2(n)) + \sigma_1 z_1(n) \xi_1(n+1), \\
z_2(n+1) =& \left(1 - \frac{a_2}{x_2^*}\right) z_2(n-1) - ((1-b_2)x_2^* - a_2)(p_2 z_1(n) + q_2 z_2(n)) + \sigma_2 z_2(n) \xi_2(n+1).
\end{aligned}
\tag{14}
$$

Representing the linear system (14) in the matrix form, we get

$$
z(n+1) = -Az(n) + Bz(n-1) + \sum_{i=1}^{2} C_i z(n) \xi_i(n+1), \tag{15}
$$

where

$$
\begin{gathered}
z(n) = \begin{bmatrix} z_1(n) \\ z_2(n) \end{bmatrix}, \quad A = \begin{bmatrix} \alpha_1 p_1 & \alpha_1 q_1 \\ \alpha_2 p_2 & \alpha_2 q_2 \end{bmatrix}, \quad B = \begin{bmatrix} \beta_1 & 0 \\ 0 & \beta_2 \end{bmatrix}, \quad C_1 = \begin{bmatrix} \sigma_1 & 0 \\ 0 & 0 \end{bmatrix}, \quad C_2 = \begin{bmatrix} 0 & 0 \\ 0 & \sigma_2 \end{bmatrix}, \\
\alpha_i = (1-b_i)x_i^* - a_i, \quad \beta_i = 1 - \frac{a_i}{x_i^*}, \quad i - 1, 2.
\end{gathered}
\tag{16}
$$

3. Stability

3.1. Some Necessary Definitions and Statements

Let $'$ be the transposition sign. Put now

$$
\begin{gathered}
y(n) = (y_1(n), y_2(n))', \quad z(n) = (z_1(n), z_2(n))', \quad n \in N, \\
\phi(j) = (\phi_1(j), \phi_2(j))', \quad j \in N_0.
\end{gathered}
$$

Definition 1. *([11]). The zero solution of the system (13) is called stable in probability if for any $\varepsilon > 0$ and $\varepsilon_1 \in (0,1)$ there exists a $\delta > 0$ such that the solution $y(n) = y(n, \phi)$ of the system (13) satisfies the inequality $\mathbf{P}\{\sup\limits_{n \in N} |y(n)| > \varepsilon\} < \varepsilon_1$ for any initial function $\phi(j)$ such that $\mathbf{P}\{\|\phi\|_0 < \delta\} = 1$, where $\|\phi\|_0 = \max\limits_{j \in N_0} |\phi(j)|$.*

Definition 2. *([11]). The zero solution of the system (14) is called mean square stable if for each $\varepsilon > 0$ there exists a $\delta > 0$ such that $\mathbf{E}|z(n)|^2 < \varepsilon$, $n \in N$, for any initial function $\phi(j)$ such that $\|\phi\|^2 = \max\limits_{j \in N_0} \mathbf{E}|\phi(j)|^2 < \delta$; asymptotically mean square stable if it is mean square stable and for each initial function $\phi(j)$ such that $\|\phi\|^2 < \infty$ the solution $z(n)$ of the system (14) satisfies the condition $\lim\limits_{n \to \infty} \mathbf{E}|z(n)|^2 = 0$.*

Let $\mathbf{E}_n = \mathbf{E}\{./\mathfrak{F}_n\}$ be the conditional expectation with respect to the σ-algebra $\mathfrak{F}_n$, $U_\varepsilon = \{y : |y| \leq \varepsilon\}$, $\varepsilon > 0$, and $\Delta V(n) = V(n+1) - V(n)$.

Theorem 1. *([11]). Let for the system (13) there exists a functional $V(n) = V(n, y(-1), ..., y(n))$ satisfying the conditions*

$$\begin{aligned} &V(n, y(-1), ..., y(n)) \geq c_0|y(n)|^2, \\ &V(0, \varphi(-1), \varphi(0)) \leq c_1\|\varphi\|_0^2, \\ &\mathbf{E}_n\Delta V(n, y(-1), ..., y(n)) \leq 0, \quad y(j) \in U_\varepsilon, \quad -1 \leq j \leq n, \quad n \in N, \end{aligned} \tag{17}$$

where $\varepsilon > 0$, $c_0 > 0$, $c_1 > 0$. Then the zero solution of the system (13) is stable in probability.

Theorem 2. *([11]). Let for the system (14) there exists a nonnegative functional $V(n) = V(n, z(-1), ..., z(n))$ satisfying the conditions*

$$\begin{aligned} &\mathbf{E}V(0, \phi(-1), \phi(0)) \leq c_1\|\phi\|^2, \\ &\mathbf{E}\Delta V(n) \leq -c_2\mathbf{E}|z(n)|^2, \quad n \in N, \end{aligned} \tag{18}$$

where $c_1 > 0$, $c_2 > 0$. Then the zero solution of the system (14) is asymptotically mean square stable.

Remark 4. *Note that the system (13) has an order of nonlinearity higher than one. It is known [11] that in this case sufficient conditions for asymptotic mean square stability of the zero solution of the linear system (14) are also sufficient conditions for stability in probability of the zero solution of the nonlinear system (13).*

3.2. Stability conditions

Theorem 3. *Let there exist positive definite 2×2-matrices P and R such that the following linear matrix inequality (LMI)*

$$\begin{bmatrix} A'PA + S_0 + R - P & A'PB \\ B'PA & B'PB - R \end{bmatrix} < 0 \tag{19}$$

holds, where

$$S_0 = \sum_{i=1}^{2} C_i'PC_i = \begin{bmatrix} \sigma_1^2 p_{11} & 0 \\ 0 & \sigma_2^2 p_{22} \end{bmatrix}, \tag{20}$$

the matrices C_1, C_2 are defined in (16) and p_{11}, p_{22} are diagonal elements of the matrix P. Then the equilibrium (x_1^*, x_2^*) of the system (11) is stable in probability.

Proof. Following the general method of Lyapunov functionals construction [11,13–15], consider the functional $V(n)$ in the form $V(n) = V_1(n) + V_2(n)$, where $V_1(n) = z'(n)Pz(n)$, $P > 0$, $z(n)$ is defined in (16) and the additional functional $V_2(n)$ will be chosen below. For the functional $V_1(n)$ via (15) we have

$$\begin{aligned} \mathbf{E}\Delta V_1(n) =& \mathbf{E}[V_1(n+1) - V_1(n)] \\ =& \mathbf{E}[z'(n+1)Pz(n+1) - z'(n)Pz(n)] \\ =& \mathbf{E}\Big[\Big(- z'(n)A' + z'(n-1)B' + \sum_{i=1}^{2} z'(n)C_i'\xi_i(n+1)\Big) \\ & * P\Big(- Az(n) + Bz(n-1) + \sum_{i=1}^{2} C_iz(n)\xi_i(n+1)\Big) - z'(n)Pz(n)\Big]. \end{aligned}$$

From here via (10) and (20) it follows that

$$\begin{aligned} \mathbf{E}\Delta V_1(n) =& \mathbf{E}[z'(n)(A'PA + S_0 - P)z(n) + z'(n)A'PBz(n-1) \\ & + z'(n-1)B'PAz(n) + z'(n-1)B'PBz(n-1)] \end{aligned}$$

or in the matrix form

$$\mathbf{E}\Delta V_1(n) = \mathbf{E}\begin{bmatrix} z(n) \\ z(n-1) \end{bmatrix}' \begin{bmatrix} A'PA + S_0 - P & A'PB \\ B'PA & B'PB \end{bmatrix} \begin{bmatrix} z(n) \\ z(n-1) \end{bmatrix}. \tag{21}$$

Using the additional functional $V_2(n) = z'(n-1)Rz(n-1)$, $R > 0$, with $\Delta V_2(n) = z'(n)Rz(n) - z'(n-1)Rz(n-1)$, for the functional $V(n) = V_1(n) + V_2(n)$ from (21) we obtain

$$\mathbf{E}\Delta V(n) = \mathbf{E}\begin{bmatrix} z(n) \\ z(n-1) \end{bmatrix}' \begin{bmatrix} A'PA + S_0 + R - P & A'PB \\ B'PA & B'PB - R \end{bmatrix} \begin{bmatrix} z(n) \\ z(n-1) \end{bmatrix}. \tag{22}$$

From (22) and the LMI (19) for some $c > 0$ we have $\mathbf{E}\Delta V(n) \leq -c\mathbf{E}|z(n)|^2$, i.e., the constructed functional $V(n)$ satisfies the conditions of Theorem 2. Therefore, the zero solution of the linear equation (15) is asymptotically mean square stable. Via Remarks 4 and 3 it means that the equilibrium (x_1^*, x_2^*) of the system (11) is stable in probability. The proof is completed. □

Remark 5. *Note that instead of the LMI (19) for definition of stability some other LMIs also can be used. Using, for instance, the additional functional $V_2(n)$ in the form $V_2(n) = z'(n-1)(R + B'PB)z(n-1)$ instead of the LMI (19) we obtain the LMI*

$$\begin{bmatrix} A'PA + B'PB + S_0 + R - P & A'PB \\ B'PA & -R \end{bmatrix} < 0. \tag{23}$$

If at least one from the LMIs (19) and (23) holds then the equilibrium (x_1^*, x_2^*) of the system (11) is stable in probability. Other ways to get appropriate LMIs are shown also in [10].

Example 2. *Consider the system (11) with the values of the parameters given in Example 1. Via MATLAB the maximal values of $\sigma_1 = 0.232$ and $\sigma_2 = 0.384$ were obtained, by which the LMIs (19) and (23) hold respectively for the positive definite matrices*

$$P = \begin{bmatrix} 10240.838 & 914.037 \\ 914.037 & 545.487 \end{bmatrix}, \qquad R = \begin{bmatrix} 8820.374 & 827.335 \\ 827.335 & 456.341 \end{bmatrix},$$

and

$$P = \begin{bmatrix} 7031.372 & 627.491 \\ 627.491 & 374.625 \end{bmatrix}, \qquad R = \begin{bmatrix} 361.556 & 59.703 \\ 59.703 & 9.976 \end{bmatrix}.$$

In Figure 3 50 trajectories of the solution of the system (11) are shown. All trajectories converge to the stable equilibrium $(x_1^*, x_2^*) = (3, 4)$.

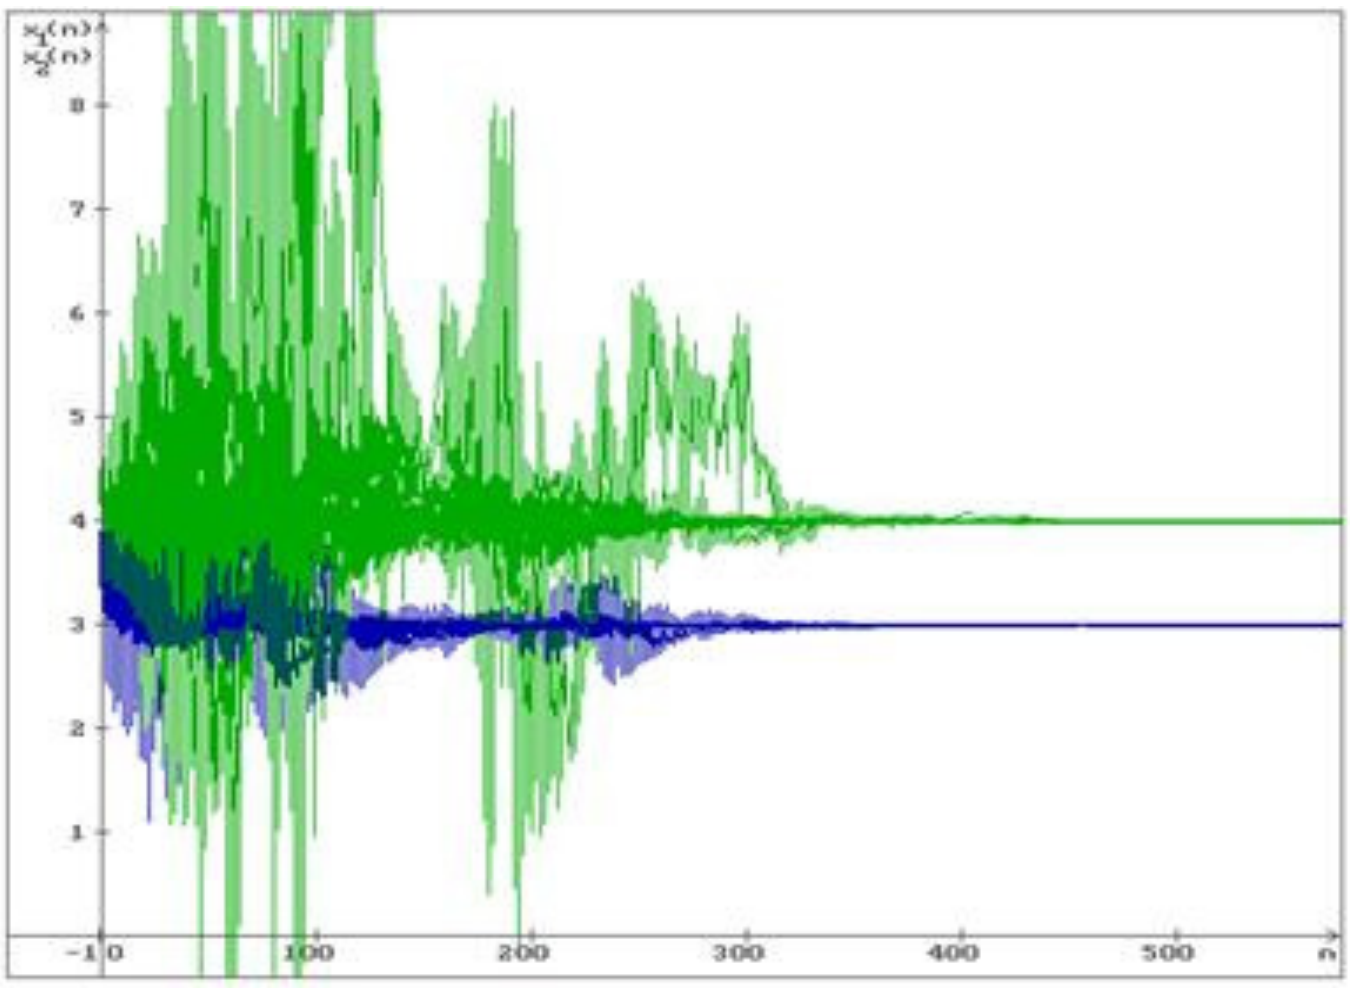

Figure 3. 50 trajectories of the system (11) solution: $x_1(n)$ (blue) and $x_2(n)$ (green). The solution converges to the stable equilibrium $(x_1^*, x_2^*) = (3, 4)$.

doi:10.20944/preprints202409.2043.v2

4. Conclusions

Stability of a system of nonlinear difference equations under stochastic perturbations is investigated. The nonli-nearity of exponential form in each equation depends on all variables of the system under consideration. The conditions of stability in probability for positive equilibrium of the considered system, obtained via the general method of Lyapunov functionals construction, are formulated in terms of linear matrix inequalities (LMIs) and are illustrated by numerical examples and figures. The method of stability investigation, used in the paper, can be applied to many other types of systems with high-order nonlinearity, for both difference and differential equations in various applications.

Funding: This research received no external funding.

Data Availability Statement: No data was used for the research described in the article.

Conflicts of Interest: No potential conflict of interest was reported by the author(s).

References

1. Q.X. Feng and J.R. Yan, *Global attractivity and oscillation in a kind of Nicholson's blowflies*, Journal of Biomathematics, 17(1) (2002), pp. 21-26.
2. A.Q. Khan, *Global Dynamics of a Nonsymmetric System of Difference Equations*, Mathematical Problems in Engineering, 14 (2022), Article ID 4435613. https://doi.org/10.1155/2022/4435613
3. G. Papaschinopoulos, M.A. Radin and C.J. Schinas, *On the system of two difference equations of exponential form:* $x_{n+1} = a + bx_{n-1}e^{-y_n}$, $y_{n+1} = c + dy_{n-1}e^{-x_n}$, Mathematical and Computer Modelling, 54(11) (2011), pp. 2969-2977.
4. G. Papaschinopoulos, M.A. Radin and C.J. Schinas, *Study of the asymptotic behavior of the solutions of three systems of difference equations of exponential form*, Applied Mathematics and Computation, 218(9) (2012), pp. 5310-5318.
5. G. Papaschinopoulos, N. Fotiades and C.J. Schinas, *On a system of difference equations including negative exponential terms*, Journal of Differential Equations and Applications, 20(5-6) (2014), pp. 717-732.
6. G. Papaschinopoulos, G. Ellina and K.B. Papadopoulos, *Asymptotic behavior of the positive solutions of an exponential type system of difference equations*, Applied Mathematics and Computation, 245 (2014), pp. 181-190. doi: 10.1016/j.amc.2014.07.074
7. L. Shaikhet, *Stability of equilibrium states for a stochastically perturbed exponential type system of difference equations*, Journal of Computational and Applied Mathematics, 290 (2015), pp. 92-103.
8. L. Shaikhet, *Stability of equilibrium states for a stochastically perturbed Mosquito population equation*, Dynamics of Continuous, Discrete and Impulsive Systems. Series B: Applications & Algorithms, 21(2) (2014), pp. 185-196.
9. L. Shaikhet, *Stability of the exponential type system of stochastic difference equations*, Special Issue "Nonlinear Stochastic Dynamics and Control and Its Applications", MDPI, Mathematics, 11(18) (2023), 3975, 20p. https://www.mdpi.com/2227-7390/11/18/3975
10. L. Shaikhet, *Stability of equilibria of exponential type system of three differential equations under stochastic perturbations*, Mathematics and Computers in Simulation, 206 (2023), pp. 105-117. https://www.sciencedirect.com/science/article/pii/S0378475422004578
11. L. Shaikhet, *Lyapunov Functionals and Stability of Stochastic Difference Equations*, Springer Science & Business Media, London, 2011.
12. T.H. Thai, N.A. Dai and P.T. Anh, *Global dynamics of some system of second-order difference equations*, Electronic Research Archive, 29(6) (2021), pp. 4159-4175. https://doi.org/10.3934/era.2021077
13. V. Kolmanovskii and L. Shaikhet, *Some peculiarities of the general method of Lyapunov functionals construction*, Applied Mathematics Letters, 15(3) (2002), pp. 355-360. doi:10.1016/S0893-9659(01)00143-4
14. V. Kolmanovskii and L. Shaikhet, *About one application of the general method of Lyapunov functionals construction*, International Journal of Robust and Nonlinear Control (Special Issue on Time Delay Systems, RNC), 13(9) (2003), pp. 805-818. https://doi.org/10.1002/rnc.846
15. L. Shaikhet, *Lyapunov Functionals and Stability of Stochastic Functional Differential Equations*, Springer Science & Business Media, Berlin, 2013.
16. S. Boyd, L. El-Ghaoui, E. Feron and V. Balakrishnan, *Linear Matrix Inequalities in System and Control Theory*; SIAM: Philadelphia, PA, USA, 1994.

17. H.H. Choi, *A new method for variable structure control system design: A linear matrix inequality approach*, Automatica, 33 (1997), pp. 2089-2092.
18. E. Fridman and L. Shaikhet, *Stabilization by using artificial delays: an LMI approach*, Automatica, 81 (2017), pp. 429-437. doi.org/10.1016/j.automatica.2017.04.015
19. E. Fridman and L. Shaikhet, *Delay-dependent LMI conditions for stability of stochastic systems with delay term in the form of Stieltjes integral*. In: Proceedings of 57th IEEE Conference on Decision and Control, Fontainebleau, Miami Beach, Florida, USA, (2018), pp. 6567–6572.
20. E. Fridman and L. Shaikhet, *Simple LMIs for stability of stochastic systems with delay term given by Stieltjes integral or with stabilizing delay*, Systems & Control Letters, 124 (2019), pp. 83-91. https://www.sciencedirect.com/science/article/abs/pii/S016769111830224X
21. F. Gouaisbaut, M. Dambrine and J.P. Richard, *Robust control of delay systems: a sliding mode control design via LMI*, Systems & Control Letters, 46(4) (2002), pp. 219-230.
22. S.K. Nguang, *Robust H^∞ control of a class of nonlinear systems with delayed state and control: an LMI approach*. In: Proceedings of 37th IEEE Conference on Decision and Control, Tampa, Florida, USA, (1998) pp. 2384-2389.
23. S.I. Niculescu, *H^∞ memory less control with an α-stability constraint for time delays systems: an LMI approach*, IEEE Transactions on Automatic Control, 43(5) (1998), pp. 739-743.
24. A. Seuret and F. Gouaisbaut, *Hierarchy of LMI conditions for the stability analysis of time-delay systems*, Systems & Control Letters, 81 (2015), pp. 1-7.
25. E. Beretta, V. Kolmanovskii and L. Shaikhet, *Stability of epidemic model with time delays influenced by stochastic perturbations*, Mathematics and Computers in Simulation, (Special Issue "Delay Systems"), 45(3-4) (1998), pp. 269-277. https://www.sciencedirect.com/science/article/pii/S0378475497001067