

Article

Exact Solutions of A Mathematical Model Describing Competition and Co-existence of Different Language Speakers

Roman Cherniha ^{1,*} and Vasyl' Davydovych ¹

¹ Institute of Mathematics, National Academy of Sciences of Ukraine, 3, Tereshchenkivs'ka Street, Kyiv 01601, Ukraine.

* Correspondence: r.m.cherniha@gmail.com; Tel.: +380442352010

Abstract: The known three-component reaction-diffusion system modeling competition and co-existence of different language speakers is under study. A modification of this system is proposed, which is examined by Lie symmetry method; furthermore exact solutions in the form of traveling fronts are constructed and their properties are identified. Plots of the traveling fronts are presented and the relevant interpretation describing the language shift occurred in Ukraine during the Soviet times is suggested.

Keywords: reaction-diffusion system; lie symmetry; exact solution; traveling front; community of language speakers

MSC: 35K57, 35K58, 35B06, 35C07

1. Introduction

It is well known at least 100 years that many processes arising in physics, chemistry, ecology etc. can be adequately described only by nonlinear partial differential (integro-differential, functional-differential) equations (see, e.g., an extensive discussion on this matter in Chapter 1 of [1]). During the second half of the last century, one may note also a rapidly growing number of papers devoted to applications of nonlinear partial differential equations for mathematical modeling in life sciences (see, e.g., the classical book [2], the recent monographs [3,4] and references therein).

On the other hand, the rigorous mathematical models came to social sciences and humanities only recently. In particular, papers devoted to rigorous mathematical modeling interaction of communities (populations) of different language speakers were published only during the last two decades [5–9]. These models are based on nonlinear differential equations of reaction-diffusion type.

Here we study the nonlinear mathematical model describing interaction of three communities of language speakers proposed in [8]. The model is governed by three nonlinear reaction-diffusion (RD) equations, which have the following form in the one-dimensional approximation (there are some misprints in [8], which are corrected here)

$$\begin{aligned} u_t &= \lambda_1 u_{xx} + a_1 u \left(1 - \frac{u}{K-(v+w)} \right) - c_{31} u w + c_{12} u v, \\ v_t &= \lambda_2 v_{xx} + a_2 v \left(1 - \frac{v}{K-(u+w)} \right) + (c_{13} + c_{31}) u w - (c_{12} u + c_{32} w) v, \\ w_t &= \lambda_3 w_{xx} + a_3 w \left(1 - \frac{w}{K-(u+v)} \right) - c_{13} u w + c_{32} v w. \end{aligned} \quad (1)$$

This model (of course, one needs to supply the relevant initial and boundary conditions) describes interaction of three communities of language speakers. Functions $u(t, x)$ and $w(t, x)$ describe

frequencies of monolingual speakers, i.e. they speak always (or almost always) native language. Function $v(t, x)$ stands for community of speakers, who fluently speak both languages and use each language depending on circumstances. Time derivatives u_t, v_t and w_t indicate the rate of change in these frequencies, while the space-derivatives describe mobility (diffusion) in space of speakers. The second terms in each equation of (1) are some generalization of a standard logistic terms arising in many well known biological models including the famous Fisher equation [10] and the diffusive Lotka–Volterra system (DLVS) for interacting species (see, e.g., [2,4]). The constant K (like in the logistic terms) means the carrying capacity of environment and defines an upper size of all three communities of speakers, i.e. it is assumed that $u + v + w < K$.

The language shift (a process whereby speakers of a community abandon their native language in favor of another) of some numbers of monolingual speakers to bilingual those is described by the terms $c_{31}uw$ and $c_{13}uw$. It can be noted that the language shift leads to growing the bilingual community (provided any other forces are absent).

On the other hand, the terms $c_{12}uv$ and $c_{32}vw$ describe an opposite tendency, when bilingual tends to be monolingual. It occurs, for example, in the case of the state politics leading to the lower status of one language comparing with another. The real example is the Lie Russification in Ukraine during the Soviet period when a few millions of Ukrainians completely switched to the Russian language (actually, the main aim of paper [8] is to study mathematically Anglicization in Scotland). The coefficients c_{12} and c_{32} represent the likelihood of bilingual speakers then becoming monolingual in community u and w , respectively. Notable, the inequality $c_{12} < c_{32}$ (in particular, if $c_{12} \ll c_{32}$ then one puts $c_{12} = 0$) takes place if the language of community u is under pressure.

In paper [8], the RD system (1) was used in order to model the Anglicization process in Scotland during the 20th century. As a result, percentages of Gaelic speakers in all parts of Scotland decreased drastically. However, there is no any mathematical analysis of the governing equations therein, while those were solved numerically (with the relevant boundary and initial conditions) in order to show a good correspondence between the numerical solutions and data from successive censuses.

In this paper, the RD system (1) is studied by analytical methods and a plausible interpretation of the mathematical results obtained is provided. The main results are presented in Section 2. Firstly, a simplification of the system in question is proposed, secondly, Lie symmetries and a variety of exact solutions (traveling waves) are found. In Section 3, properties of the exact solutions obtained are under examination, in particular, the coefficient restrictions leading to the exact solution, which describes qualitatively the language shift occurred in Ukraine during the Soviet times, are derived. Finally, some conclusions are presented and a future work is announced in the last section.

2. Main results

The RD system (1) contains fractional nonlinearities and it is a very difficult task to solve analytically such type systems. Having this in mind, we propose here a simplified system under biologically motivated restrictions. Our idea is to reduce fractional nonlinearities to quadratic those. So, taking into account the model restriction $u + v + w < K$ needed for a bounded growth of each community of speakers, we can replace the fractional nonlinearities by logistic terms, which also restrict unbounded growth of these communities. It means that we assume (with some exactness) that the following equalities take place

$$K - (v + w) \approx K_1, \quad K - (u + w) \approx K_2, \quad K - (u + v) \approx K_3,$$

where K_1 , K_2 and K_3 are arbitrary positive constants. Thus, system (1) takes the form

$$\begin{aligned} u_t &= \lambda_1 u_{xx} + a_1 u \left(1 - \frac{u}{K_1}\right) - c_{31}uw + c_{12}uv, \\ v_t &= \lambda_2 v_{xx} + a_2 v \left(1 - \frac{v}{K_2}\right) + (c_{13} + c_{31})uw - (c_{12}u + c_{32}w)v, \\ w_t &= \lambda_3 w_{xx} + a_3 w \left(1 - \frac{w}{K_3}\right) - c_{13}uw + c_{32}vw, \end{aligned} \quad (2)$$

which contains only quadratic nonlinearities. Hereafter we assume that the coefficients λ_i , a_i and K_i ($i = 1, 2, 3$) are positive, while all other are nonnegative (i.e., some of them can be zero).

The nonlinear RD system (2) can be simplified using the following re-scaling of the variables

$$u \rightarrow K_1 u, v \rightarrow K_2 v, w \rightarrow K_3 w, t \rightarrow \frac{1}{a_2} t, x \rightarrow \sqrt{\frac{\lambda_2}{a_2}} x$$

and introducing new notations

$$\alpha_1 = \frac{c_{31}K_3}{a_2}, \alpha_2 = \frac{c_{12}K_2}{a_2}, \alpha_3 = \frac{c_{13}K_1}{a_2}, \alpha_4 = \frac{c_{32}K_2}{a_2}, \\ \beta_1 = \frac{a_1}{a_2}, \beta_3 = \frac{a_3}{a_2}, \kappa_1 = \frac{K_3}{K_2}, \kappa_2 = \frac{K_1}{K_2}, d_1 = \frac{\lambda_1}{\lambda_2}, d_3 = \frac{\lambda_3}{\lambda_2}.$$

Thus, system (2) is reduced to the equivalent form

$$\begin{aligned} u_t &= d_1 u_{xx} + \beta_1 u(1-u) - \alpha_1 u w + \alpha_2 u v, \\ v_t &= v_{xx} + v(1-v) + (\kappa_1 \alpha_3 + \kappa_2 \alpha_1) u w - (\kappa_2 \alpha_2 u + \kappa_1 \alpha_4 w) v, \\ w_t &= d_3 w_{xx} + \beta_3 w(1-w) - \alpha_3 u w + \alpha_4 v w. \end{aligned} \quad (3)$$

Notably, system (3) with $\alpha_1 = \alpha_3 = 0$ is a particular case of the well-known DLVS, which describes a large number of processes in biology and chemistry (see, e.g., [2,4] and references cited therein). However the above restriction is equivalent to $c_{13} = c_{31} = 0$ in (2), what contradicts to the basic restrictions in the model (see interpretation of the terms $c_{31}uw$ and $c_{13}uw$). Thus, hereafter we assume that $c_{13}^2 + c_{31}^2 \neq 0 \Leftrightarrow \alpha_1^2 + \alpha_3^2 \neq 0$, i.e., system (3) is not equivalent to DLVS.

It is well known that there is no general theory of integrating nonlinear partial differential equations at the present time and it is very unlikely that one will be developed soon. The most effective methods for constructing *particular exact solutions* of nonlinear differential equations of reaction-diffusion type are the classical Lie method and its various generalizations (see, e.g., the recent monographs [1,11,12] for more details). Here we apply the classical Lie method and the so-called tanh method [13].

Theorem 1. *The nonlinear system (3) for any set of specified nonnegative coefficients with the additional restrictions $d_1 d_3 \kappa_1 \kappa_2 \neq 0$ and $\alpha_1^2 + \alpha_3^2 \neq 0$ is invariant only with respect to the time and space translations generated by Lie symmetries*

$$P_t = \frac{\partial}{\partial t}, P_x = \frac{\partial}{\partial x}. \quad (4)$$

The proof is based on application of the well known Lie's algorithm to system (3) and is reduced to examination of several cases depending on values of the coefficients arising in the system. We omit here the relevant calculations. Notably, a detailed proof is presented in our recent paper [14] for a similar (but inequivalent!) three-component system.

Remark 1. *In contrast to the three-component DLVS, which admits some nontrivial Lie symmetries (provided its coefficients are correctly-specified) [4,15], the RD system (3) possesses a poor symmetry.*

It is well known that the Lie symmetries (4) generate only two inequivalent substitutions (following the classical Sophus Lie papers, the terminology 'ansatz' is often used), which reduce system (3) to the relevant systems of ordinary differential equations (ODEs). The first ansatz does not depend on the space variable x , hence one leads only to time-dependent solutions. Here we are not interested in such type solutions because their realistic interpretation is questionable.

The second ansatz follows from the linear combination $P_t + \mu P_x$ of the Lie symmetries (4) and has the form

$$u = U(\omega), v = V(\omega), w = W(\omega), \omega = x - \mu t, \mu \in \mathbf{R}. \quad (5)$$

Here U , V and W are new unknown functions. Solutions of form (5) is often called plane wave solutions (traveling waves). From the applicability point of view, the most interesting those are *traveling fronts*, i.e. solutions (5), which are bounded and nonnegative. A huge number of papers is devoted to construction of traveling fronts for nonlinear PDEs, especially for scalar reaction-diffusion (with/without convection term). A majority of traveling fronts for such type equations are presented in the monograph [16] (see also the handbook [17]).

In the case of nonlinear RD systems, the progress is rather modest. To the best of our knowledge, an essential progress is derived only in the case of DLVS. Several traveling fronts are constructed in [4,18–20] for the two-component DLVS and in [21,22] for the three-component DLVS.

So, our aim is to find traveling fronts for system (3). Substituting ansatz (5) into system (3), one obtains

$$\begin{aligned} d_1 U'' + \mu U' + \beta_1 U(1 - U) - \alpha_1 UW + \alpha_2 UV &= 0, \\ V'' + \mu V' + V(1 - V) + (\kappa_1 \alpha_3 + \kappa_2 \alpha_1) UW - (\kappa_2 \alpha_2 U + \kappa_1 \alpha_4 W) V &= 0, \\ d_3 W'' + \mu W' + \beta_3 W(1 - W) - \alpha_3 UW + \alpha_4 VW &= 0. \end{aligned} \quad (6)$$

System (6) is three-component system of nonlinear second-order ODEs. Although this system is simpler object than the original RD system (3), we can speak nothing about its integrability because even the similar system obtained by reducing of the two-component DLVS has been not solved in [4,18–20]. In order to find particular solutions of (6), we start from the steady-state points. Obviously that steady-state points of (6) coincide with the stationary (homogenous) those of the RD system (3) and can be easily calculated by solving algebraic equations. Assuming $u_0 v_0 w_0 = 0$, the full list of steady-state points are as follows

$$(0, 0, 0), (0, 1, 0), (0, 0, 1), (1, 0, 0), \left(\frac{\beta_1 + \alpha_2}{\beta_1 + \kappa_2 \alpha_2^2}, \frac{\beta_1(1 - \kappa_2 \alpha_2)}{\beta_1 + \kappa_2 \alpha_2^2}, 0 \right), \left(0, \frac{\beta_3(1 - \kappa_1 \alpha_4)}{\beta_3 + \kappa_1 \alpha_4^2}, \frac{\beta_3 + \alpha_4}{\beta_3 + \kappa_1 \alpha_4^2} \right). \quad (7)$$

Obviously there are also steady-state points (u_0, v_0, w_0) , where $u_0 v_0 w_0 \neq 0$, however we prefer examine this case elsewhere. Notably, the 3rd and 4th points, similarly to 5th and 6th those, are equivalent because the first and third equations of system (6) have the same structure. So, without a generality we may say that there are only four essentially different points in (7).

Typically, each traveling front possesses the following property: such solution connects two steady-state points provided $\omega \rightarrow \pm\infty$. We were able to identify the relevant traveling fronts in the cases listed below.

Case 1. $(U_0, V_0, 0) = \left(\frac{\beta_1 + \alpha_2}{\beta_1 + \kappa_2 \alpha_2^2}, \frac{\beta_1(1 - \kappa_2 \alpha_2)}{\beta_1 + \kappa_2 \alpha_2^2}, 0 \right)$ (as $\omega \rightarrow -\infty$) and $(0, 0, 1)$ (as $\omega \rightarrow +\infty$).

Case 2. $(U_0, V_0, 0)$ (as $\omega \rightarrow -\infty$) and $(0, 0, 0)$ (as $\omega \rightarrow +\infty$).

Case 3. $(1, 1, 0)$ (as $\omega \rightarrow -\infty$) and $(0, 1, 0)$ (as $\omega \rightarrow +\infty$). This case occurs provided the additional restriction $\alpha_2 = 0$ takes place.

Let us consider **Case 1** and use the tanh method (see, e.g., [13,23,24]). Thus, we are immediately looking for traveling fronts of the form

$$U = \sigma_1 (1 - \tanh \omega)^{n_1}, \quad V = \sigma_2 (1 - \tanh \omega)^{n_2}, \quad W = 1 - \sigma_3 (1 - \tanh \omega)^{n_3}, \quad (8)$$

where σ_i and n_i are real and natural numbers, respectively. Since the exact solution of the form (8) connects steady-state points $(U_0, V_0, 0)$ and $(0, 0, 1)$, one immediately obtains the sigma-s values

$$\sigma_1 = \frac{\beta_1 + \alpha_2}{2^{n_1} (\beta_1 + \kappa_2 \alpha_2^2)}, \quad \sigma_2 = \frac{\beta_1(1 - \kappa_2 \alpha_2)}{2^{n_2} (\beta_1 + \kappa_2 \alpha_2^2)}, \quad \sigma_3 = \frac{1}{2^{n_3}}. \quad (9)$$

Substituting (8) into system (6) and taking into account (9), one can determine sufficient conditions for the coefficients n_i when the traveling fronts can be found explicitly.

Omitting the relevant calculations, we present only the result. So, system (3) has the exact solution

$$\begin{aligned}
u &= \frac{6d_1}{\beta_1} (1 - \tanh(x - \mu t))^2, \\
v &= \frac{24d_1 - \beta_1}{2\alpha_2} (1 - \tanh(x - \mu t)), \\
w &= \frac{1}{2} + \frac{1}{2} \tanh(x - \mu t)
\end{aligned} \tag{10}$$

provided its coefficients satisfy the restrictions:

$$\begin{aligned}
\alpha_1 &= 16d_1 - 4\mu + \beta_1, \quad \alpha_3 = \frac{d_3\beta_1}{3d_1}, \quad \kappa_1 = \frac{5-2\mu}{\alpha_4}, \quad \kappa_2 = \frac{\beta_1(\alpha_2 + \beta_1 - 24d_1)}{24d_1\alpha_2^2}, \\
\beta_1 &= \frac{2\alpha_2^2(\alpha_4 + (2\mu - 5)d_3)}{(10d_1 - \mu + 2\alpha_2)\alpha_4} + 24d_1 - \alpha_2, \quad \beta_3 = \frac{2(2d_3 - \mu)\alpha_2 + (\beta_1 - 24d_1)\alpha_4}{\alpha_2}.
\end{aligned} \tag{11}$$

The second exact solution

$$\begin{aligned}
u &= \frac{\beta_1 + \alpha_2}{4(\beta_1 + \kappa_2\alpha_2^2)} (1 - \tanh(x - 10t))^2, \\
v &= \frac{\beta_1(1 - \kappa_2\alpha_2)}{4(\beta_1 + \kappa_2\alpha_2^2)} (1 - \tanh(x - 10t))^2, \\
w &= 1 - \frac{1}{4} (1 - \tanh(x - 10t))^2,
\end{aligned} \tag{12}$$

was constructed provided the coefficients of system (3) satisfy the restrictions:

$$\begin{aligned}
d_1 &= 1, \quad d_3 = 1, \quad \alpha_1 = \beta_1 - 24, \\
\kappa_1 &= \frac{24\alpha_2\kappa_2 + 23\beta_1 - (\beta_1 - 24 + 24\alpha_2)\beta_1\kappa_2}{(\alpha_3 - \alpha_4)\beta_1 + (\alpha_3 + \alpha_4\beta_1\kappa_2)\alpha_2}, \quad \beta_3 = \frac{(\alpha_3 - \alpha_4 - 24)\beta_1 - 24\kappa_2\alpha_2^2 + (\alpha_3 + \alpha_4\beta_1\kappa_2)\alpha_2}{\beta_1 + \kappa_2\alpha_2^2}.
\end{aligned} \tag{13}$$

108 It is easily seen that the traveling front (10) is more general than (12), since its velocity μ is not fixed.

In **Case 2**, taking into account the corresponding steady-state points, we are looking for the traveling fronts in the form

$$\begin{aligned}
U &= \frac{\beta_1 + \alpha_2}{2^{n_1}(\beta_1 + \kappa_2\alpha_2^2)} (1 - \tanh \omega)^{n_1}, \\
V &= \frac{\beta_1(1 - \kappa_2\alpha_2)}{2^{n_2}(\beta_1 + \kappa_2\alpha_2^2)} (1 - \tanh \omega)^{n_2}, \\
W &= \sigma (1 - \tanh^2 \omega),
\end{aligned} \tag{14}$$

where σ is an unknown positive constant. Substituting (14) into system (6) and making the corresponding calculations, we arrive at the exact solution

$$\begin{aligned}
u &= \frac{17 - 16d_1 + \alpha_2}{68 - 64d_1 + 4\kappa_2\alpha_2^2} \left(1 - \tanh\left(x - \frac{17}{4}t\right)\right)^2, \\
v &= \frac{(17 - 16d_1)(1 - \kappa_2\alpha_2)}{68 - 64d_1 + 4\kappa_2\alpha_2^2} \left(1 - \tanh\left(x - \frac{17}{4}t\right)\right)^2, \\
w &= \frac{17 - 40d_1}{4\alpha_1} \left(1 - \tanh^2\left(x - \frac{17}{4}t\right)\right).
\end{aligned} \tag{15}$$

The traveling front (15) satisfies system (3) if the coefficient restrictions

$$\begin{aligned}
\beta_1 &= 17 - 16d_1, \quad \beta_3 = \frac{17 - 8d_3}{2}, \quad \alpha_4 = \frac{16d_1(17 - \alpha_3) + (17 + \alpha_2)\alpha_3 - 17(17 + \kappa_2\alpha_2^2)}{(17 - 16d_1)(1 - \kappa_2\alpha_2)}, \\
d_3 &= \frac{17}{8} - \frac{17\alpha_1}{12\alpha_1 + 80d_1 - 34}, \quad \kappa_1 = \frac{\alpha_1}{17(17 - 40d_1)} \frac{391 - 368d_1 - (289 - 952d_1 + 640d_1^2 + 408\alpha_2 - 408d_1\alpha_2)\kappa_2}{17 - 16d_1 + \kappa_2\alpha_2^2}
\end{aligned} \tag{16}$$

109 are satisfied.

Finally, in **Case 3**, the exact solutions of system (6) were prescribed to have the form

$$U = \frac{1}{2^{n_1}} (1 - \tanh \omega)^{n_1}, \quad V = 1 + \sigma_2 (1 - \tanh^2 \omega), \quad W = \sigma_3 (1 - \tanh^2 \omega).$$

After the relevant calculations, the traveling front

$$\begin{aligned} u &= \frac{1}{4} \left(1 - \tanh \left(x - \frac{\alpha_3}{4} t \right) \right)^2, \\ v &= 1 + \frac{24 - \alpha_3}{2(\alpha_3 - 8)} \left(1 - \tanh^2 \left(x - \frac{\alpha_3}{4} t \right) \right), \\ w &= \frac{\alpha_3 - 40d_1}{4\alpha_1} \left(1 - \tanh^2 \left(x - \frac{\alpha_3}{4} t \right) \right), \end{aligned} \quad (17)$$

of the nonlinear system (3) was derived provided the coefficient restrictions

$$\begin{aligned} \alpha_2 &= 0, \beta_1 = -16d_1 + \alpha_3, \beta_3 = \frac{2\alpha_1\alpha_3[\alpha_3 - 2(4 + \alpha_4)]}{(\alpha_3 - 8)(40d_1 + 6\alpha_1 - \alpha_3)}, d_3 = \frac{\alpha_3 - 2\alpha_4 - 2\beta_3}{8}, \\ \kappa_1 &= \frac{\alpha_1(\alpha_3 - 24)(\alpha_3 - 6)}{\alpha_4(\alpha_3 - 8)(\alpha_3 - 40d_1)}, \kappa_2 = \frac{\alpha_3(6 - \alpha_3 + 2\alpha_4)}{\alpha_1(\alpha_3 - 6)}\kappa_1, \end{aligned} \quad (18)$$

take place.

Remark 2. In Cases 1–3 there exist such sets of the positive parameters (excepting $\alpha_2 = 0$ in Case 3)

$$d_1, d_3, \alpha_i, \beta_1, \beta_2, \kappa_1, \kappa_2,$$

satisfying the restrictions (11), (13), (16) and (18) that three components of the exact solutions (10), (12), (15) and (17), respectively, are positive. Thus, all the solutions obtained are indeed traveling fronts.

3. Interpretation of traveling fronts

In this section, we study in detail exact solution (10). First of all, we answer the question: When positive coefficients $d_1, d_3, \alpha_2, \alpha_4$ and μ lead automatically to positive values of $\alpha_1, \alpha_3, \beta_1, \beta_3, \kappa_1$ and κ_2 in formulae (11)? It turns out that some additional restrictions are needed. The structure of such restrictions essentially depends on the sign of the parameter μ , i.e. on the traveling front direction. Thus, one needs to examine separately two cases: (i) $\mu > 0$ and (ii) $\mu < 0$.

In Case (i), one immediately obtains $0 < \mu < \frac{5}{2}$ (see the formula for κ_1 in (11)). For a simplicity, we assume additionally $\alpha_2 = \alpha_4 \equiv \alpha$ and introduce the notations

$$F \equiv 10d_1 - \mu + 2\alpha, G \equiv 2\mu d_3 - 5d_3 + \alpha.$$

Substituting these notations into (11), we arrive at the system of the inequalities:

$$\begin{aligned} FG > 0, \alpha_1 &= 40d_1 - 4\mu - \alpha \left(1 - 2 \frac{G}{F} \right) > 0, \\ \beta_1 &= 24d_1 - \alpha \left(1 - 2 \frac{G}{F} \right) > 0, \beta_3 = 4d_3 - 2\mu - \alpha \left(1 - 2 \frac{G}{F} \right) > 0. \end{aligned} \quad (19)$$

Since all the component of (10) should be nonnegative (we remind the reader that each component means a frequency of the community speakers), the inequality $\beta_1 < 24d_1$ takes place, which follows from $V \geq 0$. Thus, the restriction $\frac{G}{F} < \frac{1}{2}$ is obtained. It can be also noted that $F > 0$ and $G > 0$ (the case $F < 0$ and $G < 0$ leads to a contradiction).

In order to satisfy all the inequalities in (19), we set

$$G = \varepsilon \Leftrightarrow \alpha = (5 - 2\mu)d_3 + \varepsilon,$$

where $\varepsilon > 0$ is a sufficiently small parameter. Now the 4th inequality in (19) is reduced to the form:

$$d_3 \geq \frac{2\mu + \varepsilon}{2\mu - 1}, \quad (20)$$

hence $\mu > \frac{1}{2}$. The 2nd and 3rd those are satisfied provided

$$40d_1 > 4\mu + 5d_3 - 2\mu d_3 + \varepsilon, \quad 24d_1 > 5d_3 - 2\mu d_3 + \varepsilon. \quad (21)$$

Now one realizes that the following algorithm guarantees the positivity of all the coefficients in (11). Firstly, we fix any μ from the interval $(\frac{1}{2}, \frac{5}{2})$ and a small ε , say $\varepsilon < 1$. Secondly, we take any d_3 satisfying (20) and calculate $\alpha = (5 - 2\mu)d_3 + \varepsilon$. Finally, we choose a sufficiently large $d_1 > 0$ in order to satisfy inequalities (21).

Remark 3. In the case $\alpha_2 = \alpha_4 \equiv \alpha$ and $d_1 = d_3 \equiv d$, the above algorithm is simplified to the identification of the restrictions $d \geq \frac{2\mu+\varepsilon}{2\mu-1}$ and $\alpha = (5 - 2\mu)d + \varepsilon$, where $\varepsilon > 0$, $\mu \in (\frac{1}{2}, \frac{5}{2})$.

Case (ii) is essentially simpler. In fact, one immediately obtains $\alpha_1 > 0$ and $\kappa_1 > 0$ in (11). Assuming additionally that $\alpha_2 = 24d_1$ and solving the inequalities $\beta_1 > 0$ and $\beta_3 > 0$ (see (11)), we obtain the restrictions

$$\alpha_2 = 24d_1, \quad d_3 < 1, \quad \mu < \frac{d_3}{2(d_3-1)},$$

$$(5 - 2\mu)d_3 < \alpha_4 < \frac{2}{10d_1-\mu} (\mu^2 + 2(24d_1d_3 - d_3 - 29d_1)\mu - 4d_1d_3),$$

which guarantee the positivity of all the coefficients in (11).

Thus, we can use the formulae derived above in order to construct examples of traveling fronts, to plot the relevant curves (using the package Maple) and to present their plausible interpretation. Figures 1–3 represent the exact solution (10) in Case (i) $\mu > 0$ (Fig. 1–2) and Case (ii) $\mu < 0$ (Fig. 3). All the curves satisfy the natural requirement of positivity at the given space intervals.

In Fig. 1–2, three traveling fronts are moving to the right along the OX axes as it is predicted in Case (i). If we assume that the blue and green curves represent the communities of Russian language speakers and Ukrainian language speakers, while the red curve describes the frequency of bilingual speakers, then the real language shift occurred in Ukraine during the Soviet period (from the end of the Second WW till the USSR collapse) is qualitatively described by these curves. In fact, the language situation in Ukraine can be approximated by the 1D model because the communities of different language speakers varies very essentially from east to west (not so much from north to south). So, taking the point ($x = -4.0$) as the eastern end and the point ($x = 8.0$) as the western end, one realizes that the above curves at the time moment $t = 0.01$ (see the curves in the left part of the figure) reflects the situation in the end of the Second WW (the present borders of Ukraine were formed in that time). The frequency of Russian language speakers (blue curve) was very high in the eastern part (see the interval $x \in [-4, -2]$), while an opposite situation was in the western part (interval $x \in [6, 8]$), in which Ukrainian language dominated (actually the Russian language was unknown therein). In the central part of Ukraine (interval $x \in [-2, 6]$), the linguistic situation was more complicated and this is shown in Fig. 1 (left plot). However, one may say that Ukrainian language speakers (green curve) formed the main part of inhibitors of the Central Ukraine and the frequency of using this language decreased in the eastern direction. Finally, the community of bilingual speakers (red curve) was concentrated mostly in the east part after the end of the Second WW.

The time moment $t = 4.0$ (see the curves in the right part of the figure Fig. 1) reflects the situation in the end of Soviet times, i.e. in the beginning of 1990s. In that time, the community of Russian language speakers (blue curve) dominated in the east and central part of Ukraine (interval $x \in [-4, 6]$), the community of bilingual speakers (red curve) was also strong in these parts. However, the frequency of using Ukrainian language was very low and one may say about a rapid extinction of this community. In that time, Ukrainian language dominated only in the western part of Ukraine, while there was also a part of the Central Ukraine, in which the frequencies of using both languages was in some equilibrium (interval $x \in [4, 6]$).

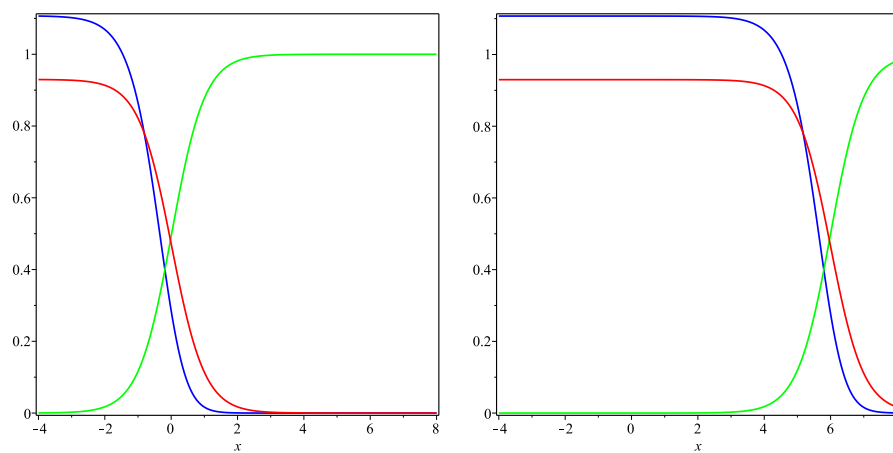


Figure 1. Traveling fronts (10). Curves represent the functions $u(t_0, x)$ (blue), $v(t_0, x)$ (red) and $w(t_0, x)$ (green) for the fixed time $t_0 = 0.01$ (left) and $t_0 = 4$ (right) and the parameters $\mu = \frac{3}{2}$, $d_1 = d_3 = 2$, $\alpha_2 = \alpha_4 = 5$ (other parameters are calculated by formulae (11)).

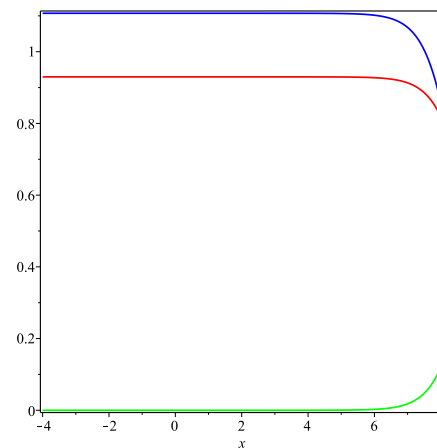


Figure 2. Traveling fronts (10). Curves represent the functions $u(t_0, x)$ (blue), $v(t_0, x)$ (red) and $w(t_0, x)$ (green) for the fixed time $t_0 = 6$ and the parameters $\mu = \frac{3}{2}$, $d_1 = d_3 = 2$, $\alpha_2 = \alpha_4 = 5$ (other parameters are calculated by formulae (11)).

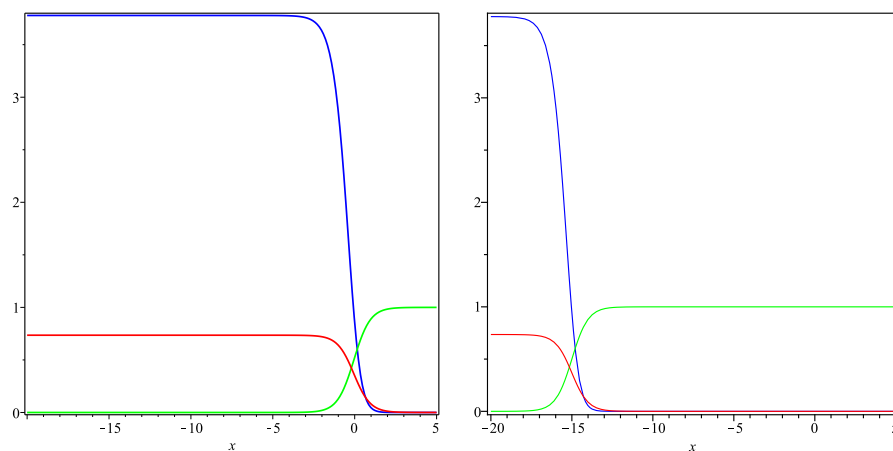


Figure 3. Traveling fronts (10). Curves represent the functions $u(t_0, x)$ (blue), $v(t_0, x)$ (red) and $w(t_0, x)$ (green) for the fixed time $t_0 = 0.01$ (left) and $t_0 = 3$ (right) and the parameters $\mu = -5$, $d_1 = d_3 = \frac{1}{2}$, $\alpha_2 = \alpha_4 = 12$ (other parameters are calculated by formulae (11)).

Traveling fronts presented in Fig. 2 model the situation under the assumption that the USSR could exist 20–30 years longer doing the same language politics, which was in favor of Russian language. Of course, one can expect the almost complete extinction of Ukrainian language speakers as it is shown (see green curve), however existence of a large community of bilingual speakers (red curve) seems to be not plausible. In fact, there is no any reason to study a ‘dead’ language. So, we believe that the red curve does not describe adequately the frequency of using both languages for large values of time.

In Fig. 3, the exact solution (10) is pictured in Case (ii) $\mu < 0$, so that the traveling fronts are moving to the left. As a result, the relevant interpretation is different. In fact, the time evolution leads to extinction of two communities, while only one monolingual community is the winner of this language competition.

Finally, it should be pointed out that the exact solutions of the form (10) used above for interpretation of the language shift occurred in Ukraine during the Soviet times present do not give numbers of speakers but present qualitatively the real linguistic situation. In order to get adequate quantitative results, one needs to calculate correct coefficients in the RD system (2) using census data in the former USSR. This is another nontrivial problem, which will be treated elsewhere.

4. Conclusions

In this work, the known three-component reaction-diffusion system modeling the competition and co-existence of two different language speakers is under study [8]. Such type competition leading to the language shift occurs in many countries (territories) and Ukraine is a typical example. A modification of this system is proposed (see system (3)), which was examined by the Lie symmetry method. It was established that the system in question is invariant only w.r.t. the Lie operators of the time and space translations provided its coefficient satisfy natural restrictions. Furthermore exact solutions in the form of traveling fronts are constructed using the tanh function technique. As a result, four exact solutions in explicit form were found for the first time. One of them (see formulae (10)) was studied in details in order to identify its properties. Having this done, plots of the traveling fronts were drawn and the relevant interpretation describing the language shift occurred in Ukraine during the Soviet times was suggested.

We are going to continue this work. In particular, some extension of the model is needed in order to take into account possible changes in language politics introduced by the government.

Finally, it should be noted that a three-component model for describing the spread of an initially localized population of farmers into a region occupied by hunter-gatherers was introduced in [25] (see also the recent paper [14], in which traveling fronts are constructed). It can be shown that the farmer–hunter-gatherers model can be derived from the RD system (2) as a particular case.

Conflicts of Interest: The authors declare no conflict of interest.

References

- Cherniha, R.; Serov, M.; Pliukhin, O. *Nonlinear reaction-diffusion-convection equations: Lie and conditional symmetry, exact solutions and their applications*; Chapman and Hall/CRC: New York, 2018.
- Murray, J.D. *Mathematical biology, II: Spatial models and biomedical applications*; Springer: Berlin, 2003.
- Kuang, Yang; Nagy, John D.; Eikenberry, Steffen E. *Introduction to mathematical oncology*; CRC Press: Boca Raton, FL, 2016.
- Cherniha, R.; Davydovych, V. *Nonlinear reaction-diffusion systems — conditional symmetry, exact solutions and their applications in biology*; Lecture Notes in Mathematics **2196**, Springer: Cham, 2017.
- Abrams, D.M.; Strogatz, S.H. Linguistics: modelling the dynamics of language death. *Nature* **2003**, *424*, 900.
- Patriarca, M.; Leppänen, T. Modeling language competition. *Phys. A* **2004**, *338*, 296–299.
- Kandler, A. Demography and language competition. *Hum. Biol.* **2009**, *81*, 181–211.
- Kandler, A.; Unger, R.; Steele, J. Language shift, bilingualism and the future of Britain’s Celtic languages. *Phil. Trans. R. Soc. B* **2010**, *365*, 3855–3864.

- 207 9. Kandler, A.; Unger, R. *Modeling language shift. In Diffusive spreading in nature, technology and society*; Springer:
208 Cham, 2018 (pp. 351–373).
- 209 10. Fisher, R.A. The wave of advance of advantageous genes. *Ann. Eugenics.* **1937**, *7*, 353–369.
- 210 11. Bluman, G.W.; Cheviakov, A.F.; Anco, S.C. *Applications of symmetry methods to partial differential equations*;
211 Springer: New York, 2010.
- 212 12. Arrigo, D.J. *Symmetry Analysis of Differential Equations*; John Wiley & Sons: Hoboken, New Jersey, 2015.
- 213 13. Malfliet, W.; Hereman, W. The tanh method: I. Exact solutions of nonlinear evolution and wave equations.
214 *Phys. Scripta* **1996**, *54*, 563–568.
- 215 14. Cherniha, R.; Davydovych, V. A hunter-gatherer–farmer population model: Lie symmetries, exact solutions
216 and their interpretation. *Eur. J. Appl. Math.* **2019**, *30*, 338–357.
- 217 15. Cherniha, R.; Davydovych, V. Lie and conditional symmetries of the three-component diffusive
218 Lotka–Volterra system. *J. Phys. A: Math. Theor.* **2013**, *46*, 185204 (14 pp).
- 219 16. Gilding, B.; Kersner, R. *Travelling waves in nonlinear diffusion-convection reaction*; Birkhäuser: Basel, 2004.
- 220 17. Polyanin, A.D.; Zaitsev, V.F. *Handbook of nonlinear partial differential equations, 2nd edn.*; CRC Press: Boca Raton
221 2012.
- 222 18. Rodrigo, M.; Mimura, M. Exact solutions of a competition-diffusion system. *Hiroshima Math. J.* **2000**, *30*,
223 257–270.
- 224 19. Cherniha, R.; Dutka, V. A diffusive Lotka–Volterra system: Lie symmetries, exact and numerical solutions.
225 *Ukr. Math. J.* **2004**, *56*, 1665–1675.
- 226 20. Hung, L.-C. Exact traveling wave solutions for diffusive Lotka–Volterra systems of two competing species.
227 *Japan J. Indust. Appl. Math.* **2012**, *29*, 237–251.
- 228 21. Chen, C.-C.; Hung, L.-C.; Mimura, M.; Ueyama, D. Exact travelling wave solutions of three-species
229 competition-diffusion systems. *Discrete Contin. Dyn. Syst. Ser. B.* **2012**, *17*, 2653–2669.
- 230 22. Hung, L.-C. Traveling wave solutions of competitive-cooperative Lotka–Volterra systems of three species.
231 *Nonlinear Anal. Real World Appl.* **2011**, *12*, 3691–3700.
- 232 23. Malfliet, W. The tanh method: a tool for solving certain classes of nonlinear evolution and wave equations. *J.*
233 *Comp. Appl. Math.* **2004**, *164*, 529–541.
- 234 24. Wazwaz, A.M. The extended tanh method for the Zakharo–Kuznetsov (ZK) equation, the modified ZK
235 equation, and its generalized forms. *Commun. Nonlinear Sci. Numer. Simulat.* **2008**, *13*, 1039–1047.
- 236 25. Aoki, K.; Shida, M.; Shigesada, N. Travelling wave solutions for the spread of farmers into a region occupied
237 by hunter-gatherers. *Theor. Popul. Biol.* **1996**, *50*, 1–17.