

Article

Not peer-reviewed version

Enabling Exploratory yet Systematic Investigation of Presence Factors in Virtual Reality: Proposed Methododology, Reserarch Tool Development, and Practical Application

[Markus Drese](#)^{*}, Rafael Bennet Wortmann, Paul Siraf, Lennart Fuchs, [Nicole Jochems](#)

Posted Date: 6 May 2025

doi: 10.20944/preprints202505.0254.v1

Keywords: Immersive Virtual Reality; Virtual Environment; Presence; Usability; Visual Fidelity; Reseach Tool; Web Interface; Unreal Engine



Preprints.org is a free multidisciplinary platform providing preprint service that is dedicated to making early versions of research outputs permanently available and citable. Preprints posted at Preprints.org appear in Web of Science, Crossref, Google Scholar, Scilit, Europe PMC.

Copyright: This open access article is published under a Creative Commons CC BY 4.0 license, which permit the free download, distribution, and reuse, provided that the author and preprint are cited in any reuse.

Article

Enabling Exploratory yet Systematic Investigation of Presence Factors in Virtual Reality: Proposed Methodology, Research Tool Development, and Practical Application

Markus Dresel , Rafael Wortmann, Paul Siraf, Lennart Fuchs and Nicole Jochems

University of Lübeck, Institute for Multimedia and Interactive Systems, Lübeck, Germany;

* Correspondence: m.dresel@uni-luebeck.de

Abstract: Presence is widely recognized as a key quality metric for immersive virtual reality (IVR) experiences. However, research on factors contributing to presence is impeded by the plethora of identified factors, contradictory results, and unclear interactions. Based on the analysis of current literature, we propose a two-step research methodology combining exploratory and confirmatory paradigms to address these issues. As existing IVR study tools do not focus on presence and its determinants, we developed our own tool consisting of two components: an IVR app, based on Unreal Engine for designing and displaying IVR scenarios, and a browser-based experimenter interface using Vue.js, enabling precise control over presence factors and study procedure. Methodology and study tool underwent a formative expert evaluation (N=6) and a first practical application within the AgeVR research project (N=115). Their feasibility has been confirmed by expert feedback, as well as data from 115 successfully completed exploratory studies with participants of various ages. The exploratory study procedure works for general presence, involvement and plausibility illusion. Measures that will enable the seamless investigation of the remaining presence subcomponents are proposed. Our next step is to develop and test hypotheses in the confirmatory studies. The study tool was made publicly available as an open source project.

Keywords: immersive virtual reality; virtual environment; presence; usability; visual fidelity; research tool; web interface; unreal engine

1. Introduction

Immersive virtual reality (IVR) has emerged as a profoundly relevant technology for a wide range of user groups, offering immersive experiences and versatile applications that cater to diverse interests and needs [1–3]. When designing virtual environments, immersion and sense of presence emerge as key quality metrics from an HCI perspective [3–6], in addition to the established paradigm of usability. Immersion is defined by Slater and Wilbur as, "the objective degree to which a system is inclusive¹, extensive, surrounding, and vivid²" [6]. In contrast, presence is a subjective experience, being generally defined as the feeling of "being there" [7] in an immersive virtual environment (IVE). A plethora of definitions and operationalization of presence has been developed throughout the last three decades of research. However, its subcomponents can be broadly grouped into five categories: spatial [5,8,9], social [5,9], and self-presence [9], as well as involvement [8,10] and plausibility illusion [5,11]. When measuring presence, subjective methods have become the standard approach, offering several valid and reliable questionnaires (e.g., [8,10,12,13]), while objective methods such as physiological

¹ *inclusive* is defined as "the extent to which physical reality is shut out", referring to the exclusion of external real-world stimuli [6].

² *vivid* is defined as "the resolution, fidelity, and variety of energy simulated within a particular modality", referring to the objective quality of display technology [6].

and behavioral measures are less established [5,14–16]. Presence enables the measurement of IVEs' effectiveness across different application contexts [17].

1.1. Motivation

Presence research in IVR is impeded by the abundance of factors that can influence IVR-experiences. From a human-centered perspective, these presence determinants can either be classified as internal (dependent on the user) or external (dependent on the system) [18]. The substantial number of identified factors, contradictory results on their influence and lack of clarity regarding their interaction [14,18,19] make the development of design guidelines for presence particularly difficult.

In this work we develop a methodology of systematic investigation with the goal to make presence factors controllable. *Internal factors* can only be controlled through purposeful recruitment of participants and rigorous documentation of user characteristics. However, this entails the risk of excluding certain user groups based on cognitive, perceptive, and motoric abilities. As characteristics of the IVR system, *external factors* are the only ones that can be controlled by technological means. When investigating external factors, confirmatory studies (testing hypotheses) are the de facto standard. Typically, these studies compare different versions of an IVE, [20–22] or entirely different IVR applications [23–25] addressing one or several specific presence factors. Studies that utilize exploratory approaches, which allow for more open investigation of presence determinants, remain scarce (e.g., individual configurability [26–28]). As mentioned, confirmatory presence studies often lead to contradictory results (e.g., for factors like display resolution [18], polygon count [29–31], emotion [32,33], VR scenario [34–36] and age [37–39]). In addition, it is hard to isolate the effect that singular factors may have on presence, since they often manipulate a conglomerate of factors within their experimental conditions. A common example is manipulating both display and interaction characteristics in one condition change [40–45]. This also complicates the identification of dependencies and interactions between factors.

We argue that a two-stage procedure that combines exploratory and confirmatory approaches is necessary for a more systematic investigation of presence determinants. The Idea is to (1) establish empirically grounded hypotheses via exploratory investigation, to then (2) verify/falsify these hypotheses by means of comparison. This process is described in detail in section 4. Also, there is a lack of VR research tools allowing for the conduction of systematic investigations of presence factors as IVR applications are typically developed for one-time use in a single study (see section 3). Thus, they have a clear context to be applied in and mostly do not allow for generalizable results. Furthermore, existing VR research toolboxes do not focus on presence and its determinants [46].

In this work we create a foundation for the conduction of systematic studies on (external) presence determinants by developing a two-component tool that implements the proposed methodology (see section 5). The VR tool is designed to (1) enable experimental control over external presence determinants, (2) guide the experimental process, and (3) facilitate data extraction. Finally, our developed methodology and VR tool underwent a formative expert evaluation (N =6) and a practical evaluation via exploratory user studies with N=115 participants in the scope of a research project (see section 6).

2. Presence Factors in IVR: State of Research

Recent literature and meta-analyses addressing determinants of presence aggregate findings on both immersive and non-immersive virtual reality settings [3,5,14,18]. Here, four general categories of presence factors can be identified. These are display fidelity and interaction fidelity [47], as well as engagement and personal characteristics [14]. To provide an overview of the state of presence research that focuses exclusively on *immersive* VR, we identified 118 studies³ as part of our own literature research. Inclusion criteria for studies were the use of immersive VR technology (e.g., CAVE, HMD) as well as some form of presence measurement (e.g., questionnaires, behavioral measures).

³ Full table available at <https://www.imis.uni-luebeck.de/sites/default/files/2021-07/index.html>

These show that the IVR-focussed state of research largely reflects the four categories of presence factors. IVR studies typically investigate the combined influence of several factors from the categories of display fidelity (N=62), interaction fidelity (N=35), engagement (N=16), and user characteristics (N=24). However, in IVR additional factors arise that do not fit into any of the previous categories. 17 studies considered *immersion/inclusiveness* (see section 1), by comparing immersive and non-immersive VR technology (e.g., HMD vs. Desktop, [48]). 13 additional factors were classified as *others* and were mostly examined in individual studies. These factors encompass content variables like character anthropomorphism [49], nested virtual environments [50], realistic anchors [51], and transitional environments [52], as well as special variables like shared VR experience [53] and indoor/outdoor VR usage [54].

Out of 118 researched studies, 70 investigate exclusively external presence factors, 16 exclusively internal ones, and 28 investigate both. Research on external presence factors focuses primarily on visual representation [3,55], with 58 of 118 studies examining the influence of visual representations. Most visual characteristics of IVR belong to the category of display fidelity. To shed light on the limitations of the current state of presence research in IVR, namely the unsystematic character of investigations (multifactorial ambiguity) and contradictory nature of the results, we present *display fidelity* as an example for external presence factors. Subsequently, we describe *user characteristics* as an example for internal presence factors.

2.1. Display Fidelity

Display fidelity (also stimulus [5] or physical fidelity [3]) is “the objective degree of exactness with which real-world sensory stimuli are reproduced” by a display system [47]. In general, this definition includes all sensory impressions (esp. visual, auditory, haptic, olfactory, and gustatory). Previous VR studies have focused primarily on visual aspects, some studies on auditory aspects, and very few studies on other modalities [3,55]. A framework of the components of visual display fidelity, based on the state of research, was developed by Bowman and McMahan [55,56]. This includes (1) field of view, FOV; (2) field of regard, FOR; (3) screen size; (4) screen resolution; (5) stereoscopy; (6) head-based rendering; (7) illumination realism; (8) frame rate; and (9) update rate. The focus of this model lies on technical properties of the used hardware. Design related characteristics of VEs are not considered (except for illumination realism). Other authors, however, emphasize (7) illumination realism [57,58] (10) texture realism [57] and (11) environmental details [57,58].

IVR studies examined these aspects in various combinations. Significant increases in presence were observed when using more realistic illumination [59,60], or more realistic textures and more environmental objects [61]. An increase in texture and geometric realism either led to significant increases [29,30,62,63] or no significant differences [31] in presence. No significant difference could be found for increased illumination realism in combination with higher texture resolution [64]. An increased texture realism alone did not lead to a significant difference in presence [65]. Still, texture realism contributed more to the sense of presence than the possibility of locomotion [66]. In a comparative evaluation of different VEs, the one with the highest values for illumination realism, texture realism and environmental details led to the highest sense of presence [23]. So, the enhancement of different factors within the category of (visual) display fidelity, in most cases, led to an increased sense of presence. However, most studies show a confounded study design, leading to a lack of factor isolation.

2.2. User Characteristics

User characteristics encompass all presence factors that can be classified as properties, abilities, or states of the user. This includes personal characteristics, such as Personality, Cognition, Imagination, Concentration, Knowledge, VR/Game Experience [14]. The relation between various user characteristics and presence remains widely unclear. For instance, both a positive [38,67], and a negative correlation [39] between chronological age and presence were identified. Other studies, however, could not find any significant difference in presence between older and younger subjects [37,68–70].

Regarding personality traits, extraversion was either found to be positively [71] or negatively correlated with presence [72,73]. Again others found no such correlation [74]. As an example for abilities, studies scarcely found spatial imagination to be significantly correlated with presence [72, 73], whereas in the majority of experiments no influence could be observed [33,75–77]. 3D gaming experience of users was found to have no association with presence [33,72], in other instances it was negatively associated [78]. Positive associations were found only in behavioral measures [79] or single questionnaire items [80].

Thus, when it comes to internal presence factors these are often well isolated in the experimental design. However, studies often have conflicting results and are generally not sufficiently comparable to explain these.

3. VR Study Tools: State of the Art

Existing VR research toolboxes do not focus on presence and its determinants [46]. In presence research, IVR applications are typically developed for one-time use in a single study (e.g., [62,81–89]), limiting their customizability and reusability. Here, experimental conditions are realized either by several separate builds⁴ or scenes within the respective engine or alternatively by changing configurations directly in the engine's editor. While the former might be resource intensive the latter might introduce the risk of configuration errors by the experimenter. Game engines, such as the Unity Engine (e.g., [22,40,82–92]) and Unreal Engine (e.g., [23,62,81]) are the most widely used development software for creating such study environments [46]. Others utilize modified [93,94] or unmodified versions [25,33,95–97] of proprietary VR applications such as videogames. In addition to the previously mentioned reusability and customizability issues, this approach might also reduce control over presence factors. Furthermore, the VR application is usually decoupled from the rest of the experimental process (e.g., randomization of experimental conditions, tutorials, questionnaires). Therefore, we propose an external interface for experimenters covering the experimental process by streamlining its steps (see section 5).

Focusing on tools for the general study of human factors in VR, Woelfel et al. [46] analyzed the current state of technology. The authors summarized the full range of feature sets that contemporary tools can provide. Study tools typically only satisfy a certain subset of features, that is beneficial to their respective application context or research domain. **(1) Setup & Control** refers to the ability of a study tool to facilitate experiment planning, customization, and real-time intervention. A tool should provide process planning before and operator control during the experiment, sample scenes should be available and customizable. Furthermore remote testing (outside the laboratory) and human or agent-controlled social agents should be available. **(2) Sensing Participants** refers to the variety of sensors provided by VR hardware as a rich source of information (based on informed legal consent) enabling the development of a responsive virtual environment. This encompasses the recognition of controller-input, the tracking of head-orientation, body pose, eye gaze, facial features, brain activities and other biosignals (e.g heart and respiration rate), audio and video recording, as well as the administration of in-VR questionnaires. **(3) Representation** of the virtual environment and its entities focuses primarily on visual realism and interaction possibilities. This comprises representing virtual entities (e.g., surrounding objects and agents), as well as real entities (e.g. participants, experimenter, physical objects) within the VE. **(4) Data Handling** refers to the reliability, validity, and transparency of data collection, processing and management by the study tool. This includes the possibility to import, export and stream data, the automation of analyses (e.g., behaviour/emotion recognition), the possibility to replay and annotate VR scenes, and to share the experimental environment for replication purposes. **(5) Integration** addresses the question of how much of the tool's source code is available open source and how much is proprietary code of the underlying engines (e.g., Unity, Unreal).

⁴ standalone software artifacts that can be run on a computer, e.g., .exe-files

Our goal is to develop a VR tool specifically dedicated to investigating presence factors which, based on our literature research, does not exist to date. For this purpose, we developed a research methodology, which is presented in the following paragraph. The development of the modular VR tool based on this methodology is described in section 5.

4. Research Methodology

As shown by the literature (section 2), the current state of research does not allow for a well-founded formulation of hypotheses on the relationship between presence and the plethora of internal and external factors. As a direct deduction from this state and as a basis for our research methodology, we propose the following measures for the systematization of presence studies. (M1) **Presence factors should be atomic in their operationalization**, as far as possible (e.g., breaking down the factor *illumination realism* into *illumination intensity*, *contrast ratio*, *lighting algorithm*, etc.). (M2) The same presence factors must be **investigated analogously in different IVR scenarios**, to enhance generalizability and eliminate one possible source of contradictory results. When it comes to control and manipulation of presence factors within an experimental setting, we build on the existing classifications by Felton et al. [18] and Souza et al. [14]. Internal Factors are dependent on the user [18], thus we focus on all abilities, properties, and states of IVR users with potential relevance for presence. External factors must be divided into the ones that cannot be controlled by technological means (we call these environmental factors), and the ones that can (we call these technological factors). Environmental factors include ambient characteristics, namely real world stimuli and the physical surrounding. Technological factors include hardware and software characteristics, namely display fidelity, interaction fidelity and content factors (see Figure1). Our proposed measures in this regard are the following. (M3) **external factors should be controlled by technological means**, as far as possible (in our case this refers to the previously defined "technological factors"). Thus, independent variables should be adjustable via the study tool used and all other technological factors should be represented via reasonable *default values* (derived from the current state of research and capabilities of the technology). External factors relating to the environment should be regulated within a *controlled laboratory setting*. (M4) Internal factors, i.e., **user characteristics should be controlled through rigorous documentation**. Purposeful recruitment by diversifying or narrowing the scope of participant acquisition can help to validate the subject sample within the study context.

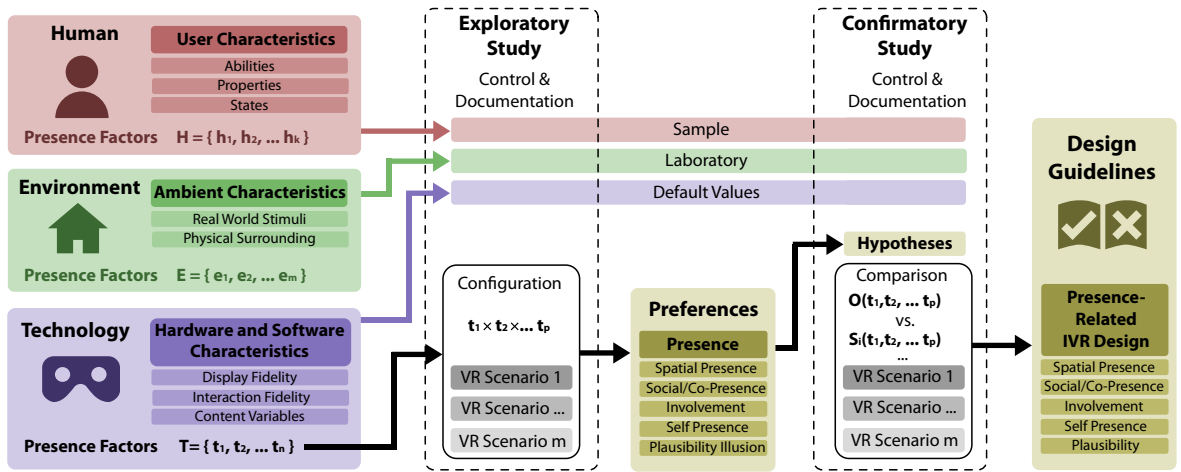


Figure 1. Overview of the proposed research methodology. Included presence factors (left). Exploratory study for hypothesis formation (middle-left). Confirmatory study for hypothesis testing (middle-right). Anticipated outcome: design guidelines for presence (right).

Our Methodology prioritizes technological presence factors since (A) they offer the highest degree of experimental controllability, and (B) they hold the greatest practical relevance for designers of virtual environments. In later stages, the methodology’s focus could shift toward human or environmental

factors; for now, these are primarily well-documented and controlled rather than manipulated. Thus, for our study design we chose a two-stage procedure consisting of an initial exploratory study followed by a confirmatory study. The exploratory approach is essential to enable the derivation of hypotheses based on the data obtained. In the subsequent confirmatory study these hypotheses are then tested via systematic manipulation of these presence factors, examining them in paired comparisons, enabling the derivation of design guidelines (see Figure 1). This two step procedure is detailed in the following.

4.1. Exploratory Assessment of Preferred Configurations of Presence Factors

An exploratory study design is chosen as the basis for hypothesis formation. We define $T = \{t_1, \dots, t_n\}$ as the set of technological factors, and p as the number of independent variables (IV). Thus, in the exploratory study we investigate possible combinations $t_1 \times t_2 \times \dots \times t_p$ in order to find the optimal configurations to achieve the highest presence (see Figure 1). Based on the approach by Slater et al. [27], this optimum is to be determined by the subjects themselves. However, since this task is potentially complex, especially for subjects unfamiliar with IVR, the configurations will be made by the experimenter in a guided process similar to subjective refraction⁵. To identify an appropriate subset of T to be used as IV in a study, the trade of between comprehensiveness (considering as many factors as possible) and complexity must be taken into account. In our first practical application of the methodology, we chose $p = 2$ as the minimal reproducible example, and conducted two studies with different pairs of IV (see section 6 and Figure 2). The general procedure of such an exploratory study is described below.

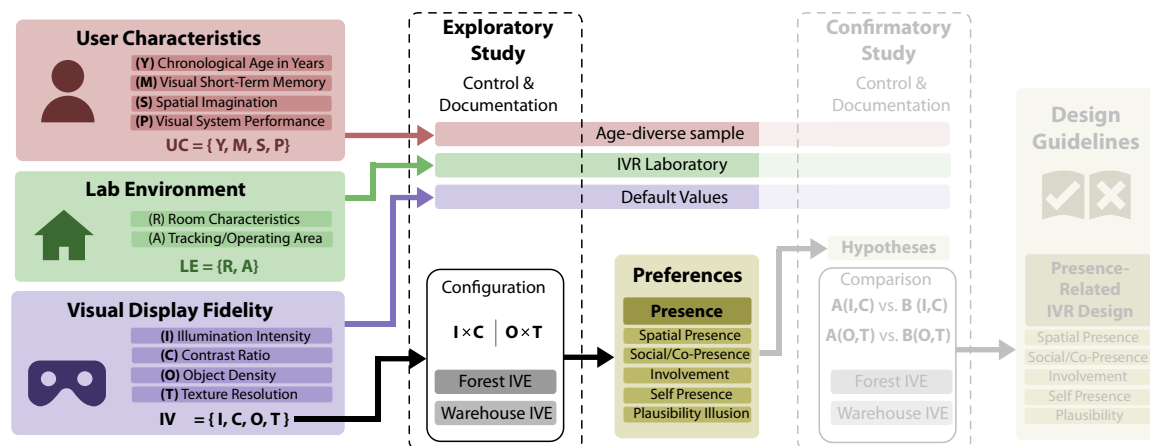


Figure 2. Instantiation of the proposed research methodology (cf. Figure 1) in the context of the AgeVR research project: Included presence factors (left), exploratory study (middle-left). Confirmatory study (middle-right) and derivation of design guidelines (right) are not part of the present evaluation.

Before the IVR experiment, control over presence factors that are not considered as IV must be ensured. The laboratory environment is set up in order to provide stable conditions in terms of real world stimuli and physical surroundings. User characteristics with potential relevance for the IV are assessed via suitable instruments (for an example of how to identify and document user characteristics, see section 6.2.1). Technological factors that are no IV are set to their respective default values. At the beginning of the IVR experiment, subjects are introduced to the concept of presence to ensure correct understanding of this term. Then subjects are informed that they will repeatedly experience two different versions of an IVE. Each time they will be asked to indicate in which of the two they feel more present. A short narrative introduction to the respective IVR scenario is given. Subjects put on the HMD, and the IVR application is started. The experimenter increments one presence factor at a time, starting at the lowest possible value. The IV $t_1, \dots, t_p$ are manipulated in randomized

⁵ From the field of optometry: process to determine, the combination of lenses that provide the best corrected visual acuity [98].

order to compensate for sequence effects. For instance, the experimenter might start by presenting the IVE with t_1 at level 0 vs. level 1, while $t_2, \dots, t_p$ stay at their default values. If subjects state that they feel more present at level 1, the experimenter will increase t_1 presenting level 1 vs. level 2. This process is repeated until the lower value is preferred or subjects state, that they do not recognize any differences between variations or if the maximum value is reached. After that, the same configuration is carried out for t_2 and all other IV up to t_p . Subsequently a refinement step is performed starting again with t_1 moving up to t_p varying all IV in a smaller range. This is intended to address a possible interdependence of presence factors that may not have become apparent from the default values. After this, the configuration is finished and all values are saved. With the resulting configuration, the subjects must then perform an IVR task involving locomotion in the IVE and interaction with virtual objects. As a control measure, all presence subcomponents are assessed after IVR exposure using a short scale (see Appendix, Table A1) based on established presence questionnaires (e.g., PQ [10], IPQ [8], SUS [12], MPS [13]).

To enable the derivation of hypotheses for subsequent studies, the resulting individual configurations $t_1 \times t_2 \times \dots t_p$ are clustered. In the scope of possible hypotheses, all possible cases must be covered. These are (H1) that clusters found relate to certain user characteristics, indicating a specific relationship between these user characteristics and the optimal configuration for presence. (H2) that clusters found are independent of user characteristics, representing different patterns of experiencing presence. It is also possible that no clusters are found at all, suggesting either (H3) a universal optimal configuration for presence or that (H4) optimal configurations can only be predicted for each user individually.

4.2. Confirmatory Study on the Combined Influence of Presence Factors

To test the developed hypotheses, a confirmatory study will be carried out. This study forms the empirical basis for deriving presence-related design guidelines for IVR Design. Measures to control environment factors and non-IV technological factors as well as the assessment of user characteristics will be performed analogous to the previous study.

In this comparative study, presence factors $t_1, \dots, t_p$ are systematically varied in several conditions, which are predefined depending on the hypothesis derived from the results of the preceding study. Thus, the hypothesized optimal configurations $O_{cluster}(t_1, \dots, t_p)$ for either (H1) each profile of user characteristics identified by the cluster analyses, or for (H2) each presence experience pattern identified by the cluster analyses, are tested against each other. Alternatively, the hypothesized (H3) universal optimal configuration $O_{uni}(t_1, \dots, t_p)$ or (H4) optimal configuration for each individual user $O_{user}(t_1, \dots, t_p)$ is tested against a certain number of hypothesized suboptimal configurations $S_i(t_1, \dots, t_p)$ that deviate strongly from it. In the IVE the same IVR task as in the exploratory study is carried out once for each experimental condition (randomized order). After each condition presence is recorded in detail via established presence questionnaires (e.g., PQ [10], IPQ [8], SUS [12], MPS [13]).

The data of the main studies will be examined having the experimental conditions (configurations of $t_1, \dots, t_p$) as within-subject factor, and in the case of H1 or H2 user characteristics or experience patterns as between-subject factors. The analysis addresses the research question of, how the examined presence factors differ regarding their effect on presence in IVEs. For this purpose all five subcomponents of presence, namely spatial, social, and self-presence, involvement, and plausibility illusion (see section 1) will be analyzed via the subscales of PQ [10], IPQ [8], SUS [12], and MPS [13]. This analysis is used to derive design recommendations for maximizing presence in IVR, which are either aimed at specific user groups or provide universal solutions.

5. IVR Study Tool Development

To enable the conduction of the planned studies (see section 4), our study tool requires the following central functionalities: (1) manipulation of IV (technological presence factors), (2) support of different IVR scenarios, (3) guidance of the experimental process, (4) IVR interaction techniques for certain tasks and respective tutorials, (5) data formatting and extraction. Furthermore, the system

needs to be modular and expandable, especially in terms of manipulable IVs. Our tool was developed in the context of the *AgeVR*⁶ research project, which focuses on the influence of age-related user characteristics and visual display fidelity on presence. Accordingly, the four exemplary IV that were implemented are in the category of visual display fidelity, namely illumination intensity (I), contrast ratio (C), objects density (O), and texture resolution (T). The proposed study process (see section 4) and an analysis of the state-of-the-art features of industrially produced IVEs form the basis of our development process. For the industrial state-of-the-art analysis ten contemporary IVR games⁷ (published 2018-2022) were investigated focusing on visual fidelity and its configurability, but also to identify industry-standard baselines for auditive and haptic fidelity. Most of the configurable visual fidelity aspects are covered by the four IV (I, C, O, T), for the remaining aspects like anti-aliasing or color correction common default values were chosen as baselines. The development process resulted in two main components: an *IVR application* and an *experimenter interface* (see Figure 3), which are described below. A formative evaluation with six field experts was conducted at the end of the first iteration (see section 6.1). Based on this feedback, the study system was refined (see section 4.1). Both components of the tool have been made freely available on github.com⁸ as an open source template that can be used to create custom IVR studies.

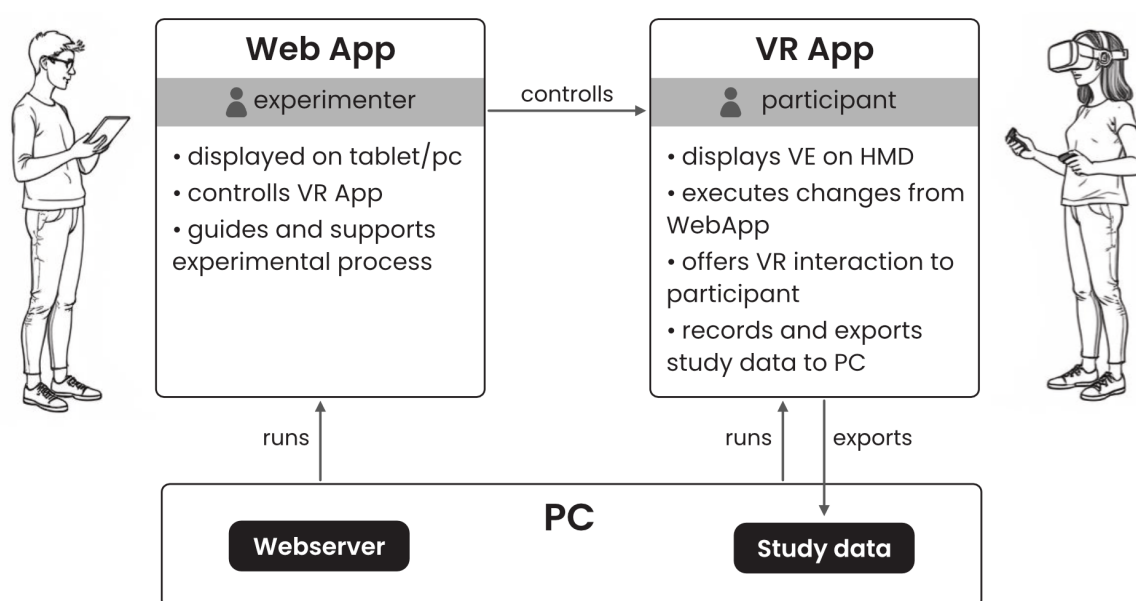


Figure 3. Two component architecture of the developed IVR study tool. The web app (left) servers as an experimenter interface by controlling the IVR App (right) that displays the VE and enables VR interaction. Both are executed locally on a laboratory PC (bottom).

5.1. IVR Application

The IVR application is powered by Unreal Engine 5 including the virtualized geometry system Nanite⁹. It displays the IVR scenarios with which subjects are presented and can interact during the experiment. The IVR application listens for instructions provided by the experimenter through the web interface. These instructions include e.g., manipulating the IV and loading new IVE. The subjects' data (IV configurations, task completion scores and times) is captured during and exported after the experiment by the IVR application. Unreal Engine 5 was chosen, because its one of the leading engines used for IVR research (next to Unity, see section 3), enables high-fidelity graphics and physics, its

⁶ <https://www.imis.uni-luebeck.de/de/forschung/projekte/agevr>

⁷ Identified through journalistic articles on the topic of "Best IVR games": Blade and Sorcery, Half-Life: Alyx, Hurbis (Demo), Kayak VR Mirage, Lone Echo, Meditation VR, Moss, Project Cars 2, Vader Immortal I-III, VR Walking Simulator

⁸ IVR application: <https://github.com/RBW1999/VR-StudySystem-Template-VE/blob/main/README.md>, experimenter interface: <https://github.com/RBW1999/VR-StudySystem-Template-WebApp>

⁹ https://dev.epicgames.com/documentation/es-mx/unreal-engine/nanite-virtualized-geometry-in-unreal-engine?application_version=5.3

low-level entry point for novice developers (through constructs such as Blueprints), and its modularity and expandability.

5.1.1. Base System

To support the creation of adaptable scenarios, a series of systems were implemented using the Blueprint¹⁰ system provided by the Unreal Engine. The manipulation of the IV (which are referred to as Adaptation Dimensions (AD) within the tool) is handled by the *Adaptation Dimension Manager* (*ADManager*). This is achieved through either direct control of the player camera contrast (C), scaling the intensity of all light sources (I) in the scene, the execution of console commands to manipulate the resolution of all textures¹¹ (T) or toggling the visibility of objects in the scene (O). The latter was implemented by extending the existing Unreal Engine construct of the *Actor*, creating the so called *Adaptation Dimension Actor* (*ADActor*), which allows the systematic manipulation of this Actor's visibility. When an *ADActor* is placed in the scene, it is randomly determined at which degree of the AD (O) it becomes visible. At the maximum degree of O, all *ADActors* are visible. To address more complex object compositions, e.g., involving gravity (objects placed on top of each other), the *ADComplexActor* was created as an extension to the *ADActor*. It allows the developer to group multiple objects together and predetermine a specific order in which the individual objects appear (with the range of AD (O) degrees still being determined randomly). Figure 4 shows a bookshelf implemented as a *ComplexADActor*. In this example, at the AD degree of $O = 5$ (left) there is only one book visible, with each degree more books get added, these can lay or lean on previous books (middle), at the degree of 16 all books are visible (right).



Figure 4. Example of the *ADComplexActor* Blueprint: A shelf containing multiple books, leaning and lying on each other. Each screenshot depicts another degree of object density (O).

Another basic functionality is the management of the IVR task. The collective of task related objects (*TaskObjects*) gets managed by the *TaskManager* Blueprint. At its current state the IVR task consists of a simple search task in which the participants have to move through the IVE and search for and pick up certain objects. Thereby, the level of presence developed by subjects, is based on an interactive experience of the IVE. The teleportation-based locomotion and the interaction with *TaskObjects*, were implemented using native functions of the Unreal Engine. The completion of (sub)tasks (individual *TaskObjects*) is assessed automatically by the system. For complex tasks monitored by the experimenter a checklist template is provided via the interface.

5.1.2. IVR Scenarios

We developed three types of IVE for the study tool: A sample IVE, a tutorial IVE, and several specific study IVEs. The *Sample IVE* serves as a template for the creation of new experimental IVE. It contains sample versions of the *ADActor*, *ComplexADActor*, and *TaskObject* Blueprints, which can be copied and customized to fit the needs of the specific experiment and/or IVR scenario being depicted.

¹⁰ https://dev.epicgames.com/documentation/en-us/unreal-engine/introduction-to-blueprints-visual-scripting-in-unreal-engine?application_version=5.0

¹¹ <https://developer.arm.com/documentation/102696/0100/Texture-mipmapping>

The *Tutorial IVE* was designed with the goal of communicating and practicing the study procedure and relevant IVR interactions. The IVR scene is kept intentionally abstract, having no corresponding real world scenario. It consists of a walled zone with a few interactive objects (see Figure 5). The participant is required to perform three tasks: (1) practice room-scale walking in the IVE, (2) practice teleportation in the IVE, (3) practice object grabbing and repositioning, (4) learn how the configuration of IV works in the exploratory study process. When practicing the movement, the participant is asked to walk or teleport to certain positions marked on the floor. When practicing object interaction, the participant needs to sort different objects according to their type, by taking them and placing them in specific containers. Configuring the IV is learned via the example of adjusting the color of an object in the scene. This way, the participant learns the process and necessary interaction with the experimenter on an abstract level, without biasing later configurations during the actual experiment.

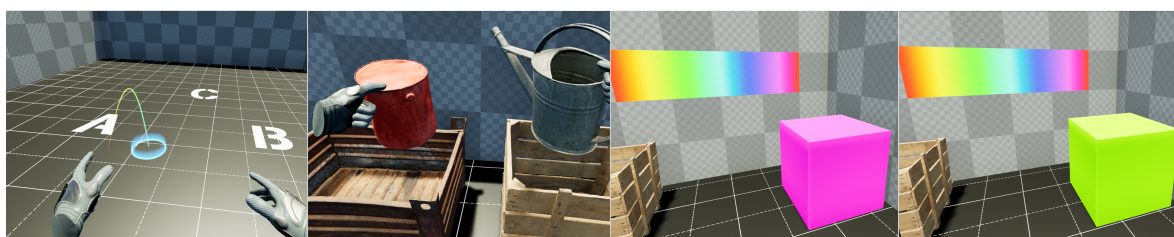


Figure 5. *Tutorial IVE* designed to practice room-scale walking, teleport locomotion (left), object interaction (middle left), and IV configuration (middle-right and right).

The four *specific study IVE* were developed using the Qixel Megascans Library¹², which provides high quality 3D-scanned assets. To derive generalizable design guidelines for presence, these IVE encompass a wide range of settings, spanning from artificial to natural spaces and from indoor to outdoor areas (see Figure 6). All IVR-Scenarios are based on real life scenarios and are designed based on photo-references to enable an objective assessment of visual fidelity based on a real-world paradigm. The *Forest IVE* depicts a large forest with paths through a wide ravine. The task is to find three metal watering cans hidden near the paths (Figure 6, left). The *Warehouse IVE* portrays the inside of a warehouse with multiple aisles of shelves, storing cardboard boxes on wooden pallets. The task is to find and collect red paint cans (Figure 6, middle-left). The *Antique Shop IVE* presents a small, cluttered indoor shop filled with old objects of varying value. The windows offer a view into a small and quiet street. The task is to locate and collect hammers hidden throughout the shop (Figure 6, middle-right). The *Urban IVE* shows a large courtyard, surrounded by different buildings, containing parking lots, small green spaces, and a construction site. The task is to find and collect scuffed soccer balls (Figure 6, right).



Figure 6. Adaptive IVEs developed in the scope of the study system (from left to right: forest, warehouse, antique shop, urban)

¹² <https://quixel.com/megascans/home>, at the time of our development, the library was available free of charge for scientific purposes.

5.2. Experimenter Interface

The experimenter interface is implemented as a web app using the JavaScript framework Vue.js¹³. It is designed to navigate the experimenter through the study and thereby preventing possible operating errors. To ensure the double-blind principle [99] it limits the information the experimenter receives during the experiment to minimize biases in the interaction with the participant. Therefore, the view of the subject in the IVE is not shown to the experimenter during the experiment.

5.2.1. UI and Study Modes

At the beginning of each experiment, the interface allows the selection of one of three study modes, (1) *explorative study*, (2) *comparative study* and (3) *debug mode* (Appendix, Figure A1). The latter is allowing for more operating freedom and insights regarding the experiment status (e.g., for pre-testing; Appendix, Figure A2). The comparative study mode will be added as studies progress according to the methodology (see section 4).

After entering the subject ID and choosing the *explorative* mode, the system determines randomly in what order IV are configured and the order in which the IVE are presented, all this information is hidden for the experimenter. The next view contains the four configuration steps needed for the *exploratory* study (Appendix, Figure A3). The experimenter increases, decreases or continues to the next step according to the exploratory study procedure (see section 4.1). After the fourth step is completed, the task can be started through the interface. During the task, the interface presents the subtask progression to the experimenter, but without revealing the status or type of specific subtasks. The configuration and IVR task get repeated for every IVE. Lastly, the experimenter has the option to add notes of unusual observations or occurrences during the experiment and to export all data recorded by the tool.

5.2.2. Communication Between Interface and IVR Application

The communication between the two components is by definition unidirectional, with the web-based experimenter interface sending requests to the IVR application. This communication is realized through http requests that get sent to a web server running in the Unreal Engine. This server is part of the remote control API¹⁴ and allows the execution of functions in instantiated objects at the currently loaded level (IVE), for example, the manipulation of IV (see Figure 7).

¹³ <https://vuejs.org/>

¹⁴ <https://dev.epicgames.com/documentation/de-de/unreal-engine/remote-control-for-unreal-engine>

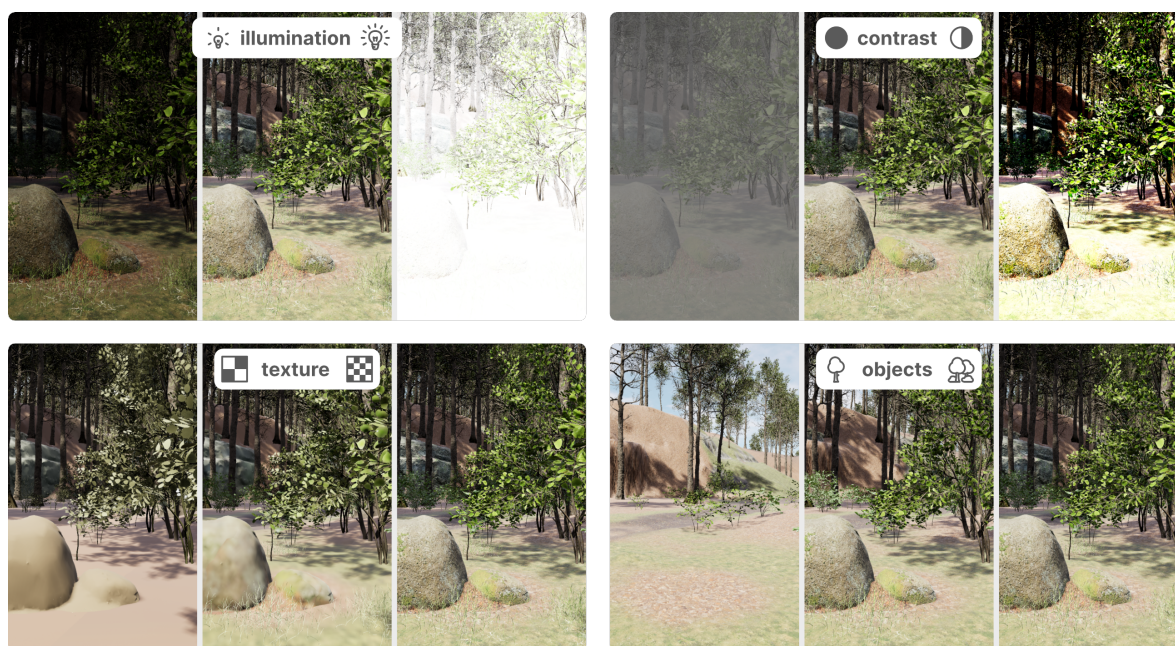


Figure 7. Forest IVE: different IV configurations on low, medium, and high levels, illumination intensity (top-left), contrast ratio (top-right), texture resolution (bottom-left), object density (bottom-right). Each IV can be configured on a scale from 0 to 16.

6. Evaluation and Practical Application

Our developed methodology (section 4) and study tool (section 5) underwent a formative expert evaluation to test the general usability and applicability for exploratory VR studies. To further evaluate our approach, we conducted exploratory user studies in the scope of the AgeVR⁶ research project with N=115 participants. So far, our evaluation covers the initial half of our methodology, up to the stage of concluding the exploratory study.

6.1. Formative Expert Evaluation

6.1.1. Method

The evaluation was conducted with six experts (6 male, 22–32 years), with prior scientific or development experience in IVR. The explorative study procedure (section 4.1) was simulated by conducting a role play in pairs of two with one expert, as experimenter and the other as participant. The participant's role was to configure two IV and complete a task within the IVE. The experimenter's role was to control the experiment through the interface, following a written step-by-step instruction. Subsequently, the experimenter evaluated the usability of the interface through the ISONORM 9241/110-S usability questionnaire [100], while the subject role's presence was measured via the IGroup Presence Questionnaire (IPQ) [8] and Slater-Usch-Steed presence questionnaires (SUS) [12]. Afterwards, the experiment was simulated a second time, swapping the roles. Finally, a semi-structured interview was conducted with each individual expert. It focused on the adequacy of the study design and the tool's implementation of the methodology as well as its feasibility for large and diverse subject samples. Considering its formative character, the evaluation was limited to the forest IVE (section 5.1.2).

6.1.2. Results

Semi-Structured Interviews¹⁵

Considering the **suitability of the proposed methodology** and the corresponding study design, it was stressed that it is essential for participants to have the correct mental model of *the sense of presence* in order to carry out the configuration task in an effective manner (E2). Furthermore, unknown limits

¹⁵ Individual experts are identified via the pseudonyms E1-E6 in the following.

of the IVR-hardware (e.g., maximum brightness of the HMD) could lead to confusion (E1), as well as certain IV starting at zero level, such as illumination intensity and contrast ratio (E3, E5). It was suggested that some of these IV should rather be manipulated on a continuum, rather than in discrete steps (E3). The importance of considering interference between IV as well as auditory aspects in the development of design guidelines was emphasized (E2). Three experts questioned the double-blind principle, saying that it might hinder communication with participants (E1, E3, E4). However, it appears to reduce biases, as four experts wanted more feedback on the status of the subjects (E1, E2, E4, E5), which was justified, e.g., by "*being able to already think about result analysis during the experiment*" (E1). Addressing the diversity of participants, experts stated that interaction with IVR technology poses different difficulties depending on the user groups (E4, E6). Users with an affinity for technology may expect more configuration options and wider ranges (E5), while too many options may lead to mental fatigue, not only in unexperienced users (E2). It was suggested to simplify the IVR task by adding optional task objects (E1). Being concerned with mobility requirements, especially for older users, experts suggested to reevaluate the time intervals that users were required to stand (E6) and how intensively they must bend down and pick up objects (E5). For the development of adequate IVR scenarios, E6 recommended focusing on the plausibility of IVE in terms of boundaries and lighting. Depending on the scenario, changes in IV may not be recognizable (e.g., if there are few objects/texture details) (E5, E2). Additionally it was stated that, when it comes to presence, there may be several different IV configurations that can be considered realistic (e.g., depending on the time of day or the underlying narrative) (E5). Furthermore, E4 stressed that IV may have different influences in each scenario, which hints at the importance of our multi-scenario approach to achieve generalizability and counteract contradictory results.

Regarding how well the **study tool implements the methodology** and study procedure, two experts stated that they had not experienced any problems with the system during the experiment. In the following section, encountered problems and positive feedback by the experts is listed separately for the experimenter interface and the IVR application respectively.

When asked about the *experimenter interface*, five of the six experts stated that they were adequately supported by the system during the procedure and that they could well imagine using it to conduct a large-scale exploratory study. The main reason given was, the linear and stringent process guidance circumventing possible diversions (E2, E5, E6). Four experts described the UI as "tidy", "uniformly designed", and "easy to use" (E1, E2, E3, E4). The use of a web application was seen as a technological advantage (E1). Several experts noted that error prevention and management could be improved. This included having clearer step descriptions and confirmation prompts for critical actions (E1), as well as checking subject IDs for duplicates when creating the study (E3). Another suggestion was the option to decrement IV, to enable direct correction of configuration errors by the experimenter (E1, E2, E5, E6). The interface seems to comply with the double-blind principle, as four experts stated that they did not know which specific IV they were manipulating (E1, E3, E5, E6). While one expert described labeling of the buttons as "unambiguous" (E3), another expert stated that the labels could easily be confused with each other (E1). It was also noted that progress bars were not directly recognized as such (E6). Additional features suggested include personalization, e.g., a dark mode (E1), keyboard shortcuts (E1), and the automatic loading of subject IDs into the system, e.g., via a text file (E3).

When asked about the *IVR application*, five experts described the forest IVE as very realistic, due to its high level of fidelity, detail (E1, E2, E4, E5, E6) and large size (E1, E5). Two experts addressed navigability and wayfinding in the IVE, stating that, the IVE and the teleport locomotion were suitable for carrying out the search task (E4), but especially for older users this should be retested (E3). One expert confirmed that the task fulfilled its purpose of ensuring that users actively explore the IVE (E1), however he found the distance of the teleport impractically short. Three experts wished for the IVE's boundaries to be visualized more prominently (E2, E4, E5). Furthermore, an additional tutorial IVE was suggested to learn the teleport locomotion and picking up objects (E3). Regarding the task objects, marking already found objects was suggested to avoid confusion, as well as more realistic physics

when picking it up (E3). Some experts mentioned performance problems, i.e., frame drops (E5, E6) and aliasing effects (E4, E6). It was suggested to perform additional performance tests to lower the risk of cybersickness (E3). W

Questionnaires¹⁶

Results of the ISONORM 9241/110-S usability questionnaire ranged from moderate to high values ($Min = 4.2, Max = 5.95, M = 5.43, SD = 0.65$). In line with the interview results, the subscales of self-descriptiveness ($M = 4.61, SD = 0.92$), error tolerance ($M = 4.39, SD = 0.59$), and individualizability ($M = 4.50, SD = 0.29$) were noticeably lower than those of task appropriateness ($M = 5.95, SD = 0.63$), expectation conformity ($M = 5.28, SD = 1.59$), learnability ($M = 5.56, SD = 0.59$), controllability ($M = 5.39, SD = 0.69$). However, the variance between experts was higher for individualizability, than for self-descriptiveness and error tolerance (see Figure 8).

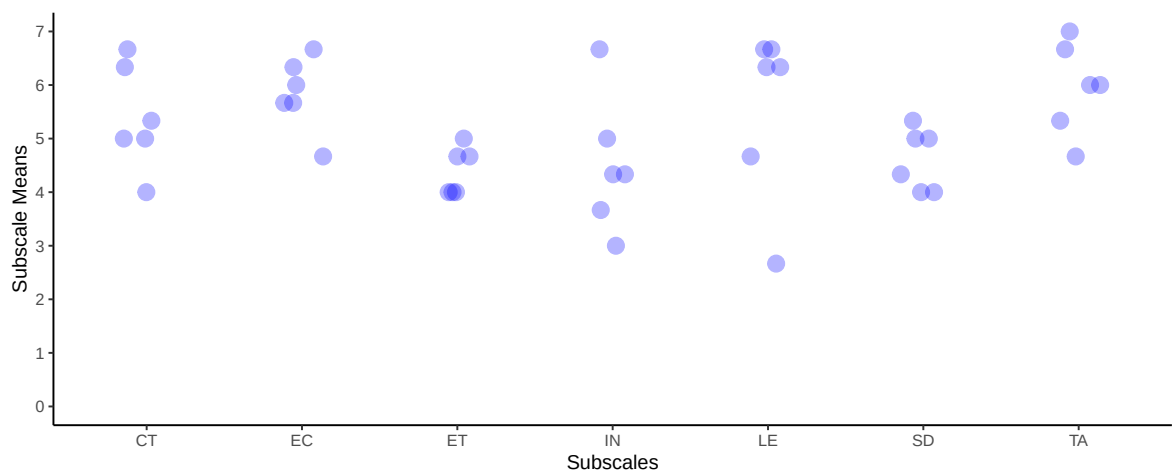


Figure 8. Strip plot of all subscales of the ISONORM 9241/110-S usability questionnaire from the formative expert evaluation. CT = controllability, EC = expectation conformity, ET = error tolerance, IN = individualizability, LE = learnability, SD = self-descriptiveness, TA = task appropriateness.

Presence ratings obtained were divergent, with SUS scores ranging from 2.5 to 6.67, ($M = 5.06, SD = 1.62$) and the SUS counts ranging from 0 to 6 ($M = 3.50, SD = 2.59$). The IPQ total score ranged from 3.64 to 5.43 ($M = 4.68, SD = 0.66$), the subscales of General Presence ($M = 5.83, SD = 1.33$), Spatial Presence ($M = 5.30, SD = 0.59$) were considerably lower than those of Involvement ($M = 4.21, SD = 0.73$) and Realness ($M = 4.22, SD = 1.24$). However, it is unclear which phase of the IVR-exposure the presence rating refer to (during configuration or IVR-task).

6.2. Conduction of Exploratory IVR Studies in the Context of a Research Project

As a first practical application of the proposed methodology (section 4), and the developed study tool (section 5), we conducted an exploratory study with 115 participants in the context of the AgeVR⁶ research project. The study tool was previously adapted based on the results of the formative expert evaluation: duplicate checking for subject IDs was implemented, button labels were unified, and possibilities to correct IV configuration errors (decrement button) and to annotate experiment data (notes text field) were added. Furthermore, to prevent frame drops and aliasing effects a high-performance VR-PC¹⁷ was used in combination with a high-resolution HMD¹⁸.

¹⁶ 7-point Likert scales were used for ISONORM 9241/110-S, SUS, and IPQ; the SUS count sums up ratings of 6 or higher, up to a maximum of 6.

¹⁷ GPU: GeForce RTX 4090, 24GB; CPU: AMD Ryzen 7 7700X, 8x 4.50 GHz; RAM:64 GB DDR5, 4800 MHz, CL40, 2x 32B Kit

¹⁸ <https://varjo.com/products/varjo-xr-3/>

6.2.1. Method

This evaluation serves as an instantiation of the proposed methodology, within the context of a concrete research project, which specifies concrete IV as well as human and environment factors (see Figure 2). The AgeVR research project aims to identify age-specific design guidelines for presence in IVR. The presence factors focused on in this project are those of visual display fidelity and associated age-related user characteristics. Technological factors serving as IV for the experiment were the exemplary ones implemented in section 5 (I, C, O, T). As a minimal reproducible example, only two IVs were analyzed at a time. Each of the two pairs (I, C and O, T) was configured in two different IVR scenarios (forest and warehouse, see section 5.1.2) according to the exploratory study process (section 4.1), leading two four IVR exposures for each participant. Age-related user characteristics were assessed prior to each study (visual short-term memory (block span), spatial imagination, visual system performance (visus, stereopsis, phorieder, color sense, visual field, contrast vision, glare sensitivity). The main Environment factors were the room characteristics stabilized by conducting all experiments in the same IVR laboratory, as well as a tracking/operating area of 4x4m. The developed presence short scale (see Appendix, Table A1) was administered after each IVR exposure. An age-diverse sample was recruited (N=115, 60 female, 55 male, age = 18–88, $mean_{age} = 45.71$, SD = 18.77).

6.2.2. Results

The following analysis is restricted to data that is essential for assessing the applicability of the methodology and the correct execution of the experiments. Data addressing the research questions will be presented in a subsequent publication.

Frequently Encountered Problems

All 115 participants successfully completed the exploratory study process, despite 84% of participants having little or no IVR experience (55% were novice users). This means that all participants understood how to configure the IV in the IVR scenario and how to find and collect the task objects in the IVE. 63 of the studies did not encounter any problems during the study procedure. The remaining 52 studies encountered problems that can be classified as technological errors, errors by the experimenter, and errors relating to the methodology (see Figure 9). In terms of technological errors, malfunctioning of IVR software, i.e., the Unreal Engine application (see section 5.1.1) occurred in 20 studies. This includes unforeseen crashes of the application, physics glitches in task objects, and the teleport locomotion not working properly. Malfunctions in the IVR hardware occurred in 34 studies, specifically non-functioning controllers and blackscreens within the HMD, due to loose or damaged cable connections (as the material was heavily stressed by over 400 IVR exposures in total). Errors by the experimenter can be attributed to a lack of attention (25), such as forgetting to turn on the controllers before the experiment, or to plug the headphones into the HMD, or incorrect operations in the experimenter interface (2), such as incrementing / decrementing an IV by mistake and accidentally loading the next IVR scenario. In terms of methodology, communication errors between experimenter and participant occurred in 13 studies, as task instructions or term definitions (i.e., presence) appear to have been ambiguous since they were not correctly understood. Furthermore, the methodological requirements could not be met in 19 studies, as the experimenter sometimes had to give additional information for solving the search task, had to physically intervene (restart controller, adjust HMD/cable), or the experimenter's voice lead to a break in presence for some participants.

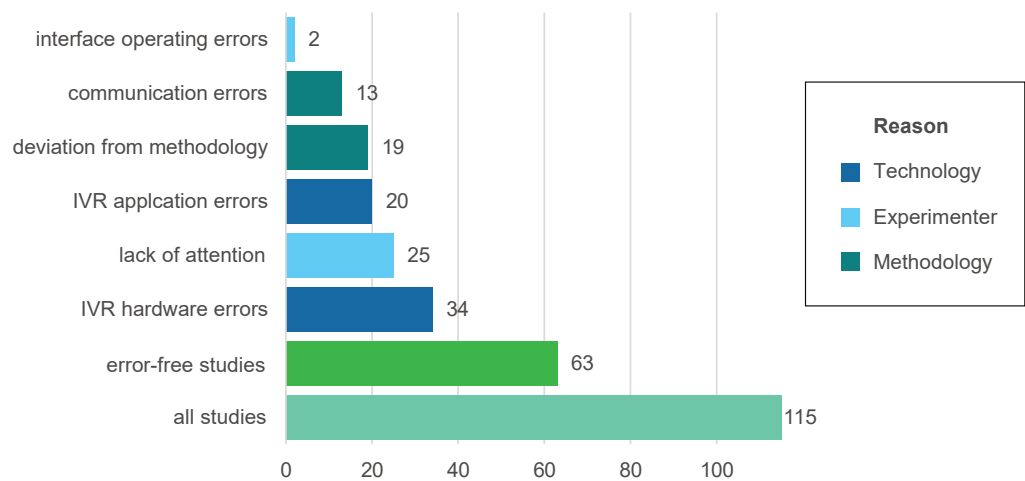


Figure 9. Types and quantity of problems encountered during the conduction of exploratory IVR studies using the proposed methodology and the developed study tool.

Configuration of IV for Optimal Presence

When analyzing the presence ratings, seven datasets had to be excluded, due to having more than one blackscreen, or data loss due to system crashes. In the IVR exposure, participants were tasked with finding their personal optimal setting for presence, by configuring the two IVs (IxC or OxD respectively). As a control measure, presence was assessed after performing the IVR search task with the set configuration. Figure 10 shows the distribution of post-hoc ratings for all presence subcomponents (data were summarized for both IVR scenarios, thus with N=108 participants, there are now 216 values for each subcomponent). There were only minor differences between the types of IV configured, IxC and OxD show roughly the same distribution ($\Delta_{mean} = 2\%$, $\Delta_{max} = 5\%$, for each level of the 5-point Likert scale). However, the subcomponents themselves differ substantially in how well participants were able to achieve their optimal configurations. In terms of the subcomponents of general presence and involvement, configuring the IV worked best with 94-96% of ratings being in the positive spectrum. 60-63% of participants reached the maximum value for involvement, while for general presence it were 47-49%. Regarding plausibility illusion, 75% were in the positive spectrum in both IV configurations (IxC and OxD), but only 27-29% at maximum value. Ratings for spatial/physical presence and self-presence ratings were less clear, both having 59% positive ratings after the OxD configuration and 62% after the IxC configuration and both having more negative (27-28% for spatial/physical presence, 25-29% for self-presence) than neutral ratings (11-14% for spatial/physical presence, 12-14% for self-presence). Regarding social presence, participants were least likely to achieve their optimal configuration as only 15-17% of ratings were positive. Here, most ratings were in the neutral spectrum (49-52%). All subscales violate the assumption of normal distribution.

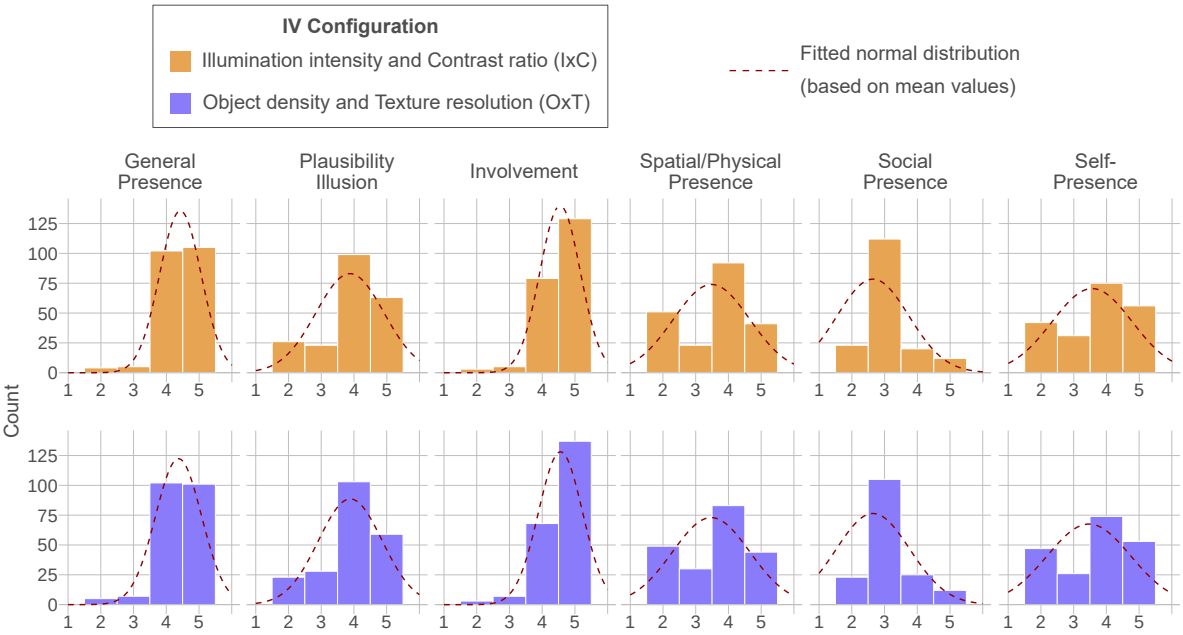


Figure 10. Histograms of the post-hoc presence ratings (all subcomponents) of the IVR task after the IV configuration (either illumination intensity and contrast ratio (top) or object density and texture resolution (bottom), measured by the presence short scale (see Appendix, Table A1).

7. Discussion

Research on presence factors is impeded by the substantial number of identified factors, contradictory results on their influence and lack of clarity regarding their interaction (section 1.1). Based on the analysis of current literature, we proposed a research methodology to address these problems using a two-step procedure, combining exploratory and confirmatory paradigms (section 4). As current IVR study tools do not focus on presence and its determinants (section 3), we developed our own tool consisting of two components: An an IVR app based on the Unreal Engine for designing an displaying various IVR scenarios and a browser-based experimenter interface, enabling precise control of presence factors and study procedure (section 5). A formative expert evaluation of both the methodology and the study tool was performed by role-playing experiments (section 6.1). A first practical application in exploratory studies of the AgeVR research project, enabled a first evaluation with study participants (section 6.2).

Qualitative expert feedback suggest that **the methodology** can reduce biases (double blind principle) and enhance generalizability of results (multi-scenario approach). Experts had some concerns regarding understandability, physical strain and cognitive load for certain user groups (unexperienced users, older adults). However, this has not been confirmed in the exploratory studies, as all participants were able to complete the study process, despite being an age-heterogeneous sample (18-88 years) and despite the majority being unexperienced or novice users. Methodological problems that *did* occur, were primarily communication errors between experimenter and participant as well as additional assistance that had to be given (additional information or physical intervention). Thus, task instructions and term definitions (i.e., presence) must be reformulated to make them unambiguous in further studies. Another issue of the proposed methodology was that the experimenter’s voice lead to a break in presence for some participants. This could be addressed by giving the experimenter a virtual representation (avatar) within the IVE or by implementing a (virtual) communication device that is coherent to the IVR scenario (e.g., phone or walkie-talkie).

Considering the **study tool**, five of the six experts felt adequately supported during the study procedure and could well imagine conducting a large-scale IVR study using the experimenter interface. Expert usability ratings for the study tool reached moderate to high values. Self-descriptiveness, error tolerance, and individualizability were rated noticeably lower than the other scales. Since the tool is supposed to strictly guide the experimental process and minimize derivation, individualizability is

not a desired property. Thus, only measures were taken to improve self-descriptiveness by unifying button labels and to increase error-tolerance by implementing duplicate checking for subject ID and possibilities to correct IV configuration errors as suggested by the experts. Consequently, in the subsequent exploratory studies with participants only two operating errors occurred in all 115 studies. Performance issues mentioned by the experts were addressed by upgrading the hardware used (VR-PC and HMD) and did not reoccur in the exploratory studies. However, software and hardware errors remained the most frequent issue within the exploratory studies. The former shows that additional debugging of our Unreal Engine-based IVR application is necessary to prevent unforeseen crashes, physics glitches, and other errors, while the Web-based experimenter interface worked without difficulty. The latter demonstrates how high frequency use can put a strain on IVR equipment and material. We learned from over 400 IVR exposures that e.g., cables simply reach their physical limits and must be replaced at some point.

To assess the **combined effectiveness of the methodology and the study tool**, the presence ratings obtained from the exploratory studies can be consulted. These show how well participants were able to achieve their optimal IV configuration for presence. While the ratings only differ marginally between the two pairs of IV (I,C and O,T), substantial differences could be identified between the different subcomponents of presence. Almost all participants were able to achieve a sense of *general presence* and *involvement* with their configurations, and two-thirds of participants had a *plausibility illusion* (section 6.2.2). Only slightly more than half of the participants achieved a sense of *self-presence*. This was likely due to the chosen default value for the avatar, being a hands-only representation which may not have met the participants' expectations for a realistic virtual body. Furthermore, the only IV that affected the avatar was the texture resolution variable, while others had a more indirect influence (illumination intensity, contrast ratio). *Spatial/physical presence* yielded ratings similar to social presence. Contrary to social presence, however, the IV configuration strongly influenced the visual appearance of virtual objects in the IVE. It is therefore not clear why about half of the participants did not manage to achieve spatial/physical presence with their IV configuration. One possible explanation might be that participants rated their spatial/physical presence for the whole IVR exposure (including the configuration task) and not only for the search task (as instructed). Thus, the great alternations in visual appearance might have led to conflicting perceptions regarding spatial/physical presence. Only one-sixth of participants achieved a sense of *social presence* with their IV configurations. The reason for that is probably the choice of IVR scenarios and their respective default values, as neither the forest nor the warehouse IVE included any form of social actor. Also, the IV configuration would not have influenced social actors. Thus, in terms of self-presence and social presence, results imply that (1) the IV investigated (I, C, O, T) seem to have no influence. As the study tool will be extended with additional presence factors, their influences might be identified in future studies. (2) Default values play an important role within the IVR scenarios, as the ones chosen for self-presence and social presence (hands-only avatar and no social actors, respectively) seem to have inhibited the experience. Especially, if IV with greater impact on self-presence and social presence are to be investigated in future studies, more sophisticated body representations and the addition of agent or user-controlled social actors might enable a more precise investigation of their influence.

8. Conclusion

In this paper, we have systematically analysed the state of research and derived measures for the systematization of presence studies (section 4). Our proposed methodology addresses the fundamental problem that the isolation of presence factors is not always possible. The practical workaround is achieved by (1) always focusing on the combined influence of several presence factors, and (2) following a two-step procedure where an exploratory investigation serves as a basis for subsequent hypothesis formation and confirmatory investigations. Our exemplary case was to enable age-differentiated investigations of different presence factors by customizing IVEs to meet varying age-specific needs⁶. The feasibility of our methodology and study tool has been confirmed by expert feedback, as well as data

from 115 successfully completed exploratory studies with participants of various ages. The exploratory study procedure works for general presence, involvement and plausibility illusion. Measures that will enable the seamless investigation of the remaining presence subcomponents have been proposed (see section 7). Our next step is to perform the cluster analysis prescribed by the methodology to develop and test hypotheses in the confirmatory studies. Beyond our own research agenda, the developed study tool was made publicly available as an open source project⁸ to enable other researchers to conduct custom experiments on presence factors in IVR. Currently the tool supports the manipulation of four IV (presence factors) in the category of visual display fidelity (I, C, O, T). As our system is designed with expandability in mind, additional presence factors, IVR scenarios, and IVR tasks can easily be added.

9. Limitations

The evaluation of the proposed methodology was limited to $p = 2$ independent variables. If the study procedures work for $p > 2$ is yet to be shown, since the complexity of configuration and the interdependence of the presence factors will increase substantially as additional IV are added. So far, our evaluation covers only the initial half of our methodology, up to the stage of concluding the exploratory study. This is because the AgeVR research project used for validation has not yet progressed beyond this step. From the experimental studies, only data relevant to the methodology's applicability and experiment execution were analyzed; data addressing the project's research questions will be published separately. Thus, our next step is to perform the cluster analysis, derive hypotheses, and to conduct confirmatory studies, serving (1) the further evaluation of our methodology and (2) the explicit goals of the research project (age-specific design guidelines for presence).

The proposed methodology itself is limited in its applicability, as it currently accounts only for technological presence factors, while human and environmental factors remain in a controlled but undynamic state. To enable a holistic investigation of factors contributing to the sense of presence, ways must be found to incorporate these presence factors as IV into IVR experiments. Furthermore, in our studies we chose discrete steps for the manipulation of presence factors, while for certain factors a continuous approach might be more adequate (as suggested in the expert evaluation). This could on the one hand enhance the precision with which optimal levels of presence can be detected; on the other hand, this approach could confound optimal values due to subject's reaction times.

Regarding the implemented study tool, the IVR task is currently limited to simple teleport locomotion and object grasping. It remains unclear how well the results of the studies can be transferred to more intricate IVR interactions, such as hand gestures, passive or active haptic feedback, or even redirected walking techniques. Furthermore, the IVEs implemented so far focus on replications of real-life contexts (forest, warehouse, courtyard, shop). While this may serve as a good starting point for investigating presence factors, it does not exhaust its possibilities. We plan to add various other virtual scenarios (e.g., fantasy settings, abstract scenarios) in the future, to fully leverage the design space for virtual environments.

Author Contributions: Conceptualization, M.D., R.W. and N.J.; methodology, M.D. and N.J.; software, R.W., M.D., P.S. and L.F.; investigation, M.D., R.W., P.S. and L.F.; formal analysis, M.D., R.W., P.S. and L.F.; visualization, M.D., R.W. and P.S.; writing—original draft preparation, M.D.; writing—review and editing, N.J., R.W., P.S. and L.F.; administration, N.J.; funding acquisition, N.J. and M.D. All authors have read and agreed to the published version of the manuscript.

Funding: This research and the APC were funded by the German Research Foundation (DFG).

Institutional Review Board Statement: The study was conducted in accordance with the Declaration of Helsinki, and approved by the Ethics Committee of the University of Lübeck.

Informed Consent Statement: Informed consent was obtained from all subjects involved in the study.

Data Availability Statement: The data will be made fully available, after the analysis of the exploratory studies is completed. So far, only those data were analyzed that are decisive for the applicability of the proposed

methodology and the correct execution experiments. Data relating to the research questions of the AgeVR project will be analyzed and provided in a subsequent publication.

Acknowledgments: We would like to thank the German Research Foundation (DFG) for funding the AgeVR research project.

Conflicts of Interest: The authors declare no conflicts of interest. The funders had no role in the design of the study; in the collection, analyses, or interpretation of data; in the writing of the manuscript; or in the decision to publish the results.

Abbreviations

The following abbreviations are used in this manuscript:

AD	Adaptation dimension(s)
CAVE	Cave Automatic Virtual Environment
HCI	Human-Computer Interaction
HMD	Head Mounted Display
IPQ	IGroup Presence Questionnaire
IV	Independent Variable(s)
IVE	Immersive Virtual Environment(s)
IVR	Immersive Virtual Reality
MPS	Multimodal Presence Scale
PQ	Witmer-Singer Presence Questionnaire
SUS	Slater-Usch-Steed Presence Questionnaire

Appendix A

Screenshots of the developed experimenter interface

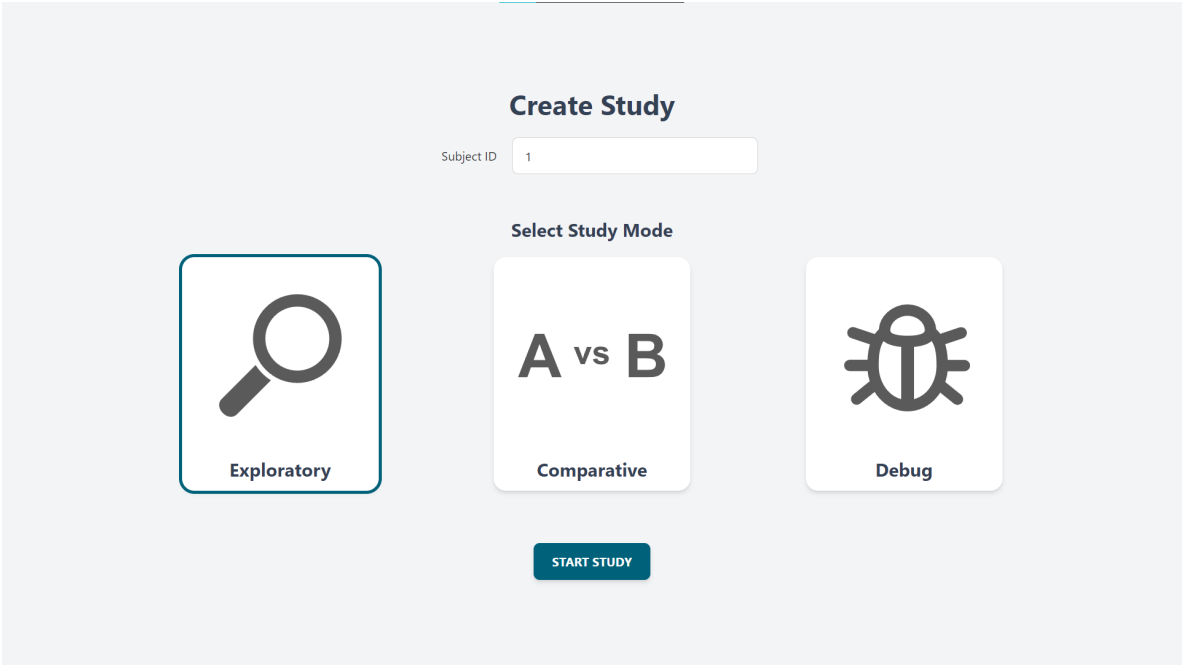


Figure A1. View of the experimenter interface when *initiating a study*. The experimenter can choose between exploratory study mode (left), comparative Study Mode (middle), and debug mode (right). The subject ID is entered in the text field above (top).

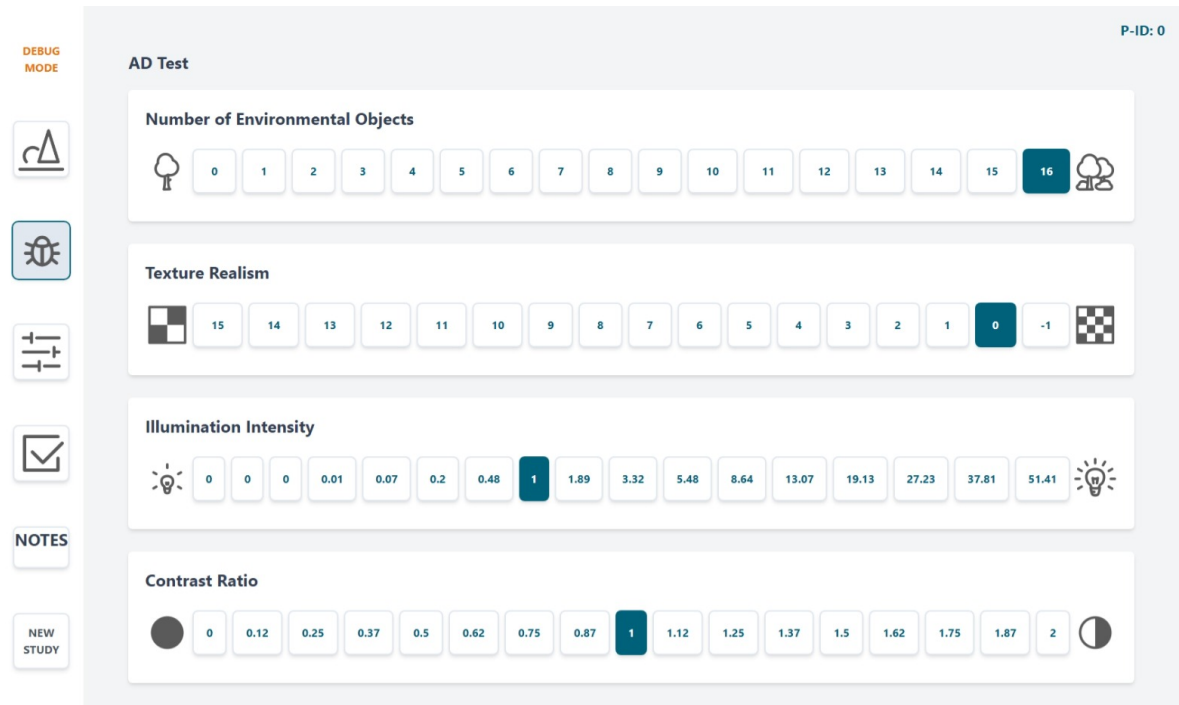


Figure A2. View of the experimenter interface when in *debug mode*. The degree of each IV (AD) is transparently displayed and can be freely configured.

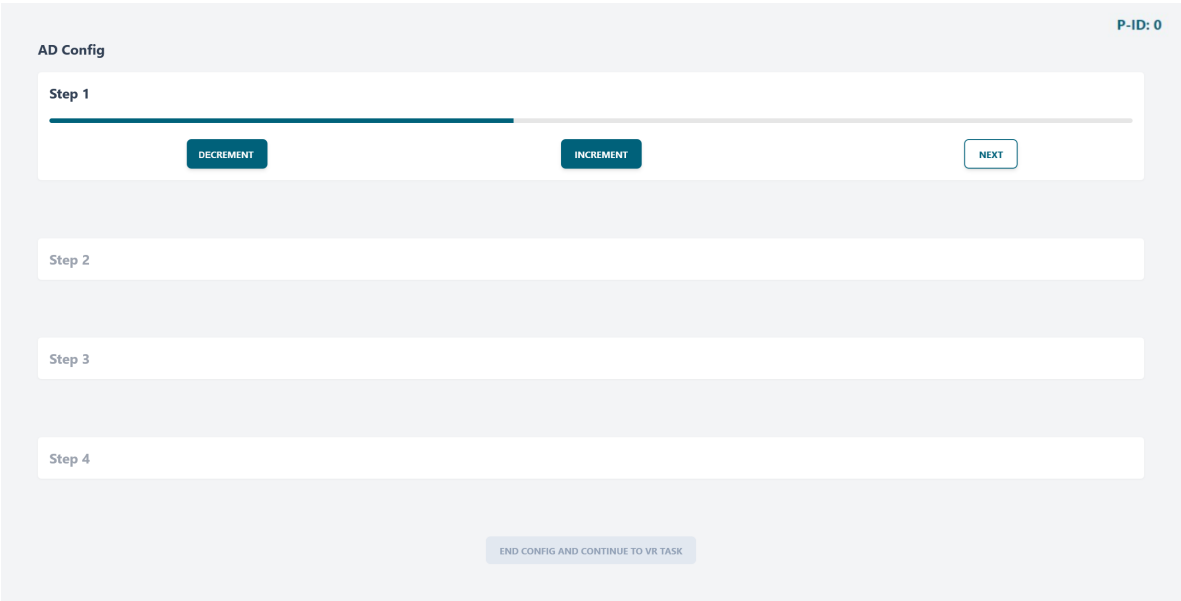


Figure A3. Configuration view of the experimenter interface when in the *explorative study mode*. Following the double-blind principle the experimenter can not see which IV (AD) is currently being configured. The current AD can be incremented or decremented, or it can be switched to the next IV.

Appendix B

Presence short scale

Table A1. The *presence short scale* developed for the proposed methodology, based on established presence questionnaires (PQ, IPQ, SUS, MPS). It was designed to measure all categories of presence subcomponents, general presence, plausibility, involvement, physical/spatial presence, social presence, and self-presence with a respective item. Each item is to be rated on a 5-point Likert-scale.

Item Name	Item Text
	In the computer-generated virtual environment ...
general presence (GP)	... I had a sense of "being there"
plausibility illusion (PSI)	... I had the feeling, that what was apparently happening was really happening.
involvement (INV)	... my attention was completely captivated.
physical/spatial presence (PP)	... the objects and rooms felt like real (material) things.
social presence (SoP)	... the people and animals seemed to me like living beings (with consciousness and feelings).
self-presence (SeP)	... I felt as if my virtual body was my real body.

References

1. Abeele, V.V.; Schraepen, B.; Huygelier, H.; Gillebert, C.; Gerling, K.; Van Ee, R. Immersive Virtual Reality for Older Adults: Empirically Grounded Design Guidelines. *ACM Transactions on Accessible Computing (TACCESS)* **2021**, *14*, 1–30.

2. McGlynn, S.A.; Rogers, W.A. Design recommendations to enhance virtual reality presence for older adults. In Proceedings of the Proceedings of the Human Factors and Ergonomics Society Annual Meeting. SAGE Publications Sage CA: Los Angeles, CA, 2017, Vol. 61, pp. 2077–2081.

3. Cummings, J.J.; Bailenson, J.N. How Immersive Is Enough? A Meta-Analysis of the Effect of Immersive Technology on User Presence. *Media Psychology* **2016**, *19*, 272–309. <https://doi.org/10.1080/15213269.2015.1015740>.

4. Coelho, C.; Tichon, J.; Hine, T.J.; Wallis, G.; Riva, G. Media presence and inner presence: the sense of presence in virtual reality technologies. *From communication to presence: Cognition, emotions and culture towards the ultimate communicative experience* **2006**, *11*, 25–45.

5. Skarbez, R.; Brooks, Jr, F.P.; Whitton, M.C. A survey of presence and related concepts. *ACM computing surveys (CSUR)* **2017**, *50*, 1–39.

6. Slater, M.; Wilbur, S. A framework for immersive virtual environments (FIVE): Speculations on the role of presence in virtual environments. *Presence: Teleoperators & Virtual Environments* **1997**, *6*, 603–616.

7. Heeter, C. Being there: The subjective experience of presence. *Presence Teleoperators Virtual Environ.* **1992**, *1*, 262–271.

8. Schubert, T.; Friedmann, F.; Regenbrecht, H. The Experience of Presence: Factor Analytic Insights. *10*, 266–281. <https://doi.org/10.1162/105474601300343603>.

9. Lee, K.M. Presence, explicated. *Communication theory* **2004**, *14*, 27–50.

10. Witmer, B.G.; Jerome, C.J.; Singer, M.J. The factor structure of the presence questionnaire. *Presence: Teleoperators & Virtual Environments* **2005**, *14*, 298–312.

11. Slater, M. Place illusion and plausibility can lead to realistic behaviour in immersive virtual environments. *Philosophical Transactions of the Royal Society B: Biological Sciences* **2009**, *364*, 3549–3557.

12. Usoh, M.; Catena, E.; Arman, S.; Slater, M. Using presence questionnaires in reality. *Presence* **2000**, *9*, 497–503.

13. Makransky, G.; Lilleholt, L.; Aaby, A. Development and validation of the Multimodal Presence Scale for virtual reality environments: A confirmatory factor analysis and item response theory approach. *Computers in Human Behavior* **2017**, *72*, 276–285. <https://doi.org/10.1016/j.chb.2017.02.066>.

14. Souza, V.; Maciel, A.; Nedel, L.; Kopper, R. Measuring Presence in Virtual Environments: A Survey. *ACM Computing Surveys* **2022**, *54*. <https://doi.org/10.1145/3466817>.

15. Schuemie, M.J.; Van der Straaten, P.; Krijn, M.; Van der Mast, C.A. Research on presence in virtual reality: A survey. *Cyberpsychology and Behavior* **2001**, *4*, 183–201. <https://doi.org/10.1089/109493101300117884>.

16. Insko, B.E. Measuring Presence: Subjective, Behavioral and Physiological Methods. *Emerging Communication* **2003**, *5*, 109–120. <https://doi.org/citeulike-article-id:1188098>.

17. Slater, M. How colorful was your day? Why questionnaires cannot assess presence in virtual environments. *Presence* **2004**, *13*, 484–493.
18. Felton, W.M.; Jackson, R.E. Presence: A Review. *International Journal of Human-Computer Interaction* **2021**, *00*, 1–18. <https://doi.org/10.1080/10447318.2021.1921368>.
19. North, M.M.; North, S. A Comparative Study of Sense of Presence of Traditional Virtual Reality and Immersive Environments **2016**. *20*, 1–16.
20. Christofi, M.; Baka, E.; Stavroulia, K.; Michael-Grigoriou, D.; Lanitis, A.; Thalmann, N.M. Studying Levels of Presence in a Virtual Environment Simulating Drug Use in Schools: Effect on Different Character Perspectives. *ICAT-EGVE 2018 - 28th International Conference on Artificial Reality and Telexistence and 23rd Eurographics Symposium on Virtual Environments* **2018**, pp. 163–170. <https://doi.org/10.2312/egve.20181329>.
21. Eckstein, B.; Krapp, E.; Elsässer, A.; Lugin, B. Smart substitutional reality: Integrating the smart home into virtual reality. *Entertainment Computing* **2019**, *31*. <https://doi.org/10.1016/j.entcom.2019.100306>.
22. Bozgeyikli, E.; Raij, A.; Katkooi, S.; Dubey, R. Point & teleport locomotion technique for virtual reality. In *Proceedings of the Proceedings of the 2016 annual symposium on computer-human interaction in play*, 2016, pp. 205–216.
23. Chessa, M.; Maiello, G.; Borsari, A.; Bex, P.J. The Perceptual Quality of the Oculus Rift for Immersive Virtual Reality. *Human-Computer Interaction* **2019**, *34*, 51–82. <https://doi.org/10.1080/07370024.2016.1243478>.
24. Carter, L.; Potter, L.E. Designing games for presence in consumer virtual reality. *SIGMIS-CPR 2016 - Proceedings of the 2016 ACM SIGMIS Conference on Computers and People Research* **2016**, pp. 141–148. <https://doi.org/10.1145/2890602.2890626>.
25. Rhiu, I.; Kim, Y.M.; Kim, W.; Yun, M.H. The evaluation of user experience of a human walking and a driving simulation in the virtual reality. *International journal of industrial ergonomics* **2020**, *79*, 103002.
26. Puri, A.; Baker, S.; Hoang, T.N.; Zuffi, R.C. To be (Me) or not to be? photorealistic avatars and older adults. *ACM International Conference Proceeding Series* **2017**, pp. 503–507. <https://doi.org/10.1145/3152771.3156166>.
27. Slater, M.; Spanlang, B.; Corominas, D. Simulating virtual environments within virtual environments as the basis for a psychophysics of presence. *ACM transactions on graphics (TOG)* **2010**, *29*, 1–9.
28. Dresel, M.; Plaumann, J.; Jochems, N. Investigating Age Differences in Passive Haptic Feedback for Immersive Virtual Reality: A Pilot Study on Configuration Tasks. In *Proceedings of the International Conference on Extended Reality*. Springer, 2023, pp. 210–222.
29. Volkmann, T.; Wessel, D.; Franke, T.; Jochems, N. Testing the Social Presence Aspect of the Multimodal Presence Scale in a Virtual Reality Game. *Proceedings of Mensch und Computer 2019* **2019**, pp. 433–437. <https://doi.org/10.1145/3340764.3344435>.
30. Schwind, V.; Knierim, P.; Haas, N.; Henze, N. Using presence questionnaires in virtual reality. In *Proceedings of the Proceedings of the 2019 CHI conference on human factors in computing systems*, 2019, pp. 1–12.
31. Putze, S.; Alexandrovsky, D.; Putze, F.; Höffner, S.; Smeddinck, J.D.; Malaka, R. Breaking The Experience: Effects of Questionnaires in VR User Studies. *Proceedings of the 2020 CHI Conference on Human Factors in Computing Systems* **2020**. <https://doi.org/10.1145/3313831.3376144>.
32. Baños, R.M.; Botella, C.; Rubió, I.; Quero, S.; García-Palacios, A.; Alcañiz, M. Presence and emotions in virtual environments: The influence of stereoscopy. *CyberPsychology & Behavior* **2008**, *11*, 1–8.
33. Grassini, S.; Laumann, K.; Luzi, A.K. Association of individual factors with simulator sickness and sense of presence in virtual reality mediated by head-mounted displays (Hmds). *Multimodal Technologies and Interaction* **2021**, *5*. <https://doi.org/10.3390/mti5030007>.
34. Tanja-Dijkstra, K.; Pahl, S.; White, M.P.; Auvray, M.; Stone, R.J.; Andrade, J.; May, J.; Mills, I.; Moles, D.R. The soothing sea: a virtual coastal walk can reduce experienced and recollected pain. *Environment and behavior* **2018**, *50*, 599–625.
35. Chirico, A.; Ferrise, F.; Cordella, L.; Gaggioli, A. Designing awe in virtual reality: An experimental study. *Frontiers in Psychology* **2018**, *8*, 1–14. <https://doi.org/10.3389/fpsyg.2017.02351>.
36. Brennan, P.F.; Nicolalde, F.D.; Ponto, K.; Kinneberg, M.; Freese, V.; Paz, D. Cultivating imagination development and pilot test of a therapeutic use of an immersive virtual reality CAVE. *American Medical Informatics Association (AMIA) Annual Symposium Proceedings* **2013**, *2013*, 135–144.
37. Corriveau Lecavalier, N.; Ouellet, É.; Boller, B.; Belleville, S. Use of immersive virtual reality to assess episodic memory: A validation study in older adults. *Neuropsychological rehabilitation* **2020**, *30*, 462–480.
38. Schuemie, M.J.; Abel, B.; Van Der Mast, C.A.; Krijn, M.; Emmelkamp, P.M. The effect of locomotion technique on presence, fear and usability in a virtual environment. *EUROMEDIA 2005 - 11th Annual Scientific Conference*

- on Web Technology, New Media Communications and Telematics Theory Methods, Tools and Applications **2005**, pp. 129–135.
39. Bangay, S.; Preston, L. An investigation into factors influencing immersion in interactive virtual reality environments. *Studies in Health Technology and Informatics* **1998**, *58*, 43–51. <https://doi.org/10.3233/978-1-60750-902-8-43>.
 40. Berndt, H.; Wessel, D.; Willer, L.; Herczeg, M.; Mentler, T. Immersion and presence in virtual reality training for mass casualty incidents. *Proceedings of the International ISCRAM Conference* **2018**, 2018-May, 797–805.
 41. Born, F.; Masuch, M.; Hahn, A. Ghost sweeper: Using a heavy passive haptic controller to enhance a room-scale vr exergame. In *Proceedings of the 2020 IEEE conference on games (CoG)*. IEEE, 2020, pp. 221–228.
 42. BOTELLA, C.; REY, A.; C. PERPIÑÁ.; BAÑOS, R.; ALCANIZ, M.; A. GARCIA-PALACIOS.; ALOZANO, J.; VILLA, H. Differences on Presence and Reality Judgement Using a High Impact Workstation and a PC Workstation **1999**. 2, 1. Ph D, Rey A, Perpiñá C, Ph D, Baños R, Ph D, et.
 43. Cmentowski, S.; Krekhov, A.; Krüger, J. Outstanding: A multi-perspective travel approach for virtual reality games. In *Proceedings of the Proceedings of the annual symposium on computer-human interaction in play*, 2019, pp. 287–299.
 44. Kritikos, J.; Zoitaki, C.; Tzannetos, G.; Mehmeti, A. Comparison between Full Body Motion Recognition Camera Interaction and Hand Controllers Interaction used in Virtual Reality Exposure Therapy for Acrophobia **2020**.
 45. Grabowski, A.; Jankowski, J. Virtual reality-based pilot training for underground coal miners. *Safety science* **2015**, *72*, 310–314.
 46. Wölfel, M.; Hepperle, D.; Purps, C.F.; Deuchler, J.; Hettmann, W. Entering a new dimension in virtual reality research: an overview of existing toolkits, their features and challenges. In *Proceedings of the 2021 International Conference on Cyberworlds (CW)*. IEEE, 2021, pp. 180–187.
 47. McMahan, R.P.; Bowman, D.A.; Zielinski, D.J.; Brady, R.B. Evaluating display fidelity and interaction fidelity in a virtual reality game. *IEEE Transactions on Visualization and Computer Graphics* **2012**, *18*, 626–633. <https://doi.org/10.1109/TVCG.2012.43>.
 48. Mania, K.; Chalmers, A. The effects of levels of immersion on memory and presence in virtual environments: A reality centered approach. *Cyberpsychology & behavior* **2001**, *4*, 247–264.
 49. Makransky, G.; Wismer, P.; Mayer, R.E. A gender matching effect in learning with pedagogical agents in an immersive virtual reality science simulation. *Journal of Computer Assisted Learning* **2019**, *35*, 349–358.
 50. Slater, M.; Usoh, M.; Steed, A. Depth of presence in virtual environments. *Presence: Teleoperators & Virtual Environments* **1994**, *3*, 130–144.
 51. Zielasko, D.; Weyers, B.; Kuhlen, T.W. Travel your desk? An office desk substitution and its effects on cybersickness, presence and performance in an hmd-based exploratory analysis task. *26th IEEE Conference on Virtual Reality and 3D User Interfaces, VR 2019 - Proceedings* **2019**, pp. 1285–1286. <https://doi.org/10.1109/VR.2019.8798068>.
 52. Steinicke, F.; Bruder, G.; Hinrichs, K.; Lappe, M.; Ries, B.; Interrante, V. Transitional environments enhance distance perception in immersive virtual reality systems. In *Proceedings of the Proceedings of the 6th Symposium on Applied Perception in Graphics and Visualization*, 2009, pp. 19–26.
 53. Fribourg, R.; Argelaguet, F.; Hoyet, L.; Lecuyer, A. Studying the Sense of Embodiment in VR Shared Experiences. *Proceedings - 25th IEEE Conference on Virtual Reality and 3D User Interfaces, VR 2018* **2018**, pp. 273–280. <https://doi.org/10.1109/VR.2018.8448293>.
 54. Llorach, G.; Evans, A.; Blat, J. Simulator sickness and presence using HMDs: Comparing use of a game controller and a position estimation system. *Proceedings of the ACM Symposium on Virtual Reality Software and Technology, VRST* **2014**, pp. 137–140. <https://doi.org/10.1145/2671015.2671120>.
 55. McMahan, R.P. Exploring the effects of higher-fidelity display and interaction for virtual reality games. PhD thesis, Virginia Tech, 2011.
 56. Bowman, D.A.; McMahan, R.P. Virtual reality: How much immersion is enough? *Computer* **2007**, *40*, 36–43. <https://doi.org/10.1109/MC.2007.257>.
 57. Nikolic, D. Evaluating Relative Impact of Virtual Reality Components Detail and Realism on Spatial Comprehension and Presence. Technical Report 52, 2007.
 58. Slater, M.; Khanna, P.; Mortensen, J.; Yu, I. Visual realism enhances realistic response in an immersive virtual environment. *IEEE computer graphics and applications* **2009**, *29*, 76–84.

59. Khanna, P.; Yu, I.; Mortensen, J.; Slater, M. Presence in response to dynamic visual realism: a preliminary report of an experiment study. In Proceedings of the Proceedings of the ACM symposium on Virtual reality software and technology, 2006, pp. 364–367.
60. Yu, I.; Mortensen, J.; Khanna, P.; Spanlang, B.; Slater, M. Visual realism enhances realistic response in an immersive virtual environment-part 2. *IEEE Computer Graphics and Applications* **2012**, 32, 36–45.
61. Welch, R.B.; Blackmon, T.T.; Liu, A.; Mellers, B.A.; Stark, L.W. The effects of pictorial realism, delay of visual feedback, and observer interactivity on the subjective sense of presence. *Presence: Teleoperators & Virtual Environments* **1996**, 5, 263–273.
62. Hvass, J.S.; Larsen, O.; Vendelbo, K.B.; Nilsson, N.C.; Nordahl, R.; Serafin, S. The effect of geometric realism on presence in a virtual reality game. *Proceedings - 2017 IEEE Virtual Reality (VR)* **2017**, pp. 339–340. <https://doi.org/10.1109/VR.2017.7892315>.
63. Gromer, D.; Reinke, M.; Christner, I.; Pauli, P. Causal interactive links between presence and fear in virtual reality height exposure. *Frontiers in Psychology* **2019**, 10, 141. <https://doi.org/10.3389/fpsyg.2019.00141>.
64. Zimmons, P.; Panter, A. The influence of rendering quality on presence and task performance in a virtual environment. *Proceedings - IEEE Virtual Reality* **2003**, pp. 293–294. <https://doi.org/10.1109/VR.2003.1191170>.
65. Phillips, L.; Interrante, V.; Kaeding, M.; Ries, B.; Anderson, L. A further assessment of factors correlating with presence in immersive virtual environments. *Joint Virtual Reality Conf. of EGVE 2010 - The 16th Eurographics Symposium on Virtual Environments, EuroVR 2010 - The 7th EuroVR (INTUITION) Conf., VEC 2010 - The Annual Virtual Efficiency Congress* **2010**, pp. 55–63. <https://doi.org/10.2312/EGVE/JVRC10/055-063>.
66. Higuera-Trujillo, J.L.; López-Tarruella Maldonado, J.; Llinares Millán, C. Psychological and physiological human responses to simulated and real environments: A comparison between Photographs, 360° Panoramas, and Virtual Reality. *Applied Ergonomics* **2017**, 65, 398–409. <https://doi.org/10.1016/j.apergo.2017.05.006>.
67. Rand, D.; Kizony, R.; Feintuch, U.; Katz, N.; Josman, N.; Rizzo, A.; Weiss, P.L. Comparison of two VR platforms for rehabilitation: Video capture versus HMD. *Presence: Teleoperators and Virtual Environments* **2005**, 14, 147–160. <https://doi.org/10.1162/1054746053967012>.
68. Felnhöfer, A.; Kothgassner, O.D.; Hauk, N.; Beutl, L.; Hlavacs, H.; Kryspin-Exner, I. Physical and social presence in collaborative virtual environments: Exploring age and gender differences with respect to empathy. *Computers in Human Behavior* **2014**, 31, 272–279. <https://doi.org/10.1016/j.chb.2013.10.045>.
69. McGlynn, S.A. Investigating age-related differences in spatial presence formation and maintenance in virtual reality. PhD thesis, Georgia Institute of Technology, 2019.
70. Janež, O.; Bruder, G.; Steinicke, F.; Gulberti, A.; Poetter-Nerger, M. Analyses of Gait Parameters of Younger and Older Adults during (Non-)Isometric Virtual Walking. *IEEE Transactions on Visualization and Computer Graphics* **2018**, 24, 2663–2674. <https://doi.org/10.1109/TVCG.2017.2771520>.
71. Laarni, J.; Ravaja, N.; Saari, T.; Hartmann, T. Personality-related differences in subjective presence. *Proceedings of the seventh annual international workshop presence 2004* **2004**, pp. 88–95.
72. Jurnet, I.A.; Beciu, C.C.; Maldonado, J.G. Individual differences in the sense of presence. *Proceedings of presence* **2005**, pp. 133–142.
73. Jurnet, I.A.; Gutiérrez-Maldonado, J. Influence of personality and individual abilities on the sense of presence experienced in anxiety triggering virtual environments. *International Journal of Human Computer Studies* **2010**, 68, 788–801. <https://doi.org/10.1016/j.ijhcs.2010.07.001>.
74. Dewez, D.; Fribourg, R.; Sanz, F.A.; Hoyet, L.; Mestre, D.; Slater, M.; Lécuyer, A.; Dewez, D.; Fribourg, R.; Sanz, F.A.; et al. Influence of Personality Traits and Body Awareness on the Sense of Embodiment in Virtual Reality To cite this version : HAL Id : hal-02385783 Influence of Personality Traits and Body Awareness on the Sense of Embodiment in Virtual Reality **2019**.
75. Brade, J.; Lorenz, M.; Busch, M.; Hammer, N.; Tscheligi, M.; Klimant, P. Being there again – Presence in real and virtual environments and its relation to usability and user experience using a mobile navigation task. *International Journal of Human Computer Studies* **2017**, 101, 76–87. <https://doi.org/10.1016/j.ijhcs.2017.01.004>.
76. Coxon, M.; Kelly, N.; Page, S. Individual differences in virtual reality: Are spatial presence and spatial ability linked? *Virtual Reality* **2016**, 20, 203–212. <https://doi.org/10.1007/s10055-016-0292-x>.
77. Phillips, L.; Interrante, V.; Kaeding, M.; Ries, B.; Anderson, L. Correlations between physiological response, gait, personality, and presence in immersive virtual environments. *Presence: Teleoperators and Virtual Environments* **2012**, 21, 119–141. [https://doi.org/10.1162/PRES\[.a_\]00100](https://doi.org/10.1162/PRES[.a_]00100).
78. Usoh, M.; Arthur, K.; Whitton, M.C.; Bastos, R.; Steed, A.; Slater, M.; Brooks, F.P. Walking > walking-in-place > flying, in virtual environments. *Proceedings of the 26th Annual Conference on Computer Graphics and Interactive Techniques, SIGGRAPH 1999* **1999**, pp. 359–364. <https://doi.org/10.1145/311535.311589>.

79. Shi, Y.; Du, J.; Ragan, E.; Choi, K.; Ma, S. Social Influence on Construction Safety Behaviors: A Multi-user Virtual Reality Experiment **2018**.
80. Li, S.; Gu, X.; Yi, K.; Yang, Y.; Wang, G.; Manocha, D. Self-Illusion: A Study on High-Level Cognition of Role-Playing in Immersive Virtual Environments from Non-Human Perspective. *IEEE Transactions on Visualization and Computer Graphics* **2020**, XX, 1–15. <https://doi.org/10.1109/TVCG.2020.3044563>.
81. Gall, D.; Latoschik, M.E. The Effect of Haptic Prediction Accuracy on Presence. *25th IEEE Conference on Virtual Reality and 3D User Interfaces, VR 2018 - Proceedings* **2018**, pp. 73–80. <https://doi.org/10.1109/VR.2018.8446153>.
82. Gamelin, G.; Chellali, A.; Cheikh, S.; Ricca, A.; Dumas, C.; Otmane, S. Point-cloud avatars to improve spatial communication in immersive collaborative virtual environments. *Personal and Ubiquitous Computing* **2021**, 25, 467–484. <https://doi.org/10.1007/s00779-020-01431-1>.
83. Volkmann, T.; Wessel, D.; Caliebe, T.O.; Jochems, N. What you see isn't necessarily what you get: testing the influence of polygon count on physical and self-presence in virtual environments. In *Proceedings of Mensch und Computer 2020*; 2020; pp. 119–128.
84. Thai, K.T.P.; Jung, S.; Lindeman, R.W. On the use of "Active Breaks" to perform Eye Exercises for more Comfortable VR Experiences. *Proceedings - 2020 IEEE Conference on Virtual Reality and 3D User Interfaces, VRW 2020* **2020**, pp. 455–459. <https://doi.org/10.1109/VRW50115.2020.00096>.
85. Born, F.; Masuch, M. Increasing presence in a mixed reality application by integrating a real time tracked full body representation. *Lecture Notes in Computer Science (including subseries Lecture Notes in Artificial Intelligence and Lecture Notes in Bioinformatics)* **2018**, 10714 LNCS, 46–60. https://doi.org/10.1007/978-3-319-76270-8_4.
86. Freiwald, J.P.; Ariza, O.; Janeh, O.; Steinicke, F. Walking by Cycling: A Novel In-Place Locomotion User Interface for Seated Virtual Reality Experiences. *Conference on Human Factors in Computing Systems - Proceedings* **2020**, pp. 1–12. <https://doi.org/10.1145/3313831.3376574>.
87. Dresel, M.; Jochems, N. A Distributed Virtual Reality Study under COVID-19 Conditions Comparing Continuous and Non-Continuous Locomotion Techniques in Mobile VR. *Mensch und Computer 2021* **2021**, pp. 406–411. <https://doi.org/10.1145/3473856.3473996>.
88. Jung, S.; Wisniewski, P.J.; Sandor, C.; Hughes, C.E. RealME: The influence of body and hand representations on body ownership and presence. In *Proceedings of the SUI 2017 - Proceedings of the 2017 Symposium on Spatial User Interaction*. Association for Computing Machinery, Inc, 10 2017, pp. 3–11. <https://doi.org/10.1145/3131277.3132186>.
89. Parger, M.; Schmalstieg, D.; Mueller, J.H.; Steinberger, M. Human upper-body inverse kinematics for increased embodiment in consumer-grade virtual reality. *Proceedings of the ACM Symposium on Virtual Reality Software and Technology, VRST* **2018**. <https://doi.org/10.1145/3281505.3281529>.
90. Athif, M.; Rathnayake, B.L.; Nagahapitiya, S.M.; Samarasinghe, S.A.; Samarasinghe, P.S.; Peiris, R.L.; De Silva, A.C. Using Biosignals for Objective Measurement of Presence in Virtual Reality Environments. *Proceedings of the Annual International Conference of the IEEE Engineering in Medicine and Biology Society, EMBS* **2020**, 2020-July, 3035–3039. <https://doi.org/10.1109/EMBC44109.2020.9176022>.
91. Brade, J.; Kögel, A.; Fuchs, C.; Klimant, P. Impact of First Person Avatar Representation in Assembly Simulations on Perceived Presence and Acceptance. In *Proceedings of the VISIGRAPP (1: GRAPP)*, 2020, pp. 17–24.
92. Buttussi, F.; Chittaro, L. Effects of Different Types of Virtual Reality Display on Presence and Learning in a Safety Training Scenario. *IEEE Transactions on Visualization and Computer Graphics* **2018**, 24, 1063–1076. <https://doi.org/10.1109/TVCG.2017.2653117>.
93. Huang, W. Exploring players' user experience in a high-embodied virtual reality game. *2019 IEEE Games, Entertainment, Media Conference, GEM 2019* **2019**, 2019-Janua. <https://doi.org/10.1109/GEM.2019.8902148>.
94. Gamito, P.; Morais, D.; Oliveira, J.; Gamito, L.; Anastácio, M. Presence: Head Mounted Display vs. Translucid Screen, 2006.
95. Felnhöfer, A.; Heinzle, A.k.; David, O. Game experience and behavior in young women : A comparison of interface technologies. *Proceedings of the Usability Day XI* **2013**, pp. 1–6.
96. Robillard, G.; Bouchard, S.; Fournier, T.; Renaud, P. Anxiety and presence during VR immersion: A comparative study of the reactions of phobic and non-phobic participants in therapeutic virtual environments derived from computer games. *CyberPsychology & Behavior* **2003**, 6, 467–476.
97. Weech, S.; Kenny, S.; Lenizky, M.; Barnett-Cowan, M. Narrative and gaming experience interact to affect presence and cybersickness in virtual reality. *International Journal of Human Computer Studies* **2020**, 138, 1–41. <https://doi.org/10.1016/j.ijhcs.2020.102398>.

98. Khurana, A. *Theory and Practice of Optics & Refraction-E Book*; Elsevier Health Sciences, 2023.
99. David, S.; Khandhar, P.B. Double-Blind Study. In *StatPearls*; StatPearls Publishing; [\[31536248\]](#).
100. Prümper, J. Der Benutzungsfragebogen ISONORM 9241/10: Ergebnisse Zur Reliabilität Und Validität. In *Liskowsky, R., Velichkovsky, B. M., Wüschmann, W. (Ed.), Software-Ergonomie '97*; Vieweg+Teubner; pp. pp. 253–262.

Disclaimer/Publisher's Note: The statements, opinions and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of MDPI and/or the editor(s). MDPI and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions or products referred to in the content.