

## Article

# Improved Gender Recognition during Stepping Activity for Rehab Application Using the Combinatorial Fusion Approach of EMG and HRV

Nor Aziyatul Izni Mohd Rosli <sup>1,†</sup>, Mohd Azizi Abdul Rahman <sup>1,†,\*</sup>, Malarvili Balakrishnan <sup>2,‡</sup>, Takashi Komeda <sup>3</sup>, Saiful Amri Mazlan <sup>1</sup> and Hairi Zamzuri <sup>1</sup>

<sup>1</sup> Malaysia-Japan International Institute of Technology, Universiti Teknologi Malaysia, 54100, Jalan Sultan Yahya Petra, Kuala Lumpur, Malaysia; naizni2@live.utm.my (N.A.I.M.R); amri.kl@utm.my (S.A.M); hairi.kl@utm.my (H.Z)

<sup>2</sup> Department of Biotechnology and Medical Engineering, Faculty of Biosciences and Medical Engineering, Universiti Teknologi Malaysia, 81310, Skudai, Johor, Malaysia; malarvili@biomedical.utm.my

<sup>3</sup> Department of Bioscience and Engineering, College of System Engineering, Shibaura Institute of Technology, Fukasaku 307, Saitama, Japan; komeda@se.shibaura-it.ac.jp

\* Correspondence: azizi.kl@utm.my; Tel.: +60-322-031-463

† These authors contributed equally to this work.

**Abstract:** Gender recognition is trivial for physiotherapist, but it is considered a challenge for computers. The electromyography (EMG) and heart rate variability (HRV) were utilized in this work for gender recognition during the stepping exercise using a stepper. The relevant features were extracted and selected. The selected features were then fused to automatically predict gender recognition. However, the feature selection for gender classification became a challenge to ensure better accuracy. Thus, in this paper, a feature selection approach based on both the performance and the diversity between the two features from the rank-score characteristic (RSC) function in a combinatorial fusion approach (CFA)(Hsu et al) was employed. Then, the features from the selected feature sets were fused using a CFA. The results were then compared with other fusion techniques such as naive bayes (NB), decision tree (J48), k-nearest neighbor (KNN) and support vector machine (SVM). Besides, the results were also compared with previous researches in gender recognition. The experimental results showed that the CFA was efficient and effective for feature selection. The fusion method was also able to improve the accuracy of the gender recognition rate. The CFA provides much better gender classification results which is 94.51% compared to Barani's work (90.34%), Nazarloo's work (92.50%), and other classifiers.

**Keywords:** signal processing; feature selection; feature fusion; data fusion; gender recognition; sensor fusion; heart rate variability (HRV), electromyography (EMG); stepper

## 1. Introduction

Rehabilitation is a physiotherapy activity to recover partially or totally the motor abilities of a patient. Usually, physiological devices (PDs) such as steppers, upright bicycles and treadmills are used to assist in the rehabilitation process. Basically, one of the PDs used in this study is a modified stepper rather than a conventional stepper. It was built using a smart material known as Magnetorheological (MR) fluid; installed as an MR valve on the stepper. The conventional stepper machine was slightly modified and can be controlled using the concept of MR valve (see Figure 1) for rehab applications. The mechanical properties such as stiffness, viscosity, and hardness of the

MR-based damper will change subjected to the induced magnetic fluxes. The modified stepper is a current-induced device that varies the stiffness level (i.e., low, medium, high) of the damper. The characteristics of the MR fluid require the users to make an effort to do lower limb exercise resistance from a low to high stiffness level on the stepper. In addition, before the Ampere current is induced to the MR-based stepper, the system interface should have the ability to identify the gender of a person using it. The main reason is that the strength level of men and women is different [1–3]. Thus, if the same load is applied to both men and women during exercise, it will cause unhealthy fitness, for example, it will cause them to be tired, unfit and so other similar states.



(a) Conventional stepper



(b) Modified stepper (MR valve)

**Figure 1.** Conventional Stepper vs Modified stepper

### 1.1. The Need for Gender Recognition Using Biometrics

In conjunction to that, there is a need for a system development without any human intervention, in this case from a physiotherapist, such as automatic gender recognition. Gender recognition is trivial for a physiotherapist or the population in general. However, it is considered a very challenging for computers. Gender recognition can be very helpful in association in terms of recognizing the individual user's personality. Currently, computer vision systems play imperative roles in our life with the development of Visual Surveillance and Human-Computer Interaction (HMI) innovation. Gender recognition, as a part of the entire computer vision system has acquired much attention in recent decades. This is due to gender recognition systems that can be utilized in many areas such as airport security [4], surveillance and security systems [5]. Besides, it is also very helpful in rehabilitation whereby the computer interface can directly recognize the gender of a person, and consequently determine and set the input of the PDs like a current input associated with the strength level of men and women. This is considered as the visual surveillance or automated monitoring in the rehabilitation process.

In addition, a biometric recognition provides rigorous security by recognizing an individual based on the physiological characteristics [6]. Various biometric modalities have been explored previously such as iris, fingerprint, face, and hand. Table 1 shows gender recognition based on the face in [7–11]. In [12–15], a gender is recognized based on human gait, and it can also be recognized based on footwear, color information, and human speech [16–19]. Nevertheless, these biometric are not sufficiently robust against counterfeiting. For example, the iris can be duplicated by using contact lenses with duplicated iris features, the fingerprint can be imitated based on latex and face can be falsified using an artificial mask. Besides, eligible performance based on recognition accuracy can also not be provided by this biometrics.

**Table 1.** Most related works for gender identification.

Work	Method
[7]	• Sift features
[8]	• Combination of gabor filters and binary features
[9]	• Using hybrid of gabor filters and binary features
[10]	• Face_based gender recognition performance with a fuzzy inference system
[11]	• Using periocular biometric for gender classification in the wild
[12]	• From gait_based using mixed conditional random field
[13]	• Extraction of the hip joint data that was computed from Bio-vision hierarchical data
[14]	• From gait sequences with arbitrary walking directions
[15]	• Human gait based gender identification using Hidden Markov Model and Support Vector Machines
[16]	• Using footwear appearance
[17]	• Color information
[18,19]	• Speech recognition
This research	• Fusion of HRV and EMG signals during stepping exercise by stepper

1.2. Gender Recognition Using Physiological Signal

Meanwhile, other information from physiological biometrics that reflects neurological changes such as electromyography (EMG) and autonomic behavior such as heart rate variability (HRV) can also affect gender recognition. Gender recognition using new physiological biometrics (e.g., EMG, ECG, and EEG) is quite complicated compared to face, iris and fingerprint physiological biometrics. This is because the signal of ECG and EMG recordings can be changed or distorted due to the physical status of the subject, movements, powerline interference and certain medications [20,21]. However, the EMG and ECG biometrics information are difficult to be stolen and impossible to imitate. So, it is well secured and confidential [22].

Basically, research on electrocardiogram (ECG) has been actively conducted. Several suggestions proposed the feasibility of utilizing the ECG as another biometric modality for identity identification [23,24]. The fact that the physiological differences of the heart in various people show certain uniqueness in their ECG signals have supported why it is logical for biometric recognition [25]. Gender recognition indicated by HRV is a standout amongst the most challenging issues in individual identification [26].

Furthermore, digital information about the physical muscles is provided by EMG. Although there a few analysis on EMG involving the lower limb [27], a research work on gender recognition during the stepping activity using EMG is yet to be investigated. Interestingly, there is a significant time delay difference between genders during the step [28], which indicates that there must be some relevant features in human muscles that help in differentiating gender.

Multimodal physiological biometrics are a combination of at least two physiological biometric features in order to handle certain limitations of utilizing them separately. There have been some previous attempts to fuse multiple biometrics such as combining the face, gait, fingerprint, palm print and geometry for gender recognition [29–31]. Table 2 shows more related works for the fusion of physiological biometrics and the gap of this study.

**Table 2.** Most related work for the fusion of physiological signals.

Work	Physiological Signals Fusion			Application
	ECG	EMG	EEG	
[32–34]	✓		✓	Automatic seizure detection hybrid-BCI
[35]		✓	✓	
[36]	✓		✓	Epileptic event detection
[37]		✓	✓	Human movement intention
[38]	✓		✓	Automatic sleep stage classification
[39]		✓	✓	Gait intent detection
[40,41] and this research	✓	✓		Gender Identification for rehabilitation exercise

Therefore, the bimodal physiological systems for automatic gender recognition were carried out in this study to develop the mechanism of physiotherapy for online monitoring. To guarantee the accurate signal of a single modality system, the fusion of two or more signals is significant to improve the performance of the system [39,41–48]. To achieve robust and discriminative performance for gender recognition, a fusion of EMG and HRV [40,41,49] is proposed before feeding into the interface system in order to control the level of MR valve stiffness of the stepper before the rehabilitation exercise can be emulated [40,41]. Two modalities ECG (HRV) and EMG are selected to be combined because both modalities are closely related when performing exercise associated with lower limb. It seems that the gender factor motivates people differently, in performing the regular exercise for rehab. The reduction of cost and frequent monitoring are also the ultimate objectives in the improvement of rehabilitation process based on the gender physiological feedback control. Hence, the automated online monitoring system can be developed and a bimodal fusion system can be achieved.

Basically, the overall view of this research is shown in Figure 2. Firstly, all the raw data are preprocessed for artifact corrections. Next, all the features are extracted and the most relevant features are selected based on the performance and the diversity between the two feature sets. Then, the Combinatorial Fusion Algorithm (CFA) (Hsu et al [63–65]) is implemented to fuse the EMG and HRV features for automatic gender recognition during stepping which may help to isolate male and female subjects before undergoing the rehabilitation process. Finally, the gender classification based on the feature fusion correct rate (%) is obtained. However, the section outside the bold solid line (i.e., the interface section, control signal section and physiological device section) is out of the scope of this study.

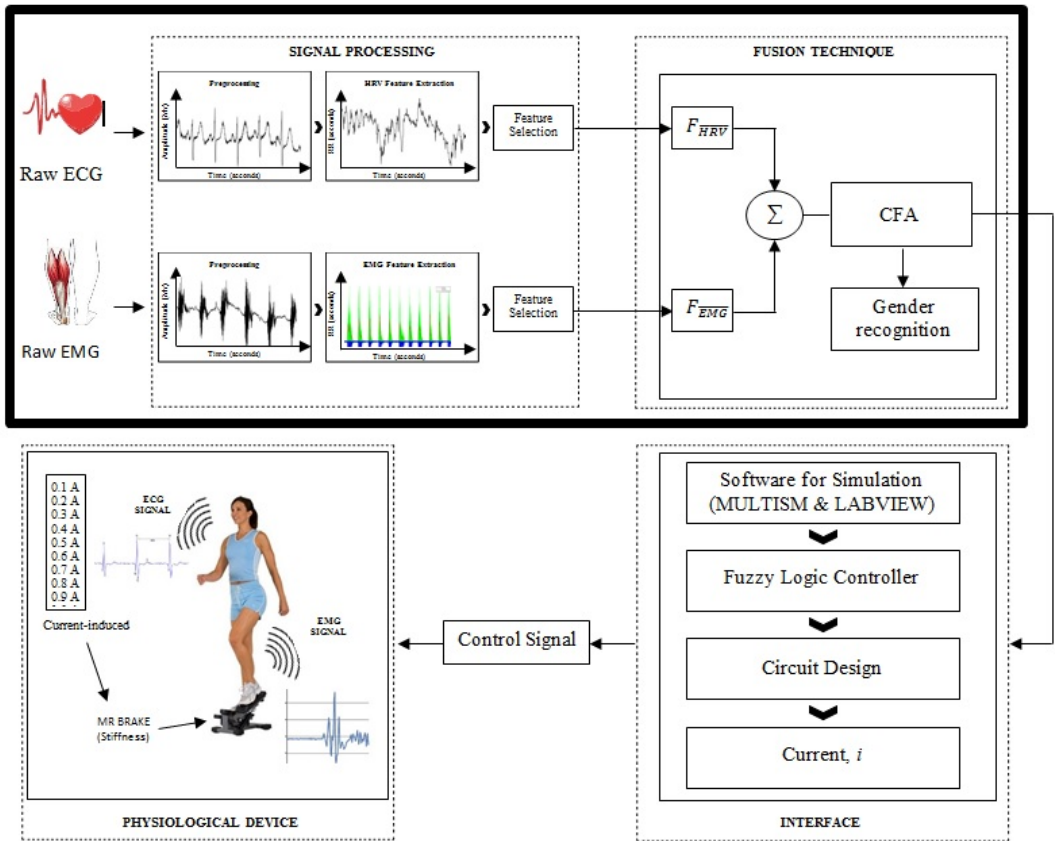


Figure 2. The need of this research

The organization of this paper is as follows. Section 2 describes the research steps involved in automatic gender recognition during the stepping activity using the MR-based stepper in

rehabilitation. The steps include data acquisition and preprocessing of EMG and HRV. The HRV is quantified from the ECG signals and both EMG and HRV features are extracted. Section 3 represents the feature selection using performance and cognitive diversity. The implementation of the CFA to fuse the features is conducted in section 4. The experimental results are analyzed and discussed in section 4.2. Finally, the conclusion and the recommendation of future works resulted from this paper is suggested in section 5.

2. Methodology

The proposed young gender recognition based on the EMG and HRV biometrics is illustrated in Figure 3. The proposed method is composed of a sequence of processing steps which are the preprocessing of the EMG and ECG signals, feature extraction, feature selection based on the performance and the diversity between EMG and HRV feature sets, and EMG and HRV feature fusion process based on the Combinatorial Fusion Approach (CFA) (Hsu, Chung and Kristal [64] and Hsu, Kristal and Schweikert [65]). In this paper, the feature selection and the feature fusion have been focused as shown in the bold dotted line.

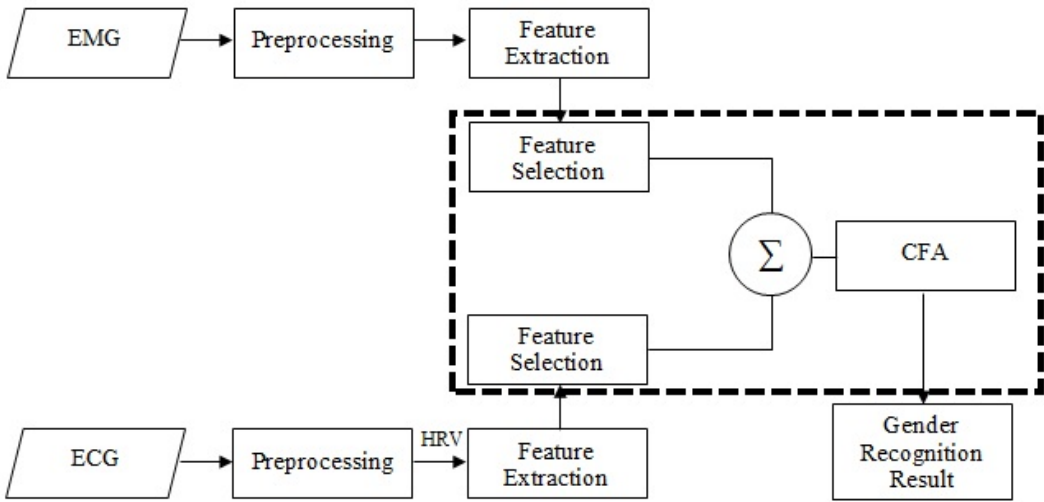


Figure 3. Gender identification process based on EMG-HRV feature fusion. The selected features of EMG and HRV are combined using CFA to obtain gender classification result

2.1. Data Acquisition

The EMG and ECG data used in this study were acquired from 59 healthy, untrained young volunteers (i.e., 23 years old on average). All the subjects were considered free from any disease and have been briefed about the procedures involved, an informed consents have been obtained. An EMG channel was simultaneously recorded with ECG using the Porti system from the Twente Medical Systems International (TMSi) equipment. The Porti is a 32-channel ambulatory and stationary system for physiological research. An EMG channel was obtained from the vastus lateralis muscle (VL), placed according to the recommendations of Surface Electromyography for the Non-Invasive Assessment of Muscles (SENIAM) [50]. Basically, 16 European expertise groups are working together with the SENIAM project for the development and applications of surface EMG (sEMG). The recommendation of the sEMG electrode placement is partly based on simulation outputs. The sampling frequency of raw EMG and ECG biosignals used in this study was about 2048Hz. Higher sampling frequency was chosen to prevent a signal loss and to avoid too much noise during the stepping exercise. Plus, it is also to avoid jitter in the estimation of the R-wave fiducial point for ECG signal. Also, the stepper machine was used to carry out the stepping activity. In order to get the same stepping rate among the subjects, a metronome (i.e., 60 beats per minute) was used simultaneously



with the stepping activity. Generally, a metronome is a device used by musicians that indicate the time at a selected rate by giving a regular tick.

2.2. Biosignals Preprocessing

**ECG:** The Kubios HRV software [51] is utilized for ECG preprocessing to quantify the HRV. It is an advanced software and extremely easy to use for HRV analysis. It consists of a mechanism for artifact correction (i.e., powerline interference, baseline wander and other noise components), trend component removal, an adaptive QRS detection and analysis for sample selection. Basically, the QRS detection algorithm in the Kubios HRV software was developed based on the Pan-Tompkins algorithm [52]. Figure 4a shows the patterns of the HRV.

**EMG:** All the EMG signals were processed using MATLAB. There was a low amplitude voltage offset present in the hardware. The direct current (DC) power was eliminated. Then a bandpass filter was applied to the raw data to remove any movement artifacts with 20Hz and 300Hz cutoff frequencies. Since the raw EMG signal had positive and negative values [53], the full-wave rectification was applied to make sure the raw EMG signal did not have nearly zero mean and to analyze positive values only. The EMG signals linear envelope was then computed for further processing. Figure 4b shows the patterns of the EMG.

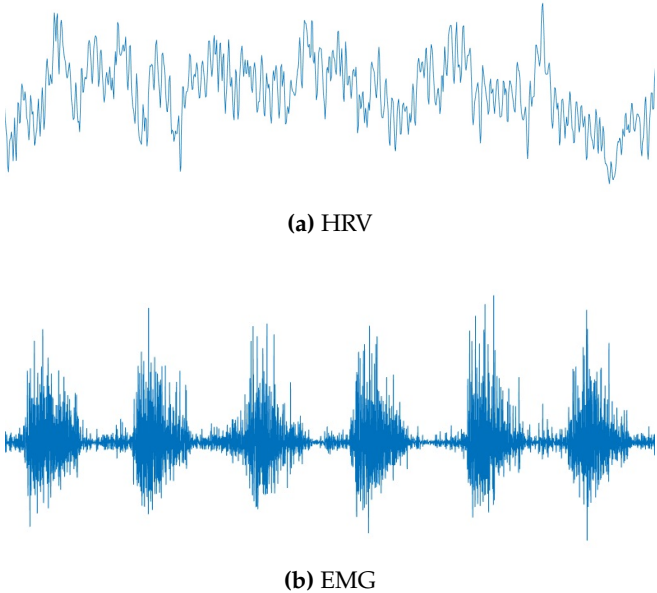


Figure 4. The patterns of HRV and EMG.

2.3. Features Extraction

The features are used in order to classify the males and females during the stepping activity using a stepper. The selected features were extracted using Kubios software [51]. The descriptions for HRV features in the Standards of Measurement, Physiological Interpretation, and Clinical Use [54] were utilized. For EMG features, the conventional features are the mean [55], standard deviation [55–57], root mean square [56–58], maximum amplitude [57], median frequency [58,59], mean frequency [59], variance [60], skewness [61] and kurtosis [61,62]. Table 3 describes a detailed description of the extracted features.

3. Combinatorial Fusion Approach (CFA)

Combinatorial Fusion (CF) (Hsu et al [63–65]) gives a useful piece of fusion method information in the analysis of a set of Multiple Scoring Systems (MSS) to obtain better accuracy and higher

Table 3. Description of the 32 extracted features.

Category	Number	Symbol	Name	units	Feature Description
HRV Feature	23	Time domain			
		A	mean_HRV	ms	Mean of all RR intervals.
		B	SDNN	ms	Standard deviation of all NN intervals.
		C	mean_HR	1/min	Mean of all heart rate.
		D	SD_HR	1/min	Standard deviation of all heart rate.
		E	RMSSD	ms	The square root of the mean of the sum of the squares of differences between adjacent NN intervals.
		F	NN50	count	Number of pairs of adjacent NN intervals differing by more than 50 ms in the entire recording. Three variants are possible counting all such NN interval pairs or only pairs in which the first or the second interval is longer.
		G	pNN50	%	NN50 count divided by the total number of all MM intervals.
		H	HRV triangular index		Total number of all NN intervals divided by the height of the histogram of all NN intervals measured on a discrete scale with bins of 7.8125ms (1/128 s).
		I	TINN	ms	Baseline width of the minimum square difference triangular interpolation of the highest peak of the histogram of all NN intervals.
		Frequency domain			
		J	VLF_peak	Hz	Peak of very low frequency.
		K	LF_peak	Hz	Peak of low frequency.
		L	HF_peak	Hz	Peak of high frequency.
		M	VLF_power	ms <sup>2</sup>	Power of very low frequency range.
		N	VLF_percentage	%	Percentage power of very low frequency range.
		O	LF_power	ms <sup>2</sup>	Power of low frequency range.
		P	LF_percentage	%	Percentage power of low frequency range.
		Q	LF_norm	n.u.	Low frequency power in normalized units.
		R	HF_power	ms <sup>2</sup>	Power of high frequency range.
		S	HF_percentage	%	Percentage power of high frequency range.
		T	HF_norm	n.u.	High frequency power in normalized units.
		U	LF/HF	ms <sup>2</sup>	Ratio LF (ms <sup>2</sup> )/HF (ms <sup>2</sup> ).
		V	TP	ms <sup>2</sup>	Variance of all NN intervals.
		W	EDR	Hz	Respiration frequency.
EMG Feature	9	a	EMG_mean	ms <sup>2</sup>	The normalized mean of the all EMG data.
		b	EMG_SD	ms <sup>2</sup>	Standard deviation of all EMG data.
		c	EMG_RMS	ms <sup>2</sup>	Square root of the mean over time of the square of the vertical distance of the graph from the rest state.
		d	EMG_maxamp	ms <sup>2</sup>	Maximum amplitude of EMG.
		e	EMG_MDF	ms <sup>2</sup>	Median frequency of EMG.
		f	EMG_MNF	ms <sup>2</sup>	Mean frequency of EMG.
		g	EMG_var	ms <sup>2</sup>	Variance of EMG.
		h	EMG_skew	ms <sup>2</sup>	Skewness of EMG.
		i	EMG_kurt	ms <sup>2</sup>	Kurtosis of EMG.

effectiveness of feature characteristics. Each system contains a score function, a rank function, and a Rank-Score Characteristic (RSC) function (see Figure 5). The scoring or ranking behavior is indicated by the RSC function and it is extremely easy to compute. Plus, the cognitive diversity of at least two scoring systems can be measured [65]. Furthermore, the CFA method has been widely applied in some research areas such as visual cognition systems [66], ChIP-seq peak detection [67], video target tracking [68] and the prediction of protein structure [69] when the result was obtained by using an RSC graph to assess the scoring diversity [65]. Meanwhile, the CFA was implemented in this work in order to demonstrate that the fusion performance of HRV and EMG for automatic gender recognition during the stepping activity can be improved by fusing score or rank combinations using the RSC function as an indicator.

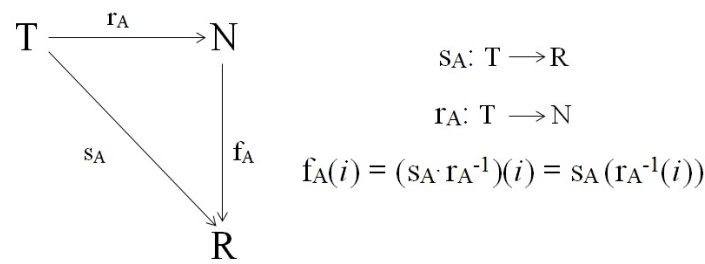


Figure 5. Rank-Score Characteristics (RSC) function [64,65].

Figure 5 illustrates the RSC function in a set of MSS. Let  $T = \{t_1, t_2, \dots, t_n\}$  be a set of subjects under study. Let  $N = [1, n]$  be the integers set from 1 to  $n$  and  $R$  be the set of real numbers. Next, let  $A$  be the scoring system. Each scoring system  $A$  is one of the  $q$  scoring systems  $A_1, A_2, \dots, A_q$  on the set  $T$ , contains two functions which are:

- (a) a score function,  $s_A$ , and
- (b) a rank function,  $r_A$ .

The  $r_A$  are derived by sorting the  $s_A$ . A Rank-Score Characteristics (RSC) function,  $f_A$  was defined (see [64,65]) as:  $f_A: N \rightarrow R$  while a score function,  $s_A$ , and a rank function,  $r_A$  are shown in Figure 5. There are two distinct forms of procedures that can be applied to integrate a set of  $q$  scoring systems namely:

- (a) Score Combination, sc.
- (b) Rank Combination, rc.

and the equations are defined as follows:

$$s_{sc}(t_i) = \sum_{j=1}^q (s_{A_j}(t_i)) / q \quad (1)$$

$$s_{rc}(t_i) = \sum_{j=1}^q (r_{A_j}(t_i)) / q \quad (2)$$

where  $t_i$  is in  $T$ .

Moreover, the diversity between  $A$  and  $B$ , for a pair of two scoring systems,  $d(A, B)$  is defined as  $d(f_A, f_B)$ , between RSC functions  $f_A$  and  $f_B$  (see [64,65]).

### 3.1. Feature Selection Using Performance and Cognitive Diversity

The features from the EMG and HRV are viewed as a scoring system. The performance and the diversity between the feature sets in MSS have been carried out to select the relevant and non-redundant features, which can yield a better result when the features are fused. Thus the combination of the MSS can improve the result when the features of each of the individual scoring systems have relatively high performance and high diversity [65]. Therefore the aim of our feature selection is to find the features with relatively good performance as well as relatively high diversity.

In our experiment, there are 32 features in total and 59 possible values for each feature. The correct rate is calculated to measure the performance and to make comparisons between the machine learning classifiers (see Figure 6). The classifiers used in this work are Naïve Bayes (NB), k-Nearest Neighbors (k-NN with  $k = 1, 3, 5$ ), and Decision Tree (J48). As shown in Figure 6, the highest average correct rate is J48 classifier with 72.19% of accuracy.

After that, the final performance of each feature from the J48 classifier is sorted in decreasing order as illustrated in Figure 7. It can be seen that the highest correct rate with a rate of 86.44%



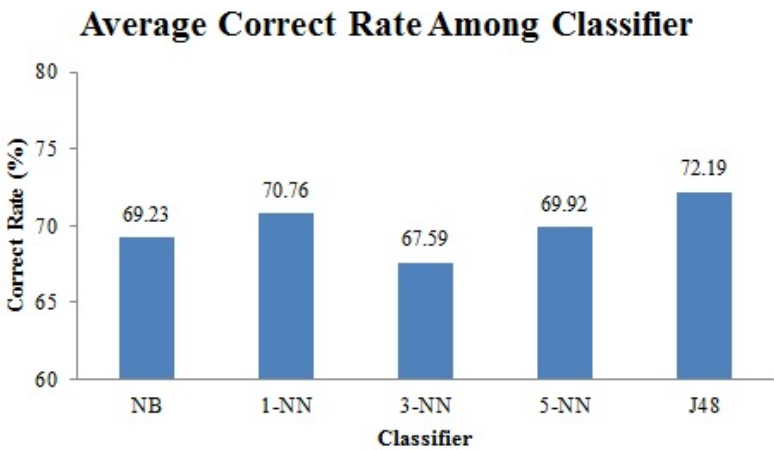


Figure 6. Average Correct rate comparison among classifiers

203 is generated from feature O (LF<sub>power</sub> (ms<sup>2</sup>)) and feature d (maximum amplitude of EMG (ms<sup>2</sup>))  
204 generates the lowest correct rate of with a rate of 66.1%. From previous work in [70], there are  
205 significant gender differences (p < 0.05) in the LF in male subjects compared to females. This implies  
206 that the male subjects are more active and dominant than the female subjects. Therefore, this is  
207 particularly suitable to be used to isolate male and female subjects in developing the rehabilitation  
208 devices, control system, and rehabilitation engineering.

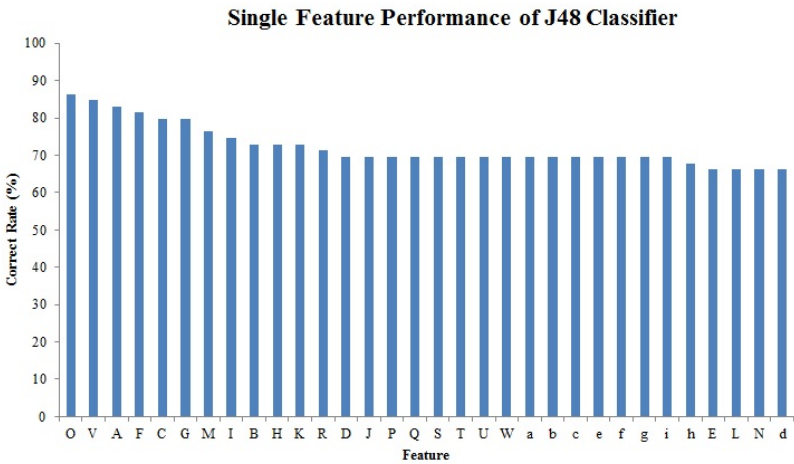


Figure 7. Single feature performance of J48 Classifier

209 3.1.1. The Diversity between MSS

210 Generally, the diversity of a feature pair {F<sub>1</sub>, F<sub>2</sub>} can be derived as in Equation 3, where f<sub>1</sub> and  
211 f<sub>2</sub> are the RSC function represented for F<sub>1</sub> and F<sub>2</sub> respectively in which they can be calculated based  
212 on the equation denoted in Figure 5. Both functions f<sub>1</sub> and f<sub>2</sub> have n score values in total and a rank  
213 sequence ranging from 1 to n.

$$d(F_1, F_2) = \sum_{i=1}^n |f_1(i) - f_2(i)| / n \tag{3}$$

The diversity of feature sets  $D = \{F_1, F_2, \dots, F_n\}$  is generated as in Equation 4. Basically,  $C(n, 2)$  depicts the total number of the combination of two features in the feature set  $D$ .

$$d(D) = \sum_{F_i \in D, F_j \in D} d(F_i, F_j) / |C(n, 2)| \quad (4)$$

In addition, the diversity between the two feature sets  $D_1$  and  $D_2$  is derived as in Equation 5. Generally,  $|D_1|$  and  $|D_2|$  are the cardinal number of  $D_1$  and  $D_2$ .

$$d(D_1, D_2) = \sum_{F_i \in D_1, F_j \in D_2} d(F_i, F_j) / (|D_1| \cdot |D_2|) \quad (5)$$

### 3.1.2. Feature Selection Approach

The approach for feature selection based on the performance and the diversity between the two features (Deng, Wu, Chu, Zhang, and Hsu [46]) is illustrated in Figure 8.

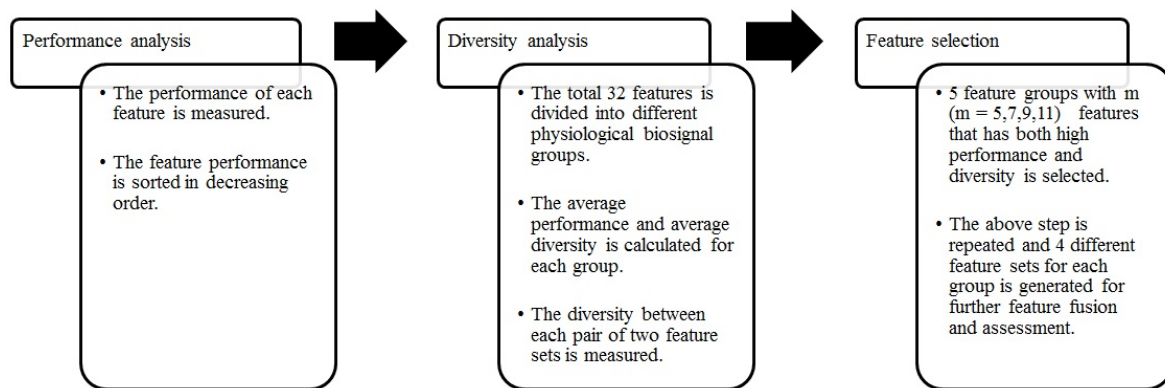


Figure 8. Feature selection approach (FSA)

Figure 9 illustrates the modalities, performance, and diversity of the features. All 32 features are divided into two modalities according to the corresponding sensor types which are EMG and ECG. The feature performance in each of the EMG and ECG physiological signals is sorted in decreasing order. 15 features with a bold font demonstrated in the figure is selected for further process and is denoted as the top features. While a number above the horizontal link between two modalities is denoted as the diversity between the two feature sets. Besides, a number above the curve within a node of the modality is the average of a feature set diversity. Generally, a better fusion performance is produced when the diversity between two modalities is larger [46]. Apart from that, better individual feature performance also provides a better combination result [46]. However, only two modalities were utilized in this work but the comparison of the diversity of the two modalities is not required. In this work, the diversity between EMG and HRV generates a better diversity of a feature set and the diversity between two feature sets. Hence, a better combination performance can be achieved.

### 3.2. Feature Selection Performances

In the feature selection process, the top-15 features which are O, V, A, F, C, G, M and I from the HRV and a, b, c, e, f, g, and i from the EMG are selected. All of these top-15 features are selected because of their performance and the diversity is higher than the other features. A total of four 5-feature sets (A), four 7-feature sets (C), four 9-feature sets (D) and four 11-feature sets (E) are then generated. Plus, four 5-feature sets (B) are also randomly selected from 32 extracted features for comparison of their performances. The average performance and average diversity of selected features are demonstrated in Table 4.

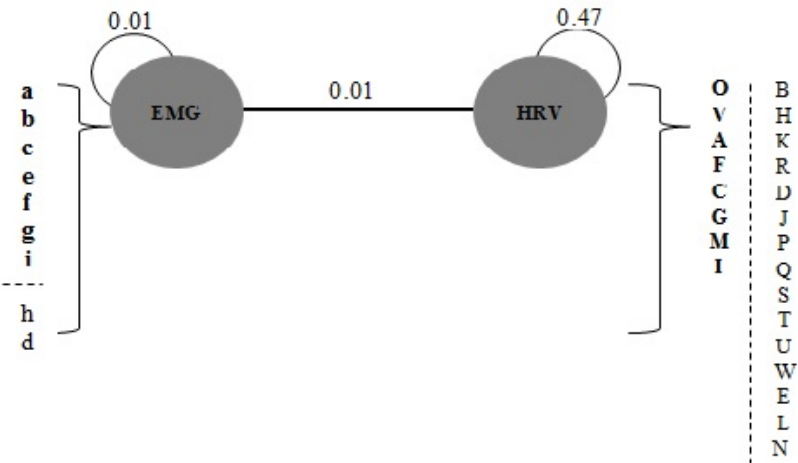


Figure 9. Feature classification using diversity and performance in two modalities

Table 4. Feature selection results.

Feature Group		Feature Symbols	Average Performance	Average Diversity
(A) 5-feature set	A(5,1)	O,V,A,F,a	0.81	2.39
	A(5,2)	O,V,A,b,c	0.79	2.61
	A(5,3)	O,V,F,a,b	0.78	2.58
	A(5,4)	O,V,A,F,b	0.81	2.41
(B) 5-feature set	B(5,1)	I,P,U,c,d	0.70	0.10
	B(5,2)	E,H,R,a,h	0.70	0.09
	B(5,3)	H,I,J,c,d	0.71	0.12
	B(5,4)	I,Q,S,d,i	0.70	0.10
(C) 7-feature set	C(7,1)	O,V,C,G,M,f,i	0.78	2.06
	C(7,2)	O,V,A,F,I,b,e	0.79	2.10
	C(7,3)	O,A,F,C,G,c,e	0.79	1.85
	C(7,4)	O,V,A,F,G,e,g	0.79	2.11
(D) 9-feature set	D(9,1)	V,C,G,M,I,c,e,g,i	0.75	0.85
	D(9,2)	V,A,G,M,I,a,e,f,g	0.75	0.97
	D(9,3)	O,V,C,G,M,a,c,e,f	0.76	1.84
	D(9,4)	O,V,F,M,I,a,f,g,i	0.76	1.92
(E) 11-feature set	E(11,1)	O,V,A,F,G,M,a,b,c,e,g	0.76	2.46
	E(11,2)	O,V,F,C,G,M,I,a,b,c,e	0.76	2.16
	E(11,3)	O,V,A,F,G,M,I,b,c,f,g	0.77	2.47
	E(11,4)	O,V,A,F,C,G,I,a,b,f,g	0.77	2.48


241 4. CFA for EMG and HRV Feature Fusion

242 In the feature fusion process, the score combination for all 20 selected features resulting from  
243 Table 4 is performed one-by-one according to Equation 1.


244 4.1. Fusion Results in 5-Reature Rets

245 The feature’s fusion correct rate using the score combination of CFA for both of 5-feature sets (A)  
246 and (B) are illustrated in Figure 10 and Figure 11.

247 With reference to Figure 10 and 11, the dotted lines show the average of 26 combined  
248 features. Basically, in this paper, the combined features that have the correct rate over an average  
249 of 26 combined features will be the better selected combined features for the automatic gender

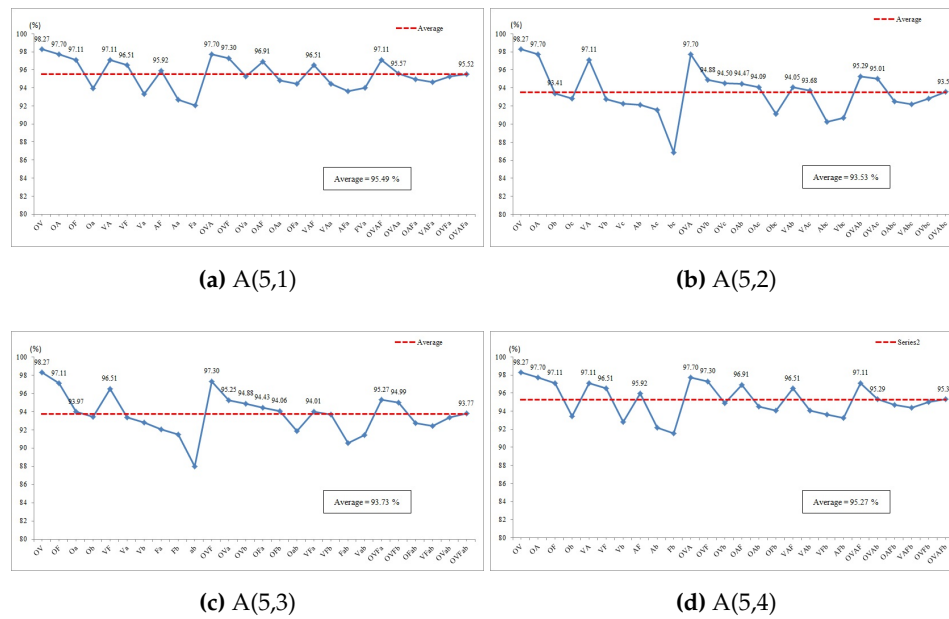

**Figure 10.** Performance of the combination of 5-features sets (A group) using CFA

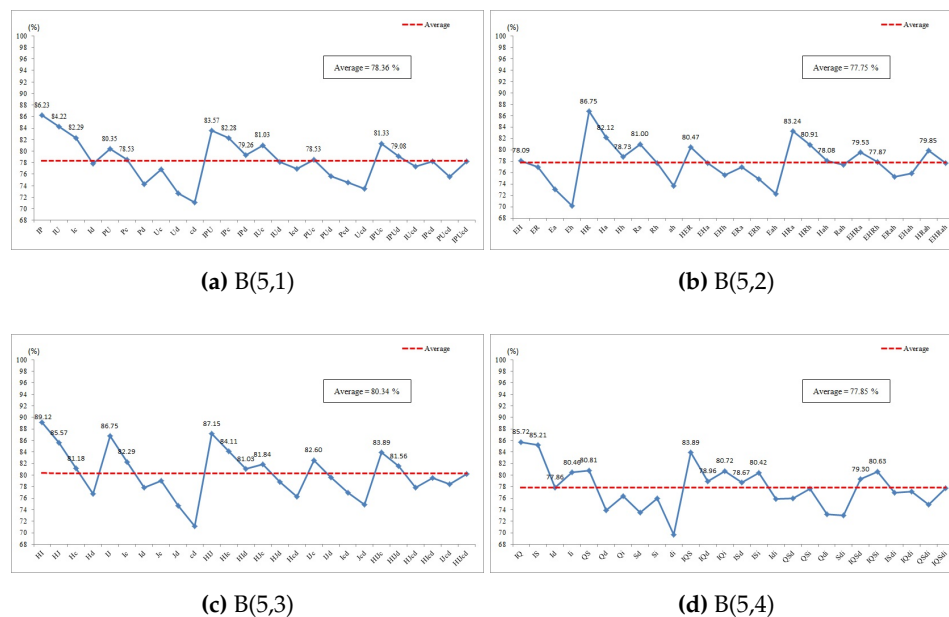

**Figure 11.** Performance of the combination of 5-feature sets (B group) using CFA

250 identification. In Figure 10a, the average correct rate is 95.49%, and it possesses the top-13 combined  
 251 features which are OV, OA, OVA, OVF, OF, VA, OVAF, OAF, VF, VAF, AF, OVAFa, and OVAFa. Next,  
 252 in Figure 10b, the average correct rate is 93.53% and it possesses the top-13 combined features which  
 253 are OV, OA, OVA, VA, OVAb, OVAc, OVb, OVc, OAb, OAc, VAb, VAc, and OVAbc. Then, in Figure  
 254 10c, the average correct rate is 93.73% and it possesses the top-13 combined features which are OV,  
 255 OVF, OF, VF, OVFa, OVa, OVFB, OVb, OFa, OFb, VFa, Oa, and OVFB. Lastly, in Figure 10d, the  
 256 average correct rate is 95.27% and it possesses the top-13 combined features which are OV, OA, OVA,  
 257 OVF, OF, VA, OVAF, OAF, VF, VAF, AF, OVAFb, and OVAb. Thus, in short, all four 5-feature sets (A)

have their own top-13 combined features that contribute to automatic gender identification during the stepping activity using the stepper.

Moreover, in Figure 11a, the average correct rate is 78.36% and it possesses the top-12 combined features which are IP, IU, IPU, Ic, IPc, IPUC, IUc, PU, IPd, IPUD, Pc, and PUC. Next, in Figure 11b, the average correct rate is 77.75% and it possesses the top-12 combined features which are HR, HRa, Ha, Ra, HRh, HER, HRah, EHRa, Hh, EH, Hah, and EHRh. Then, in Figure 11c, the average correct rate is 80.34% and it possesses the top-12 combined features which are HI, HIJ, IJ, HJ, Hic, HIJc, IJc, Ic, HJc, HIJd, Hc, and HId. Lastly, in Figure 11d, the average correct rate is 77.85% and it possesses the top-12 combined features which are OV, IQ, IS, IQS, QS, IQi, IQSi, Ii, ISi, IQSd, IQd, ISd, and Id. Thus, all the four 5-feature sets (B) have their own top-12 combined features.

All the figures from Figure 10 and 11, shows that the four 5-feature sets (A) have higher correct rate compared to the four 5-feature sets (B). Thus, the overall performance of the 5-feature sets (A) is considerably better than that of the 5-feature sets (B) for automatic gender identification during the stepping activity.

Besides that, the fusion of  $t$ -feature sets where  $t = 7, 9$  and 11 is also calculated. 7-feature sets have 120 combined features, 9-feature sets have 502 combined features and 11-feature sets have 2036 combined features in total. Since the total combination is large, the results were only listed in Table 5 in Section 4.2.

#### 4.2. Fusion Results Comparison

For the feature fusion evaluation, six feature fusion algorithms which are Naïve Bayes (NB), k-Nearest Neighbors (k-NN with  $K = 1, 3, 5$ ), Decision Tree (J48) and Support Vector Machine (SVM) are implemented. The comparisons of the correct rates for different 20 feature sets found in the fusion methods are shown in Table 5. The average correct rate of all the combinations's results for all the selected feature sets is denoted as the overall correct rate of CFA for automatic gender recognition during stepping.

With reference to Table 5, it can be seen that for the feature sets selected using our method, the combinatorial fusion can result in better performance than the other six fusion algorithms. CFA generates a higher value of an average correct rate for all the 5-feature set (A), 5-feature set (B), 7-feature set (C), 9-feature set (D) and 11-feature set (E). Over all, for automatic gender recognition during the stepping exercise, CFA gives a better performance than the other six fusion methods.

From Table 5, it can be seen that when using the combinatorial fusion, the highest average correct rate is 95.49% for feature set A(5,1), 93.22% for feature set C(7,2), 91.33% for feature set D(9,3) and 91.20% for feature set E(11,4). Thus, the correct rate decreases when the number of features increases. The reason is the more features we have, the more irrelevant and redundant features will cause decreases in accuracy. However, all the selected feature sets outperformed the other six fusion algorithms.

Meanwhile, the best performance of the randomly selected 5-feature set (B) is 86.44%, produced using the 1-NN method on B(5,3) feature set. The highest performance using CFA is 80.41% which is also on the same feature set. However, the average performance of CFA is 78.64% which is lower than 86.44%. Yet, it is better than the average performance of 5-feature set (B) using 1-NN and also the highest average correct rate of the four 5-feature set (B) which is 76.27%. Therefore, in conclusion, the CFA is better compared to six fusion methods for the feature group of the 5-feature set (B).

Other than that, to evaluate the proposed method, the results of the proposed method are compared with the work done in [8] and [9] and are shown in Table 6. Barani's and Nazarloo's used a face biometric and Hybrid Gabor filters and binary features of an image for gender recognition. Table 6 shows that our proposed method outperformed the work done in [8] and [9].



**Table 5.** Comparison of performance among fusion method.

Feature Group \ Fusion Method		NB (%)	1-NN (%)	3-NN (%)	5-NN (%)	J48 (%)	SVM (%)	CFA (%)
(A) 5-feature set	A(5,1)	81.36	79.66	79.66	77.97	86.44	74.58	<b>95.49</b>
	A(5,2)	81.36	77.97	83.05	86.44	84.75	74.58	93.53
	A(5,3)	76.27	76.27	76.27	81.36	84.75	72.88	93.73
	A(5,4)	83.05	76.27	77.97	79.66	84.75	74.58	95.27
	Average	80.51	77.54	79.24	81.36	85.17	74.16	<b>94.51</b>
(B) 5-feature set	B(5,1)	64.41	69.49	69.49	69.49	74.58	67.8	78.36
	B(5,2)	81.36	77.97	74.58	77.97	77.97	79.67	77.75
	B(5,3)	84.75	<b>86.44</b>	83.05	77.97	72.88	74.58	80.34
	B(5,4)	62.71	71.19	77.97	76.27	74.58	67.8	77.85
	Average	73.31	<b>76.27</b>	<b>76.27</b>	75.43	75.00	72.46	<b>78.58</b>
(C) 7-feature set	C(7,1)	83.05	79.66	86.44	86.44	77.97	74.58	91.80
	C(7,2)	81.36	77.97	74.58	79.66	79.66	72.88	<b>93.22</b>
	C(7,3)	83.05	76.27	79.66	84.75	76.27	77.97	92.92
	C(7,4)	81.36	72.88	76.27	81.36	77.97	74.58	92.99
	Average	82.21	76.70	79.24	83.05	77.97	75.00	<b>92.73</b>
(D) 9-feature set	D(9,1)	84.75	76.27	83.05	88.14	72.88	72.88	89.50
	D(9,2)	79.66	77.97	79.66	83.05	72.88	74.58	90.28
	D(9,3)	79.66	77.97	79.66	88.14	77.97	72.88	<b>91.33</b>
	D(9,4)	81.36	81.36	79.66	74.58	76.27	71.19	90.49
	Average	81.36	78.39	80.51	83.48	75.00	72.88	<b>90.40</b>
(E) 11-feature set	E(11,1)	83.05	76.27	83.05	84.75	76.27	72.88	90.50
	E(11,2)	79.66	76.27	84.75	86.44	76.27	74.58	90.10
	E(11,3)	81.36	79.66	81.36	88.14	76.27	74.58	88.60
	E(11,4)	86.44	77.97	83.05	86.44	77.97	77.97	<b>91.20</b>
	Average	82.63	77.54	83.05	86.44	76.70	75.00	<b>90.10</b>

**Table 6.** Correct Rate (%) comparison of proposed method with previous work of gender recognition.

Approach	Correct Rate (%)
Proposed Method	94.51
[8]	90.34
[9]	92.50

## 5. Conclusion and Future Work

In this paper, the function of CFA [64,65] was described for both features' selection and fusion in order to automatically recognize gender during the stepping exercise. The performance results demonstrated that the CFA provided a promising solution compared to other machine learning methods in combining relevant features from physiological biosignals. The CFA also provided a much better correct rate compared to Barani's [8] and Nazarloo's work [9]. Generally, when the performance and diversity between the selected two features are relatively high, a better correct rate of the feature fusion can be attained.

Basically, the main contributions of this work are the physiological biometrics used for automatic gender recognition during stepping using stepper which are EMG and HRV, a feature selection technique based on the performance and the diversity between the feature sets, feature fusion technique using CFA, a comparison of CFA with another five machine learning classifiers, and a comparison of our proposed method with previous research for gender recognition. Our work demonstrated that the CFA is a good and efficient method for the feature fusion.

In future, the HRV features will be combined with bi-channel EMG features based on CFA. In addition, the decision level combination using CFA will be considered.

**Acknowledgments:** The work presented in this study is funded by Ministry of Education Malaysia and Universiti Teknologi Malaysia under research grant VOTE NO: 15H81.

**Author Contributions:** Nor Aziyatul Izni Mohd Rosli and Mohd Azizi Abdul Rahman conceived and designed the experiments. Nor Aziyatul Izni Mohd Rosli and Malarvili Balakrishnan performed the experiments. Nor Aziyatul Izni analyzed the data. Mohd Azizi Abdul Rahman, Malarvili Balakrishnan, Takashi Komeda, Saiful Amri Mazlan and Hairi Zamzuri contributed data acquisition tools. Nor Aziyatul Izni Mohd Rosli and Mohd Azizi Abdul Rahman wrote the paper. All authors have read and approved the final manuscript.

**Conflicts of Interest:** The authors declare no conflict of interest.

**Abbreviations**

The following abbreviations are used in this manuscript:

- ECG: Electrocardiogram
- EMG: Electromyogram
- EEG: Electroencephalogram
- HRV: Heart Rate Variability
- HR: Heart Rate
- CFA: Combinatorial Fusion Algorithm
- PDs: Physiological Devices
- MR: Magnetorheological
- NB: Naïve Bayes
- SVM: Support Vector Machine
- J48: Decision Tree
- kNN: k-Nearest Neighbor
- MSS: Multiple Scoring Systems
- BCI: Brain-Computer Interaction
- HMI: Human-Computer Interaction RSC: Rank-Score Characteristics
- SC: Score Combination
- RC: Rank Combination
- VL: Vastus Lateralis
- RRi: RR Interval
- DAQ: Data Acquisition
- RMS: Root Mean Square
- SD: Standard Deviation
- VLF: Very Low Frequency
- LF: Low Frequency
- HF: High Frequency
- LBP: Local Binary Pattern
- DC: Direct Current

**References**

1. Miller, A.E.J.; MacDougall, J.D.; Tarnopolsky M.A.; Sale, D.G. Gender differences in strength and muscle fiber characteristics. *Europ. J. Appl. Physiol.* **1993**, *66*, 254-262.
2. Samsøe, B.D.; Bartel, E.M.; Low, P.M.B.; Lund, H.; Stockmarr, A.; Holm, C.C.; Wätjen, I.; Appleyard, M.; Bliddal, H. Isokinetic and isometric muscle strength in a healthy population with special reference ro age and gender. *Acta. Physiol.* **2009**, *197*, 1-68.
3. Kubota, H; Demura, S. Gender differences and laterality in maximal handgrip strength and controlled force exertion in young adults. *Health* **2011**, *3*, 684-688.

- 367 4. Ratnakar, A.; More, G. Real time gender recognition on FGPA. *Int. J. Sci. Eng. Res.* **2015**, *6*, 19-22.
- 368 5. Tapia, J.E.; Perez, C.A. Gender classification based on fusion of different spatial scale features selected by  
369 mutual information from histogram of LBP, intensity and shape. *IEEE Trans. Inf. Forensics Security* **2013**, *8*,  
370 488-499.
- 371 6. Anil, K.J.; Ross, A.; Prabhakar, S. An introduction to Biometric Recognition. *IEEE Trans. Circuits Syst. Video*  
372 *Technol.* **2004**, *14*, 4-20.
- 373 7. Zahedi, M.; Yousefi, S. Gender Recognition based on sift features. *Int. J. Artif. Intell. Appl.* **2011**, *2*, 87-94.
- 374 8. Barani, M.J.; Faez, K.; Jalili, F. Implementation of gabor filters combined with binary features for gender  
375 recognition. *Int. J. Electr. Comput. Eng.* **2014**, *4*, 108-115.
- 376 9. Nazarloo, M.; Parcham, E.; Pourani, R.A. Gender classification using hybrid of gabor filters and binary  
377 features. *Int. J. Electr. Comput. Eng.* **2014**, *4*, 539-547.
- 378 10. Danisman, T.; Bilasco, I.M.; Martinet, J. Boosting gender recognition performance with a fuzzy inference  
379 system. *Expert Syst. Appl.* **2015**, *42*, 2772-2784.
- 380 11. Castrillón-Santana, M.; Lorenzo-Navarro, J.; Ramón-Balmaseda, E. On using periocular biometric for  
381 gender classification in the wild. *Pattern Recognit. Lett.* **2016**, *82*, 181-189.
- 382 12. Hu, M.; Wang, Y.; Zhang, Z.; Zhang, D. Gait\_based gender classification using mixed conditional random  
383 field. *IEEE Trans. Syst., Man, Cybern.-Part B: Cybernetics* **2011**, *41*, 1429-1439.
- 384 13. Ali, S.; Zhou, M.; Wu, Z.; Razzaq, A.; Hamada, M.; Ahmed, H. Comprehensive use of hip joint in gender  
385 identification using 3-dimension data. *TELKOMNIKA* **2013**, *11*, 2933-2941.
- 386 14. Lu, J.; Wang, G.; Moulin, P. Human identity and gender recognition from gait sequences with arbitrary  
387 walking directions. *IEEE Trans. Inf. Forensics Security* **2014**, *9*, 51-61.
- 388 15. Das, D.; Chakrabarty, A. Human gait based gender identification system using hidden markov model  
389 and support vector machines. *International Conference on Computing, Communication and Automation* **2015**,  
390 268-272.
- 391 16. Yuan, Y.; Pang, Y.; Li, X. Footwear for Gender Recognition. *IEEE Trans. Circuits Syst. Video Technol.* **2010**, *20*,  
392 131-135.
- 393 17. Lin, G.S.; Zhao Y.J. A feature-based gender recognition method based on color information. *2011 First*  
394 *International Conference on Robot, Vision and Signal Processing* **2011**, 40-43.
- 395 18. Rakesh, K.; Duta, S.; Shama, K. Gender Recognition using speech processing techniques in Labview. *Int. J.*  
396 *Adv. Eng. Technol.* **2011**, *1*, 51-63.
- 397 19. Yücesoy, E.; Nabiyeve, V. V. A new approach with score-level fusion for the classification of a speaker age  
398 and gender. *Comput. Electr. Eng.* **2016**, *53*, 29-39.
- 399 20. Nemirko, A.P.; Lugovaya, T.S. Biometric human identification based on electrocardiogram. *Proceedings*  
400 *XIIIth Russian Conference on Mathematical Methods of Pattern Recognition, Moscow, MAKS Press* **2005**, 387-390.
- 401 21. Bassiouni, M.; Khaleefa, W.; El-Dahshan, E.A.; Salem, A.B.M. A machine learning technique for person  
402 identification using ECG signals. *Int. J. Appl. Phys.* **2016**, *1*, 37-41.
- 403 22. Singh, Y.N.; Singh, S.K. Evaluation of Electrocardiogram for Biometric Authentication. *J. Inf. Secur.* **2012**, *3*,  
404 39-48.
- 405 23. Sufi, F.; Khalil, I. Faster person identification using compressed ECG in time critical wireless telecardiology  
406 applications. *J. Netw. Comput. Appl.* **2011**, *34*, 282-293.
- 407 24. Merone, M.; Soda, P.; Sansone, M.; Sansone, C. ECG databases for biometric systems: A systematic review.  
408 *Expert Syst. Appl.* **2016**, *67*, 189-202.
- 409 25. Hoekema, R.; Uijen, G.J.H.; Oosterom, A.V. Geometrical Aspects of the Inter-individual variability of  
410 multilead ECG recordings. *Comput. Cardiol.* **1999**, *26*, 499-502.
- 411 26. Tripathy, R.K.; Acharya, A.; Choudary, S.K. Gender classification from ECG signal analysis using Least  
412 Square Support Vector Machine. *Am. J. Signal Process.* **2012**, *2*, 145-149.
- 413 27. Nazmi, N.; Rahman, M.A.A.; Mazlan, S.A.; Zamzuri, H. Electromyography (EMG) based signal analysis  
414 for physiological device application in lower limb rehabilitation. *2nd International Conference on Biomedical*  
415 *Engineering (ICoBe)* **2015**, 77-82.
- 416 28. Sung, P.S.; Lee, D.C. Gender differences in onset timing and activation of the muscles of the dominant knee  
417 during stair climbing. *The Knee* **2009**, *16*, 375-380.
- 418 29. Zhang, D.; Wang, Y.H. Gender recognition based on fusion of face and gait information. *Proceedings of the*  
419 *Seventh International Conference on Machine Learning and Cybernetics* **2008**, *1*, 62-67.

30. Li, X.; Zhao, X.; Fu, Y.; Liu, Y. Bimodal gender recognition from face and fingerprint. *2010 IEEE Computer Society Conference on Computer Vision and Pattern* **2010**, 2590-2597.
31. Prabhu, G.; Poormina, S. Minimize search time through gender classification from multimodal biometrics. *Procedia Comput. Sci.* **2015**, *50*, 289-294.
32. Greene, B.R.; Boylan, G.B.; Reilly, R.B.; Chazal, P.D.; Connolly, S. Combination of EEG and ECG for improved automatic neonatal seizure detection. *Clin. Neurophysiol.* **2007**, *118*, 1348-1359.
33. Balakrishnan, M.; Mesbah, M. Combining newborn EEG and HRV information for automatic seizure detection. *30th Annual International Conference of the IEEE Engineering in Medicine and Biology Society* **2008**, 4756-4759.
34. Mesbah, M.; Balakrishnan, M.; Colditz, P.B.; Boashash, B. Automatic seizure detection based on the combination of newborn multi-channel EEG and HRV information. *EURASIP J. Adv. Signal Process.* **2012**, *2012*, 1-14.
35. Leeb, R.; Sagha, H.; Chavarriaga, R.; Millan, J.S.D. Multimodal fusion of muscle and brain signals for a hybrid-BCI. *32th Annual International Conference of the IEEE Engineering in Medicine and Biology Society* **2010**, 4343-4346.
36. Bermudez, T.; Lowe, D.; Arlaud-Lamborelle, A.M. EEG/ECG information fusion for epileptic event detection. *IEEE 16th International Conference on Digital Signal Processing* **2009**, 1-8.
37. Xie, P.; Chen, X.; Ma, P.; Li, X.; Su, Y. Identification method of human movement intention based on the fusion feature of EEG and EMG. *Proceedings of the World Congress on Engineering* **2013**, *II*, 1340-1344.
38. Yu, S.; Chen, X.; Wang, B.; Wang, X. Automatic sleep stage classification based on ECG and EEG features for day time short nap evaluation. *Proceedings of the 10th World Congress on Intelligent Control and Automation* **2012**, 4974-4977.
39. Sherwani, K.I.K.; Kumar, N. Fusion of EEG and EMG signals for gait intent detection. *MMU J. Manage. Techn.* **2016**, *1*, 50-55.
40. Rosli, N.A.I.M.; Rahman, M.A.A.; Mazlan, S.A.; Zamzuri, H. Electrocardiographic (ECG) and Electromyography (EMG) signals fusion for physiological device in rehab application. *IEEE Student Conference on Research and Development* **2014**, 1-5.
41. Rosli, N.A.I.M.; Rahman, M.A.A.; Malarvili, M.B.; Mazlan, S.A.; Zamzuri, H. The fusion of HRV and EMG signals for automatic gender recognition during stepping exercise. *TELKOMNIKA* (in press).
42. Gupta, L.; Chung, B.; Srinath, M.D.; Molfese, D.L.; Kook, H. Multichannel fusion models for the parametric classification of differential brain activity. *IEEE T. Bio-Med Eng.* **2005**, *52*, 1869-1881.
43. Atrey, P.K.; Hossain, M.A.; El Saddik, A.; Kankanhalli, M.S. Multimodal fusion for multimedia analysis: a survey. *Multimed. Syst.* **2010**, *16*, 345-379.
44. Lee, P.H.; Hung, J.Y.; Hung, Y.P. Automatic gender recognition using fusion of facial strips. *20th International Conference on Pattern Recognition* **2010**, 1140-1143.
45. Zokaee, S.; Faez, K. Human identification based on ECG and palmprint. *Int. J. Elec. Comput. Eng* **2012**, *2*, 261-266.
46. Deng, Y.; Wu, Z.; Chu, C.H.; Zhang, Q.; Hsu, D.F. Sensor feature selection and combination for stress identification using combinatorial fusion. *Int J. Adv. Robot. Syst.* **2013**, *10*, 306-313.
47. Orphanidou, C.; Fleming, S.; Shah, S.A.; Tarassenko, L. Data fusion for estimating respiratory rate from a single-lead ECG. *Biomed. Signal Process. Contr.* **2013**, *8*, 98-105.
48. Triloka, J.; Senanayake, S.M.N.A.; Lai, D. Neural computing for walking gait pattern identification based on multi-sensor data fusion of lower limb muscles. *Neural Comput. Appl.* **2016**, 1-13.
49. Rosli, N.A.I.M.; Rahman, M.A.A.; Mazlan, S.A.; Zamzuri, H. A review fusion of EMG and HRV biofeedback for physiological device interface in rehabilitation. In *Recent Trends & Applications in HRV*; Editor, M.B., Malarvili; Publishing House: Johor Bahru, Malaysia, 2016; pp. 29-45.
50. Hermens, H.J.; Freriks, B.; Merletti, R.; Stegeman, D.; Blok, J.; Rau, G.; Disselhorst-Klug, C.; Hagg, G. European recommendations for surface electromyography. *Roessingh Res. Develop.* **1999**, *8*, 13-54.
51. Tarvainen, M.P.; Niskanen, J.P.; Lipponen, J.A.; Ranta-Aho, P.O.; Karjalainen, P.A. Kubios HRV - Heart Rate Variability analysis software. *Comput. Methods Programs Biomed.* **2014**, *113*, 210-220.
52. Pan, J.; Tompkins, W.J. A real-time QRS detection algorithm. *IEEE Trans. Biomed. Electrophysiol.* **1985**, *32*, 230-236.

53. Nazmi, N.; Rahman, M.A.A.; Yamamoto, S.; Ahmad, S.A.; Zamzuri, H.; Mazlan, S.A. A review of classification techniques of EMG signals during isotonic and isometric contractions. *Sens.* **2016**, *16*, 1304.
54. Task Force of the European Society of Cardiology and the North American Society of Pacing and Electrophysiology. Heart Rate Variability - Standards of Measurement, Physiological Interpretation, and Clinical Use. *Circ.* **1996**, *93*, 1043-1065.
55. Varol, H.A.; Sup, F.; Goldfarb, M. Multiclass real-time intent recognition of a powered lower limb prosthesis. *IEEE Trans. Biomed. Eng.* **2010**, *57*, 542-551.
56. Triloka, J.; Senanayake, S.M.N.A.; Lai, D. Neural computing for walking gait pattern identification based on multi-sensor data fusion of lower limb muscles. *Neural Comput. Appl.* **2016**, 1-13.
57. Daud, W.M.B.W.; Yahya, A.B.; Horng, C.H.; Sulaima, M.F.; Sudirman, R. Features extraction of Electromyography signals in time domain on biceps brachii muscle. *Int. J. Model. Optimization* **2013**, *3*, 515-519.
58. Jones, A.A.; Power, G.A.; Herzoq, W. History dependence of the electromyogram: Implications for isometric steady-state EMG parameters following a lengthening or shortening contraction. *J. Electromyogr. Kinesiol.* **2016**, *27*, 30-38.
59. Phinyomark, A.; Thongpanja, S.; Hu, H.; Phukpattaranont P.; Limsakul, C. The usefulness of mean and median frequency in Electromyography analysis, in: Naik, R.G. (Ed.), Computational Intelligence in Electromyography Analysis-A Perspective on Current Applications and Future Challenges. *InTech* **2012**, 195-220, ISBN 978-953-51-0805-4.
60. Rokicki, L.A.; Houle, T.T.; Dhingra, L.K.; Weinland, S.R.; Urban, A.M.; Bhalla, R.K. A preliminary analysis of EMG variance as an index of change in EMG biofeedback treatment of tension-type headache. *Appl. Psychophysiol. Biofeedback* **2003**, *28*, 205-215.
61. Harrach, M.A.; Boudaoud, S.; Gamet, D.; Grosset, J.F.; Marin, F. Evaluation of HD-sEMG probability density function deformations in ramp exercise. *36th Annual International Conference of the IEEE Engineering in Medicine and Biology Society (EMBC)* **2014**, 2209-2212.
62. Zhang, X.; Barkhaus, P.E.; Rymer, W.Z. Machine learning for supporting diagnosis of amyotrophic lateral sclerosis using surface electromyogram. *IEEE Trans. Neural Syst. Rehabil. Eng.* **2014**, *22*, 96-103.
63. Hsu, D.F.; Taksa, I. Comparing rank and score combination methods for data fusion in information retrieval. *Inform. Retrieval* **2005**, *8*, 449-480.
64. Hsu, D.F.; Chung, Y.S.; Kristal B.S. Combinatorial fusion analysis: methods and practice of combining multiple scoring systems. *Adv. Data Mining Technol. in Bioinformatics, Idea Group Inc.* **2006**, 32-62.
65. Hsu, D.F.; Kristal B.S.; Schweikert, C. Rank-score characteristics (RSC) function and cognitive diversity. *Brain Inform.* **2010**, *LNAI 6334*, 42-54.
66. Batallones, A.; Sanchez, K.; Mott, B.; Coffran, C.; Hsu, D.F. On the combination of two visual cognition systems using combinatorial fusion. *Brain Inform.* **2015**, *2*, 21-32.
67. Schweikert, C.; Brown, S.; Tang, Z.; Smith, P.R.; Hsu, D.F. Combining multiple ChIP-seq peak detection systems using combinatorial fusion. *BMC Genomics* **2012**, *13*, S1-S12.
68. Lyons, D.M.; Hsu D.F. Combining multiple scoring systems for target tracking using rank-score characteristics. *Inform. Fusion* **2009**, *10*, 124-136.
69. Lin, K.L.; Lin, C.Y.; Huang, C.D.; Chang, H.M.; Yang, C.Y.; Lin, C.T.; Tang, C.Y.; Hsu, D.F. Feature selection and combination criteria for improving accuracy in protein structure prediction. *IEEE Trans. Nanobiosci.* **2007**, *6*, 186-196.
70. Rosli, N.A.I.M.; Rahman, M.A.A.; Malarvili, M.B.; Komeda, T.; Mazlan, S.A.; Zamzuri, H. The gender effects of heart rate variability response during short-term exercise using stair stepper from statistical analysis. *Indonesian Journal of Electrical Engineering and Computer Science* **2016**, *2*, 359-366.

