

Article

Not peer-reviewed version

Quantum Security of A Compact Multi-Signature

[Shaoquan Jiang](#)*

Posted Date: 30 August 2024

doi: 10.20944/preprints202408.2138.v1

Keywords: Compressed quantum random oracle; ring-LWE; multi-signature; identification scheme



Preprints.org is a free multidiscipline platform providing preprint service that is dedicated to making early versions of research outputs permanently available and citable. Preprints posted at Preprints.org appear in Web of Science, Crossref, Google Scholar, Scilit, Europe PMC.

Copyright: This is an open access article distributed under the Creative Commons Attribution License which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Article

Quantum Security of A Compact Multi-Signature

Shaoquan Jiang

School of Computer Science, University of Windsor, Windsor, ON, Canada N9B 3P4; jiangshq@uwindsor.ca

Abstract: With the rapid advance in quantum computing, quantum security is now an indispensable property for any cryptographic system. In this paper, we study how to prove the security of a complex cryptographic system in the quantum random oracle model. We first give a variant of Zhandry's compressed quantum random oracle (CStO), called compressed quantum random oracle with adaptive special points (CStO_s). Then, we extend the on-line extraction technique of Don et al (EUROCRYPT'22) from CStO to CStO_s . We also extend the random experiment technique of Liu and Zhandry (CRYPTO'19) for extracting the CStO query that witnesses the future adversarial output. With these preparations, a systematic security proof in the quantum random oracle model can start with a random CStO experiment (that extracts the witness for the future adversarial output) and then convert this game to one involving CStO_s . Next, the on-line extraction technique for CStO_s can be applied to extract the witness for any on-line commitment. With this strategy, we give a security proof of our recent compact multi-signature framework that is converted from any weakly secure linear ID scheme. We also prove the quantum security of our recent lattice realization of this linear ID scheme, by iteratively applying the weakly collapsing protocol technique of Liu and Zhandry (CRYPTO 2019). Combining these two results, we obtain the first quantum security proof for a compact multi-signature.

Keywords: compressed quantum random oracle; ring-LWE; multi-signature; identification scheme

1. Introduction

A multi-signature scheme allows a group of signers to jointly generate a signature while any subset of them can not represent the group. This mechanism was introduced by Itakura and Nakamura [22] with the motivation to reduce the signature size. In the blockchain application [41], it is also demanded that the aggregated public-key that represents the group should also have a small size, as it will be part of the transaction and the network storage. The blockchain has no control over a user and hence one should be able to freely decide his public-keys. Accordingly, we must make sure that it is secure against a *rogue key attack*: the attacker might choose his public-key after seeing other signers' public-keys. In a poorly designed scheme, an attacker could manage to decide the secret key of the aggregated public-key. In addition, with the advance of quantum computer, the quantum attack places a major threat to any cryptographic system. Especially, the RSA based multi-signature (such as [5]) is no longer secure [45]. In this paper, we investigate the multi-signature security in the quantum random oracle model, where the attacker has an internal quantum computer and also can access to the quantum random oracle. We aim to develop quantum random oracle techniques that enable a security proof of a complex cryptographic system. We then apply it to prove the security of our recent compact multi-signature.

1.1. Related Works

A multi-signature scheme [22] is a special case of aggregate signature [8] where each signer of the latter can sign a possibly different message. Since it was introduced by Itakura and Nakamura [22], it has been intensively studied in the literature [2,3,5,7,32,36,38,39,42,46]. However, most of schemes are based on some variants of discrete logarithm assumption which does not hold under a quantum attack [45]. There are multi-signatures that are based on quantum mechanics only (i.e., without a computational hardness assumption) [21,25]. However, their schemes are certainly not what

is understood in the crypto community: (1) signers need to share a private key with a trusted party; (2) the verification is completely done by the trusted party; (3) signer has no public-key.

Constructions from lattice assumptions such as (ring-)LWE are potentially the solutions for the quantum secure multi-signature problem. However, currently there are only very few schemes [10,19,26,27,31,37] from this. In addition, some schemes [26,27] are known insecure [23,31]. Schemes [10,14,17–19,23,37] did not consider a quantum attacker. Fukumitsu and Hasegawa [20] is the only previous scheme that considered the quantum security. Their construction is based on Dilithium signature [28]. However, their scheme only allows a constant number of signers and the verification requires all signers' public-keys. Their proof technique (also that of Dilithium [28]) seems to rely on the statistical lossy property of the underlying ID scheme and is unclear if it can be generally usable in other security analysis. In this paper, we investigate general quantum random oracle techniques that are useful in proving a wide class of random oracle based systems. With this, we prove the quantum security of our recent multi-signature framework [23].

The random oracle basically models a hash function as a completely random function. It was first proposed by Bellare and Rogaway [4]. This methodology has a heuristic assumption: when the random oracle is replaced by a cryptographic hash function, the security will preserve. This generally is not true [11]. However, the counter example does not seem realistic. So the crypto community still widely believes that this methodology is practically meaningful. Furthermore, it greatly simplifies the construction of many cryptographic systems and the proof in the classic random oracle is usually amazingly simple. However, it is not true for the quantum world. The great advantage of a classic random oracle is that the simulator can easily record the attacker's query history. In the quantum setting, this is difficult as an attacker can query a superposition. If the simulator makes a measurement on the query, it will destroy the quantum state. Zhandry [49] proposed new techniques to record the oracle query which is called *compressed random oracle (CStO)*. Essentially, if the oracle is only queried q times, then the oracle can be compactly represented into a superposition of database with the basis record only containing at most q non-trivial values. Don et al. [15] showed a simulation that can extract an oracle query of a (classic) commitment on the fly. The impact of this feature is that if an adversary outputs a commitment value, we can immediately extract his query input that matches this commitment. This will not destroy the quantum state essentially because when an attacker outputs his classic commitment, he must have already made the measurement. Hence, this gives us a very useful tool, especially when a simulator needs to know the query in order to continue the simulation. However, this is not enough in some proofs. For example, in our multi-signature scheme, the adversary will receive a honest user's public-key pk_1 and then generate two public-key pk_2, pk_3 . At the end, he will try to forge a signature w.r.t. a combined public-key $F(pk_1, pk_2, pk_3)$ that is computed from $H(pk_i|pk_1|pk_2|pk_3)$ for $i = 1, 2, 3$ and H is the random oracle. The problem is that pk_2, pk_3 will reveal only at the end of the game. If the simulator wishes to know it in advance, it is impossible using the techniques in [15]. Liu and Zhandry [30] presented a measurement technique to extract pk_2, pk_3 during the game involving *CStO*. Essentially, it chooses a random query and measures it. Then, the outcome is $pk_i|pk_1|pk_2|pk_3$ for some i with a good probability. Further, the adversary success probability for the forgery will be degraded only by a polynomial fraction. For technique reasons, it is desired that the simulator can set the random oracle value of the measure outcome $pk_i|pk_1|pk_2|pk_3$ (called *special point*) to a value of his favorite. To take the advantage of both extraction techniques, one might consider the simulation of [15] with the measurement techniques in [30]. However, there are two issues. First, Some verification measurements in [30] will be done on the random oracle database and hence the extraction theorems in [15] will no longer hold. Second, the special input measurement [30] is operated only once. This sometimes is insufficient to produce a witness for the final adversary output. Our work in this paper is to propose an improved *CStO* that addresses the two issues and then apply the improved random oracle techniques to prove the security of our recent compact multi-signature scheme [23].

1.2. Contribution

In this paper, we study how to improve *CStO* so that it still has a simulator (similar to [15]) that allows to extract a query input of any given commitment on the fly but additionally also allows to adaptively specify a small number of special points and set their random oracle values to our own choices. The improved random oracle is called *compressed random oracle with adaptive special points* (**CStO_s**). We generalize the simulator and extraction theorem in [15] to the **CStO_s** setting. We also generalize the experiment sampling technique in [30] to allow samplings for several times. This allows us to extract the witness of the final adversary output, where this witness might depend on several random oracle queries (that are measured during the game). This random experiment can be easily converted to an interaction with **CStO_s** oracle and hence the foregoing on-line extraction technique can be applied. With this improved random oracle technique, we show that our recent multi-signature framework (which is converted from any weakly secure linear identification) is provably secure in the quantum random oracle model. The proof strategy is to use the sequence of game technique. It starts the adversary with a standard quantum random oracle and then continues with the compressed quantum random oracle (**CStO**) while preserving the same adversary success probability. It next applies the random experiment sampling techniques which degrades the adversary success only by a polynomial fraction but it can extract the witness for the final adversary output. Then, we convert the random experiment (with **CStO**) to one involving **CStO_s**. Finally, the online extraction technique is used to simulate the interaction without the knowledge of the secret of an ID scheme. This allows to reduce the adversary success to the security of the ID scheme. We also prove the quantum security of the JAK ID scheme in [23]. The main tool to achieve this is to use the collapsing sigma protocol technique in [30] that was originally proposed by Unruh [47]. Our security proof essentially is to formulate the JAK ID security game into two public-coin protocols, each of which uses the collapsing property to guarantee the non-negligibility of the adversary success probability. This two-step analysis allows us to reduce the adversary success probability in attacking the JAK ID scheme to break the underlying ring-SIS assumption.

2. Preliminaries

Notations. We will use the following notations.

- $x \leftarrow S$ samples x uniformly random from a set S .
- For a randomized algorithm A , $u = A(x; r)$ denotes the output of A with input x and randomness r , while $u \leftarrow A(x)$ denotes the random output (with unspecified randomness).
- Min-entropy $H_\infty(X) = -\log(\max_x P_X(x))$.
- A concatenating with B is represented by $A|B$ and also by (A, B) (if the context is clear).
- $\text{negl}(\lambda)$ is *negligible*: $\lim_{\lambda \rightarrow \infty} \text{poly}(\lambda) \text{negl}(\lambda) = 0$ for any polynomial $\text{poly}(\lambda)$.
- $[v]$ denotes set $\{1, \dots, v\}$.
- $\|v\|$ is the Euclidean norm: $\|v\| = \sqrt{\langle v|v \rangle}$.
- \mathcal{Y}^λ denotes the set of vector $\mathbf{y} := \{y_x\}_{x \in \mathcal{X}}$. We use $\mathbf{y}(x)$ to denote y_x .

2.1. Ring and Module

In this section, we review math concepts: ring and module (for details, see [29]). A **ring** A is a set, associated with multiplication and addition operators, respectively written as a product and a sum, satisfying the following conditions:

- **R-1.** A is a commutative group under addition operator $+$ with identity element $\mathbf{0}$.
- **R-2.** A is associative under multiplication operator: for $a, b, c \in A$, $(ab)c = a(bc)$. Also, it has a unit element $\mathbf{1}$: $\mathbf{1}a = a$.
- **R-3.** It satisfies the distributive law: for $a, b, c \in A$, $a(b + c) = ab + ac$ and $(b + c)a = ba + ca$.

In this paper, we only consider a *commutative ring*: if $a, b \in A$, then $ab = ba$. When we say ring, it always means a commutative ring. If A is a commutative ring with $\mathbf{0} \neq \mathbf{1}$ and every non-zero element in A has an inverse, then A is a **field**.

Definition 1. Let R be a ring. An Abelian group M (with group operator \boxplus) is a R -module, if (1) it has defined a multiplication operator \bullet between R and M : for any $r \in R, m \in M, r \bullet m \in M$; (2) the following conditions are satisfied: for any $r, s \in R$ and $x, y \in M$,

1. $r \bullet (x \boxplus y) = (r \bullet x) \boxplus (r \bullet y)$;
2. $(r + s) \bullet x = (r \bullet x) \boxplus (s \bullet x)$
3. $(rs) \bullet x = r \bullet (s \bullet x)$
4. $1_R \bullet x = x$, where 1_R is the multiplicative identity of R .

Note that if R is a field, then R -module M in fact is the well-understood concept - *vector space*, where M consists of vectors and R is the coefficient field.

2.2. Elements in Quantum Computing

In this section, we give a brief introduction to quantum computing. Details can be found in [43]. A quantum system is a finite-dimensional complex Hilbert space \mathcal{H} with an inner product $\langle \cdot | \cdot \rangle$. We use standard bra-ket notations to denote vectors in \mathcal{H} and its dual space. The state of a quantum system is a unit vector $|\psi\rangle$. Let \mathcal{Y} be a finite Abelian group. We use $\{|y\rangle\}_{y \in \mathcal{Y}}$ to represent an orthonormal basis for $\mathcal{H} = \mathbb{C}^{|\mathcal{Y}|}$. We also write this \mathcal{H} as $\mathbb{C}[\mathcal{Y}]$ to emphasize that \mathcal{H} is expanded by $\{|y\rangle\}_{y \in \mathcal{Y}}$. For two quantum systems \mathcal{H}_1 and \mathcal{H}_2 , the joint system is a tensor product $\mathcal{H}_1 \otimes \mathcal{H}_2$. For $|\psi_1\rangle \in \mathcal{H}_1$ and $|\psi_2\rangle \in \mathcal{H}_2$, their product state is $|\psi_1\rangle|\psi_2\rangle$. For an ordered set $\mathcal{X} = \{x_1, \dots, x_n\}$, $\mathbb{C}[\mathcal{Y}]^{\otimes \mathcal{X}}$ represents the tensor product of $|\mathcal{X}|$ copies of $\mathbb{C}[\mathcal{Y}]$ with the i th copy labeled by x_i . A quantum system \mathcal{H} has an orthonormal basis $\{|\psi_1\rangle, \dots, |\psi_n\rangle\}$. With this, a quantum state $|\psi\rangle \in \mathcal{H}$ can be represented as $|\psi\rangle = \sum_{i=1}^n \lambda_i |\psi_i\rangle$ with $\sum_i |\lambda_i|^2 = 1$. Quantum operations on \mathcal{H} consist of unitaries and measurements. A unitary U on \mathcal{H} is an operator from \mathcal{H} to \mathcal{H} with $UU^\dagger = I$, where U^\dagger is the conjugate of U . Measurement $M = \{M_i\}_i$ on a quantum state $|\psi\rangle \in \mathcal{H}$ is the operator for extracting the classic information from $|\psi\rangle$, where each M_i must be Hermitian (i.e., $M_i^\dagger = M_i$) and satisfies the completeness condition $\sum_i M_i^\dagger M_i = I$. After the measurement, the post-measurement state will be $M_i|\psi\rangle / \|M_i|\psi\rangle\|$, which occurs with probability $\|M_i|\psi\rangle\|^2$. A quantum algorithm A is represented by a list of unitaries/measurements. Due to deferred measurement principle [43, pp. 186], the measurement can be deferred to the end of operations of A . Hence, whenever applicable, we assume that A before the final measurement is represented by a list of unitaries U_1, \dots, U_ℓ .

Let $\mathcal{L}(\mathcal{H})$ denote the linear operator from \mathcal{H} to \mathcal{H} . For $A, B \in \mathcal{L}(\mathcal{H})$, their commutator is defined as $[A, B] = AB - BA$. The norm of linear operator A on \mathcal{H} is defined as $\|A\| = \max_v \|A|v\rangle\|$, where $|v\rangle$ goes over all the possible unit vectors in \mathcal{H} . By the singular value decomposition theorem, we can write $A = \sum_i \lambda_i |v_i\rangle\langle y_i|$, where $\{|v_i\rangle\}_i$ and $\{|y_i\rangle\}_i$ are respectively a set of orthonormal vectors in \mathcal{H} and $\{\lambda_i\}_i$ is the set of positive singular values of A . Hence, $\|A\| = \max_i \lambda_i$. The trace distance between two states ρ, σ is defined as $D_t(\rho, \sigma) = \frac{1}{2} \text{tr}(|\rho - \sigma|)$, where $|A| := \sqrt{A^\dagger A}$.

2.3. Multi-Signature

In this section, we introduce the multi-signature and its security model. A *multi-signature* scheme is a protocol that allows a group of signers to jointly generate a signature. The signature should be valid against an *aggregated public-key* determined from all signers' public-keys. The protocol proceeds in rounds. Signers are pair-wise connected but the channel is not secure. The target is to generate a short signature. It is desired that the aggregated public-key should be short too.

Definition 2. A **multi-signature** scheme is a quadruple of algorithms (**Setup**, **KeyGen**, **Sign**, **Verify**), described as follows.

Setup. Given 1^λ , it generates a system parameter *param*. Note: *param* should be part of the input for **KeyGen**, **Sign**, **Verify**. But we usually omit it for brevity.

KeyGen. It takes *param* as input and generates a private key *sk* and a public-key *pk*.

Sign. Given public-keys (pk_1, \dots, pk_n) and a message M , user i has the private key sk_i w.r.t. pk_i . Then, they interact with each other and finally output a signature σ , with respect to an aggregated public-key $\overline{pk} := F(pk_1, \dots, pk_n)$, where F is called an aggregation function.

Verify. Upon (σ, M) and an aggregated public-key $\overline{pk} = F(pk_1, \dots, pk_n)$, verifier outputs either 1 (for accept) or 0 (for reject).

Remark 1. The aggregated key \overline{pk} carries the information of the signers' public-keys. It is desired that it has a size independent of n . But this is not enforced in the definition.

2.3.1. Security Model

In the following, we define the existential unforgeability of a multi-signature in the quantum random oracle model. Essentially, it says that no quantum adversary can forge a valid signature on a new message as long as the signing group contains an honest member. Toward this, the attacker can access to a signing oracle and quantum random oracle and create fake public-keys at will. The security is defined through a game between a challenger CHAL and a quantum attacker \mathcal{A} that has oracle access to quantum random oracle maintained by CHAL.

Initially, CHAL generates param and a challenge public-key pk^* with a private key sk^* . It then provides $pk^*|\text{param}$ to \mathcal{A} who has an initial state $|\psi\rangle = \sum_{xyw} \lambda_{xyw} |x\rangle_X |y\rangle_Y |w\rangle_W$, where X, Y, W represents query register, response register and working register respectively. Next, \mathcal{A} interacts with CHAL through signing oracle and random oracle RO and finally generates a forgery.

Sign(PK, M). Here PK is a set of *distinct* public-keys with $pk^* \in PK$. Upon this query, CHAL represents the signer of pk^* and \mathcal{A} represents signers of $PK - \{pk^*\}$ to run the signing protocol on message M . Finally, it outputs the multi-signature σ (if it succeeds) or \perp (if it fails).

RO. \mathcal{A} can query random oracle RO by providing his XY registers to CHAL who applies RO on XYD so that $RO|x\rangle_X |y\rangle_Y |H\rangle_D = |x\rangle |y + H(x)\rangle |H\rangle$, where H is the random function and D is the random oracle register. Finally, it returns registers XY back to \mathcal{A} . See Section 4.1 for details.

Forgery. Finally, \mathcal{A} outputs a signature σ^* for a message M^* , w.r.t. a set of *distinct* public-keys (pk_1^*, \dots, pk_N^*) s.t. $pk^* = pk_i^*$ for some i . \mathcal{A} succeeds if (a) $\text{Verify}(\overline{pk}^*, \sigma^*, M^*) = 1$ and (b) $((pk_1^*, \dots, pk_N^*), M^*)$ was not issued to **Sign** oracle. Denote a success forgery event by **succ**.

Definition 3. A multi-signature scheme (**Setup, KeyGen, Sign, Verify**) is existentially unforgeable against chosen message attack (or EU-CMA for short) in the quantum random oracle model, if the following holds.

- **Correctness.** For $(sk_1, pk_1), \dots, (sk_n, pk_n)$ generated by **KeyGen**, the signature generated by signing algorithm on a message M will pass the verification, except for a negligible probability.
- **Existential Unforgeability.** For any quantum polynomial time adversary \mathcal{A} in the above forgery game, $\Pr(\text{succ}(\mathcal{A}))$ is negligible.

2.4. Canonical Linear Identification

A canonical identification system is a 3-round public coin protocol where the first round message has a super logarithmic min-entropy. It is formally defined as follows (also see Figure 1).

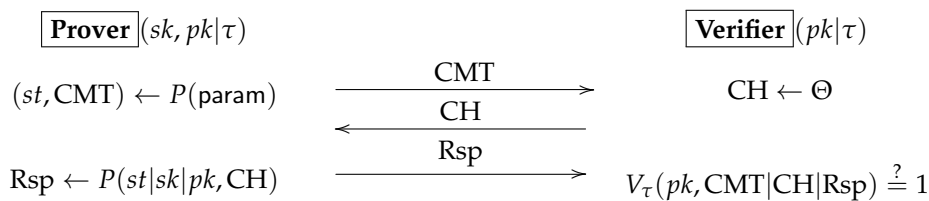


Figure 1. Canonical Identification Protocol.

Definition 4. A canonical identification scheme with parameter $\tau \in \mathbb{N}$ is a quadruple of algorithms $\mathcal{ID} = (\mathbf{Setup}, \mathbf{KeyGen}, P, V_\tau)$, where **Setup** takes security parameter λ as input and generates a system parameter *param*; **KeyGen** is a key generation algorithm that takes *param* as input and outputs a public key pk and a private key sk ; P is an algorithm, executed by prover; V_τ is an algorithm parameterized by τ , executed by Verifier. \mathcal{ID} is a three-round protocol, where Prover starts with a committing message CMT with $H_\infty(CMT) = \omega(\log \lambda)$, and then Verifier replies with a challenge $CH \leftarrow \Theta$ and finally Prover finishes with a response Rsp which will be either rejected or accepted by V_τ .

The domains of sk , pk , CMT , Rsp are respectively denoted by $\mathcal{SK}, \mathcal{PK}, \mathcal{CMT}, \mathcal{RSP}$. We are interested in a canonical ID scheme with linearity [23] and simulability in the following sense.

Linearity. A canonical ID scheme $\mathcal{ID} = (\mathbf{Setup}, \mathbf{KeyGen}, P, V_\tau)$ is **linear** if it satisfies the following conditions.

- i. $\mathcal{SK}, \mathcal{PK}, \mathcal{CMT}, \mathcal{RSP}$ are \mathcal{R} -modules for some ring \mathcal{R} with $\Theta \subseteq \mathcal{R}$ (as a set);
- ii. For any $\lambda_1, \dots, \lambda_t \in \Theta$ and public/private pairs (sk_i, pk_i) ($i = 1, \dots, t$), we have that $\overline{sk} = \sum_{i=1}^t \lambda_i \bullet sk_i$ is a private key of $\overline{pk} = \sum_{i=1}^t \lambda_i \bullet pk_i$.

Note: Operator \bullet between \mathcal{R} and \mathcal{SK} (resp. $\mathcal{PK}, \mathcal{CMT}, \mathcal{RSP}$) might be different. But we will use the same symbol \bullet as long as it is clear from the context.

- iii. Let $\lambda_i \leftarrow \Theta$ and $(pk_i, sk_i) \leftarrow \mathbf{KeyGen}(1^\lambda)$, for $i = 1, \dots, t$. If $CMT_i|CH|Rsp_i$ is a *faithfully* generated transcript of the ID scheme w.r.t. pk_i , then

$$V_\tau(\overline{pk}, \overline{CMT}|CH|\overline{Rsp}) = 1, \quad (1)$$

where $\overline{pk} = \sum_{i=1}^t \lambda_i \bullet pk_i$, $\overline{CMT} = \sum_{i=1}^t \lambda_i \bullet CMT_i$ and $\overline{Rsp} = \sum_{i=1}^t \lambda_i \bullet Rsp_i$.

Note: we require Equation (1) to hold only if the keys and transcripts are faithfully generated. If some are contributed by attacker, this equality might fail.

Simulability. \mathcal{ID} is simulatable if there exists a polynomial time algorithm **SIM** s.t. for $(sk, pk) \leftarrow \mathbf{KeyGen}(1^\lambda)$, $CH \leftarrow \Theta$ and $(CMT, Rsp) \leftarrow \mathbf{SIM}(CH, pk, param)$, it holds that $CMT|CH|Rsp$ is indistinguishable from a real transcript, even if the quantum distinguisher is given $pk|param$ and has access to oracle $\mathcal{O}_{id}(sk, pk)$, where $\mathcal{O}_{id}(sk, pk)$ acts as follows: $(st, CMT) \leftarrow P(param)$; $CH \leftarrow \Theta$; $Rsp \leftarrow P(st|sk|pk, CH)$; output $CMT|CH|Rsp$.

Now we define the security for a linear ID scheme. Essentially, it is desired that an attacker is unable to impersonate a prover w.r.t. an aggregated public-key, where at least one of the participating public-keys is not generated by attacker. Here we use the aggregated public-key as the challenge public-key in order to relate it to the security of the multi-signature later.

Definition 5. A canonical identification scheme $\mathcal{ID} = (\mathbf{Setup}, \mathbf{KeyGen}, P, V_\tau, \Theta)$ with linearity and $\tau \in \mathbb{N}$ is **secure** if it satisfies correctness and security below.

Correctness. When no attack presents, Prover will convince Verifier.

Soundness. For any quantum polynomial time algorithm \mathcal{A} , $\Pr(\text{EXP}_{\mathcal{ID}, \mathcal{A}} = 1)$ is negligible, where $\text{EXP}_{\mathcal{ID}, \mathcal{A}}$ is defined below with $pk_i \in \mathcal{PK}$ for $i \in [t]$ and $\overline{pk} = \sum_{i=1}^t \lambda_i \bullet pk_i$.

Experiment $\text{EXP}_{\mathcal{ID}, \mathcal{A}}(\lambda)$

$param \leftarrow \mathbf{Setup}(1^\lambda)$;
 $(pk_1, sk_1) \leftarrow \mathbf{KeyGen}(param)$;
 $(|st_0\rangle, pk_2, \dots, pk_t) \leftarrow \mathcal{A}(param, pk_1)$
 $\lambda_1, \dots, \lambda_t \leftarrow \Theta$
 $(|st_1\rangle, CMT) \leftarrow \mathcal{A}(|st_0\rangle, \lambda_1, \dots, \lambda_t)$;
 $CH \leftarrow \Theta$; $Rsp \leftarrow \mathcal{A}(|st_1\rangle, CH)$;

$b \leftarrow V_t(\overline{pk}, \text{CMT}|CH|Rsp);$
output b .

3. Basic Properties in Quantum Computing

In this section, we give some fundamental properties in quantum computing. The first result is trivial and can be verified by simple calculations. We thus state it without a proof.

Lemma 1. *Let $A, B, C \in \mathcal{L}(\mathcal{H})$. Then, the following holds.*

1. $[AB, C] = A[B, C] + [A, C]B;$
2. $[ABC, D] = AB[C, D] + A[B, D]C + [A, D]BC;$
3. $[A^n, B] = \sum_{i=0}^{n-1} A^i[A, B]A^{n-i-1}.$

The next lemma was stated in [15] with a proof omitted. We give a proof for completeness.

Lemma 2. *Let $A, B, A_1, A_2 \in \mathcal{L}(\mathcal{H})$. Then, the following holds.*

1. If $A_1, A_2 \in \mathcal{L}(\mathcal{H})$, then $\|A_1 \otimes A_2\| = \|A_1\| \cdot \|A_2\|.$
2. If $A^\dagger B = 0$ and $AB^\dagger = 0$, then $\|A + B\| \leq \max(\|A\|, \|B\|).$ Especially, if $A = \sum_x |x\rangle\langle x| \otimes A^x$, then $\|A\| \leq \max_x \|A^x\|.$

Proof. 1. Let $A_1 = U_1 D_1 V_1$ and $A_2 = U_2 D_2 V_2$ for $D_i = \text{diag}(\mu_{i1}, \dots, \mu_{it_i})$ with $\mu_{ij} \geq 0$ and unitary U_1, U_2, V_1, V_2 . Then, $A_1 \otimes A_2 = (U_1 \otimes U_2)(D_1 \otimes D_2)(V_1 \otimes V_2)$. Hence, $\|A_1 \otimes A_2\| = (\max_t \mu_{1t})(\max_j \mu_{2j}) = \|A_1\| \cdot \|A_2\|$ as $U_1 \otimes U_2$ and $V_1 \otimes V_2$ are unitary.

2. By the singular value decomposition theorem, we can write $A = \sum_{i=1}^s \lambda_i |x_i\rangle\langle y_i|$ and $B = \sum_{i=1}^t \beta_i |u_i\rangle\langle v_i|$, where $\{|x_i\rangle\}_i, \{|y_i\rangle\}_i, \{|u_i\rangle\}_i, \{|v_i\rangle\}_i$ are respectively orthonormal sets of vectors in \mathcal{H} and $\lambda_j, \beta_j > 0$. Then, from $A^\dagger B = 0$, we have $\sum_{i,j} \lambda_i^* \beta_j \langle x_i | u_j \rangle \cdot |y_i\rangle\langle v_j| = 0$. As $\langle y_i | A^\dagger B | v_j \rangle = 0$, we know that $\langle x_i | u_j \rangle = 0$ for $i = 1, \dots, s$ and $j = 1, \dots, t$. Similarly, from $AB^\dagger = 0$, we have $\langle y_i | v_j \rangle = 0$. Hence, $\{|y_i\rangle\}_{i=1}^s, \{|v_i\rangle\}_{i=1}^t$ are disjoint and together orthonormal states. They together can be extended to an orthonormal basis. Let $|x\rangle$ be any normalized state represented under this basis with coordinate vector (w_1, \dots, w_n) . Then, $(A + B)|x\rangle = \sum_{i=1}^s \lambda_i w_i |x_i\rangle + \sum_{j=1}^t \beta_j w_{s+j} |u_j\rangle$. Its norm is upper bounded by $\max_{ij} (|\lambda_i|, |\beta_j|) = \max(\|A\|, \|B\|)$, desired! This result implies the second claim as $(|x\rangle\langle x| \otimes A^x)^\dagger (|y\rangle\langle y| \otimes A^y) = 0$ for any $x \neq y$. \square

Definition 6. Register D is a **control register** for operator B which works on registers WD , if B can be written as $B = \sum_y B_y \otimes |y\rangle\langle y|_D$ for an orthonormal basis $\{|y\rangle\}_y$, where B_y works on W .

Remark 2. This definition is very loose. If B does not operate on D , by default, it is understood as $B \otimes I_D = \sum_x B \otimes |x\rangle\langle x|$ for a basis $\{|x\rangle\}_x$ and so D is a control register for B . The following lemma is shown by simple verifications.

Lemma 3. *Let XYD be three quantum registers. The following properties hold.*

1. If A operates on XD while B operates on YD with D being a control register in the same basis $\{|y\rangle\}_{y \in D}$ for both A and B , then $[A, B] = 0$.
2. If A is a projector on D in basis $\{|y\rangle\}_y$ and B operates on YD with D being a control register in the same basis, then $[A, B] = 0$.

Lemma 4. *Let $|\psi\rangle = \sum_y t_y |\psi_y\rangle |y\rangle$ be a joint state for register XY with $\{|y\rangle\}_{y \in Y}$ orthonormal basis of register Y . Let $P = \{|y\rangle\langle y|\}_y$ be the projective measurement on register Y . Let $Q = \{|x\rangle\langle x|\}_x$ be the measurement on register X . Let U_y be a unitary on register X , labelled with $y \in Y$. Consider procedure A : apply*

$\sum_{y \in Y} U_y \otimes |y\rangle\langle y|$ to $|\psi\rangle$ and then apply measurement Q on X to output x . Also consider procedure A' which starts with measurement P on Y and continues with procedure A with the final output denoted by x' . Then, the distributions of x and x' are identical.

Proof. Procedure A outputs x with probability $\|\sum_y t_y Q_x U_y |\psi_y\rangle |y\rangle\|^2$. The procedure A' outputs y , resulting in the collapsed state $U_y |\psi_y\rangle |y\rangle$ with probability $\|t_y\|^2$. Following the measurement Q , it outputs x with probability $\|t_y Q_x U_y |\psi_y\rangle |y\rangle\|^2$. So the overall probability to output x with probability $\sum_y \|t_y Q_x U_y |\psi_y\rangle |y\rangle\|^2 = \|\sum_y t_y Q_x U_y |\psi_y\rangle |y\rangle\|^2$, as $\{|y\rangle\}_y$ is orthogonal, desired. \square

Remark 3. There are two points to clarify.

(1) In Lemma 4, it is important that projective measurement $P = \{|y\rangle\langle y|\}_y$ uses the same basis as $\{|y\rangle\}_y$ as in $\sum_y U_y \otimes |y\rangle\langle y|$. That is, the unitary needs to use register Y as a control register in the basis of the projective measurement P . Otherwise, the result will be incorrect. For example, let $|\psi\rangle = |0\rangle|+\rangle$, where $|+\rangle = \frac{|0\rangle+|1\rangle}{\sqrt{2}}$ and $|-\rangle = \frac{|0\rangle-|1\rangle}{\sqrt{2}}$. Define $U_+ = |1\rangle\langle 0| + |0\rangle\langle 1|$ and $U_- = I$. Let $Q = \{|0\rangle\langle 0|, |1\rangle\langle 1|\}$ on register X and $P = Q$ but on register Y . Let $U = U_+ \otimes |+\rangle\langle +| + U_- \otimes |-\rangle\langle -|$. Then, for procedure A , the state before measurement Q is $|1\rangle|+\rangle$ and hence the outcome of Q is 1 with probability 1. But procedure A' , after measurement P , the state is $|0\rangle|1\rangle$ or $|0\rangle|0\rangle$, each with probability 1/2. Since $|1\rangle = \frac{|+\rangle-|-\rangle}{\sqrt{2}}$ and $|0\rangle = \frac{|+\rangle+|-\rangle}{\sqrt{2}}$, after applying U , the result is $\frac{1}{\sqrt{2}}(|1\rangle|+\rangle \pm |0\rangle|-\rangle)$ (\pm depending 1 or 0 on Y register) and next the measurement Q on register X gives the outcome 1 with probability $1/2 \cdot 1/2 + 1/2 \cdot 1/2 = 1/2$. This is different from the procedure A .

(2) This counter example can also be regarded as the evidence that starting with a different projective measurement on the same register will result in a different final output distribution. Indeed, Procedure A in our example can also be regarded as starting with a projective measurement $P' = \{|+\rangle\langle +|, |-\rangle\langle -|\}$ as it does not change $|\psi\rangle$, while procedure A' remains unchanged (starting with measurement P). But x and x' are distributed differently.

Summarizing the example, if we insert a measurement into the quantum algorithm, the output could be disturbed. But the following result states that the probabilities w/o a measurement are actually related. This result was given by Boneh and Zhandry [9] but it seems only valid for the case where M is a projective (instead of general) measurement.

Lemma 5. Let A be a quantum algorithm and $\Pr[x]$ be the probability that A outputs x . Let A' be the algorithm that runs A till some stage and then performs a projective measurement M which gives an outcome m (out of k possible choices) and next continues the execution of A with post-measurement state. Let $\Pr'[x]$ be the probability that A' outputs x . Then, $\Pr'[x] \geq \Pr[x]/k$.

Proof. Let $M = \{M_i\}_{i=1}^k$ be the measurement. Let $|\phi\rangle$ be the state right before this measurement. Then, the probability of partial measurement outcome m occurs with probability $p_m = \langle \phi | M_m^* M_m | \phi \rangle$ and the post-measurement has the state $|\phi_m\rangle = M_m |\phi\rangle / \sqrt{p_m}$. By deferred measurement principle, we can assume that A after this consists of a unitary U and a final projective measurement $\{P_i\}_i$ be the final measurement. Then

$$\Pr'[x] = \sum_m p_m \langle \phi_m | U^\dagger P_x^\dagger P_x U | \phi_m \rangle = \sum_m \langle \phi | M_m^\dagger U^\dagger P_x^\dagger P_x U M_m | \phi \rangle \quad (2)$$

$$= \sum_m \|P_x U M_m | \phi \rangle\|^2 \geq \|\sum_m P_x U M_m | \phi \rangle\|^2 / k \quad (3)$$

$$= \|P_x U | \phi \rangle\|^2 / k = \Pr[x] / k. \quad (4)$$

where the inequality follows from Cauchy-Schwarz inequality and Equation (4) uses the fact that M is the projective measurement so $\sum_m M_m = \sum_m M_m^\dagger M_m = I$. \square

Lemma 6. Let $|u\rangle, |v\rangle$ be two states for a quantum system. $D_t(|u\rangle\langle u|, |v\rangle\langle v|) \leq |||u\rangle - |v\rangle||$.

Proof. Let $|0\rangle = |u\rangle$ and take $|1\rangle$ as a unit orthogonal state of $|0\rangle$ so that $|v\rangle = \omega(\cos(\theta)|0\rangle + \sin(\theta)|1\rangle)$ with $\theta \in [0, \pi/2]$, by absorbing the complex unit factor (if any) into $|1\rangle$, where ω is a complex unit factor. By calculation, $D_t(|u\rangle\langle u|, |v\rangle\langle v|) = |\sin(\theta)|$. On the other hand, $|||u\rangle - |v\rangle|| = \sqrt{|1 - \omega \cos(\theta)|^2 + \sin^2(\theta)} \geq \sqrt{(1 - \cos(\theta))^2 + \sin^2(\theta)} = 2|\sin(\theta/2)|$. Since $|\sin(\theta)| = 2|\sin(\theta/2)| \cdot \cos(\theta/2) \leq 2|\sin(\theta/2)|$, the result follows. \square

The following property states that an intermediate measurement by a quantum algorithm is not necessary (in the sense that we can replace it with a certain unitary) if we are only concerned with the final output. This is essentially the *deferred measurement principle* [43].

Lemma 7. Let $|\phi\rangle$ be a quantum state. We apply the following operators on register A : first a unitary U , then a measurement $M = \{M_y\}_y$ that results in y , next a unitary V_y and finally a measurement $N_y = \{N_{yx}\}_x$ that results in x . Then, there exist a unitary W on A and additional registers BC and a projective measurement P on C that results x with the same probability.

Proof. It can be seen that the original procedure outputs x with probability $\sum_y ||N_{yx}V_yM_yU|\phi\rangle||^2$. Then, define a unitary operator U_M so that $U_M|\phi\rangle_A|0\rangle_B = \sum_y M_y|\phi\rangle_A|y\rangle_B$ ([43, pp. 95]). Also define unitary V on AB with $V = \sum_y V_y \otimes |y\rangle\langle y|_B$. Also define unitary U_N so that $U_N|u\rangle_A|y\rangle_B|0\rangle_C = \sum_x \sum_r (N_{rx} \otimes |r\rangle\langle r|) |u\rangle_A |y\rangle_B |x\rangle_C$. Finally, define P to be the projective measurement $P = \{|x\rangle\langle x|\}_x$. Then, consider $U_N V U_M U |\phi\rangle_A |0\rangle_B |0\rangle_C$ followed by P on C . Then, the probability of outcome x , by first applying $W = U_N V U_M$, followed by measurement P on C , is

$$\begin{aligned} \Pr'(x) &= || \sum_r (N_{rx} \otimes |r\rangle\langle r|_B) \cdot \sum_{y'} V_{y'} \otimes |y'\rangle\langle y'|_B \cdot \sum_y M_y |\phi\rangle_A |y\rangle_B |x\rangle_C ||^2 \\ &= || \sum_y N_{yx} V_y M_y U |\phi\rangle |y\rangle ||^2 \\ &= \sum_y ||N_{yx} V_y M_y U |\phi\rangle||^2, \text{ desired!} \end{aligned} \quad \square$$

Remark 4. In this lemma, register B is a control register in the basis $\{|y\rangle_B\}_y$ for other operators; register C is a control register in the basis $\{|x\rangle_C\}_x$ for other operators. Hence, the projective measurement $\{|x\rangle\langle x|\}_x$ on B commutes with other operators and so can be moved to the end of the operations (especially, after measurement P on C) and hence does not affect the distribution of outcome x of P , and hence it can be removed. This justifies the proof idea of the above lemma. With this in mind, the following generalization corollary of the lemma is straightforward.

Corollary 1. Let $|\phi\rangle$ be a quantum state of register A . For $\ell = 1, \dots, N$, run a unitary U_ℓ , measurement $M_{y^{\ell-1}} = \{M_{y^\ell}\}_{y^\ell}$ that results in y^ℓ , followed by unitary V_{y^ℓ} , where y^i represents the sequence $y_1 \cdot \dots \cdot y_i$. Finally, it applies measurement $N_{y^N} = \{N_{y^N x}\}_x$ that results in x . Then, there is unitary W and projective measurement P that applies to the initial state $|\phi\rangle|0\rangle_1 \cdot \dots \cdot |0\rangle_N |0\rangle$ and results in x with the same probability.

4. Quantum Random Oracle

In this section, we will introduce the quantum random oracle. We use bold font to represent the random oracle (e.g., **RO**) and the italic font (e.g., *RO*) to represent the operator for the random oracle query. We distinguish an oracle and its operator because some oracle could offer more operators.

4.1. Standard Random Oracle

In the random oracle model, a cryptographic hash function $H : \mathcal{X} \rightarrow \{0, 1\}^n$ is treated as an external oracle so that whenever one needs to compute $H(x)$, he queries x to this oracle and receives $H(x)$. We assume \mathcal{X} has a finite bit-length. The oracle uses a random function from \mathcal{X} to \mathcal{Y} to answer

the queries. Let $\mathcal{X} = \{x_1, \dots, x_N\}$ be an ordered set with $x_1 < x_2 < \dots < x_N$. Function H can be represented by its truth table $H(x_1), H(x_2), \dots, H(x_N)$. In the *quantum random oracle* model, H is represented by state $|H\rangle$ (using its truth table). An algorithm \mathcal{A} can query a superposition to random oracle **RO**. For query $|x\rangle|y\rangle$, **RO** maps $|x\rangle|y\rangle|H\rangle$ to $|x\rangle|y \oplus H(x)\rangle|H\rangle$.

The *standard random oracle* **StO** has an initial state in a uniform superposition $\frac{1}{\sqrt{2^{n|\mathcal{X}|}}} \sum_H |H\rangle$. For query $|x\rangle|y\rangle$, **StO** maps $\frac{1}{\sqrt{2^{n|\mathcal{X}|}}} \sum_H |x\rangle|y\rangle|H\rangle$ to $\frac{1}{\sqrt{2^{n|\mathcal{X}|}}} \sum_H |x\rangle|y \oplus H(x)\rangle|H\rangle$. Notice that **RO** can be obtained from **StO** by starting with a projective measurement on oracle register (resulting in $|H\rangle$). Even though **RO** and **StO** are different, no adversary can distinguish them. This can be seen from Lemma 3(2) by observing that oracle register is a control register in the computational basis for adversarial operators (which do not operate on oracle register) and **StO**. Hence, the projective measurement on oracle register can be moved to after \mathcal{A} makes the final measurement.

Fact 1. Let \mathcal{A} be a quantum algorithm with oracle access to the quantum random oracle. Then, $\Pr(\mathcal{A}^{\text{RO}}() = 1) = \Pr(\mathcal{A}^{\text{StO}}() = 1)$.

4.2. Compressed Random Oracle

The *compressed* random oracle **CStO** was introduced in [49] and our exposition mainly follows [15]. It is a powerful tool for security proof in the quantum random oracle model (QROM). Let $\mathcal{Y} = \{0, 1\}^n$ and $\bar{\mathcal{Y}} = \mathcal{Y} \cup \{\perp\}$. Let H be the quantum Walsh-Hadamard transform over $\mathbb{C}[\mathcal{Y}]$. Define $\phi_y = H|y\rangle$ for $y \in \{0, 1\}^n$. Since $\{|y\rangle\}_{y \in \{0, 1\}^n}$ is orthonormal and $H^2 = I$, $\{\phi_y\}_{y \in \{0, 1\}^n}$ is orthonormal either. Then, we define an unitary operator F over $\mathbb{C}[\bar{\mathcal{Y}}]$ such that

$$F|\perp\rangle = |\phi_0\rangle, \quad F|\phi_0\rangle = |\perp\rangle, \quad F|\phi_y\rangle = |\phi_y\rangle, \quad \forall y \in \mathcal{Y} - \{0\}. \quad (5)$$

It is Hermitian (i.e., $F^\dagger = F$) because $F = |\phi_0\rangle\langle\perp| + |\perp\rangle\langle\phi_0| + \sum_{y \neq 0} |\phi_y\rangle\langle\phi_y|$. Further, notice that $|y\rangle = 2^{-n/2} \sum_{\eta \in \{0, 1\}^n} (-1)^{y \cdot \eta} |\phi_\eta\rangle$. This implies that $F|y\rangle = |y\rangle + 2^{-n/2}(|\perp\rangle - |\phi_0\rangle)$.

We consider the multi-register $D = \{D_x\}_{x \in \mathcal{X}}$ for the random oracle, where D_x has a state space $\mathbb{C}[\bar{\mathcal{Y}}]$, spanned by the computational basis $\{|y\rangle\}_{y \in \mathcal{Y}} \cup \{|\perp\rangle\}$. The initial state of D is $\otimes_x |\perp\rangle_{D_x}$. We assume that the adversary has a query register X , response register Y and a work register W . To query the oracle, adversary provides XY registers to oracle who then applies unitary

$$\text{CStO}_{XYD} = \sum_{x \in \mathcal{X}} |x\rangle\langle x|_X \otimes \text{CStO}_{YD_x} \quad (6)$$

on XYD , where $\text{CStO}_{YD_x} = F_{D_x} \cdot \text{CNOT}_{YD_x} \cdot F_{D_x}$ and $\text{CNOT}_{YD_x} |y\rangle_Y |u\rangle_{D_x} = |y + u\rangle_Y |u\rangle_{D_x}$. Then, the following result holds. It must be pointed out that the result holds only if no operator other than **CStO** (resp. **StO**) is applied on D ; otherwise, the result might fail.

Lemma 8. [49] Let \mathcal{A} be a quantum algorithm with oracle access to the quantum random oracle. Then, $\Pr(\mathcal{A}^{\text{StO}}() = 1) = \Pr(\mathcal{A}^{\text{CStO}}() = 1)$.

4.3. Compressed Random Oracle with Adaptive Special Points

Compressed random oracle with adaptive special points (denoted by **CStO_s**) is a natural generalization of **CStO**. Liu and Zhandry [30] briefly introduced **CStO** with non-adaptive special points. But we believe that **CStO_s** (which has adaptive special points) is very useful in applications. It allows to register special points on the fly. In fact, it seems the Fiat-Shamir based signature proof in [30] also seems to require this adaptivity as the adversary's signing query can not be guessed or predicted before the query. The oracle has the initial state $\otimes_x |\perp\rangle_{D_x}$. We maintain two initially empty set Ξ_0 and Ξ_1 to record the special points at different stages. We also allow the oracle to abort after certain measurements and the motivation will be discussed later. The oracle can be accessed through three types of queries below.

- *PointReg0 Query.* One can send a new point $x \in \mathcal{X}$ to oracle. If $x \in \Xi_0 \cup \Xi_1$, it does nothing; otherwise, the oracle updates $\Xi_0 = \Xi_0 \cup \{x\}$.
- *Random Oracle Query.* One can issue a random oracle query by providing a query register X and a response register Y to oracle. If this is the i th random oracle query, the oracle applies a projective measurement $\Lambda_i = (\Lambda_{i0}, \Lambda_{i1})$ in the computational basis to oracle register D_{Ξ_0} (Λ_i can be determined by i and some parameters that are determined before the oracle starts). If the outcome is 1, it **aborts**; otherwise, it applies $CStO_s = \sum_{x \in \mathcal{X}} |x\rangle\langle x| \otimes CStO_{sYD_x}$ to XYD registers, where

$$CStO_{sYD_x} = \begin{cases} CStO_{YD_x}, & x \notin \Xi_1 \\ CNOT_{YD_x}, & \text{otherwise.} \end{cases}$$

Finally, it returns register XY .

- *PointReg1 Query.* One can send $x \in \Xi_0$ to oracle. If $x \notin \Xi_0$, it does nothing. Otherwise, it measures D_x with $\Pi = (\Pi_0, \Pi_1)$, where $\Pi_0 = |\perp\rangle\langle\perp|$, $\Pi_1 = I - \Pi_0$. If the outcome is 1, it **aborts**; otherwise, it updates $|\perp\rangle_{D_x}$ with $|r\rangle$ for a random $r \in \mathcal{Y}$ (this can be done as $|\perp\rangle_{D_x}$ is now classic; or, we can apply unitary $|\perp\rangle\langle r| + |r\rangle\langle\perp| + \sum_{v \in \mathcal{Y} - \{r\}} |v\rangle\langle v|$). Finally, it updates $\Xi_1 = \Xi_1 \cup \{x\}$ and $\Xi_0 = \Xi_0 - \{x\}$.

Remark 5. *It is time to justify this strange random oracle. It is in fact motivated by the requirements in the security proof. The main motivation is to find a modified random oracle so that the randomly sampled experiment (with **CStO**) in Section 5 can be easily converted into a game with this modified random oracle. The idea is that we want to define some special points and set their random oracle values to our own choices, just as I can do in the classical random oracle.*

- *In the classic random oracle, a simulator can set the random oracle values of special queries to his own choices. In the **CStO_s**, a special point will be first recorded in Ξ_0 and later set to a planned value (when a *PointReg1* query on this point is issued). We handle special points in two stages for technical reasons (See the remark after Theorem 5) only. Essentially, if we define the random oracle value of a special point early (e.g., at the time of adding into Ξ_0), it could make the previously selected experiment change to a different one.*
- ***CStO_s** is to formulate the selected experiment in Section 5 as a well-defined random oracle model. Especially, measurement Λ_i in a random oracle query is to make sure the interaction with oracle follows the restriction of the selected experiment. If the measurement outcome is 1, it indicates that the game is not consistent with the selected experiment and hence it can stop now; otherwise, it continues. This randomly selected but consistent experiment can guarantee the adversary to have a good success probability, compared with the original game.*
- *In the classic random oracle, a simulator can pay attention to each query to make sure that each special point is not queried before it is set to the designated value. In the quantum setting, recording each query is difficult as one can query $\frac{1}{|\mathcal{X}|} \sum_x |x\rangle_X |0\rangle_Y$ which indicates that every x is actually queried. To overcome this, we need to confirm that $OR(x)$ is not defined by measurement Π on D_x . If measurement is successful, then D_x will have $|\perp\rangle_{D_x}$ now and non- \perp components in the superposition are pruned and we can define the random oracle value for this x ; if the measurement fails, we have no way to set the random oracle value for x and so abort.*

We define **CStO'** to be a variant of **CStO_s** so that $CStO_s$ in the random oracle query is replaced by $CStO$ and also in *PointReg1* query, in case the measurement outcome 0, it leaves $|\perp\rangle_{D_x}$ as it is (instead of replacing it by $|r\rangle$). Essentially, **CStO'** is the same as **CStO**, except it applies Λ_i and Π measurements on D . The following lemma shows that **CStO_s** is perfectly indistinguishable from **CStO'**, conditional on that the abort event in the oracle does not occur.

Lemma 9. Let \mathcal{A} be a quantum algorithm with access to quantum random oracle and abort be the oracle abortion event. Then,

$$\Pr(\mathcal{A}^{\text{CStO}'_s}() = 1 \wedge \neg\text{abort}) = \Pr(\mathcal{A}^{\text{CStO}_s}() = 1 \wedge \neg\text{abort}). \quad (7)$$

Proof. We use the hybrid argument with a variant CStO'_s of CStO_s to bridge CStO_s and CStO'_s .

Oracle CStO'_s . We modify CStO_s to CStO'_s so that upon PointReg1 query x with D_x measured with outcome 0 (i.e., $|\perp\rangle$), it updates $|\mathbf{y}\rangle_D$ to $\frac{1}{2^{n/2}} \sum_r |\mathbf{y} \cup (r)_x\rangle_D$ (instead of $|\mathbf{y} \cup (r)_x\rangle_D$ for a random r), where $\mathbf{y} \cup (r)_x$ (which is well defined as $y_x = \perp$) is the vector with $y_{x'}$ at index $x' \neq x$ and r at index x . Notice that right after this, $x \in \Xi_1$. Further, D_x for this x is a *control register* (Def. 6) in the computational basis for adversary operations, $\Pi_0, \Pi_1, \Lambda_{i0}, \Lambda_{i1}$ and CStO_{sYD_u} . To see this, it suffices to check CStO_{sYD_x} only as other cases are clear (e.g., CStO_{sYD_u} for $u \neq x$ does not operate on D_x at all). Since $x \in \Xi_1$, we know that $\text{CStO}_{YD_x} = \text{CNOT}_{YD_x}$ which obviously can be written as a format of $\sum_{y \in \mathcal{Y}} B_y \otimes |y\rangle\langle y|_{D_x}$. Further, CStO_s is obtained from CStO'_s by projective measurement on D_x in the computational basis for every $x \in \Xi_1$ (right after x is put in Ξ_1). By Lemma 3(2), the projective measurement on D_x can be moved to the end of the interaction (after \mathcal{A} outputs). Thus, the output of \mathcal{A} with access to CStO'_s is the same as with access to CStO_s .

Oracle CStO'_s . We show that under the event $\neg\text{abort}$, if the final (unnormalized) state after interacting with CStO'_s is $|\psi\rangle$, then the final state (unnormalized) after interacting with CStO' will be $F_{D_{\Xi_1}}|\psi\rangle$. This can be shown by induction on the query. It is correct initially, as $\Xi_1 = \emptyset$ initially and hence $F_{D_{\Xi_1}}$ is identity. Then, if it is correct after query $i-1$, consider query i . Before query i , \mathcal{A} will operate on XYW registers (for simplicity, assume it is a unitary). But since adversary does not operate on D , if the state right before query i (when interacting with CStO'_s) is $|\psi\rangle$, then the state right before query i (when interacting with CStO') will be $F_{D_{\Xi_1}}|\psi\rangle$.

If query i is a PointReg0 query, then the claim still holds after the query as no operation on the quantum state is executed.

If query i is a PointReg1 query x , then it suffices to consider $x \in \Xi_0$. Since $x \notin \Xi_1$ and the outcome of Π is 0 (otherwise, abort occurs, contradiction to the probability condition) so x will be added to Ξ_1 , the conclusion holds after the query as $F|\perp\rangle = |\phi_0\rangle$ (while, after the query, D_x in case of CStO'_s will have $|\perp\rangle$ and D_x in case of CStO' will $|\phi_0\rangle$).

If query i is a random oracle query, we show that the induction still holds. First, $[F_{D_{\Xi_1}}, \Lambda_{ib}] = 0$ for both $b = 0, 1$ as Λ_i only operates on register D_{Ξ_0} . Thus, after the measurement (with the same outcome), the relation still holds. Second, the relation still holds after operator CStO_s (in case of CStO'_s) and operator CStO (in case of CStO'): for query $|x\rangle_X|y\rangle_Y$ with $x \notin \Xi_1$, both oracles use CStO_{YD_x} to respond and hence their states after the query maintain the same relation (as D_{Ξ_1} is untouched); for query $|x\rangle_X|y\rangle_Y$ with $x \in \Xi_1$, CStO' uses CStO_{YD_x} and CStO'_s uses CNOT_{YD_x} but two applications of F_{D_x} in CStO_{YD_x} will cancel out. So after the query the relation still holds. The induction holds too.

Let $|\psi\rangle$ be the final unnormalized state under $\neg\text{abort}$ and the final measurement of \mathcal{A} be (P_0, P_1) with P_1 corresponding to outcome 1. Then, $\Pr(\mathcal{A}^{\text{CStO}'_s}() = 1 \wedge \neg\text{abort})$ is $\|P_1|\psi\rangle\|^2$, while $\Pr(\mathcal{A}^{\text{CStO}'_s}() = 1 \wedge \neg\text{abort})$ is $\|P_1 \cdot F_{D_{\Xi_1}}|\psi\rangle\|^2$. However, $\|P_1 \cdot F_{D_{\Xi_1}}|\psi\rangle\|^2 = \|P_1|\psi\rangle\|^2$ as $F_{D_{\Xi_1}}$ commute with P_1 (since they operate on disjoint registers) and $F^2 = I$. \square

The following lemma essentially states that if x^* has large min-entropy and we measure D_{x^*} of the adversary-oracle joint state, then, with high probability, the post-measurement state with outcome \perp is close to the original state.

Lemma 10. Let the current adversary-oracle joint state be $|\psi\rangle = \sum_{zy} \lambda_{zy} |z\rangle |y\rangle_D$ after q queries to CStO_s (or CStO). Let $|\psi_x\rangle = \sum_{zy: y_x = \perp} \lambda_{zy} |z\rangle |y\rangle_D$ and x^* is a random variable over \mathcal{X} with min-entropy at least μ . Then, with probability $1 - 2^{-\mu/2}$ (over x^*), $\| |\psi\rangle - |\psi_{x^*}\rangle \| \leq q^{1/2} 2^{-\mu/4}$.

Proof. Let $|\psi'_x\rangle = \sum_{zy: y_x \neq \perp} \lambda_{zy} |z\rangle |y\rangle_D$. Then, $|\psi\rangle = |\psi'_x\rangle + |\psi_x\rangle$. Consider $L := \sum_x |||\psi'_x\rangle||^2$. Let N_y be the number of x so that $y_x \neq \perp$ in \mathbf{y} . Then, given \mathbf{y} , $|\mathbf{y}\rangle$ appears in $|\psi'_x\rangle$ for exactly N_y possible x 's. Thus, $L = \sum_{zy} |\lambda_{zy}|^2 N_y$. Since each \mathbf{y} in $|\psi\rangle$ has at most q possible non- \perp entries, it follows that $N_y \leq q$ and hence $L \leq q$. Hence, there are at most $2^{\mu/2}$ choices for x so that $|||\psi'_x\rangle|| \geq q^{1/2} 2^{-\mu/4}$. Since x^* has min-entropy μ , we have that $|||\psi'_{x^*}\rangle|| < q^{1/2} 2^{-\mu/4}$ with probability at least $1 - 2^{-\mu/2}$. The lemma follows. \square

4.4. Measurement U_R

Let $R \subset \mathcal{X} \times \mathcal{Y}$ be a fixed and efficiently verifiable relation with $R(x, y) = 1$ if and only if $(x, y) \in R$. Especially, $R(x, y) = 0$ for any $(x, y) \notin \mathcal{X} \times \mathcal{Y}$. We assume that $0 \notin \mathcal{X}$ and so $R(0, y) = 0$. Further, $R(x, \perp) = 0$ as $\perp \notin \mathcal{Y}$. Let $\tilde{\mathcal{X}} = \mathcal{X} \cup \{0\}$. We define function $f_R : \tilde{\mathcal{Y}}^{|\mathcal{X}|} \rightarrow \tilde{\mathcal{X}}$ so that

$$f_R(y_1, \dots, y_N) = \begin{cases} x_i, & (x_j, y_j) \notin R \text{ for } j < i \text{ but } (x_i, y_i) \in R \\ 0, & i \text{ does not exist.} \end{cases}$$

where $\mathcal{X} = \{x_1, \dots, x_N\}$ is an ordered set with $x_1 < x_2 < \dots < x_N$. In other words, $f_R(y_1, \dots, y_N)$ is the smallest x_i so that $(x_i, y_i) \in R$. It is easy to verify that

$$f_{\bar{R}}(y_1, \dots, y_{|\mathcal{X}|}) = \sum_{i=1}^{|\mathcal{X}|} x_i \cdot \bar{R}(x_1, y_1) \cdot \dots \cdot \bar{R}(x_{i-1}, y_{i-1}) \cdot R(x_i, y_i). \quad (8)$$

Here we emphasize that we do not require $\tilde{\mathcal{X}}$ itself to be a group but we implicitly assume that it can be regarded as a subset of an Abelian group $\tilde{\mathcal{X}}$ (e.g., $\tilde{\mathcal{X}} = \{0, 1, 2, 4\}$ can be regarded as a subset of \mathbb{Z}_5). Next, we define U_R to be a unitary on $\mathbb{C}[\tilde{\mathcal{Y}}]^{\otimes |\mathcal{X}|} \otimes \mathbb{C}[\tilde{\mathcal{X}}]$ for register DP so that

$$U_R |\mathbf{y}\rangle_D |w\rangle_P = |\mathbf{y}\rangle_D |w + f_R(y_1, \dots, y_{|\mathcal{X}|})\rangle_P, \quad (9)$$

where $|\mathbf{y}\rangle_D := |y_1\rangle_{D_{x_1}} \cdots |y_{|\mathcal{X}|}\rangle_{D_{x_{|\mathcal{X}|}}}$. Let

$$\Gamma_R = \max_x |\{y \mid (x, y) \in R\}| \text{ and } \Gamma_x = |\{y \mid (x, y) \in R\}|. \quad (10)$$

Notice that our U_R is an alternative specification but identical to U_R in [15]. The following lemma was proved in [15] (we can obtain the same bound by a proof for our specification).

Lemma 11. For any $x \in \mathcal{X}$, $||[F_{D_x}, U_R]|| \leq 4\sqrt{2\Gamma_R/2^n}$.

Lemma 12. $[\text{CNOT}_{XYD}, U_R] = 0$.

Proof. It can be seen that $\text{CNOT}_{XYD} = \sum_{\mathbf{y}} (\sum_{x,y} |x, y_x + y\rangle \langle x, y|) \otimes |\mathbf{y}\rangle \langle \mathbf{y}|_D$ and also that $U_R = \sum_{\mathbf{y}} (\sum_w |w + f_R(\mathbf{y})\rangle \langle w|_P) \otimes |\mathbf{y}\rangle \langle \mathbf{y}|_D$. Therefore, D is a control register for U_R and CNOT_{XYD} in the computational basis. By Lemma 3(1), they commute. \square

Theorem 1. $||[\text{CStO}_s, U_R]|| \leq 8 \cdot 2^{-n/2} \sqrt{2\Gamma_R}$.

Proof. Notice that $\text{CStO}_s = \sum_{x \in \mathcal{X}} |x\rangle \langle x| \otimes \text{CStO}_{sYD_x}$ and for $x \in \mathbb{E}_1$, $\text{CStO}_{sYD_x} = \text{CNOT}_{YD_x}$. Hence, by Lemma 12, $[\text{CStO}_s, U_R] = \sum_{x \notin \mathbb{E}_1} |x\rangle \langle x|_X \otimes [F_{D_x} \otimes \text{CNOT}_{YD_x} \otimes F_{D_x}, U_R]$, where we also use $||x\rangle \langle x|_X, U_R] = 0$. By Lemma 1(3) and Lemma 2(2),

$$||[\text{CStO}_s, U_R]|| \leq 2 \max_i ||[F_{D_{x_i}}, U_R]|| + ||[\text{CNOT}, U_R]||.$$

By Lemma 11 and Lemma 12, the result follows. \square

4.5. Bounding the Probability for Relation Search through Oracle Queries

We are interested in finding an entry y_x for some x in the oracle (through oracle queries) so that $R(x, y_x) = 1$ for a relation R . The following lemma upper bounds the probability for this. The proof idea is that $R(x, y_x) = 1$ can be detected by applying U_R and measuring P register with outcome $\hat{x} \neq 0$. If we apply U_R and measure P at the beginning of the interaction, then $\hat{x} = 0$ because the initial oracle state is dummy. Hence, the success probability with U_R at the end of interaction, is bounded by the squared norm of the commutator of operators (throughout the interaction) with U_R .

Lemma 13. *Let \mathcal{A} be a quantum algorithm with access to \mathbf{CStO}_s , incurring L_0 random oracle queries and $q - L_0$ PointReg1 queries. The final state goes through U_R of relation R and a projective measurement on register P in the computational basis with outcome $\hat{x} \in \mathcal{X}$. Then,*

$$\Pr(\hat{x} \neq 0 \wedge \neg\text{abort}) \leq 128q^2\Gamma_R/2^n. \quad (11)$$

Proof. Let $|\psi\rangle$ be the initial state of \mathcal{A} with registers XYZ . The joint initial state with oracle is then $|\omega_0\rangle = |\psi\rangle_{XYZ} \otimes (\otimes_x |\perp\rangle_{D_x}) \otimes |0\rangle_P$ (after register P added). Then, \mathcal{A} has access to \mathbf{CStO}_s , incurring L_0 random oracle queries with intermediate operator V_{XYZ} , where, for simplicity, we assume that V_{XYZ} remains unchanged throughout the game. Finally, oracle applies U_R on DP and projective measurement \mathbf{P} on P , outputting the outcome \hat{x} . The final state before measurement \mathbf{P} is $|\omega\rangle = U_R(V \cdot \mathbf{CStO}_s)^L|\omega_0\rangle$ for some L , where \mathbf{CStO}_s is PointReg0 query or PointReg1 query or random oracle query. If the query is PointReg0, it does not operate on the state and so commutes with U_R ; if it is PointReg1, then we only consider the case $x \in \Xi_0$. Under $\neg\text{abort}$, it consists of projector Π_0 and $U_{\perp,r} = |r\rangle\langle\perp| + |\perp\rangle\langle r| + \sum_{v \neq r} |v\rangle\langle v|$ for uniformly random r over \mathcal{Y} . We notice that $[\Pi_0, U_R] = 0$. Further, it is not hard to verify that $U_{\perp,r}\Pi_0$ in PointReg1 commutes with U_R if $(x, r) \notin R$ (as $(x, \perp) \notin R$). If it is a random oracle query, we notice that $[\Lambda_i, U_R] = 0$ as D is control register for both Λ_i and U_R in the computational basis. Therefore,

$$\begin{aligned} & \Pr(\hat{x} \neq 0 \wedge \neg\text{abort}) \\ & \leq \mathbf{E}_{\mathbf{r}}(\|(I - |0\rangle\langle 0|_P)|\omega\rangle\|^2) \quad /* r's from PointReg1; state $|\omega\rangle$ is consistent with $\neg\text{abort}$ */ \\ & = \mathbf{E}_{\mathbf{r}}(\|(I - |0\rangle\langle 0|_P)[U_R, (V \cdot \mathbf{CStO}_s)^L]|\omega_0\rangle + (I - |0\rangle\langle 0|_P)(V \cdot \mathbf{CStO}_s)^L U_R|\omega_0\rangle\|^2) \\ & \quad /* \mathbf{CStO}_s requires the operator for measurement outcome (e.g., Π_0, Λ_{i0}) consistent with $\neg\text{abort}$ */ \\ & = \mathbf{E}_{\mathbf{r}}(\|(I - |0\rangle\langle 0|_P)[U_R, (V \cdot \mathbf{CStO}_s)^L]|\omega_0\rangle\|^2) \\ & \quad /* as V and \mathbf{CStO}_s do not operate on P and so part 2 has $|0\rangle_P$ before applying $I - |0\rangle\langle 0|_P$ */ \\ & \leq \mathbf{E}_{\mathbf{r}}(\|[U_R, (V \cdot \mathbf{CStO}_s)^L]\|^2) \leq \mathbf{E}_{\mathbf{r}}\{(L_0\|[U_R, \mathbf{CStO}_s]\| + \sum_i \|[U_R, U_{\perp,r_i}]\|)^2\} \\ & \quad /* Lemma 1(3) and $[\Lambda_i, U_R] = [\Pi_0, U_R] = [V, U_R] = 0$ and L_0 is \sharp of \mathbf{CStO}_s queries and r_i corresponds to r in the i th PointReg1 query. */ \\ & \leq \mathbf{E}_{\mathbf{r}}\{(8L_0 \cdot 2^{-n/2} \sqrt{2\Gamma_R} + 2N_{\mathbf{r}})^2\}. \\ & \quad /* $N_{\mathbf{r}}$ is the number of r_i in i th PointReg1(x_i) so that $(x_i, r_i) \in R$ */ \\ & \quad /* $[U_R, U_{\perp,r}] = 0$ for $(x, r) \notin R$; $\|[U_R, U_{\perp,r}]\| \leq 2$ as $\|U_R\| = \|U_{\perp,r}\| = 1$ */ \\ & \leq 128q^2\Gamma_R/2^n, \end{aligned}$$

where the last inequality follows from the calculation with the observation: $N_{\mathbf{r}}$ is the result of Bernoulli trial with probability $\Gamma_R/2^n$ for $q - L_0$ times; $\mathbf{E}(a + N_{\mathbf{r}})^2 = \text{Var}(N_{\mathbf{r}}) + [a + \mathbf{E}(N_{\mathbf{r}})]^2$; $\text{Var}(N_{\mathbf{r}}) = (q - L_0)\Gamma_R/2^n(1 - \Gamma_R/2^n)$ and $\mathbf{E}(N_{\mathbf{r}}) = (q - L_0)\Gamma_R/2^n$. The lemma follows. \square

4.6. Simulating \mathbf{CStO}_s with Extraction

In this section, we adapt the simulation of \mathbf{CStO} with the extraction capability in [15] to the \mathbf{CStO}_s setting. Essentially, the simulator simulates the oracle and also provides an interface for extracting the attacker's oracle query x that, together with y in D_x , is a witness of a target "commitment". Let $\theta(x, y)$ be an arbitrary but fixed function from $\mathcal{X} \times \mathcal{Y}$ to \mathcal{T} . For $t \in \mathcal{T}$, define relation $R_t = \{(x, y) \mid \theta(x, y) = t\}$ and U_t denotes unitary U_{R_t} . Then, the simulator is described in Figure 2.

- **Initialization.** The initial state for D is $\otimes_x |\perp\rangle_{D_x}$ and set $\Xi_0 = \Xi_1 = \emptyset$.
- **PointReg0 Query $\mathcal{S}.PR_0$.** Upon $x \in \mathcal{X}$, if $x \in \Xi_0 \cup \Xi_1$, it does nothing; otherwise, update $\Xi_0 = \Xi_0 \cup \{x\}$.
- **PointReg1 Query $\mathcal{S}.PR_1$.** Upon $x \in \mathcal{X}$, if $x \notin \Xi_0$, it does nothing; otherwise, it applies Π to register D_x . For outcome 1, it aborts; for outcome 0, it replaces $|\perp\rangle_{D_x}$ with $|r\rangle_{D_x}$ for a random $r \in \mathcal{Y}$ and finally updates $\Xi_0 = \Xi_0 - \{x\}$ and $\Xi_1 = \Xi_1 \cup \{x\}$.
- **Random Oracle Query $\mathcal{S}.RO$.** Upon the i th random oracle query with register XY , \mathcal{S} applies a measurement Λ_i to register D_{Ξ_0} . For outcome 1, it aborts; for outcome 0, it applies \mathbf{CStO}_s to XYD . Finally, it returns register XY .
- **Extraction $\mathcal{S}.E$.** Upon a classical extraction query t , \mathcal{S} applies unitary U_t to registers DP and projective measurement $\{|x\rangle\langle x|\}_{x \in \mathcal{X}}$ to register P and returns outcome \hat{x} .

Figure 2. Simulator \mathcal{S} .

In the following, we prove that if \mathcal{A} uses x and $y = OR(x)$ to generate t , then the extracted \hat{x} from $\mathcal{S}.E(t)$ will equal to x . This is useful in a security proof where an attacker generates an output and we need to find out the witness of this output. We first prove a weaker version of this: if \hat{x} is extracted at the end of game, the claim is true. Then, we extend to the case that \hat{x} is extracted on-the-fly (i.e., right after \mathcal{A} outputs t).

4.6.1. Extraction at the End of Game

We begin with a *collision* event in a computational basis $|y\rangle_D$ in the oracle state w.r.t. a function f in the sense that $f(x, y_x) = f(x', y_{x'})$ for some $x' \neq x$. We give a result which says that after q oracle queries, the probability of collision in the oracle is small. It is extended from [49, Theorem 2] in the setting of \mathbf{CStO} to \mathbf{CStO}_s (see Appendix C for details).

Lemma 14. *Let $f : \mathcal{X} \times \mathcal{Y} \rightarrow \mathcal{T}$. Then, for any quantum algorithm \mathcal{A} with access to \mathbf{CStO}_s , incurring q oracle queries of either PointReg1 or random oracle,*

$$\Pr(\text{col} \wedge \neg \text{abort}) \leq 16q^3 \Gamma_f / 2^n, \quad (12)$$

where col is the collision event in the final state ρ_q and $\Gamma_f = \max_{x' \neq x, y'} |\{y \mid f(x, y) = f(x', y')\}|$.

Now we give an extraction theorem, where \hat{x} is extracted at the end of oracle access. It states that if attacker computes t from x so that $t = f(x, RO(x))$, then $\mathcal{S}.E(t)$ at the end of game will most likely have $\hat{x} = x$. The idea is as follows. Assume $\hat{x} \neq x$. After attacker's oracle access to \mathbf{CStO}_s , we apply a classical oracle query on x with result y_x . Assume this state (right before $\mathcal{S}.E(t)$) is $\sum_{\mathbf{y}: y_x \text{ fixed}} \lambda_{\mathbf{y}} |\omega_{\mathbf{y}}\rangle_{\mathbf{y}} |y_x\rangle_{D_x} |0\rangle_P$. Further, notice that $F|y_x\rangle_{D_x} = |y_x\rangle + |\delta\rangle$. If \mathbf{y} in the sum measures with outcome \hat{x} (i.e., after $\mathcal{S}.E(t)$), then it has a collision (since $f(\hat{x}, y_{\hat{x}}) = t = f(x, y_x)$). This probability is small (by Lemma 14) and we can ignore it. If $|y\rangle_{D_{\mathcal{X}-\{x\}}} |y'_x\rangle$ for $y'_x \neq y_x$ under $\mathcal{S}.E(t)$ gives \hat{x} , then y'_x must come from δ . However, $\|\delta\|$ is very small. So this is unlikely too. This idea is from [15, Prop 4.5] in the \mathbf{CStO} case and can be generalized to prove a vector (\mathbf{t}, \mathbf{x}) case.

Theorem 2. Consider quantum algorithm \mathcal{A} with access to \mathcal{S} (via interfaces other than $S.E$), including q random oracle queries or PointReg1 queries and outputting $\mathbf{t} \in \mathcal{T}^\ell$ and $\mathbf{x} \in \mathcal{X}^\ell$. Let h_i be the output for an additional classical query x_i to $S.RO$ and $\hat{x}_i = S.E(t_i)$. Then,

$$\Pr(\exists i : x_i \neq \hat{x}_i, f(x_i, h_i) = t_i \wedge \neg \text{abort}) \leq 2^{-n+1}\ell + 16(q + \ell)^3\Gamma_f/2^n. \quad (13)$$

Proof. Let the adversary-oracle joint state be $|\psi_0\rangle$ after queries to \mathcal{S} (including q random oracle queries or PointReg1 queries). In the following, we always assume that random oracle query does not abort. Then, \mathcal{A} measures and outputs \mathbf{t}, \mathbf{x} . Each x_i is then classically queried to $S.RO$ and results in a joint state $|\psi_1\rangle$. We assume that $\mathbf{x} \cap \Xi_1 = \emptyset$ (the other case is similar). Hence, $|\psi_1\rangle$ can be written as $|\psi_1\rangle = |\mathbf{r}\rangle_{D_{\Xi_1}} \otimes F_{D_x}|\mathbf{h}\rangle_{D_x} \otimes \sum_{\omega, \mathbf{u}: \mathbf{u} \in \bar{\mathcal{Y}}^A} \lambda_{\omega, \mathbf{u}} |\omega\rangle_{XYZ} |\mathbf{u}\rangle_{D_A}$, where $\Xi_1 \cup \mathbf{x} \cup A$ is a decomposition of \mathcal{X} .

Finally, it applies the projective measurement $\Pi_D = \{|\mathbf{y}\rangle\langle \mathbf{y}|\}_{\mathbf{y} \in \bar{\mathcal{Y}}^X}$ in the computational basis on D and applies $U_{t_i}, i = 1, \dots, \ell$ followed by (projective) measurement on register P as well as measurement $(\Pi_{col}, I - \Pi_{col})$ to the resulting state (assuming the collision measurement writes the result in a new register C), where Π_{col} is a projection into a space spanned by $|\mathbf{y}\rangle_D$ with $\mathbf{y} \in \bar{\mathcal{Y}}^X$ satisfying $f(x, y_x) = f(x', y_{x'})$ for some $x' \neq x$ and $y_x, y_{x'} \in \mathcal{Y}$. Notice that D is a control register in the computational basis for $\Pi_D, \mathbf{P}U_{t_i}$, and collision measurement, where \mathbf{P} is the projective measurement on P . Hence, by Lemma 3, they all commute. Hence, both collision probability and $\Pr(\exists i : x_i \neq \hat{x}_i, f(x_i, h_i) = t_i)$ will remain the same as the original game. For collision probability, it is the same as we move $\mathbf{P}U_{t_i}$ and Π_D to after collision measurement; for $\Pr(\exists i : x_i \neq \hat{x}_i, f(x_i, h_i) = t_i)$, it is similar by keeping $\mathbf{P}U_{t_i}$ while moving other two operators to the end of game. Let col be the output 0 of measurement $(\Pi_{col}, I - \Pi_{col})$. Notice that

$$\Pr(\exists i : x_i \neq \hat{x}_i, f(x_i, h_i) = t_i | |\psi_1\rangle) \quad (14)$$

$$\leq \Pr(\exists i : x_i \neq \hat{x}_i \wedge f(x_i, h_i) = t_i \wedge \neg col | |\psi_1\rangle) + \Pr(col | |\psi_1\rangle) \quad (15)$$

Notice that register D_{x_i} in $|\psi_1\rangle$ is $|h_i\rangle + 2^{-n/2}(|\perp\rangle - |\phi_0\rangle)$. Since $f(x_i, h_i) = t_i$, it follows that under $\neg col$ condition, $x_i \neq \hat{x}_i$ implies that after measurement on P (that results in \hat{x}_i in the i th component on register P), the post-measurement joint state $|\psi'\rangle_{XYZD} |\hat{\mathbf{x}}\rangle_P$ must have D_{x_i} content different from h_i (that is, $\langle h_i | \psi' \rangle = 0$). Since $|\psi_1\rangle$ has $F|h_i\rangle$ in D_{x_i} , this has a probability $1 - |\langle h_i | (|h_i\rangle + 2^{-n/2}|\phi_0\rangle) \rangle|^2 = 1 - (1 - 2^{-n})^2 \leq 2^{-n+1}$. There are at most ℓ possible i 's. So the first item in Equation (15) is at most $2^{-n+1}\ell$. On the other hand, $|\psi_1\rangle$ is obtained by measurements. Averaging over the choices of $|\psi_1\rangle$ satisfying $\neg \text{abort}$ (due to intermediate measurements) gives $\Pr(\exists i : x_i \neq \hat{x}_i \wedge f(x_i, h_i) = t_i \wedge \neg col \wedge \neg \text{abort}) \leq 2^{-n+1}\ell$. By Lemma 14, $\Pr(col \wedge \neg \text{abort}) \leq 16(q + \ell)^3\Gamma_f/2^n$. Thus, $\Pr(\exists i : x_i \neq \hat{x}_i, f(x_i, h_i) = t_i \wedge \neg \text{abort}) \leq 2^{-n+1}\ell + 16(q + \ell)^3\Gamma_f/2^n$. \square

4.6.2. Extraction on the Fly

We have showed the extraction result where the extractions occur only at the *end* of the game. To be useful, it is expected that we can extract them "on-the-fly" (i.e., right after each commitment is given during the game). In the following, we consider this. The result is extended from [15] from the \mathbf{CStO} setting to the \mathbf{CStO}_s setting.

Let us consider a function $f : \mathcal{X} \rightarrow \mathcal{T} \cup \{\emptyset\}$ with some special set $\Xi \subset \mathcal{X}$ so that $f(\Xi, \mathcal{Y}) = \emptyset$ and $f(\bar{\Xi}, \mathcal{Y}) \subseteq \mathcal{T}$. Consider the following games, where $\mathbf{S.CStO}_s$ is $S.RO$ or $S.PR_0$ or $S.PR_1$.

Game Γ_0 . \mathcal{A} , with q'_1 queries to \mathbf{CStO}_s , outputs $t \in \mathcal{T}$ and then with q'_2 queries to \mathbf{CStO}_s , outputs $x \in \mathcal{X}$ and auxiliary output W . Finally, x is classically issued to \mathbf{CStO}_s with response h .

Game Γ_1 . \mathcal{A} , with q'_1 queries to $\mathbf{S.CStO}_s$, outputs $t \in \mathcal{T}$ and $S.E(t)$ is executed to output \hat{x} . Then, \mathcal{A} continues q'_2 queries to $\mathbf{S.CStO}_s$ and finally outputs $x \in \mathcal{X}$ and auxiliary output W . Finally, x is classically issued to $\mathbf{S.CStO}_s$ with response h .

Let q_1 be the number of random oracle queries or PointReg1 queries in the first q'_1 queries to $\mathcal{S.CStO}_s$. Similarly, we can define q_2 . The pair $(X, Y)_\Gamma$ denotes (X, Y) in game Γ . Define $\Delta((X, Y = y)_{\Gamma_0}, (X, Y = y)_{\Gamma_1}) \stackrel{def}{=} \frac{1}{2} \sum_x |P_{XY}(x, y) - Q_{XY}(x, y)|$ (a partial sum in the statistical distance), where P_{XY} (resp. Q_{XY}) is the joint distribution of XY in Γ_0 (resp. Γ_1).

In the following, we show that adversarial outputs from Γ_0 and Γ_1 are close. Also, the extraction \hat{x} from $\mathcal{S.E}(t)$ in Γ_1 will be mostly identical to x . The idea is that Γ_0 can be regarded as the simulated game with extraction occurring at the end because the extraction at the end does not affect the adversarial output. Then, we try to shift $\mathcal{S.E}(t)$ toward the end of game step-by-step and quantify the change of the quantum state. We find that the change throughout this shift process is small. The second claim $x = \hat{x}$ follows from the foregoing argument and Theorem 2.

Theorem 3. Let $(\alpha)_\Gamma$ be the random variable α w.r.t. game Γ . Let \mathcal{A} be a quantum algorithm with access to \mathcal{CStO}_s s.t. $\Xi_1 \subseteq \Xi$. Let $q = q_1 + q_2$. Then,

$$\Delta((t, x, h, W, abort = 0)_{\Gamma_0}, (t, x, h, W, abort = 0)_{\Gamma_1}) \leq 8(q_2 + 1) \sqrt{2\Gamma_f/2^n}, \quad (16)$$

$$\Pr(x \neq \hat{x} \wedge f(x, h) = t \wedge abort = 0) \leq 8(q_2 + 1) \sqrt{2\Gamma_f/2^n} + 2^{-n+1} + \frac{16(q+1)^3 \Gamma_f}{2^n}. \quad (17)$$

Proof. Let U_t be the unitary measurement on DP , following which, the projective measurement $\{P_x\}_{x \in \mathcal{X}}$ on register P is applied, resulting in \hat{x} . Assume that $\{T_t\}_t$ is the measurement for t . Let V_{XYW} be the unitary operator of \mathcal{A} between queries, and $\{M_{xw}\}_{x,w}$ be the measurement for (x, w) . The initial state is $|\gamma_0\rangle = |\omega\rangle_{XYW} \otimes (\otimes_x |\perp\rangle_{D_x}) \otimes |0\rangle_P$. Then, the final unnormalized state in Γ_1 is

$$|\gamma_1\rangle = P_h \cdot \mathcal{S.RO} \cdot M_{xw} \cdot (\mathcal{S.CStO}_s \cdot V)^{q_2} \cdot \mathcal{S.E}(t) \cdot T_t \cdot (\mathcal{S.CStO}_s \cdot V)^{q_1} |\gamma_0\rangle \quad (18)$$

$$= P_h \cdot \mathcal{CStO}_s \cdot M_{xw} \cdot (\mathcal{CStO}_s \cdot V)^{q_2} \cdot P_{\hat{x}} \cdot U_t \cdot T_t \cdot (\mathcal{CStO}_s \cdot V)^{q_1} |\gamma_0\rangle, \quad (19)$$

where the last \mathcal{CStO}_s in Equation (19) is a random oracle query and $P_{\hat{x}} = |\hat{x}\rangle\langle\hat{x}|_P$. Further, if \mathcal{A} makes a random oracle query, then under $abort = 0$, $\mathcal{S.CStO}_s$ is $\mathcal{CStO}_s \cdot \Lambda_{i0}$; if \mathcal{A} makes PointReg1 query x and $abort = 0$, then oracle applies Π_0 and then $U_{\perp,r}$ to D_x . A PointReg0 query does not impact on the quantum state and hence does not occur in the above equation but it is implicit to maintain Ξ_0 . We assume that the operators other than the measurements mentioned are unitary (which can be made up with some auxiliary registers). Then, the probability of $xhw\hat{x}t\Xi_1$ with $abort = 0$ in Γ_1 (denoted by $p_{xhw\hat{x}t\Xi_1}$) is $\|\gamma_1\|^2$. Further, since $P_{\hat{x}}$ can be moved to the end of game (as variable \hat{x} and register P are not related to operators currently on the left to $P_{\hat{x}}$), $p_{xhw\hat{x}t\Xi_1} = \|\gamma_2\|^2$, where

$$|\gamma_2\rangle = P_{\hat{x}} P_h \cdot \mathcal{CStO}_s \cdot M_{xw} \cdot (\mathcal{CStO}_s \cdot V)^{q_2} \cdot U_t \cdot T_t \cdot (\mathcal{CStO}_s \cdot V)^{q_1} |\gamma_0\rangle. \quad (20)$$

If we remove $P_{\hat{x}} U_t$ from Equation (19), then $|\gamma_1\rangle$ becomes the final state of Γ_0 . Then, the probability of $xhw\hat{x}t\Xi_1$ in Γ_0 with $abort = 0$ (denoted by $q_{xhw\hat{x}t\Xi_1}$) is $\|\gamma'_2\|^2$ (if further applying U_t and projective measurement $\{P_{\hat{x}}\}_{\hat{x}}$ at the end of Γ_0), where

$$|\gamma'_2\rangle = P_{\hat{x}} U_t P_h \cdot \mathcal{CStO}_s \cdot M_{xw} \cdot (\mathcal{CStO}_s \cdot V)^{q_2} \cdot T_t \cdot (\mathcal{CStO}_s \cdot V)^{q_1} |\gamma_0\rangle. \quad (21)$$

By triangle inequality, Equation (16) is bounded by

$$\frac{1}{2} \sum_{xhw\hat{x}t\Xi_1} | \|\gamma_2\rangle\|^2 - \|\gamma'_2\rangle\|^2 | \leq \frac{1}{2} \sum_{i=0}^{q_2} \sum_{xhw\hat{x}t\Xi_1} | \|\gamma_{2(i+1)}\rangle\|^2 - \|\gamma_{2i}\rangle\|^2 |, \quad (22)$$

where $|\gamma_{2i}\rangle$ is the variant of $|\gamma_2\rangle$ with U_t relocated (starting from the leftmost) to right after the i th \mathbf{CStO}_s operator in $|\gamma_2\rangle$ (that is either random oracle query or PointReg1 query) and thus $\gamma'_2 = |\gamma_{20}\rangle$ and $|\gamma_2\rangle = |\gamma_{2(q_2+1)}\rangle$.

We consider the inner summation at Equation (22) for a fixed i . We can separate $xhw\hat{x}t\Xi_1$ as AB , where A is the subset of variables obtained by measurements in $|\gamma_{2i}\rangle$ after U_t and B is the remaining variables. Denote $|\psi_B\rangle$ be the state right before U_t and M'_A be the product of operators after U_t and the i th \mathbf{CStO}_s in $|\gamma_{2i}\rangle$. Then, $|\gamma_{2i}\rangle = M'_A \cdot U_t \cdot \mathbf{CStO}_s |\psi_B\rangle$ and, $|\gamma_{2(i+1)}\rangle = M'_A \cdot \mathbf{CStO}_s \cdot U_t |\psi_B\rangle$ as $[U_t, V] = 0$. It is well-known that the measurement can be made at the end of operation without changing the measurement outcome distribution. Hence, we can assume $M'_A = M_A S$ for projection M_A of A and unitary S . That is, we can assume that $|\gamma_{2i}\rangle = M_A \cdot S \cdot U_t \cdot \mathbf{CStO}_s |\psi_B\rangle$ and $|\gamma_{2(i+1)}\rangle = M_A \cdot S \cdot \mathbf{CStO}_s \cdot U_t |\psi_B\rangle$. Let $|\psi'_B\rangle$ be the normalized $|\psi_B\rangle$. Then,

$$\frac{1}{2} \sum_{xhw\hat{x}t\Xi} | \|\gamma_{2(i+1)}\rangle \|^2 - \|\gamma_{2i}\rangle \|^2 | \quad (23)$$

$$= \sum_B | \|\psi_B\rangle \|^2 \cdot \frac{1}{2} \sum_A | \|M_A \cdot S \cdot U_t \cdot \mathbf{CStO}_s |\psi'_B\rangle \|^2 - \|M_A \cdot S \cdot \mathbf{CStO}_s \cdot U_t |\psi'_B\rangle \|^2 | \quad (24)$$

If \mathbf{CStO}_s is a random oracle query, then the inner sum is the statistical distance between measurement outcomes from $S \cdot U_t \cdot \mathbf{CStO}_s \cdot \Lambda |\psi'_B\rangle$ and $S \cdot \mathbf{CStO}_s \cdot U_t \cdot \Lambda |\psi'_B\rangle$ (note: Here Λ is some Λ_{i0} and $[U_t, \Lambda] = 0$). By [43, Theorem 9.1], it is no more than their trace distance. Further, by Lemma 6, trace distance of two states is no more than their Euclidean distance which is further bounded by $\|[\mathbf{CStO}_s, U_t]\|$. Hence, by Theorem 1,

$$\text{Equation(24)} \leq \sum_B | \|\psi_B\rangle \|^2 \cdot \|U_t, \mathbf{CStO}_s\| = \|U_t, \mathbf{CStO}_s\| \leq 8 \cdot 2^{-n/2} \sqrt{2\Gamma_f}. \quad (25)$$

If \mathbf{CStO}_s is PointReg1 query $x \in \Xi_0$ with $\text{abort} = 0$, this will apply Π_0 and $U_{\perp,r} = |r\rangle\langle\perp|_{D_x}$ to register D_x . Note that U_t commutes with $U_{\perp,r}$ if $f(x,r) \neq t$ (that is, $|\perp\rangle_{D_x}$ replaced by $|r\rangle_{D_x}$ will not change \hat{x}). By Lemma 3, $[\Pi_0, U_t] = 0$. Thus, \mathbf{CStO}_s (i.e., PointReg1) commutes with U_t if $f(x,r) \neq t$. By our assumption, \mathcal{A} satisfies $\Xi_1 \subseteq \Xi$. Hence, $f(x,r) = \emptyset$ and so $f(x,r) = t$ will never hold. Hence, PointReg1 commutes with U_t . Hence, Equation (24) is 0 for this query.

Finally, since there are at most q_2 random oracle queries after t is measured, Equation (22) is bounded by $8(q_2 + 1)\sqrt{2\Gamma_f/2^n}$.

Now we consider the second claim. Notice that Z is defined as boolean variable ($x \neq \hat{x} \wedge f(x,h) = t \wedge \text{abort} = 0$) of (x,h,\hat{x},t) . We still use p_Z to denote the distribution in Γ_1 and q_Z to denote the distribution of Z in Γ_0 . Then, by the forgoing argument, $p_Z(1) \leq q_Z(1) + 8(q_2 + 1)\sqrt{2\Gamma_f/2^n}$. Then, by Theorem 2, $q_Z(1) \leq 2^{-n+1} + 16(q+1)^3\Gamma_f/2^n$. The result follows. \square

The above theorem can be extended to the vector case, where M_{xw}, U_t are replaced with several $M_{x_i w_i}, U_{t_i}$ at location i . Then, we switch U_{t_i} with each \mathbf{CStO}_s after t_i is measured as in the above theorem. Denote the number of this kind of \mathbf{CStO}_s (that is either random oracle query or PointReg1 query) by q_{2i} . Then, $q_{2i} < q$. For each i , we obtain the similar bound as the above theorem. Summarizing the argument for $i = 1, \dots, \ell$, the extension of the first claim can be obtained. For the extension of the second claim is very similar to the second claim of the above theorem.

Corollary 2. Let q be the total number of random oracle queries or PointReg1 queries and $\Xi_1 \subseteq \Xi$. If $(\mathbf{x}, \mathbf{t}, \mathbf{h}, \hat{\mathbf{x}})$ with vector length ℓ is the vector corresponding to (x, t, h, \hat{x}) in Theorem 3, then

$$\Delta((\mathbf{t}, \mathbf{x}, \mathbf{h}, W, \text{abort} = 0)_{\Gamma_0}, (\mathbf{t}, \mathbf{x}, \mathbf{h}, W, \text{abort} = 0)_{\Gamma_1}) \leq 8(q + \ell)\ell\sqrt{2\Gamma_f/2^n} \quad (26)$$

$$\Pr(\exists i : x_i \neq \hat{x}_i \wedge f(x_i, h_i) = t_i \wedge \text{abort} = 0) \leq 8(q + \ell)\ell\sqrt{\frac{2\Gamma_f}{2^n}} + \frac{2\ell}{2^n} + \frac{16(q + \ell)^3\Gamma_f}{2^n}.$$

Remark 6. Theorem 3 requires $\Xi_1 \subset \Xi$. If this is not satisfied, then the proof can not get through. However, this condition is only used in the PointReg1 query to guarantee that $f(x, r) \neq t$. Since r is taken uniformly randomly after x is fixed, this condition holds for $2^n - \Gamma_t$ choices of r . Since there are at most q_s PointReg1 queries, this holds for every PointReg1 query with probability at least $1 - q_s \Gamma_t / 2^n$. When this holds, the proof of Theorem 3 remains valid. Furthermore, this argument extends to the vector case in Corollary 2 with further observation that Equation (26) holds with q replaced by $q - q_s$ as that is the bound from the number of the random oracle queries. Notice that $\Gamma_t / 2^n < 8\ell\sqrt{2\Gamma_t/2^n}$. Hence, with this tighter analysis, we have the following corollary that preserves the same bound.

Corollary 3. Let q be the number of random oracle queries or PointReg1 queries. If $(\mathbf{x}, \mathbf{t}, \mathbf{h}, \hat{\mathbf{x}})$ with vector length ℓ is the vector corresponding to (x, t, h, \hat{x}) in Theorem 3. Let \mathcal{A} be a quantum algorithm with access to \mathbf{CStO}_s with at most q_s PointReg1 queries. Then,

$$\Delta((\mathbf{t}, \mathbf{x}, \mathbf{h}, W, \text{abort} = 0)_{\Gamma_0}, (\mathbf{t}, \mathbf{x}, \mathbf{h}, W, \text{abort} = 0)_{\Gamma_1}) \leq 8(q + \ell)\ell\sqrt{2\Gamma_f/2^n},$$

$$\Pr(\exists i : x_i \neq \hat{x}_i \wedge f(x_i, h_i) = t_i \wedge \text{abort} = 0) \leq 8(q + \ell)\ell\sqrt{\frac{2\Gamma_f}{2^n}} + \frac{\ell}{2^{n-1}} + \frac{16(q + \ell)^3\Gamma_f}{2^n}.$$

4.7. Efficient Encoding of \mathbf{CStO} and \mathbf{CStO}_s

Notice that so far the oracle state is represented via basis states $|\mathbf{y}\rangle_D \in \mathcal{Y}^{\mathcal{X}}$ with at most q non- \perp entries. However, we need to show how operators used so far can be efficiently implemented. Zhandry [49] showed how to efficiently encode and compute O_{XYD} . In our work, more operators on D are introduced. It is necessary to show that Zhandry's encoding can be extended. In Appendix B, we detail how these operators can be efficiently executed on the encoded oracle state.

5. Extracting Queries to \mathbf{CStO} that Witness the Future Adversarial Output

In this section, we introduce and extend the techniques of Liu and Zhandry [30] for extracting an adversarial query that matches the adversary's final output which is unknown at the time of the extraction. This extraction technique is very useful in a security proof when the final adversary output is the final solution of the attack while the query input to be extracted is a certain witness of this solution. In the classical world, we can find this witness query by guessing, which has the polynomial fraction of the success probability. In the quantum world, this guessing strategy does not quite work as the query could be a superposition. Liu and Zhandry [30] showed that we can randomly guess which superposition query will contain the witness and then measure it. Then, the measurement outcome is the witness to the final output with a good probability. In the following, we adapt their technique to the setting of multiple extractions (but still interacting with \mathbf{CStO}). This modified game can be used to extract multiple queries that are collectively used to derive a witness for the final adversary output. This game can be easily converted to one where the random oracle is \mathbf{CStO}_s and so our extraction theorems in the previous sections can be used.

Assume that adversary \mathcal{A} makes at most q oracle queries to \mathbf{CStO} oracle. In the end, we measure the adversary-oracle joint state and obtain (w, \mathbf{y}) so that D has the collapsed state $F_D|\mathbf{y}\rangle_D$ (i.e., measuring the final state on D using $\{F_D|\mathbf{y}\rangle_D\}_{\mathbf{y}}$ basis). Let $\lambda_{w,\mathbf{y}}$ denote the probability of outcome (w, \mathbf{y}) . We define game $\text{Exp}_{i,j,k}$ (with either $i = j = k$ or $i < j < k$ for $i, j, k \in [q]$). Before this, we define \underline{x} as an *equivalence class* (which is a subset of \mathcal{X} , including x and also determined by x) in the sense that $\underline{x} = \underline{u}$ for any $u \in \underline{x}$. We assume that the cardinality of \underline{x} is polynomially bounded. For $\mathbf{y} \in \mathcal{Y}^{\mathcal{X}}$, $\mathbf{y}(\underline{x}) = \perp$ denotes that $y_u = \perp$ for $\forall u \in \underline{x}$.

$\text{Exp}_{i,i,i}$: In this game, it proceeds normally until the i th oracle query. Assume the attacker-oracle state is $\sum_{x_1, \dots, x_i, \mathbf{y}} \alpha_{x_1, \dots, x_i, \mathbf{y}} |x_1, \dots, x_i, \mathbf{y}\rangle$, where we remind that Y register is represented using Fourier basis $\{\phi_u\}_{u \in \mathcal{Y}}$.

Then, we measure¹ the query input to output \underline{x}^* and further we measure to test (by two measurements) whether it holds: $D(\underline{x}^*) = \bar{\perp}$ before the oracle query² **but** $D(\underline{x}^*) \neq \bar{\perp}$ after the oracle query³. If both test measurements succeed, then the resulting state before applying CStO oracle will be

$$\sum_{x'uz\mathbf{y}: y_{x'}=\perp, u \neq 0, x' \in \underline{x}^*} \alpha_{x'uz\mathbf{y}} |x', \phi_u, z, \mathbf{y}\rangle. \quad (27)$$

In this case, the state after the CStO query will become

$$\sum_{x'uz\mathbf{y}: y_{x'}=\perp, u \neq 0, x' \in \underline{x}^*} \alpha_{x'uz\mathbf{y}} |x', \phi_u, z\rangle \frac{1}{\sqrt{2^n}} \sum_{\mathbf{y} \in \mathcal{Y}} (-1)^{u \cdot \mathbf{y}} |\mathbf{y} \cup (y)_{x'}\rangle. \quad (28)$$

Then, the game proceeds normally. If one or both measurements fails, the game aborts.

$\text{Exp}_{i,j,k}$ with $i < j < k$: In this game, it proceeds normally until the i th oracle query. Let the attacker-oracle state be $\sum_{xuz\mathbf{y}} \alpha_{xuz\mathbf{y}} |x, \phi_u, z, \mathbf{y}\rangle$. Then, we measure the query input to output \underline{x}^* and further we measure (similar to that in $\text{Exp}_{i,i,i}$) to test whether the followings are satisfied throughout the i th oracle query to the k th oracle query (using footnotes 2 and 3):

- right before the i th query, $D(\underline{x}^*) = \bar{\perp}$; but after it, $D(\underline{x}^*) \neq \bar{\perp}$.
- after i th query and before the j th query, it remains that $D(\underline{x}^*) \neq \bar{\perp}$.
- after j th query and before the k th query, $D(\underline{x}^*) = \bar{\perp}$.
- right after the k th query, $D(\underline{x}^*) \neq \bar{\perp}$.

If the test measurement fails, the game aborts; otherwise, it proceeds normally. It should be emphasized that we do not care if $D(\underline{x}^*) = \bar{\perp}$ after any other query than those listed above.

We remark that $\text{Exp}_{i,i,i}$ in fact is a special case of $\text{Exp}_{i,j,k}$ with $i = j = k$ as "after i th query and before the j query" and "after j th query and before the k query" in $\text{Exp}_{i,j,k}$ are both null statements in this setting.

Further, although $\text{Exp}_{i,j,k}$ is defined in the game between adversary and CStO, by inspecting its definition, we can see that $\text{Exp}_{i',j',k'}$ in $\text{Exp}_{i,j,k}$ is also well-defined (as the conducted measurements are well-defined). It is not hard to see that the game $\text{Exp}_{i,j,k}$ in $\text{Exp}_{i',j',k'}$ and the game $\text{Exp}_{i',j',k'}$ in $\text{Exp}_{i,j,k}$ are the same. By iteration, we can define Exp_{i^t,j^t,k^t} as game Exp_{i_t,j_t,k_t} in $\text{Exp}_{i^{t-1},j^{t-1},k^{t-1}}$, where v^t is the sequence v_1, \dots, v_t . Let \mathcal{U}_{IJK} be the distribution of (i, j, k) that is uniformly random in $\{(i, i, i) \mid i \in [q]\} \cup \{(i, j, k) \mid 1 \leq i < j < k \leq q\}$. Further, \mathcal{U}_{IJK}^c is the product distribution of \mathcal{U}_{IJK} of c copies.

The following is the main result in this section. This is an extension of [30, Corollary 6] with the proof mainly extending [30, Theorem 9]. The details can be found in Appendix D.

Theorem 4. Let $c > 0$ be a constant. Take $(i^c, j^c, k^c) \leftarrow \mathcal{U}_{IJK}^c$. Let S be a subset of the possible output (w, \mathbf{y}) in the game with CStO oracle. Define the measurement (P_0, P_1) with $P_0 = \sum_{(w,\mathbf{y}) \in S} |w, \tilde{\mathbf{y}}\rangle \langle w, \tilde{\mathbf{y}}|$ (where we use the basis $F_D | \mathbf{y} \rangle = | \tilde{\mathbf{y}} \rangle$ for the consistency with the measurement at the beginning of this section) and $P_1 = I - P_0$. Let $x_{w,\mathbf{y},t} \in \mathcal{X}$ for $t = 1, \dots, c$ be representatives for c (possibly repeating) classes, determined by (w, \mathbf{y}) with $\mathbf{y}(x_{w,\mathbf{y},t}) \neq \perp$. Let λ be the probability in the random game Exp_{i^c,j^c,k^c} that gives $x_{w,\mathbf{y},t}$ for some $(w, \mathbf{y}) \in S$ from the measurement on the i_t th oracle query for $t = 1, \dots, c$ and the final measurement (P_0, P_1)

¹ Let $\text{rep}(\underline{x}) \in \mathcal{X}$ be the representative of \underline{x} and assume that it can be efficiently computed from any $u \in \underline{x}$. Let U_C be a unitary with $|x\rangle_X |0\rangle_C \mapsto |x\rangle | \text{rep}(\underline{x}) \rangle$; measuring register C in the computational basis gives $\text{rep}(\underline{x})$.

² $D(\underline{x}^*) = \bar{\perp}$ can be tested by a projective measurement $\Pi_{\perp} = (\Pi_{\perp}^0, I - \Pi_{\perp}^0)$ with $\Pi_{\perp}^0 = \sum_{\mathbf{y}: \mathbf{y}(\underline{x}^*) = \bar{\perp}} |\mathbf{y}\rangle \langle \mathbf{y}|$, which can be implemented by writing bit $\mathbf{y}(\underline{x}^*) = \bar{\perp}$ onto a new register and measuring it.

³ If $D(x') = \perp$ before the oracle query, then it remains $D(x') = \perp$ after the oracle query (i.e., after applying CStO) if and only if Y register is currently $|\phi_0\rangle$. Thus, to test if $D(x') = \perp$ after the oracle query, we can simply apply the unitary $|\phi_y\rangle_Y |0\rangle_Q \mapsto |\phi_y\rangle_Y |y\rangle_Q$ and measure if Q register has 0. That is, we can make the test *without* applying the CStO operation.

gives outcome 0. Let γ be the probability that the final measurement in the normal game gives outcome 0. Then, $\lambda \geq \frac{\gamma}{(q+\binom{q}{3})^{3c}}$.

6. Quantum Security of the JAK Multi-Signature Framework

Jiang et al. [23] proposed a framework that converts a linear ID scheme into a compact multi-signature scheme and proved its security in the classic random oracle model. In this section, we prove its security in the quantum random oracle model.

6.1. Review of JAK Multi-Signature Framework

Let

$$\mathcal{ID} = (\text{Setup}_{id}, \text{KeyGen}_{id}, P, V_\tau, \Theta)$$

be a canonical linear ID with parameter $\tau \in \mathbb{N}$. Let H_0, H_1 be two random oracles from $\{0, 1\}^*$ to Θ with $\Theta \subseteq \mathcal{R}$, where \mathcal{R} is the ring defined for the linearity property of \mathcal{ID} . The JAK multi-signature scheme $(\text{Setup}, \text{KeyGen}, \text{Sign}, \text{Verify})$ is as follows.

Setup. Sample and output $\text{param} \leftarrow \text{Setup}_{id}(1^\lambda)$.

KeyGen. Sample $(pk, sk) \leftarrow \text{KeyGen}_{id}(\text{param})$; output a public-key pk and private key sk .

Sign. Assume that signers with public-keys $\{pk_i\}_{i=1}^t$ want to jointly sign message M . Let $\lambda_i = H_0(pk_i, PK)$ and $\overline{pk} = \sum_{i=1}^t \lambda_i \bullet pk_i$, where $PK = (pk_1, \dots, pk_t)$. They execute the following.

- R-1. Signer i takes $(st_i, \text{CMT}_i) \leftarrow P(\text{param})$ and sends $r_i := H_0(\text{CMT}_i | pk_i)$ to all signers.
- R-2. Upon r_j for all j (we don't restrict $j \neq i$ for brevity), signer i sends CMT_i to all signers.
- R-3. Upon $\text{CMT}_j, j = 1, \dots, t$, signer i checks if $r_j = H_0(\text{CMT}_j | pk_j)$ for all j . If no, it rejects; otherwise, it computes $\overline{\text{CMT}} = \sum_{j=1}^t \lambda_j \bullet \text{CMT}_j$, $\text{CH} = H_1(\overline{pk} | \overline{\text{CMT}} | M)$ and $\text{Rsp}_i = P(st_i | sk_i | pk_i, \text{CH})$. Finally, it sends Rsp_i to all signers.
- **Output.** Upon $\text{Rsp}_j, j = 1, \dots, t$, signer i computes $\overline{\text{Rsp}} = \sum_{j=1}^t \lambda_j \bullet \text{Rsp}_j$, and outputs the aggregated public-key $\overline{pk} | t$ and multi-signature $\overline{\text{CMT}} | \overline{\text{Rsp}}$.

Verify. Upon signature $(\overline{\text{CMT}}, \overline{\text{Rsp}})$ on message M with the aggregated public key $\overline{pk} | t$, it outputs $V_i(\overline{pk}, \overline{\text{CMT}} | \text{CH} | \overline{\text{Rsp}})$, where $\text{CH} = H_1(\overline{pk} | \overline{\text{CMT}} | M)$.

6.2. Security Theorem

In this section, we prove the security of the JAK framework in the quantum random oracle model. Our proof strategy is to use the sequence of game techniques. We first replace two random oracles $|H_0\rangle$ and $|H_1\rangle$ with a single one $|H\rangle$ so that $H(0|x) = H_0(x)$ and $H(1|x) = H_1(x)$. Since the distributions of $H(b|x)$ and $H_b(x)$ are identical, adversary success does not decrease. Then, we replace $|H\rangle$ by **CStO** and this will not change the adversary success by Fact 1 and Lemma 8. Next, we sample experiment $\text{Exp}_{i^2, j^2, k^2}$ so that the i_1 th query has measurement outcome x_1^* with $x_1^* = 0 | pk'_1 | PK'$ where PK' is the signature group in the attacker's forgery and the measurement outcome for the i_2 th query is x_2^* with $x_2^* = 1 | \overline{pk}' | \overline{\text{CMT}}' | M$ being the attacker's input to compute CH' in its forgery. By Theorem 4, the adversary success in this experiment is degraded only by a polynomial fraction. Then, we consider the signing oracle in $\text{Exp}_{i^2, j^2, k^2}$. We will try to confirm (by measurement) that the query input $x = 1 | \overline{pk}' | \overline{\text{CMT}}' | M$ to compute CH , is not recorded in **CStO** (so that we can set this CH by ourselves). Since $\overline{\text{CMT}}$ contains the challenger's committing message (that has super-logarithmic min-entropy), this confirmation measurement will succeed with high probability (Lemma 10). Then, we reformulate $\text{Exp}_{i^2, j^2, k^2}$ as the game with **CStO'** and further change to a game with **CStO_s**. The format of $\text{Exp}_{i^2, j^2, k^2}$ is very compatible with **CStO'** and so this switch is just a simple formatting problem. Now under the game with **CStO_s**, we can use the extraction technique to extract the committing messages from adversary in a signing oracle and treat $x = 1 | \overline{pk}' | \overline{\text{CMT}}' | M$ as a special point. We also treat x_1^*, x_2^* as

special points. We can set the random oracle value of these special points by ourselves. With this benefit, we use the ID simulator to simulate the honest signer's messages in a signing oracle without its secret. Finally, we can reduce the adversary success to break the ID scheme by setting the CH in attacker's forgery as the challenge from the ID challenger. So the attacker's forgery will help us to break the ID security.

Theorem 5. Assume that $h \leftarrow \Theta$ is invertible in \mathcal{R} with probability $1 - \text{negl}(\lambda)$. Let $\mathcal{ID} = (\text{Setup}_{id}, \text{KeyGen}_{id}, P, V_\tau)$ be a secure ID scheme with linearity and simulability. Then, the JAK multi-signature scheme is **EU-CMA** secure in the quantum random oracle model.

Proof. Our proof follows the sequence of game strategy. The game consists of quantum polynomial time adversary \mathcal{D} and a challenger \mathcal{C} who maintains the quantum random oracle and the signing oracle that jointly signs a message M with \mathcal{D} . We use $\text{Succ}(\mathbf{G})$ to denote the adversary success probability in game \mathbf{G} .

Game \mathbf{G}_0 . This is the real forgery game. Challenger runs $\text{Setup}(1^\lambda)$ to generate param and executes $\text{KeyGen}(\text{param})$ to generate a challenge key pair (pk^*, sk^*) . Then, it provides (pk^*, param) to \mathcal{D} and maintains two quantum random oracles $|H_0\rangle, |H_1\rangle$ and signing oracle \mathcal{O}_s to interact with \mathcal{D} . Finally, \mathcal{D} outputs a forgery (σ^*, M^*) with a set of public keys (pk_1^*, \dots, pk_N^*) where $pk^* = pk_1^*$. He succeeds if $\text{Verify}(\overline{pk^*}, \sigma^*, M^*) = 1$ and no query $(pk_1^*, \dots, pk_N^*, M^*)$ was issued to \mathcal{O}_s .

Game \mathbf{G}_1 . We modify \mathbf{G}_0 to \mathbf{G}_1 so that $H_0(x) = H(0|x)$ and $H_1(x) = H(1|x)$ for a random oracle H . This does not reduce the adversary success probability as the tables for $H(0|\cdot), H(1|\cdot)$ and the tables for $H_0(\cdot), H_1(\cdot)$ jointly are identically distributed (i.e., purely random in both cases). Any query $|\psi\rangle$ to $H_b(\cdot)$ is a special case of query $|b\rangle|\psi\rangle$ to $|H\rangle$. Thus, $\text{Pr}(\text{Succ}(\mathbf{G}_1)) \geq \text{Pr}(\text{Succ}(\mathbf{G}_0))$.

Game \mathbf{G}_2 . We modify \mathbf{G}_1 to \mathbf{G}_2 so that the random oracle is implemented using **CStO**. By Fact 1 and Lemma 8, the success probabilities of \mathcal{D} in \mathbf{G}_1 and \mathbf{G}_2 are identical.

Game \mathbf{G}_3 . We modify \mathbf{G}_2 to \mathbf{G}_3 so that it selects the game (involving \mathcal{D}) $\text{Exp}_{i^2, j^2, k^2}$ for $(i^2, j^2, k^2) \leftarrow \mathcal{U}_{IJK}^2$. Let the measurement at the i_t th oracle query be \underline{x}_t^* for some x_t^* for $t = 1, 2$. At the end of game, let (w, \mathbf{y}) be the measurement output, where w is the forgery (α, β, PK', M) measured by \mathcal{D} on register XYW and \mathbf{y} is the measurement outcome on D (which represents the quantum state $F_D|\mathbf{y}\rangle_D$ and hence \mathbf{y} satisfies $y_x = RO(x)$). Define $x_{w, \mathbf{y}, 1} = 0|pk'_1|PK'$ for $PK' = (pk'_1, \dots, pk'_n)$. Further, define $\underline{x}_{w, \mathbf{y}, 1} = \{0|pk'_v|PK' : v = 1, \dots, n\}$ and $\underline{x} = \{x\}$ (for any x that can not be written in $0|pk_v|PK$ with $pk_v \in PK$). Hence, the equivalence class is well-defined. In addition, define $x_{w, \mathbf{y}, 2} = 1|\overline{pk'}|\alpha|M$. We consider the case $x_t^* = x_{w, \mathbf{y}, t}$ for $t = 1, 2$. Define S in Theorem 4 as the set of all pairs (w, \mathbf{y}) so that w is a valid forgery under random oracle assignments $y_x = RO(x)$. Since the probability $(w, \mathbf{y}) \in S$ is the success probability of \mathcal{D} in \mathbf{G}_2 , by Theorem 4, the success probability of \mathcal{D} in \mathbf{G}_3 will be at least $\frac{\epsilon}{(q + \binom{q}{3})^6}$.

Game \mathbf{G}_4 . We modify \mathbf{G}_3 to \mathbf{G}_4 so that in the signing oracle, right before the classic oracle query $x = 1|\overline{pk'}|\text{CMT}|M$ to generate CH, it does a measurement $(|\perp\rangle\langle\perp|, I - |\perp\rangle\langle\perp|)$ to the register D_x of the oracle. If it gives the outcome 0, it aborts with Fail (indicating the failure of the simulation); otherwise, it continues normally. By Lemma 10, this Fail occurs only with a negligible probability (recall that $H_\infty(\text{CMT})$ is super-logarithmic for randomly generated CMT) and hence the success probability \mathcal{D} in \mathbf{G}_4 is at least $\frac{\epsilon}{(q + \binom{q}{3})^6} - \text{negl}(\kappa)$.

Game \mathbf{G}_5 . We re-format \mathbf{G}_4 as a game between an adversary \mathcal{D} and challenger \mathcal{C}' that has oracle access to **CStO'** (ref. Section 4.3) so that \mathcal{D} in \mathbf{G}_5 has the success probability exactly identical to that of \mathcal{D} in \mathbf{G}_4 . The code of \mathcal{C}' as follows. It follows \mathcal{C} to set up \mathbf{G}_4 to invoke \mathcal{D} with the public parameters and then interacts with \mathcal{D} . \mathcal{C}' also follows \mathcal{C} to choose the random game $\text{Exp}_{i^2, j^2, k^2}$.

- Whenever a random oracle query is issued, \mathcal{C}' does as follows. Assume this is the ℓ th random oracle query. If $\ell = i_1$ or i_2 , then \mathcal{C}' (like challenger \mathcal{C} in \mathbf{G}_4) will apply a projective measurement on X register in the computational basis and results in x_1^* or x_2^* and then it issues a *PointReg0* query with each $x \in x_1^*$ or x_2^* to \mathbf{CStO}' . If $\ell = k_t$ (for $t = 1$ or 2), it issues a *PointReg1* query with $x' \in x_t^*$ (which does measurement Π on $D_{x'}$ like challenger in Γ_4). Then (no matter what is ℓ), recall that, in \mathbf{G}_4 , the challenger will conduct a projective measurement Λ' (determined by ℓ and i_1, j_1, k_1) on D and another projective measurement Λ'' (still determined by ℓ, i_2, j_2, k_2) on D . These measurements are described in $\mathbf{Exp}_{i_2, j_2, k_2}$ and can be seen that they are only applied on D_{Ξ_0} as desired by \mathbf{CStO}' . These two measurements can be combined into one projective measurement $\Lambda_\ell = (\Lambda_{\ell_0}, I - \Lambda_{\ell_0})$ in the computational basis on D_{Ξ_0} . Then, to be consistent with \mathbf{G}_4 , \mathcal{D}' in \mathbf{G}_5 issues the random oracle query with its register XY to \mathbf{CStO}' which will handle it first with measurement Λ_ℓ and then with \mathbf{CStO} (if it does not abort). Under this reformatting, the action on the joint state is the same as in \mathbf{G}_4 .
- When \mathcal{D} issues a signing query (PK, M) so that PK contains pk_1^* , \mathcal{C}' in \mathbf{G}_5 computes $\overline{pk}, \overline{\text{CMT}}$ and $x = 1|pk|\overline{\text{CMT}}|M$ normally as in \mathbf{G}_4 , with possibly random oracle access to \mathbf{CStO}' as in the previous item. Next, it issues *PointReg0* query and then *PointReg1* query both with x to \mathbf{CStO}' , and finally a classic random oracle query with x (if it does not abort), where the random oracle queries are handled as the above reformatting. In turn, if \mathbf{CStO}' does not abort, \mathcal{C}' receives the reply $y = RO(x)$ and it continues normally as in \mathbf{G}_4 to generate the signature. Note that \mathcal{C}' together with \mathbf{CStO}' acts the same as \mathcal{C} together with \mathbf{CStO} in \mathbf{G}_4 . Thus, this does not change the view of \mathcal{D} and the joint quantum state.

From our description, we can see that \mathcal{D} in \mathbf{G}_4 and \mathbf{G}_5 has the same view, as it is just a reformatting of \mathbf{G}_4 . Hence, \mathcal{D} in \mathbf{G}_5 has the same success probability as in \mathbf{G}_4 .

Game \mathbf{G}_6 . We modify \mathbf{G}_5 to \mathbf{G}_6 s.t. \mathbf{CStO}' is replaced by \mathbf{CStO}_s . By Lemma 9, the success probability of \mathcal{D} in \mathbf{G}_6 is the same as in \mathbf{G}_5 by checking the output of \mathcal{C}' which is defined as 1 if and only if \mathcal{D} succeeds ($\neg\text{abort}$ can be removed in the lemma as \mathcal{C}' outputting 1 indicates $\neg\text{abort} = 1$).

Game \mathbf{G}_7 . We modify \mathbf{G}_6 to \mathbf{G}_7 so that \mathbf{CStO}_s is now simulated by \mathcal{S} . Since $\mathcal{S}.E$ is not used, the adversary success probability is identical to \mathbf{G}_6 .

Game \mathbf{G}_8 . We modify \mathbf{G}_7 to \mathbf{G}_8 so that in the signing query $O_s(pk_1, \dots, pk_n, M)$, after receiving r_i , challenger extracts $\text{CMT}'_i = \mathcal{S}.E(r_i)$ and later in round $R-3$, when it receives CMT_i , if $\text{CMT}_i \neq \text{CMT}'_i$ but $\mathcal{S}.RO(\text{CMT}_i) = r_i$, it terminates with Fail. By Corollary 2, this occurs negligibly. Thus, the success probability of \mathcal{D} in \mathbf{G}_8 is negligibly close to that in \mathbf{G}_7 .

Game \mathbf{G}_9 . We modify \mathbf{G}_8 to \mathbf{G}_9 so that in $O_s(pk_1, \dots, pk_n, M)$ with $pk_t = pk^*$ for some t , it generates $(\text{CMT}_t, \text{Rsp}_t) \leftarrow \mathbf{SIM}(\text{CH}, pk^*, \text{param})$, where $\text{CH} \leftarrow \Theta$. It does the same as \mathbf{G}_8 : measure $(|\perp\rangle\langle\perp|, I - |\perp\rangle\langle\perp|)$ on D_x (specified since \mathbf{G}_4), issues *PointReg0* query, then *PointReg1* queries with $x = 1|pk|\overline{\text{CMT}}|M$ to \mathbf{CStO}_s , where *PointReg1* will define r in \mathbf{CStO}_s for D_x (if it does not abort) as the random oracle value for x . In \mathbf{G}_9 , it defines this r as CH . By the simulability of ID, this has the same distribution as \mathbf{G}_8 . So the adversary success probability remains the same as in \mathbf{G}_8 (specifically, any non-negligible difference in this success probability can be straightforwardly reduced through hybrid argument on $(\text{CMT}_t, \text{Rsp}_t, \text{CH}_t)$ in the signing queries to break the ID simulability; details are omitted). We remind that the secret key sk is no longer used in \mathbf{G}_9 .

Game \mathbf{G}_{10} . We modify \mathbf{G}_9 to \mathbf{G}_{10} so that it will embed the ID challenges into the attack. Specially, \mathcal{C}' sets up the game so that pk_1^* is the ID challenge key. In addition, after obtaining x_1^* (by measuring the i_1 th random oracle query) with $x_1^* = 1|pk_1^*|\{pk_1^*, \dots, pk_n^*\}$, it sends pk_2^*, \dots, pk_n^* as its response of group keys to its own ID challenger and in turn will receive $\lambda_1, \dots, \lambda_n$. Upon *PointReg1* queries

$x_u \in \underline{x}_1^*$ (from \mathcal{C}'), \mathbf{CStO}_s sets its random oracle value⁴ $S.RO(x_u)$ as λ_u ($u = 1, \dots, n$), provided by ID challenger. In addition, later for $x_2^* = 1|pk'|a|M$, in *PointReg1* query x_2^* , it sets the hash value $r = \text{CH}$, provided by ID challenger. This will not change the distribution of the game because λ_u for any u as well as this CH are all uniformly random and hence remains the same distribution as in \mathbf{G}_9 . When \mathcal{D} outputs its forgery, if the output $(\mathbf{w}, \mathbf{y}) \in S$, then it sends the response Rsp in w to ID challenger as its response. Obviously, \mathcal{C}' succeeds in its ID challenge session if and only if \mathcal{D} succeeds with $(w, \mathbf{y}) \in S$ (that is, the forgery is valid). Thus, the adversary success probability is the same as in \mathbf{G}_9 and hence \mathcal{C}' has a success probability negligibly close to $\frac{\epsilon}{(q+\binom{q}{3})^6}$. This contradicts the security of ID scheme. \square

Remark 7. In \mathbf{G}_5 , we convert the game with \mathbf{CStO} to the game with \mathbf{CStO}' , where we register \underline{x}_t^* to Ξ_0 at the i_t th oracle random oracle query while it registers to Ξ_1 only at the k_t th random oracle query. This generally is the routine to convert $\mathbf{Exp}_{\mathcal{P}, \mathcal{C}, \mathcal{K}}$ to a game with \mathbf{CStO}' . One might wonder why we register \underline{x}_t^* twice. The issue in fact comes from the switch from \mathbf{CStO}' to \mathbf{CStO}_s in \mathbf{G}_6 . \mathbf{CStO}_s requires that after registration in Ξ_1 , no measurement for testing $D(x) = \perp$ will be performed. If we register it once, this should happen at the i_t th query for \underline{x}_t^* . But in this case, we can not guarantee that \mathbf{G}_5 (with \mathbf{CStO}') will be indistinguishably switched to \mathbf{G}_6 with \mathbf{CStO}_s : after the i_t th query, we still need to measure if $D(\underline{x}_t^*) = \perp$. But in \mathbf{G}_6 , this will never be true as $|\perp\rangle$ is replaced by $|r\rangle$, while in \mathbf{G}_5 (with \mathbf{CStO}'), it is still possible. This distinguishing event does not violate Lemma 9 because this test is no longer performed in \mathbf{CStO}_s after updating $|\perp\rangle$ by $|r\rangle$.

7. Quantum Security of The JAK ID Scheme

In this section, we prove the quantum security of the lattice-based ID scheme in [23] (which we call it the JAK ID scheme). Together with Theorem 5, it gives a secure lattice-based multi-signature in the quantum random oracle model. We will use the following notations.

- As a convention for lattice over ring, the security parameter is denoted by n (a power of 2);
- q is a prime with $q \equiv 3 \pmod{8}$;
- $R = \mathbb{Z}[x]/(x^n + 1)$; $R_q = \mathbb{Z}_q[x]/(x^n + 1)$; R_q^* is the set of invertible elements in R_q ;
- A vector \mathbf{w} is implicitly a column vector and the i th component is w_i or $\mathbf{w}[i]$;
- for a matrix or vector X , X^T is its transpose;
- $\mathbf{1}$ denotes the all-1 vector $(1, \dots, 1)^T$ of dimension clear only in the specific context;
- for $u = \sum_{i=0}^{n-1} u_i x^i \in R$, $\|u\|_\infty = \max_i |u_i|$;
- $\alpha \in \mathbb{Z}_q$ always uses the default representative with $-(q-1)/2 \leq \alpha \leq (q-1)/2$ and similarly, for $u \in R_q$, each coefficient of u by default belongs to this range;
- $e = 2.71828 \dots$ is the Euler's number;
- $\mathcal{C} = \{c \in R \mid \|c\|_\infty \leq \log n, \deg(c) < n/2\}$
- $\mathcal{Y} = \{y \in R \mid \|y\|_\infty \leq n^{1.5} \sigma \log^3 n\}$
- $\mathcal{Z} = \{z \in R \mid \|z\|_\infty \leq (n-1)n^{1/2} \sigma \log^3 n\}$.

7.1. Ring-LWE and Ring-SIS

In the following, we introduce the ring-LWE and ring-SIS assumptions (see [33,35,44] for details). For $\sigma > 0$, distribution $D_{\mathbb{Z}^n, \sigma}$ assigns the probability proportional to $e^{-\pi \|y\|^2 / \sigma^2}$ for any $\mathbf{y} \in \mathbb{Z}^n$ and 0 for other cases. As in [1], $y \leftarrow D_{R, \sigma}$ samples $y = \sum_{i=0}^{n-1} y_i x^i$ from R by taking $y_i \leftarrow D_{\mathbb{Z}, \sigma}$.

The Ring Learning With Error (Ring-LWE $_{q, \sigma, 2n}$) problem over R with standard deviation σ is defined as follows. Initially, it takes $s \leftarrow D_{R, \sigma}$ as secret. It then takes $a \leftarrow R_q, e \leftarrow D_{R, \sigma}$ and outputs $(a, as + e)$. The problem is to distinguish $(a, as + e)$ from a tuple (a, b) for $a, b \leftarrow R_q$. The Ring-LWE $_{q, \sigma, 2n}$ assumption [16,34] is to say that no quantum polynomial time algorithm can solve Ring-LWE $_{q, \sigma, 2n}$ problem with a non-negligible advantage.

⁴ Recall that in \mathbf{G}_5 - \mathbf{G}_9 , *PointReg1* query for $x \in \underline{x}_1^*$ occurs when \mathcal{D} issues the k_t th random oracle query, where the test measurement Π has outcome $|\perp\rangle_{D_x}$ (since it does not abort) and hence $D(x) = \perp$.

The Small Integer Solution problem with parameters q, m, β over ring R (Ring-SIS $_{q,m,\beta}$) is as follows: given m uniformly random elements a_1, \dots, a_m over R_q , find (t_1, \dots, t_m) so that $\|t_i\|_\infty \leq \beta$ and $a_1 t_1 + \dots + a_m t_m = 0$. We consider the case $m = 3$. We assume that $q = 3 \pmod 8$, in which case, by [6, Theorem 1], $x^n + 1 = \Phi_1(x)\Phi_2(x)$ for irreducible polynomials $\Phi_1(x), \Phi_2(x)$ of degree $n/2$. So by Chinese remainder theorem, a_i is invertible, except for probability $2q^{-n/2}$. Hence, ring-SIS is equivalent to the case of invertible a_2 which is further equivalent to problem $a_1 t_1 + t_2 + a_3 t_3 = 0$, as we can multiply it by a_2^{-1} . The quantum hardness of ring-SIS can be found in [13,33].

7.2. The JAK ID Scheme

We now review the JAK ID scheme [23]. Initially, take $s_1, s_2 \leftarrow D_{R,\sigma}, a_1, a_2 \leftarrow R_q^*$ and compute $u = a_1 s_1 + a_2 s_2$. The system parameter is (a_1, a_2) ; the public key is u and the private key is (s_1, s_2) . The ID scheme is as follows (also see Figure 3).

1. Prover generates $y_1, y_2 \leftarrow \mathcal{Y}^\mu$ and computes $\mathbf{v} = a_1 y_1 + a_2 y_2$ and sends \mathbf{v} to Verifier, where $\mu \geq \log^2 n$.
2. Receiver samples $c \leftarrow \mathcal{C}$ and sends it to Prover.
3. Upon c , Prover computes $z_1 = s_1 c + \sum_j y_{1j}, z_2 = s_2 c + \sum_j y_{2j}$.
4. Upon z_1, z_2 , Verifier checks if $\sum_{i=1}^\mu v_i \stackrel{?}{=} a_1 z_1 + a_2 z_2 - uc$ and $\|z_b\|_\infty \stackrel{?}{\leq} \eta_t$ for $b = 1, 2$, where $\eta_t = 5\sigma n^2 \sqrt{t\mu} \log^6 n$ and t is a positive integer (that represents the number of signers when converted to a signature scheme) and recall that (as a convention) v_i is the i th component of \mathbf{v} . If all are valid, it accepts; otherwise, it rejects.

The above specification uses the public-key $u = a_1 s_1 + a_2 s_2$ while the original protocol uses $u = a s_1 + s_2$. This change is only for convenience for our proof for Lemmas A3 (that is needed for the ID security). It will not affect other properties: correctness, simulatability, linearity and classical security, as if we define $a = a_1 a_2^{-1}$, the current version is different from the original one only by a scaling factor a_2 and all the proofs go through. Further, Step 3 in the above specification is a simplified but equivalent version of the original protocol (see the remark after the scheme description in [23]). The proofs of the correctness and linearity do not involve the adversary and hence remain unchanged as in [23]. The simulability given in [23] holds statistically. It hence holds against a quantum attacker, where the model is the same except that the attacker can also internally run the quantum operations.

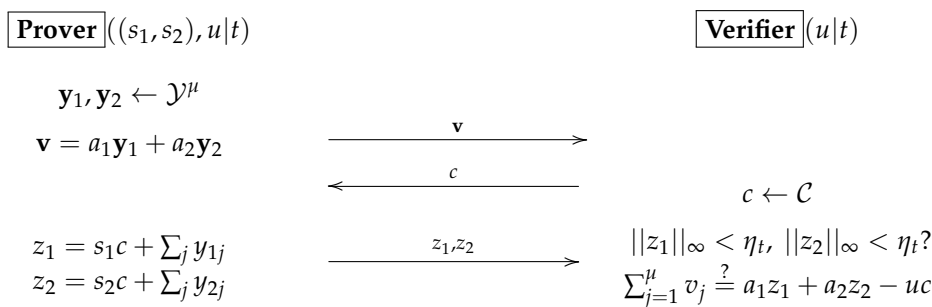


Figure 3. The JAK ID Scheme

It remains to prove the quantum security of this ID scheme under Definition 5. The idea is to implement the classic rewinding technique in the quantum world. We start with the security game below with u_1 the honest signer's public key. We first make the change that $\lambda_2, \dots, \lambda_t$ are provided by attacker (which will increase the attacker A 's success probability only).

1. $a_1, a_2 \leftarrow \mathbf{Setup}(1^\lambda)$;
2. $(|st_0\rangle, \lambda_2, u_2, \dots, \lambda_t, u_t) \leftarrow A(a_1, a_2, u_1)$

3. $\lambda_1 \leftarrow \mathcal{C}$
4. $(|st_1\rangle, \mathbf{v}) \leftarrow A(|st_0\rangle, \lambda_1)$;
5. $c \leftarrow \mathcal{C}$; $z_1|z_2 \leftarrow A(|st_1\rangle, c)$;
6. **Check:** $\sum_{j=1}^m v_j \stackrel{?}{=} a_1 z_1 + a_2 z_2 - \bar{u}c$, $\|z_1\|_\infty < \eta_t$, $\|z_2\|_\infty < \eta_t$?

In the classic proof, we first obtain a valid transcript $(\{\lambda_i|u_i\}_{i=2}^t, \lambda_1, \mathbf{v}, c, z_1|z_2)$ and then rewind A to line 5 and produce another valid transcript $(\{\lambda_i|u_i\}_{i=2}^t, \lambda_1, \mathbf{v}, c', z'_1|z'_2)$. This allows us to derive a short solution $(o_1, o_2, o_3) = (z_1 - z'_1, z_2 - z'_2, c - c')$ for equation $a_1 o_1 + a_2 o_2 - \bar{u} o_3 = 0$. In the quantum world, this rewinding strategy is not quite working because when A produces z_1, z_2 , it might do a measurement which is not reversible. If it only uses unitary (e.g., U), then the rewinding can be done by applying U^\dagger . Unruh [47] introduced a notion of collapsing property for a protocol: even with the measurement, the rewinding still can produce a successful new transcript with a good probability. In our quantum security proof, we will guarantee this property is satisfied. Next, we rewind A to step 3 with a new challenge λ'_1 and repeat the above procedure to obtain a new solution (o'_1, o'_2, o'_3) satisfying $a_1 o'_1 + a_2 o'_2 - \bar{u}' o'_3 = 0$, where \bar{u}' is updated as $u_1 \lambda'_1 + \sum_{i=2}^t \lambda_i u_i$. Combining these two solutions allows us to derive a short solution (x_1, x_2, x_3) for $a_1 x_1 + a_2 x_2 + u_1 x_3 = 0$. If u_1 is uniformly random in R_q , this is the solution for Ring-SIS. However, even though u_1 is sampled as $a_1 s_1 + a_2 s_2$, it is indistinguishable from the uniformly random u_1 by Ring-LWE assumption. Since the secret (s_1, s_2) is never used in the above game, if we use the uniformly random u_1 in the game, we can obtain the solution (x_1, x_2, x_3) with the similar probability. This contradicts the Ring-SIS assumption. The detailed implementation of this strategy is given Appendix A.

Theorem 6. *Under ring-LWE $_{q,\sigma,2n}$ and ring-SIS $_{3,q,\beta}$ assumptions, the JAK ID scheme is secure (under Definition 5), where $\beta \geq 16\eta_t \sqrt{n} \log^2 n$.*

Applying the compiler theorem to the JAK ID scheme, it gives a quantum-secure multi-signature scheme (denoted by RLWE-Multisig scheme). For a complete description of this scheme, see [23]. The following is a summary of its security.

Corollary 4. *Under Ring-LWE $_{q,\sigma,2n}$ and Ring-SIS $_{3,q,\beta}$ assumptions, RLWE-MultiSig is EU-CMA secure in the quantum random oracle model, where $\beta \geq 16\eta_t \sqrt{n} \log^2 n$.*

8. Conclusions

In this paper, we investigated the security analysis techniques in the quantum random oracle model. We combined and extended three existing techniques to form a model called compressed random oracle with adaptive special points (CStO_s). We extended the query extractions from previous models to CStO_s. We can simulate this random oracle so that we can extract the query for a given commitment and we can also extract a query that is a witness for the future (unknown) adversary output. To see the power of this simulated oracle, we proved the security of our previous compact multi-signature scheme. This gives the first compact multi-signature provable secure in the quantum random oracle model. We hope that this oracle technique will be useful to prove the post-quantum security of many cryptographic systems.

Funding: This research received no external funding

Institutional Review Board Statement: not applicable

Informed Consent Statement: not applicable

Data Availability Statement: not applicable

Acknowledgments:

Conflicts of Interest: The author declares no conflict of interest.

Appendix A. Proof of Theorem 6

In the following, we first introduce the notion of a *public-coin protocol*, which is a straightforward generalization of a sigma protocol.

Definition A1. A n -round public-coin protocol Σ is a tuple of algorithms $(Gen, \mathcal{P}, \mathcal{V})$ that executes as follows.

- Initially, $(pk, sk) \leftarrow Gen$ is executed to generate a public-key pk for \mathcal{P} and \mathcal{V} and a private key sk for \mathcal{P} . \mathcal{P} has an initial state $st_{\mathcal{P}} = pk|sk$ while \mathcal{V} has an initial state $st_{\mathcal{V}} = pk$. Let $c_0 = nil$.
- The protocol proceeds in n rounds. In round $\ell = 1, \dots, n$, \mathcal{P} executes $a_{\ell} \leftarrow \mathcal{P}.com_{\ell}(st_{\mathcal{P}}, c_{\ell-1})$ and sends it to \mathcal{V} . For $\ell < n$, \mathcal{V} replies with a challenge $c_{\ell} \leftarrow \Theta_{\ell}$. For $\ell = n$, \mathcal{V} runs $\mathcal{V}.ver(pk, a_1|c_1|\dots|a_n)$ and outputs 0 (for reject) or 1 (for accept).

Appendix A.1. Collapsing Public-Coin Protocol

For any quantum polynomial time distinguisher \mathcal{D} , we define a collapsing game $\text{clpsExp}(\mathcal{D})$ between \mathcal{D} and a challenger Chal with respect to a n -round public-coin protocol $\Sigma = (\mathbf{Gen}, \mathcal{P}, \mathcal{V})$.

- Initially, Chal generates pk and gives it to \mathcal{D} .
- Then, \mathcal{D} (in the role of \mathcal{P}) and Chal (in the role of \mathcal{V}) executes the protocol Σ except for round n . At round n , \mathcal{D} generates a quantum superposition $|\phi\rangle$ (over the response a_n) which might be entangled with states in extra registers. He then provides $|\phi\rangle$ to Chal .
- Upon $|\phi\rangle$, Chal uses a measurement to check if a_n in $|\phi\rangle$ is a valid response for $a_1|c_1|\dots|a_{n-1}|c_{n-1}$. If the verification fails, Chal aborts; otherwise, let $|\phi'\rangle$ be the superposition containing all the valid a_n 's. Then, Chal flips a coin $b \leftarrow \{0, 1\}$. If $b = 0$, it does nothing; otherwise, it measures $|\phi'\rangle$ in the computational basis. Finally, it sends the resulting superposition back to \mathcal{D} .
- Finally, \mathcal{D} outputs a guess bit b' for b , which is also set as the output of the game.

We use $\text{clpsExp}_{\mathcal{D}}^b$ to denote the game with challenge bit b .

Definition A2. A Σ -protocol is collapsing if

$$\Pr(\text{clpsExp}_{\mathcal{D}}^1 = 0) = \Pr(\text{clpsExp}_{\mathcal{D}}^0 = 0) + \mathbf{negl}(\lambda). \quad (\text{A1})$$

It is γ -weakly collapsing if

$$\Pr(\text{clpsExp}_{\mathcal{D}}^1 = 0) \geq \gamma \cdot \Pr(\text{clpsExp}_{\mathcal{D}}^0 = 0) - \mathbf{negl}(\lambda). \quad (\text{A2})$$

Remark. This definition was extended from [30] for the Sigma protocol to a general public coin protocol. In this definition, the collapsing property states that no attacker can detect whether the final round is a superposition or a classic response by measuring the former. This property is concerned only with the last round and all the previous $n - 1$ prover messages are still classic.

Appendix A.2. Two Public-Coin Protocols from Our ID Scheme

We define two public-coin protocols Σ_1 and Σ_2 between quantum algorithm A and challenger, which are derived from the JAK ID protocol. We keep the notations in Section 7.2 unless specified.

Appendix A.2.1. Protocol Σ_1 .

Let $u_1, a_1, a_2 \leftarrow R_q$. A interacts with challenger as follows.

1. A sends $(\lambda_2, u_2, \dots, \lambda_t, u_t)$ to challenger and holds a state $|\psi_1\rangle$, where $\lambda_i \leftarrow \Theta$.
2. Challenger sends $\lambda_1 \leftarrow \Theta$ to A .
3. A applies a unitary U_{λ_1} to $|\psi_1\rangle$ and results in $\sum_{o, \psi_o} |o, \psi_o\rangle$. It measures $o = (o_1, o_2, o_3)$ in the computational basis and sends it to challenger.
4. Challenger accepts if $a_1 o_1 + a_2 o_2 - \bar{u} o_3 = 0$ and $\|o_i\|_{\infty} \leq 2\eta_t$ for $i = 1, 2, 3$, where $\bar{u} = \sum_{i=1}^t \lambda_i u_i$.

Appendix A.2.2. Protocol Σ_2 .

Let $u_1, a_1, a_2 \leftarrow R_q$. A interacts with challenger as follows.

1. A sends $(\lambda_2, u_2, \dots, \lambda_t, u_t)$ to challenger, where $\lambda_i \leftarrow \Theta$.
2. Challenger sends $\lambda_1 \leftarrow \Theta$ to A .
3. A sends $\mathbf{v} \in R_q^\mu$ to challenger and prepares a state $|\psi_1\rangle$.
4. Challenger replies with $c \leftarrow \Theta$.
5. A applies a unitary $V_{\lambda_1 c}$ to its state $|\psi_1\rangle$ and results in $\sum_{\mathbf{z}, \psi_{\mathbf{z}}} |\mathbf{z}, \psi_{\mathbf{z}}\rangle$, where, although not stated, $V_{\lambda_1 c}$ also depends on the previous messages. It measures $\mathbf{z} = (z_1, z_2)$ in the computational basis and sends it to challenger.
6. Challenger accepts if $\sum_{i=1}^{\mu} v_i = a_1 z_1 + a_2 z_2 - \bar{u}c$ and $\|z_1\|_{\infty} \leq \eta_t, \|z_2\|_{\infty} \leq \eta_t$.

Appendix A.3. Security of the JAK ID Scheme when Σ_1 and Σ_2 are Weakly Collapsing

In the following we prove that the JAK ID is secure (w.r.t. Def. 5) based on the assumptions that Σ_1 and Σ_2 are both weakly collapsing. This proof is threaded by two observations.

First, in Σ_2 , if we can rewind the execution to the beginning of Step 4, then we can obtain two tuples (z_1, z_2, c) and (z'_1, z'_2, c') with z_1, z_2, z'_1, z'_2 short, satisfying

$$\sum_{i=1}^{\mu} v_i = a_1 z_1 + a_2 z_2 - \bar{u}c, \quad \sum_{i=1}^{\mu} v_i = a_1 z'_1 + a_2 z'_2 - \bar{u}c'. \quad (\text{A3})$$

This gives a solution (o_1, o_2, o_3) with short o_i (as c, c' are also short) so that $a_1 o_1 + a_2 o_2 - \bar{u}o_3 = 0$. If A executes Step 5 by unitary operator U_c on its state (i.e., without measuring (z_1, z_2)), then the rewinding is just to apply U_c^\dagger . The weakly collapsing property of Σ_2 assures that even if it measure (z_1, z_2) , the rewinding technique by U^\dagger still produces two accepting tuples (z_1, z_2, c) and (z'_1, z'_2, c') with a good probability.

Second, in Σ_1 , if we can rewind the execution to the beginning of Step 2, we obtain two solutions $(o_1, o_2, o_3, \lambda_1)$ and $(o'_1, o'_2, o'_3, \lambda'_1)$ so that

$$a_1 o_1 + a_2 o_2 - \bar{u}o_3 = 0, \quad a_1 o'_1 + a_2 o'_2 - \bar{u}'o'_3 = 0, \quad (\text{A4})$$

where $\bar{u}' = \lambda'_1 u_1 + \sum_{i=2}^t \lambda_i u_i$. This allows us to derive a short solution (t_1, t_2, t_3) for $a_1 t_1 + a_2 t_2 + \bar{u}' t_3 = 0$, contradiction to the ring-SIS assumption. Again, due to the weakly collapsing property of Σ_1 , this rewinding with measuring (o_1, o_2, o_3) can still succeed with good probability, compared with the rewinding without measuring (o_1, o_2, o_3) .

With these observations, we can now return the ID security game (Def. 5). We notice that this game can be formulated as Σ_2 . On the other hand, Σ_1 can be regarded as the internal execution of Σ_2 after step 2, the rewinding of which gives a solution (o_1, o_2, o_3) . This leads to an attack for ring-SIS: the attacker runs A to run Σ_2 to produce (o_1, o_2, o_3) and with rewinding, it produces another (o'_1, o'_2, o'_3) . As seen above, this gives a solution to the ring-SIS problem.

Lemma A1. *If Σ_1 is γ_1 -weakly collapsing and Σ_2 is γ_2 -weakly collapsing, then under ring-LWE $_{q,\sigma,2n}$ and ring-SIS $_{3,q,\beta}$ assumptions, the JAK ID scheme is secure, where $\beta \geq 16\eta_t \sqrt{n} \log^2 n$.*

Proof. Assume that A has a success probability ϵ in the security game of an ID scheme (see Definition 5). We revise the game so that u_1 is uniformly random over R_q (instead of $u_1 = a_1 s_1 + a_2 s_2$ which is indistinguishable from uniformly random over R_q under ring-LWE assumption, as a_2 is invertible in R_q except for a negligible probability). Then, by ring-LWE assumption, the success of A is changed only negligibly. Further, we change the game so that A chooses $\lambda_2, \dots, \lambda_t$. This will only increase the success of A . Finally, we change the game so that A is unitary (whenever operating on its quantum state) except when it needs to measure its state to produce a protocol message (in the computational

basis). This does not change the success probability of A as any A can always be made into this kind without changing its output distribution by adding more ancilla registers and also applying the deferred measurement principle. Now the security game is simply Σ_2 . For brevity, we still assume A can succeed with probability ϵ . Let τ be the partial transcript $(u_1, a_1, a_2, \{u_i, \lambda_i\}_{i=2}^t, \lambda_1, \mathbf{v})$. Let ω_τ be the probability of τ . For fixed τ , let $P_{\tau c}$ be the projection to the subspace from all $|z_1, z_2\rangle\langle z_1, z_2|$ so that $(\mathbf{v}, c, (z_1, z_2))$ is accepting. Further, let ϵ_τ be the accepting probability (over c), given the partial transcript τ . We modify Σ_2 to Σ'_2 so that A does not measure (z_1, z_2) and instead it only measures $P_{\tau c}$. It is not hard to see that A in Σ'_2 and Σ_2 has the same success probability ϵ (by Lemma 3(2)). Let $|\psi_\tau\rangle$ be the normalized state after A sending \mathbf{v} . Then, $\epsilon_\tau = \frac{1}{|\Theta|} \sum_{c \in \Theta} \|V_{\tau c}^\dagger P_{\tau c} V_{\tau c} |\psi_\tau\rangle\|^2$ and $\epsilon = \sum_\tau \omega_\tau \epsilon_\tau$. Define $\tilde{P}_{\tau c} = V_{\tau c}^\dagger P_{\tau c} V_{\tau c}$. Before moving on, we give a claim from [47, Lemma 7].

Claim 1. *Let E be a set. Let $(Q_e)_{e \in E}$ be orthogonal projectors on Hilbert space \mathcal{H} . Let $|\Phi\rangle \in \mathcal{H}$ be a unit vector. Let $V = \sum_{e \in E} \frac{1}{|E|} \|Q_e |\Phi\rangle\|^2$ and $F = \sum_{e_1, e_2 \in E} \frac{1}{|E|} \|Q_{e_1} Q_{e_2} |\Phi\rangle\|^2$. Then, $F \geq V^3$.*

From this claim, we have that $\frac{1}{|\Theta|^2} \sum_{c', c \in \Theta} \|\tilde{P}_{\tau c'} \tilde{P}_{\tau c} |\psi_\tau\rangle\|^2 \geq \epsilon_\tau^3$. This is the probability that we rewind A in Σ'_2 , after $P_{\tau c}$ projection, to produce a second response (z'_1, z'_2) using challenge c' . If we require $c' \neq c$, then this probability will change to $\epsilon_\tau^3 - \epsilon_\tau / |\Theta|$, as $\tilde{P}_{\tau c'} \tilde{P}_{\tau c} = \tilde{P}_{\tau c}$ when $c' = c$.

Now consider this success probability in Σ_2 (not Σ'_2) when $c' \neq c$, where the projective measurement for (z_1, z_2) after $P_{\tau c}$ and the projective measurement for (z'_1, z'_2) after $P_{\tau c'}$ will be applied. By γ -weakly collapsing property of Σ_2 , it is easy to show that this probability is at least $\gamma_2^2(\epsilon_\tau^3 - \epsilon_\tau / |\Theta|)$ (similar to [30, Lemma 5] and the analysis right after it). Therefore, Σ_2 rewindings produce two accepting transcripts (c, z_1, z_2) and (c', z'_1, z'_2) for $c' \neq c$, with probability at least $\gamma_2^2(\epsilon_\tau^3 - \epsilon_\tau / |\Theta|)$. Notice that these two accepting transcripts will result in a witness $(o_1, o_2, o_3) = (z_1 - z'_1, z_2 - z'_2, c - c')$ so that $a_1 o_1 + a_2 o_2 - \bar{u} o_3 = 0$. When $\tau' = (u_1, a_1, a_2, \{u_i, \lambda_i\}_{i=2}^t)$ is fixed, this occurs with probability at least $\sum_{\lambda_1 \mathbf{v}} P_{\lambda_1 \mathbf{v} | \tau'} \gamma_2^2(\epsilon_{\tau' \lambda_1 \mathbf{v}}^3 - \epsilon_{\tau' \lambda_1 \mathbf{v}} / |\Theta|) \geq \gamma_2^2(\epsilon_{\tau'}^3 - \epsilon_{\tau'} / |\Theta|)$ by Cauchy-Schwarz inequality, where $\epsilon_{\tau'} = \mathbf{E}_{\lambda_1 \mathbf{v}}(\epsilon_{\tau' \lambda_1 \mathbf{v}} | \tau')$ and marginal probability $P_{\tau'} = \sum_{\lambda_1 \mathbf{v}} P_{\tau' \lambda_1 \mathbf{v}}$ is the occurrence of τ' .

We then modify A in Σ_2 to an attacker A' for Σ_1 : in Σ_1 , A' follows A to prepare Step 1 message and after receiving λ_1 , it makes use of A in Σ_2 in the above rewinding technique (where the challenge c', c are sampled randomly) to produce (o_1, o_2, o_2) . We then modify A' so that it defers the measurements (after receiving λ_1) other than measuring (o_1, o_2, o_3) to the end of the game (where A' has already produced (o_1, o_2, o_3)). This does not change the success probability of A' by the deferred measurement principle (with some ancilla registers as in Corollary 1, extended from Lemma 7). Next, we modify A' so that A' does not do the deferred measurements mentioned above. This does not change the success probability of A' as the deferred measurements are done after (o_1, o_2, o_3) are obtained. Let $\epsilon'_{\tau'}$ be the success probability of this A' that produces (o_1, o_2, o_3) with short (o_1, o_2, o_3) so that $a_1 o_1 + a_2 o_2 - \bar{u} o_3 = 0$ with $\|o_i\|_\infty \leq 2\eta t$. By our foregoing argument, $\epsilon'_{\tau'} \geq \gamma_2^2(\epsilon_{\tau'}^3 - \epsilon_{\tau'} / |\Theta|)$. Let $|\psi_{\tau' \lambda_1}\rangle$ be the state right before the projective measurement that results in (o_1, o_2, o_3) and $Q_{\tau' \lambda_1}$ be the test measurement on $|\psi_{\tau' \lambda_1}\rangle$ to check if $a_1 o_1 + a_2 o_2 - \bar{u} o_3 = 0$. Let A'' be the variant of A' so that projective measure resulting in (o_1, o_2, o_3) is not made and instead it makes only the test measurement $Q_{\tau' \lambda_1}$. Under this, A'' still has the success probability $\epsilon'_{\tau'}$. Let the unitary that produces $|\psi_{\tau' \lambda_1}\rangle$ be $U_{\tau' \lambda_1}$. Then, using Claim above, we similarly have that $\frac{1}{|\Theta|^2} \sum_{\lambda_1, \lambda'_1} \|\tilde{Q}_{\tau' \lambda'_1} \tilde{Q}_{\tau' \lambda_1} |\psi_{\tau'}\rangle\|^2 \geq \epsilon'^3_{\tau'}$, where $\tilde{Q}_{\tau' \lambda_1} = U_{\tau' \lambda_1}^\dagger Q_{\tau' \lambda_1} U_{\tau' \lambda_1}$. Further, if we require $\lambda_1 \neq \lambda'_1$, then $\frac{1}{|\Theta|^2} \sum_{\lambda_1 \neq \lambda'_1} \|\tilde{Q}_{\tau' \lambda'_1} \tilde{Q}_{\tau' \lambda_1} |\psi_{\tau'}\rangle\|^2 \geq \epsilon'^3_{\tau'} - \epsilon'_{\tau'} / |\Theta|$. Again, by applying weakly-collapsing property of Σ_1 , if A'' does the measurement for (o_1, o_2, o_3) after $Q_{\tau' \lambda_1}$ and the measurement for (o'_1, o'_2, o'_3) after $Q_{\tau' \lambda'_1}$, then the success probability producing successful (o_1, o_2, o_3) and (o'_1, o'_2, o'_3) with probability at least $\gamma_1^2(\epsilon'^3_{\tau'} - \epsilon'_{\tau'} / |\Theta|) \geq \gamma_1^2(\epsilon'^3_{\tau'} - 1 / |\Theta|)$. Since $\epsilon'_{\tau'} \geq \gamma_2^2(\epsilon_{\tau'}^3 - \epsilon_{\tau'} / |\Theta|)$, averaging over τ' and using Cauchy-Schwarz inequality, the success probability to produce two accepting (o_1, o_2, o_3) and (o'_1, o'_2, o'_3) with $\lambda_1 \neq \lambda'_1$ is at least $\gamma_1^2(\gamma_2^6(\epsilon^3 - \epsilon / |\Theta|)^3 - 1 / |\Theta|)$. Since γ_1, γ_2 and ϵ are all non-negligible, this lower bound is non-negligible either. However, (o_1, o_2, o_3) and (o'_1, o'_2, o'_3) with $\lambda_1 \neq \lambda'_1$ leads to a solution (x_1, x_2, x_3) for Ring-SIS problem $a_1 x_1 + a_2 x_2 + u_1 x_3 = 0$

(see Eqs (36)-(38) in [23] where our length bound β for $\|x_i\|_\infty$ is summarized from there). This contradicts the ring-SIS $_{q,n,\beta}$ assumption! \square

Appendix A.4. Σ_2 and Σ_1 are Weakly Collapsing

We introduce the notation of compatible lossy function of a n -round public-coin protocol (as a straightforward generalization of the same notion in [30] for a sigma protocol).

Definition A3. A compatible lossy function for a n -round public-coin protocol $\Sigma = (\text{Gen}, \mathcal{P}, \mathcal{V})$ is an efficiently computable function generator $\text{CLF.gen}(\lambda, pk, sk, \{a_i|c_i\}_{i=1}^{n-1}, \text{mode})$ which takes λ (security parameter), pk, sk , partial transcript $\{a_i|c_i\}_{i=1}^{n-1}$ in Σ and mode (either constant or injective) and outputs an efficiently computable function f so that

- constant mode: Let the domain of f be all r with $\{a_i|c_i\}_{i=1}^{n-1}|r$ being a valid transcript when $a_n = r$. Then, the probability that f has an image of size at most p , is at least γ . That is, $\Pr_f(\text{Im}(f) \leq p) \geq \gamma$, for $f \leftarrow \text{CLF.gen}(\lambda, pk, sk, \{a_i|c_i\}_{i=1}^{n-1}, \text{constant})$.
- injective mode: for $f \leftarrow \text{CLF.gen}(\lambda, pk, sk, \{a_i|c_i\}_{i=1}^{n-1}, \text{injective})$, f is injective over all r s.t. $(\{a_i|c_i\}_{i=1}^{n-1}|r)$ is a valid transcript when $a_n = r$, except for a negligible probability.
- indistinguishability. We first define game $\text{clfExp}_{\mathcal{D}, pk, sk}^b$ for $b = 0, 1$.
 - \mathcal{D} is given pk and challenge Chal has pk, sk .
 - \mathcal{D} (in the role of \mathcal{P}) and Chal (in the role of \mathcal{V}) execute Σ in the first $n - 1$ rounds, resulting in the partial transcript $\{a_i|c_i\}_{i=1}^{n-1}$.
 - If $b = 0$, let mode = constant; otherwise, mode=injective. Then, challenger samples

$$f \leftarrow \text{CLF.gen}(\lambda, pk, sk, \{a_i|c_i\}_{i=1}^{n-1}, \text{mode})$$

and provides it to \mathcal{D} . Then, \mathcal{D} outputs a guess bit b' for b , which is also defined as the output of the game.

The function generator CLF.gen is (p, γ) -**compatible** w.r.t. Σ if for any polynomial time quantum algorithm \mathcal{D} and for $(pk, sk) \leftarrow \text{Gen}(1^\lambda)$, we have

$$\Pr(\text{clfExp}_{\mathcal{D}, pk, sk}^0 = 0) = \Pr(\text{clfExp}_{\mathcal{D}, pk, sk}^1 = 0) + \text{negl}(\lambda). \quad (\text{A5})$$

The following lemma is adapted from Liu and Zhandry [30, Lemma 1], which shows that the existence of a compatible function for Σ implies that Σ is weakly collapsing. The result is stated with respect to a quantum secure sigma protocol. But their proof does not require the quantum security of the sigma protocol and can also be trivially extended to a n -round public-coin protocol. Thus, we state it without a proof.

Lemma A2. If A n -round public-coin protocol Σ has a (p, γ) -compatible lossy function, then Σ is γ/p -weakly collapsing.

In the following, we prove that Σ_2 has a compatible lossy function.

Lemma A3. Let \mathcal{F}_0 and \mathcal{F}_1 w.r.t. $a_1|a_2|\{u_i|\lambda_i\}_{i=1}^t|\mathbf{v}|c$ in Σ_2 be two distributions of function families: for each valid $(z_1, z_2) \in R_q^2$ (w.r.t. $\{u_i|\lambda_i\}_{i=1}^t|\mathbf{v}|c$),

$$\mathcal{F}_0 = \{f \mid f(z_1, z_2) = \lfloor (\mathbf{s}(a_1, a_2) + \mathbf{e})(z_1, z_2)^T + \mathbf{r} \rfloor_\theta, \mathbf{s} \leftarrow R_q^{2 \log n}, \mathbf{e} \leftarrow D_{R, \sigma}^{2 \log n \times 2}, \mathbf{r} \leftarrow R_q^{2 \log n} \}$$

$$\mathcal{F}_1 = \{f \mid f(z_1, z_2) = \lfloor \mathbf{B}(z_1, z_2)^T + \mathbf{r} \rfloor_\theta, \mathbf{B} \leftarrow R_q^{2 \log n \times 2}, \mathbf{r} \leftarrow R_q^{2 \log n} \},$$

where $8\sigma n\eta_t^{1.5} \log n < \theta < \frac{q}{n \log n}$ and $\lfloor \mathbf{x} \rfloor_\theta$ for $\mathbf{x} \in R_q^2$ rounds each coefficient $x_i \in \mathbb{F}_q$ (when representing \mathbf{x} as a vector in \mathbb{F}_q^{2n}) using the $\lfloor x \rfloor_\theta$ function: it first represents $x = k\theta + y$ with $y \in (-\theta/2, \theta/2]$ and $k \in \mathbb{Z}$ and then outputs $k\theta$. Then, \mathcal{F}_0 and \mathcal{F}_1 are $(\frac{2^6}{3^6}, 1)$ -compatible w.r.t. Σ_2 .

Proof. First, we show that \mathcal{F}_0 is a constant function family; second, we show that \mathcal{F}_1 is an injective function family; finally, we show that they are indistinguishable. In Σ_2 , the message flows in order are $\{\lambda_i | u_i\}_{i=2}^t, \lambda_1, \mathbf{v}, c$ and (z_1, z_2) . The transcript is valid if $\|z_1\|_\infty < \eta_t$ and $\|z_2\|_\infty < \eta_t$ and $\sum_{i=1}^t v_i = a_1 z_1 + a_2 z_2 - \bar{u}c$, where $\bar{u} = \sum_{i=1}^t \lambda_i u_i$.

To show \mathcal{F}_0 is a constant function family, we first show that

$$\mathcal{F}'_0 = \{f \mid f(z_1, z_2) = \lfloor \mathbf{s}(a_1, a_2)(z_1, z_2)^T + \mathbf{r} \rfloor_\theta, \mathbf{s} \leftarrow R_q^{2 \log n}\} \quad (\text{A6})$$

is a constant function family for Σ_2 . Indeed, since transcript is valid, $f(z_1, z_2) = \lfloor \mathbf{r} + \mathbf{s}(\sum_i v_i + \bar{u}c) \rfloor_\theta$ (invariant). Then, we continue to show that \mathcal{F}_0 is a constant function family. The strategy is to show that there is a constant probability that

$$\lfloor \mathbf{r} + \mathbf{s}(\sum_i v_i + \bar{u}c) \rfloor_\theta = \lfloor \mathbf{s}(a_1, a_2)(z_1, z_2)^T + \mathbf{r} + \mathbf{e}(z_1, z_2)^T \rfloor_\theta, \forall \text{valid } (z_1, z_2). \quad (\text{A7})$$

Since the left side is constant, \mathcal{F}_0 is a constant family. Now we implement this strategy.

Claim. Let $\sigma > \omega(\sqrt{n})$. For $e \leftarrow D_{R, \sigma}$ and $z \in R_q$ with $\|z\|_\infty < \eta_t$, then $\Pr(\|ez\|_\infty \geq \eta_t^{1.5} \sigma) < n \cdot \exp(-\pi \eta_t)$.

Proof. Notice that i th component of $ez \in R_q$ is $\sum_{j=0}^{n-1} \pm e_j z_{i-j}$, where $i-j$ means $(i-j) \bmod n$ and the sign is $-$ when $i < j$ and is $+$ otherwise. By [40, Lemma 4.4], $\Pr(\|\sum_{j=0}^{n-1} \pm e_j z_{i-j}\| > \sigma \|z\|_\infty \sqrt{\eta_t}) < e^{-\pi \eta_t}$. The union bound on i gives the result. \square

Back to our proof, the above claim implies that

$$\Pr(\|e_{b_1} z_1 + e_{b_2} z_2\|_\infty > 2\sigma \eta_t \sqrt{\eta_t} : \exists b \in [2 \log n]) < 2n \log n \cdot \exp(-\pi \eta_t). \quad (\text{A8})$$

The space of $x \in R_q$ with $\|x\|_\infty \leq \eta_t$ has a size at most $(2\eta_t)^n$. Since $\|z_1\|_\infty \leq \eta_t$ and $\|z_2\|_\infty \leq \eta_t$, (z_1, z_2) has at most $(2\eta_t)^{2n}$ choices. By union bound, $\|e_{b_1} z_1 + e_{b_2} z_2\|_\infty > 2\sigma \eta_t \sqrt{\eta_t}$ for some (z_1, z_2, b) only has an exponentially small probability (over $(\mathbf{e}_1, \mathbf{e}_2)$), as $\eta_t = \omega(n \log n)$. Assume that $\|e_{b_1} z_1 + e_{b_2} z_2\|_\infty \leq 2\sigma \eta_t^{1.5}$ holds for any (b, z_1, z_2) . Notice that $\mathbf{w} := \mathbf{s}(a_1, a_2)(z_1, z_2)^T + \mathbf{r}$ is uniformly random in $R_q^{2 \log n}$ (as \mathbf{r} is). For $x \in R_q$, we use \underline{x} to denote the coefficient vector of x over \mathbb{F}_q . Similarly, for a vector $\mathbf{x} \in R_q^\ell$, we still use $\underline{\mathbf{x}}$ to denote the concatenated vector from \underline{x}_i for all $i = 1, \dots, \ell$ and use $\underline{\mathbf{x}}[j]$ to denote the j th coordinate in $\underline{\mathbf{x}}$. Then, $\underline{\mathbf{w}}$ is uniformly random over $\mathbb{F}_q^{2n \log n}$. If all $\underline{\mathbf{w}}[i] \bmod \theta$ belong to $(-\theta/2 + 2\sigma \eta_t^{1.5}, \theta/2 - 2\sigma \eta_t^{1.5})$, then $\lfloor \underline{\mathbf{w}}[i] \rfloor_\theta = \lfloor \underline{\mathbf{w}}[i] + (\mathbf{e}_1, \mathbf{e}_2)(z_1, z_2)^T [i] \rfloor_\theta$ for all i . By a simple calculation, the statistical distance between $\underline{\mathbf{w}}[i] \bmod \theta$ and the uniform distribution over $(-\theta/2, \theta/2)$ is at most $\frac{\theta}{2q}$. Hence, $\underline{\mathbf{w}}[i] \bmod \theta$ is in that interval for all i with probability at least $(1 - \frac{4\sigma \eta_t^{1.5}}{\theta} - \frac{\theta}{2q})^{2n \log n} \geq (1 - \frac{1}{n \log n})^{2n \log n}$, which is at least $2^6/3^6$ by our assumption on θ due to the fact that $(1 - 1/x)^x$ is increasing when $x \geq 3$. This indicates that $(\mathbf{e}_1, \mathbf{e}_2)(z_1, z_2)^T$ does not change the value of $f(z_1, z_2)$. In addition, \mathbf{w} is unchanged over all valid (z_1, z_2) (as seen in \mathcal{F}'_0). Hence, f is constant, which occurs with probability at least $2^6/3^6$.

Next, we prove that \mathcal{F}_1 is injective. That is, $\mathbf{B}(z_1, z_2) + \mathbf{r}$ is injective. Indeed, \mathbf{B} is invertible if $\det(B)$ is invertible in R_q , where B is $\mathbf{B}_i \in R_q^{2 \times 2}$ for some i while $\mathbf{B} = (\mathbf{B}_i)_{i=1}^{\log n}$. Let $B = (a_{ij})_{i,j=1,2}$. Represented using Chinese Remainder basis, $\det(B) = a_{11} \odot a_{22} - a_{12} \odot a_{21}$, where \odot is the coordinate-wise multiplication over F_q and \underline{x} is the coordinate vector of $x \in R_q$ under Chinese Remainder basis (for background on this, see [24,35]). Notice that $x \in R_q$ is invertible if and only if each coordinate of \underline{x} is non-zero. Since a_{ij} is uniformly random over R_q , a calculation shows that

$\det(B)$ is invertible with probability $(1 - 1/q - 1/q^2 + 1/q^3)^n$ and so $\det(B)$ is not invertible with probability at most $n/q + O(n^2/q^2)$. Thus, the statement that no \mathbf{B}_i is invertible, has a probability at most $(n/q + O(n^2/q^2))^{\log n} = O(2^{-\log^2 n})$, negligible.

Finally, we prove that \mathcal{F}_0 and \mathcal{F}_1 are indistinguishable. This directly follows from ring-LWE assumption as $s_b(a_1, a_2) + (e_{b1}, e_{b2})$ for $s_b \leftarrow R_q, e_{b1}, e_{b2} \leftarrow D_{R, \sigma}$ is indistinguishable from $(B_{b1}, B_{b2}) \leftarrow R_q^2$ for $b = 1, 2, \dots, 2 \log n$. This concludes our proof. \square

Next, we consider the compatible function families \mathcal{F}_0 and \mathcal{F}_1 for Σ_1 .

Lemma A4. Assume that $\ell = \log n$. Let \mathcal{F}_0 and \mathcal{F}_1 be the two families of function distributions w.r.t. $a_1 | a_2 | \{u_i | \lambda_i\}_{i=1}^t$ in Σ_1 defined as follows.

$$\begin{aligned} \mathcal{F}_0 &= \{f \mid f(o_1, o_2, o_3) = \lfloor (\mathbf{s}(a_1, a_2, -\bar{u}) + \mathbf{e})(o_1, o_2, o_3)^T + \mathbf{r} \rfloor_{\theta}, \mathbf{s} \leftarrow R_q^{3\ell \times 1}, \mathbf{e} \leftarrow D_{R, \sigma}^{3\ell \times 3}, \mathbf{r} \leftarrow R_q^{3\ell} \} \\ \mathcal{F}_1 &= \{f \mid f(o_1, o_2, o_3) = \lfloor \mathbf{B}(o_1, o_2, o_3)^T + \mathbf{r} \rfloor_{\theta}, \mathbf{B} \leftarrow R_q^{3\ell \times 3}, \mathbf{r} \leftarrow R_q^{3\ell} \}, \end{aligned}$$

where $12\sigma n \eta_t^{1.5} \log n \leq \theta \leq \frac{q}{n \log n}$ and $\eta'_t = 2\eta_t$. Then, \mathcal{F}_0 and \mathcal{F}_1 are $(\frac{2^9}{3^9}, 1)$ -compatible w.r.t. Σ_1 .

Proof. The proof is very similar to Lemma A3. We only sketch the main changes: (1) we use $(a_1, a_2, -\bar{u})(o_1, o_2, o_3)^T = 0$ (fixed) instead of $(a_1, a_2)(z_1, z_2)^T = \sum_i v_i + uc$ (fixed), and hence \mathcal{F}'_0 consists only of a constant function \mathbf{r} ; (2) η_t is replaced by η'_t . Further, the injective property of $\mathbf{B}(o_1, o_2, o_3) + \mathbf{r}$ is reduced to the invertibility of $B = (a_{ij})_{i,j=1,2,3}$ (instead of order 2 matrix) when a_{ij} is random in R_q . By Gaussian elimination, if a_{11} is invertible, then we make the entries (1, 2) and (1, 3) in B as zero. This updates a_{22} to a'_{22} and a_{33} to a'_{33} while a'_{22} and a'_{33} are still uniformly random in R_q . If a'_{22} is invertible, then we can make a'_{23} zero similarly that updates a'_{33} to a''_{33} while preserving its uniformity. So B is invertible if a_{11}, a'_{22} and a''_{33} are all invertible, which has a probability at least $(1 - 1/q)^{3n}$. So for $\mathbf{B} = (\mathbf{B}_i)_{i=1}^{\ell}$, $\mathbf{B}(o_1, o_2, o_3) + \mathbf{r}$ is invertible if some \mathbf{B}_i is invertible. This is violated with probability at most $(3n/q + O(n^2/q^2))^{\log n} \leq 2^{-\log^2 n}$, negligible. \square

From Lemmas A2, A3 and A4, we can immediately conclude the following corollary.

Corollary A1. Σ_2 is $\frac{2^6}{3^6}$ -weakly collapsing and Σ_1 is $\frac{2^9}{3^9}$ -weakly collapsing.

Proof of Theorem 6. From Corollary A1, we know that Σ_1 and Σ_2 are both weakly collapsing. Then, Lemma A1 gives our desired result. \square

Appendix B. Encoding of $CStO$ or $CStO_s$ and Efficient Operations on Oracle State

In this section, we detail how to efficiently encode $CStO$ (or $CStO_s$) and efficiently implement operations (such as U_R and projective measurements) on oracle register. Since $CStO$ is a special case of $CStO_s$, we only need to consider $CStO_s$. Let q be a polynomial upper bound on the number of random oracle queries to $CStO_s$. Let $\mathcal{X} = \{x_1, \dots, x_N\}$ be an ordered set with $x_1 < \dots < x_N$ and $|\mathcal{X}| = N$, with $0 \notin \mathcal{X}$. Let \mathcal{D}_q be the set of $\mathbf{y} \in \mathcal{Y}^{\mathcal{X}}$ that contains at most q non- \perp entries, where $\mathcal{Y} = \mathcal{Y} \cup \{\perp\}$. For $\mathbf{y} \in \mathcal{D}_q$, $|\mathbf{y}\rangle_D$ represents $|y_1\rangle_{D_{x_1}} \cdots |y_\ell\rangle_{D_{x_N}}$. We can encode it as $|x'_1\rangle|y'_1\rangle \cdots |x'_\ell\rangle|y'_\ell\rangle(|0\rangle|\perp\rangle)^{q-\ell}$ (denoted it by $|(x', y')\rangle$) and in this case the number of records in the encoded D as $|D| := \ell$ where $x'_1 < x'_2 < \dots < x'_\ell$ are all the indices in \mathbf{y} with $D(x'_i) = y'_i \neq \perp$. Denote this encoding by enc . Let $\mathcal{L}_q \subset \mathcal{X} \times \mathcal{Y}$ be the set of all the possible pairs (x', y') of cardinality at most q (sorted according to the first coordinate). Since $|(x', y')\rangle$ represents $|x'_1\rangle|y'_1\rangle \cdots |x'_\ell\rangle|y'_\ell\rangle(|0\rangle|\perp\rangle)^{q-\ell}$ for $(x', y') = \{(x'_i, y'_i)\}_{i=1}^{\ell}$ with $x'_1 < x'_2 < \dots < x'_\ell$ and $\ell \leq q$, enc is a unitary between $\mathcal{H}(\mathcal{D}_q)$ and $\mathcal{H}(\mathcal{L}_q)$ (indeed, enc is one-one and onto mapping between the two sets of orthonormal basis states).

With enc in mind, we claim that our results in this paper holds when the quantum state in D is encoded (via enc). Specifically, if originally an operator O is applied (with the state on D not encoded), it now applies $enc \cdot O \cdot enc^\dagger$ (with the state on D encoded), where enc operates on D . Since

$enc^\dagger \cdot enc = I$, the final (adversary-oracle) state with or without encoding on D are related by enc unitary. This will not change the final *adversary* output (from measurement, say $M = \{M_t\}_t$), as $\langle \psi | \cdot enc^\dagger \cdot M_t^\dagger M_t \cdot enc | \psi \rangle = \langle \psi | M_t^\dagger M_t | \psi \rangle$ (recall that adversary does not operate on D and so enc and M_t operate on disjoint registers and commute and also that enc is unitary).

However, this is not enough as we need an efficient implementation of enc . Our next step is to deal with this. We first introduce some notations. If D has a state $|(x, y)\rangle$ with $|D| = \ell < q$, define $|(x, y) \cup (x, y)\rangle$ with $x \neq x_i$ for any $i = 1, \dots, \ell$, as sorted pairs $|(x', y')\rangle$ (w.r.t. the first coordinate), updated from (x, y) with (x, y) inserted. This operation is undefined for $\ell \geq q$. Similarly, we can define $|(x, y) \setminus (x_i, y_i)\rangle$ as removing (x_i, y_i) from D and sorting the remaining pairs. Next, we introduce the encoding operator COD on XD . For $x \in \mathcal{X}$, COD_x is a unitary from $\mathcal{H}(\tilde{\mathcal{L}}_q)$ to $\mathcal{H}(\tilde{\mathcal{L}}_q)$, where $\tilde{\mathcal{L}}_q \subset \mathcal{X} \times \mathcal{Y}$ is similar to \mathcal{L}_q , except that $(x, y) \in \tilde{\mathcal{L}}_q$ means $y_i \in \mathcal{Y}$ (instead of $y \in \mathcal{Y}$). For basis state $|(x, y)\rangle_D$ with $(x, y) \in \tilde{\mathcal{L}}_q$ and $|D| = \ell$, we use $D(x_i)$ to denote y_i and $D(x) = nil$ if $x \neq x_i$ for any $i = 1, \dots, \ell$. Essentially, COD_x operates on D_x (by trying to clean up or adding entry (x, \perp)) and then sorts the updated $|(x, y)\rangle$ on D . Specifically, it operates as follows.

- If $D(x) \in \mathcal{Y}$, then $COD_x |(x, y)\rangle_D = |(x, y)\rangle$.
- If $D(x) = \perp$, then $COD_x |(x, y)\rangle_D = |(x, y) \setminus (x, \perp)\rangle$ (this implies $|D| < q$ after the operation).
- If $D(x) = nil$ (i.e., x is not in D) and $|D| < q$, then $COD_x |(x, y)\rangle_D = |(x, y) \cup (x, \perp)\rangle$.
- If $D(x) = nil$ and $|D| = q$, then $COD_x |(x, y)\rangle_D = |(x, y)\rangle$.

Note that COD_x is unitary as it maps from orthonormal basis to orthonormal basis in $\mathcal{H}(\tilde{\mathcal{L}}_q)$. Further, COD_x is obviously Hermitian. Finally, we define $COD = \sum_{x \in \mathcal{X}} |x\rangle\langle x|_X \otimes COD_x$. Note this COD can be implemented in a polynomial size of quantum gates as it can be described in polynomial and hence the known techniques (e.g., [48]) can be applied.

We know that without encoding, the initial state of D is $|\otimes_x |\perp\rangle_{D_x}$ and hence after encoding, the initial state is $(|0\rangle|\perp\rangle)^q$. In the following, we show $enc \cdot O \cdot enc^\dagger$ for any original operator O in this paper can be implemented in polynomial time. This can be seen through the following cases.

1. O does not operate on D . For example, attacker's operator and projective measurements on P belong to this category. In this case, since enc and O operates on disjoint registers and $enc \cdot enc^\dagger = I$, $enc \cdot O \cdot enc^\dagger = O$. So instead of $enc \cdot O \cdot enc^\dagger$, it suffices to apply O .
2. $CStO_{sXYD}$. Recall that $CStO_{sXYD} = \sum_{x \in \mathcal{X}} |x\rangle\langle x| \otimes CStO_{sYD_x}$ and $CStO_{sYD_x} = F_{D_x} \cdot CNOT_{YD_x} \cdot F_{D_x}$ for $x \notin \Xi$ and $CStO_{sYD_x} = CNOT_{YD_x}$ for $x \in \Xi$. We implement $enc \cdot CStO_s \cdot enc^\dagger$ with $COD \cdot CStO_s \cdot COD = \sum_{x \in \mathcal{X}} |x\rangle\langle x| \otimes COD_x \cdot CStO_{sYD_x} \cdot COD_x$. The validity of this implementation can be verified through the basis state $|(x, y)\rangle$. The verification is tedious but straightforward and hence omitted here.
3. U_R . Recall that for $\mathbf{y} \in \mathcal{D}_q$, there exists $x'_1 < x'_2 < \dots < x'_\ell$ so that $y_{x'_i} \in \mathcal{Y}$ and $y_x = \perp$ for $x \neq x'_i$ for any $i \in [\ell]$. Then, \mathbf{y} is encoded as (x', y') , where $\mathbf{y}' = (y_{x'_1}, \dots, y_{x'_\ell})$. Define $\tilde{f}_R((x'_1, y'_1), \dots, (x'_\ell, y'_\ell)) = \sum_i x'_i \cdot \bar{R}(x'_1, y'_1) \cdot \dots \cdot \bar{R}(x'_{i-1}, y'_{i-1}) \cdot R(x'_i, y'_i)$, where $x'_i = 0$ and $y'_i = \perp$ for $i > \ell$. We remind that $f_R(\mathbf{y}) = \tilde{f}_R(x', y')$. Define unitary \tilde{U}_R so that $\tilde{U}_R |(x', y')\rangle |0\rangle_P = |(x', y')\rangle |\tilde{f}_R(x', y')\rangle$. Then, $enc \cdot U_R \cdot enc^\dagger$ can be implemented by \tilde{U}_R , by directly operating \tilde{U}_R on DP without decoding D .
4. Measurement $\Pi = (\Pi_0, \Pi_1) = (|\perp\rangle\langle\perp|, I - |\perp\rangle\langle\perp|)$ on D_x (in PointReg1 query). In this case, we implement $enc \cdot \Pi_b \cdot enc^*$ as $COD \cdot \Pi_b \cdot COD$. For any $(x', y') \in \mathcal{L}_q$, let $enc^* |(x', y')\rangle = |y\rangle$. It suffices to verify $COD_x \cdot \Pi_b \cdot COD_x |(x', y')\rangle = enc \cdot \Pi_b |y\rangle$. This can be checked for cases $D(x) = nil, \perp, y$ for $y \in \mathcal{Y}$. Tedious details are omitted.
5. Measurement on D . In this paper, measurement property on D with $|y\rangle$ only depends on the non- \perp entries. That is, the property $f(\mathbf{y})$ equals to $\tilde{f}((x', y'))$ for some \tilde{f} , where $enc(\mathbf{y}) = (x', y')$. Hence, measurement on uncompressed D for property f can be done on compressed D for property \tilde{f} . For example, f is a collision property on \mathbf{y} for non- \perp is equivalent to the collision property \tilde{f} on encoded \mathbf{y} (i.e., (x', y')). Since \tilde{f} on the encoded D can be implemented efficiently, measurement of property f can be done efficiently.

Based on the analysis above, we can conclude that our computation with the oracle state un-encoded can be implemented by applying efficient operations with oracle state encoded, preserving the same adversary success probability and the resulting joint-state related only by the unitary encoding on the oracle state.

Appendix C. Proof of Lemma 14

Proof. Our strategy is to relate the collision probabilities before and after *one* oracle query, when the abort event does not happen. Since there are at most q queries of either *PointReg1* or *CStO_s* to **CStO_s**, and the initial state $\otimes_x |\perp\rangle_{D_x}$ has no collision, this will allow us to bound the collision probability in the final state. We use μ to represent the collision probability after the next operation and μ' to the collision probability before the query. We will show $\sqrt{\mu} \leq \sqrt{\mu'} + \epsilon$ for some ϵ . We assume that the current state is a pure state $|\psi\rangle = \sum_{xyz} \lambda_{xyz} |x\rangle |\phi_y\rangle |z\rangle |\mathbf{y}\rangle_D$ (the mixed state will be handled later), where we use basis $\{\phi_y\}_y$ on response register Y for the ease of adapting the phase oracle based proof in [49] to **CStO_s**. If the next query is *PointReg0*, then the state is unchanged and hence $\mu' = \mu$. Then, we consider the other two cases: random oracle query and *PointReg1* query.

Next operation is random oracle query. We classify basis $\{|x, \phi_y, z, \mathbf{y}\}_{xyz}$ into four sets: P, Q, R, S .

- P : It consists of the basis states so that \mathbf{y} contains a collision.
- Q : It consists of the basis states satisfying: (1) \mathbf{y} has no collision; (2) $y \neq 0$; (3) $y_x = \perp$.
- R : It consists of the basis states satisfying: (1) \mathbf{y} has no collision; (2) $y \neq 0$; (3) $y_x \neq \perp$.
- S : It consists of the basis states satisfying: (1) \mathbf{y} has no collision; (2) $y = 0$.

We also use P, Q, R, S to denote the projection into the space spanned by the basis states in the respective category. Then, $P + Q + R + S = I$. Since the attacker only makes at most q random oracle queries, D contains at most q non- \perp entries. In this case, the square root of collision probability (when abort does not occur) is $\|P \cdot \text{CStO}_s \cdot \Lambda_{i0} |\psi\rangle\|$, which is at most

$$\|P \cdot \text{CStO}_s \cdot \Lambda_{i0} P |\psi\rangle\| + \|P \cdot \text{CStO}_s \cdot \Lambda_{i0} Q |\psi\rangle\| + \|P \cdot \text{CStO}_s \cdot \Lambda_{i0} R |\psi\rangle\| + \|P \cdot \text{CStO}_s \cdot \Lambda_{i0} S |\psi\rangle\|.$$

Notice that CStO_s has two cases: if $x \in \Xi_1$, then $\text{CStO}_{sYD_x} = \text{CNOT}_{YD_x}$; if $x \notin \Xi_1$, then $\text{CStO}_{sYD_x} = \text{CStO}_{YD_x}$. Let's write $|\psi\rangle = \sum_x |\psi_x\rangle$ where $\psi_x = |x\rangle_X \cdots$.

We first consider the case $x \notin \Xi_1$. In this case, $\text{CStO}_s |\psi_x\rangle = \text{CStO} |\psi_x\rangle$.

Case $P|\psi_x\rangle$. In this case, $\|P \cdot \text{CStO} \cdot \Lambda_{i0} P |\psi_x\rangle\| \leq \|\text{CStO} \cdot \Lambda_{i0} P |\psi_x\rangle\| = \|\Lambda_{i0} \cdot P |\psi_x\rangle\| \leq \|P |\psi_x\rangle\|$.

Case $Q|\psi_x\rangle$. CStO on $|x, z\rangle |\phi_y\rangle \otimes |\mathbf{y}\rangle_D$ (in Q) gives $|x, z\rangle |\phi_y\rangle \otimes \frac{1}{\sqrt{2^n}} \sum_w (-1)^{y \cdot w} |\mathbf{y} \cup (w)_x\rangle$ as $y_x = \perp$.

Hence, further after operator P , it has a norm of at most $\sqrt{q\Gamma_f/2^n}$, as $|D| \leq q$ and the collision implies that $f(x, w) = f(x', y_{x'})$ for some $x' \neq x$ (recall that \mathbf{y} has no collision) because each $(x', y_{x'})$ collides with (x, w) for at most Γ_f possible w 's. Since distinct $|x, z\rangle |\phi_y\rangle \otimes |\mathbf{y}\rangle$ (in Q) gives orthogonal images, it follows that $P \cdot \text{CStO} \cdot \Lambda_{i0} Q |\psi_x\rangle$ has a norm at most $\sqrt{q\Gamma_f/2^n} \|\Lambda_{i0} Q |\psi_x\rangle\| \leq \sqrt{q\Gamma_f/2^n} \|Q |\psi_x\rangle\|$ (as Λ_{i0}, Q are projectors on D in the computational basis).

Case $R|\psi_x\rangle$. For category R , consider that D has a state $|\mathbf{y} \cup (w)_x\rangle$ with $y_x = \perp$ and $w \neq \perp$. By a tedious calculation (also in [49, Theorem 1]), we can show that $\text{CStO} |x, z\rangle |\phi_y\rangle |\mathbf{y} \cup (w)_x\rangle$ is

$$|x, z\rangle |\phi_y\rangle \left((-1)^{y \cdot w} \left(|\mathbf{y} \cup (w)_x\rangle + \frac{1}{2^{n/2}} |\mathbf{y}\rangle \right) + \frac{1}{2^n} \sum_{y'} (1 - (-1)^{y \cdot w} - (-1)^{y \cdot y'}) |\mathbf{y} \cup (y')_x\rangle \right).$$

After applying P , since $|x, \phi_y, z\rangle |\mathbf{y} \cup (w)_x\rangle$ is in R and so $|x, \phi_y, z\rangle |\mathbf{y}\rangle$ is in Q , it becomes

$$|x, z\rangle |\phi_y\rangle \otimes \frac{1}{2^n} \sum_{y': \exists x', f(x, y') = f(x', y_{x'})} (1 - (-1)^{y \cdot w} - (-1)^{y \cdot y'}) P |\mathbf{y} \cup (y')_x\rangle. \quad (\text{A9})$$

Now we relate the different states of form $|x, z\rangle|\phi_y\rangle|\mathbf{y} \cup (w)_x\rangle$ in category R . If they have different (x, z, y, \mathbf{y}) tuples, then their results in (A9) are orthogonal (as they all have $y_x = \perp$ by definition and thus their tuple $(x, z, y, \{y_t\}_{t \neq x})$ are different). So we only need to consider the setting of the same (x, z, y, \mathbf{y}) for the norm in this category. In this case, there are at most 2^n choices of w . By Cauchy-Schwarz inequality, the norm of the superposition of Equation (A9) over w , is at most $\sqrt{2^n}$ times of its maximum over w . It remains to upper bound the norm of Equation (A9) for a given w . In this case, notice that for each $(x', y_{x'})$ with $y_{x'} \neq \perp$, there are at most Γ_f possible y' in Equation (A9) so that $f(x, y') = f(x', y_{x'})$. There are at most q non- \perp $y_{x'}$ in \mathbf{y} . Equation (A9) has a norm of at most $3\sqrt{q\Gamma_f} \cdot 2^{-n}$. Hence, the superposition of Equation (A9) has a norm at most $3\sqrt{q\Gamma_f/2^n}$. Thus,

$$\|P \cdot CStO \cdot \Lambda_{i0}R|\psi_x\rangle\| \leq 3\sqrt{q\Gamma_f/2^n}\|\Lambda_{i0}R|\psi_x\rangle\| \leq 3\sqrt{q\Gamma_f/2^n}\|R|\psi_x\rangle\|$$

(as Λ_{i0}, R are projectors on D in the computational basis).

Case S $|\psi_x\rangle$. In this case, $CStO \cdot |x, z\rangle|\phi_0\rangle|\mathbf{y}\rangle = |x, z\rangle|\phi_0\rangle|\mathbf{y}\rangle$, which has no collision.

Summarizing the four cases, we have

$$\|P \cdot CStO \cdot \Lambda_{i0}|\psi_x\rangle\| \leq \|P \cdot |\psi_x\rangle\| + 4\sqrt{q\Gamma_f/2^n}\| |\psi_x\rangle\|. \quad (\text{A10})$$

Second, we consider case $x \in \Xi_1$ and so $CStO_s = \text{CNOT}$. In this case, notice that $P \cdot \text{CNOT} \cdot \Lambda_{i0}|\psi_x\rangle = P^2 \cdot \text{CNOT} \cdot \Lambda_{i0}|\psi_x\rangle = P \cdot \text{CNOT} \cdot \Lambda_{i0}P|\psi_x\rangle$, as P commutes with CNOT and Λ_{i0} . Further, $\|P \cdot \text{CNOT} \cdot \Lambda_{i0}P|\psi_x\rangle\| \leq \|\text{CNOT} \cdot \Lambda_{i0}P|\psi_x\rangle\| = \|\Lambda_{i0}P|\psi_x\rangle\| \leq \|P|\psi_x\rangle\|$, as CNOT is unitary and Λ_{i0} is a projector in the computational basis (as is for P).

Summarizing both $x \in \Xi_1$ and $x \notin \Xi_1$ cases and noticing that their images are orthogonal (as $|x\rangle_X$ will remain unchanged after the operation), we have

$$\|P \cdot CStO_s \cdot \Lambda_{i0}|\psi\rangle\| \leq \|P \cdot |\psi\rangle\| + 4\sqrt{q\Gamma_f/2^n} \quad (\text{A11})$$

For the mixed state, suppose $|\psi\rangle$ has the probability λ_ψ . Then averaging the square of the above inequality and expanding the right side and using the Cauchy-Schwarz inequality $\sum_i \lambda_i x_i \leq (\sum_i \lambda_i x_i^2)^{1/2}$ with $\lambda_i, x_i \geq 0$ and $\sum_i \lambda_i = 1$, we have

$$\sqrt{\mu} \leq \sqrt{\mu'} + 4\sqrt{q\Gamma_f/2^n}. \quad (\text{A12})$$

Next operation is PointReg1. Still we assume the current adversary-oracle joint state is a pure state $|\psi\rangle$. In this case, under event $\neg\text{abort}$, projection Π_0 on $|\psi\rangle$ is applied and $|\perp\rangle_{D_x}$ is replaced by $|r\rangle_{D_x}$. Since r is random, the resulting state ρ_0 is the mixed state (over r) and so the collision probability is $\text{tr}(P \cdot \rho_0 \cdot P)$. We write the current state $|\psi\rangle = \sum_{yzy} \alpha_{yzy} |x, z\rangle|\phi_y\rangle|\mathbf{y}\rangle_D$. We classify the basis states $|x, z, \phi_y\rangle|\mathbf{y}\rangle_D$ into 3 categories P, Q', R' , similar to the $CStO_s$ case. But different from Q, R , here Q', R' respectively removes condition 2 (the restriction on y). It is not hard to show⁵ that $\sqrt{\text{tr}(P \cdot \rho_0 \cdot P)}$ for

⁵ Let $\rho_0 = \sum_i M_i^\dagger |\psi\rangle\langle\psi| M_i$. Let $|a_i\rangle = PM_iP|\psi\rangle, |b_i\rangle = PM_iQ'|\psi\rangle, |c_i\rangle = PM_iR'|\psi\rangle$. Then, Equation (A13) becomes $\sqrt{\sum_{i=1}^n (||a_i\rangle + |b_i\rangle + |c_i\rangle)^2} \leq \sqrt{\sum_{i=1}^n ||a_i\rangle^2} + \sqrt{\sum_{i=1}^n ||b_i\rangle^2} + \sqrt{\sum_{i=1}^n ||c_i\rangle^2}$. Further, define \mathbf{a} as the long vector $(|a_1\rangle, \dots, |a_n\rangle)$ and \mathbf{b}, \mathbf{c} similarly. Then, Equation (A13) becomes $\|\mathbf{a} + \mathbf{b} + \mathbf{c}\| \leq \|\mathbf{a}\| + \|\mathbf{b}\| + \|\mathbf{c}\|$, which is evident.

any mixed state ρ_0 that starts from $|\psi\rangle$ and through some quantum algorithm, can be upper bounded by

$$\sum_{V \in \{P, Q', R'\}} \sqrt{\text{tr}(P \cdot \rho_{0V} \cdot P)}, \quad (\text{A13})$$

where ρ_{0V} is the mixed state ρ_0 with the input state $V|\psi\rangle$ (instead of $|\psi\rangle$).

Case $P|\psi$. In this case, after applying Π_0 , only the basis states $|x, z\rangle|\phi_y\rangle|\mathbf{y}\rangle$ in $P|\psi\rangle$, with $y_x = \perp$ and \mathbf{y} containing a collision, are left and after the query, this state becomes $|x, z\rangle|\phi_y\rangle|\mathbf{y} \cup (r)_x\rangle$ for a uniformly random r . Note $\mathbf{y} \cup (r)_x$ for any r still contains a collision. Therefore, $\text{tr}(P \cdot \rho_{0P} \cdot P) = \sum_r 2^{-n} \langle \psi | P \Pi_0 U_{\perp, r} P P U_{\perp, r} \Pi_0 P | \psi \rangle = \langle \psi | P \Pi_0 \Pi_0 P | \psi \rangle = \|\Pi_0 P |\psi\rangle\|^2 \leq \|P |\psi\rangle\|^2$, where $U_{\perp, r} = |r\rangle\langle \perp| + |\perp\rangle\langle r| + \sum_{s \neq r} |s\rangle\langle s|$. Thus the collision probability of $P|\psi\rangle$ after the query is at most $\|P |\psi\rangle\|^2$.

Case $Q'|\psi$. In this case, since D_x in this category always has \perp , $\Pi_0 Q'|\psi\rangle = Q'|\psi\rangle$, which, after applying $U_{\perp, r}$ and P , changes the basis state $|x, z\rangle|\phi_y\rangle|\mathbf{y}\rangle$ in $Q'|\psi\rangle$ (where $y_x = \perp$) to $|x, z\rangle|\phi_y\rangle|\mathbf{y} \cup (r)_x\rangle$ (if (x, r) collides with $(x', y_{x'})$ (for some $x' \neq x$) or 0 (if (x, r) does not collide with any $(x', y_{x'})$). Notice that for different (x, z, y, \mathbf{y}) , $|x, z\rangle|\phi_y\rangle|\mathbf{y} \cup (r)_x\rangle$ in this category will be orthogonal to each other. Therefore,

$$\text{tr}(P \cdot \rho_{0Q'} \cdot P) \leq \frac{q\Gamma_f}{2^n} \|Q'|\psi\rangle\|^2, \quad (\text{A14})$$

as there are at most q choices of $(x', y_{x'})$ in \mathbf{y} and that \mathbf{y} itself has no collision by definition.

Case $R'|\psi$. In this case, since $D(x) \neq \perp$, under \neg abort event, $\Pi_0 R'|\psi\rangle = 0$ (no collision).

Summarizing the three cases, we have that

$$\sqrt{\text{tr}(P \cdot \rho_0 \cdot P)} \leq \|P |\psi\rangle\| + \sqrt{\frac{q\Gamma_f}{2^n}} \|\psi\|. \quad (\text{A15})$$

If the current state is a mixed state so $|\psi\rangle$ has a probability λ_ψ and ρ_ψ is $P \cdot \rho_0 \cdot P$ from $|\psi\rangle$, then

$\sqrt{\sum_\psi \lambda_\psi \text{tr}(\rho_\psi)} \leq \sqrt{\sum_\psi \lambda_\psi (\|P |\psi\rangle\| + \sqrt{\frac{q\Gamma_f}{2^n}} \|\psi\|)^2}$, which is upper bounded by

$$\sqrt{\sum_\psi \lambda_\psi \|P |\psi\rangle\|^2} + \sqrt{\sum_\psi \lambda_\psi \frac{q\Gamma_f}{2^n} \|\psi\|^2} = \sqrt{\mu'} + \sqrt{q\Gamma_f/2^n}, \quad (\text{A16})$$

where the first part of Equation (A16) uses $\sqrt{\sum_{i=1}^n (\mathbf{a}_i + \mathbf{b}_i)^2} \leq \sqrt{\sum_{i=1}^n \|\mathbf{a}_i\|^2} + \sqrt{\sum_{i=1}^n \|\mathbf{b}_i\|^2}$. This gives $\sqrt{\mu} \leq \sqrt{\mu'} + \sqrt{\frac{q\Gamma_f}{2^n}}$.

Let μ_q be the collision probability of the final state. Since there are at most q queries (either PointReg1 or random oracle query) to CStO_s , $\sqrt{\mu_q} \leq 4q\sqrt{\frac{q\Gamma_f}{2^n}}$. This gives our lemma. \square

Appendix D. Proof of Theorem 4

For constant $c > 0$, define $\lambda_{i^c, j^c, k^c, x^c, w, \mathbf{y}}$ to be the probability that the measurement in the i_t th oracle query in $\text{Exp}_{i^c, j^c, k^c}$ has outcome x_t (for $t = 1, \dots, c$) and the final measurement outcome is (w, \mathbf{y}) , where $x^c = (x_1, \dots, x_c)$. For $v \in \mathcal{Y}$, we use $\{v\}_x$ to denote the vector in $\mathcal{Y}^{\mathcal{X}}$ so that the coordinate at index x is v and the remaining coordinates are all 0 (do not confuse with $(v)_x$ where it is v at coordinate x and \perp otherwise). For $\mathbf{v} \in \mathcal{Y}^{\mathcal{X}}$, we use $|\phi_{\mathbf{v}}\rangle_D$ to denote the oracle state with $|\phi_{v_x}\rangle_{D_x}$. Then, CStO oracle has the following property (which is an alternative description of Fourier oracle's essential property in [49] but in the language of CStO).

Fact 1. $|x\rangle_X |\phi_y\rangle_Y F_D |\phi_{\mathbf{v}}\rangle_D$ under CStO oracle will be mapped to $|x\rangle_X |\phi_y\rangle_Y F_D |\phi_{\mathbf{v} + \{y\}_x}\rangle_D$

The following lemma is extended from [30, Theorem 9] through translating their proof on compressed Fourier oracle using $CStO$ oracle and generalizing it from Exp_{ijk} to $\text{Exp}_{i^c, j^c, k^c}$.

Lemma A5. For any w, \mathbf{y}, x^c with $D(\underline{x}_t) \neq \perp$ ($t = 1, \dots, c$) and $\gamma_{w, \mathbf{y}}$ is the probability in the normal game with output (w, \mathbf{y}) . Then, there exists (i^c, j^c, k^c) so that $\lambda_{i^c, j^c, k^c, \underline{x}^c, w, \mathbf{y}} \geq \gamma_{w, \mathbf{y}} / (q + \binom{q}{3})^{2c}$.

Proof. Let $\sum_{x, y, z} \alpha_{x, y, z} |x, \phi_y, z\rangle$ be the state of the adversary before the first query. Let $U_{x, y, z, x', y', z'}^{(i)}$ be the transition function from $|x, \phi_y, z\rangle$ to $|x', \phi_{y'}, z'\rangle$, starting from the i th query to $CStO$ but right before $(i + 1)$ th query, where the $CStO$ is represented under basis $F_D|\phi_{\mathbf{v}}\rangle_D$. By Fact 1 above, this is well-defined for a fixed adversary quantum algorithm (as adversarial algorithm is not acting on D). For any vector $\mathbf{x}, \mathbf{y}, \mathbf{z}$ and w , let

$$\alpha_{\mathbf{x}, \mathbf{y}, \mathbf{z}, w} = \alpha_{x_1, y_1, z_1} U_{x_1, y_1, z_1, x_2, y_2, z_2}^{(1)} \cdots U_{x_q, y_q, z_q, w}^{(q)}. \quad (\text{A17})$$

Then, we can write the final adversary-oracle joint state as

$$\sum_{\mathbf{x}, \mathbf{y}, \mathbf{z}, w} \alpha_{\mathbf{x}, \mathbf{y}, \mathbf{z}, w} |w\rangle \otimes F_D|\phi_{\{y_1\}_{x_1} + \dots + \{y_q\}_{x_q}}\rangle_D. \quad (\text{A18})$$

(Note: here the oracle uses basis $F_D|\phi_{\mathbf{y}}\rangle$ and will switch to $|\mathbf{y}\rangle$ later). For any $\mathbf{v} \in \mathcal{Y}^{\mathcal{X}}$ with at most q non-zero coordinates, define set $S_{\mathbf{v}}$: it contains \mathbf{x}, \mathbf{y} so that $\sum_{i=1}^q \{y_i\}_{x_i} = \mathbf{v}$, where the addition is the coordinate-wise addition in group \mathcal{Y} .

If we measure D using basis $F_D|\phi_{\mathbf{v}}\rangle$ for $\mathbf{v} \in \mathcal{Y}^{\mathcal{X}}$ and measure w normally, then the measurement outcome (w, \mathbf{v}) has a probability $\gamma_{w, \mathbf{v}} = |\gamma'_{w, \mathbf{v}}|^2$, where

$$\gamma'_{w, \mathbf{v}} = \sum_{(\mathbf{x}, \mathbf{y}, \mathbf{z}) : (\mathbf{x}, \mathbf{y}) \in S_{\mathbf{v}}} \alpha_{\mathbf{x}, \mathbf{y}, \mathbf{z}, w}.$$

Next, starting with $S_{\mathbf{v}, i^0, j^0, k^0} := S_{\mathbf{v}}$, we iteratively define $S_{\mathbf{v}, i^t, j^t, k^t}$ as a subset of $S_{\mathbf{v}, i^{t-1}, j^{t-1}, k^{t-1}}$. For vector $(\mathbf{x}', \mathbf{y}')$ and x , we say that \underline{x} is in the database after the t th query, we mean $F_D|\phi_{\{y'_1\}_{x'_1} + \dots + \{y'_t\}_{x'_t}}\rangle$ is orthogonal to $|\perp\rangle_{D_u}$ at some coordinate $u \in \underline{x}$ (i.e., at coordinate u , it is $|\phi_y\rangle_{D_u}$ for some $y \neq 0$). We fix x^c with $\mathbf{v}(\underline{x}_t) \neq 0, \forall t \in [c]$. Then, $S_{\mathbf{v}, i^t, j^t, k^t}$ is defined as follows.

- **Case $i_t = j_t = k_t$:** It contains all $(\mathbf{x}', \mathbf{y}')$ in $S_{\mathbf{v}, i^{t-1}, j^{t-1}, k^{t-1}}$ so that
 1. \underline{x}_t is not in $F_D|\phi_{\{y'_1\}_{x'_1} + \dots + \{y'_{i_t-1}\}_{x'_{i_t-1}}}\rangle$ (i.e., every index $u \in \underline{x}_t$ has coordinate $|\perp\rangle$).
 2. $\underline{x}_t = \underline{x}'_{i_t}$ and $y'_{i_t} \neq 0$.
- **Case $i_t < j_t < k_t$:** It contains all $(\mathbf{x}', \mathbf{y}')$ in $S_{\mathbf{v}, i^{t-1}, j^{t-1}, k^{t-1}}$ so that
 1. \underline{x}_t is not in the database before the i_t th query
 2. \underline{x}_t is in the database after the i_t th query and before j_t th query
 3. \underline{x}_t is not in the database after the j_t th query and before k_t th query
 4. \underline{x}_t is in the database after the k_t th query.

Then, we define

$$\gamma'_{i^t, j^t, k^t, w, \mathbf{v}} = \sum_{(\mathbf{x}, \mathbf{y}, \mathbf{z}) : (\mathbf{x}, \mathbf{y}) \in S_{\mathbf{v}, i^t, j^t, k^t}} \alpha_{\mathbf{x}, \mathbf{y}, \mathbf{z}, w}, \quad (\text{A19})$$

where we remind x^c is fixed and implicit in γ' and S variables. Then, we have the following claim.

Claim. For any x^c, w, \mathbf{v} with $\mathbf{v}(\underline{x}_t) \neq 0$ ($t = 1, \dots, c$), it holds that

$$\sum_{i_t: i_t = j_t = k_t} \gamma'_{i^t, j^t, k^t, w, \mathbf{v}} - \sum_{i_t < j_t < k_t} \gamma'_{i^t, j^t, k^t, w, \mathbf{v}} = \gamma'_{i^{t-1}, j^{t-1}, k^{t-1}, w, \mathbf{v}} \quad (\text{A20})$$

Proof. Given $(\mathbf{x}, \mathbf{y}) \in S_{\mathbf{v}, i^{t-1}, j^{t-1}, k^{t-1}}$ and \mathbf{z} , consider the first i_t queries in the process toward $\alpha_{\mathbf{x}, \mathbf{y}, \mathbf{z}, w} |w\rangle_{F_D} | \phi_{\mathbf{v}} \rangle_D$. Assume that \underline{x}_t is inserted ℓ times into the database (i.e., the change from not in the database to being in the database). Then, $\ell \geq 1$; otherwise, $\mathbf{v}(x_t) = 0$ (contradiction). On the left side, $\alpha_{\mathbf{x}, \mathbf{y}, \mathbf{z}, w}$ will appear in $\sum_{i_t: i_t = j_t = k_t} \gamma'_{i_t, j_t, k_t, w, \mathbf{v}}$ for ℓ times (by the meaning of insertion: before it, it is not in while it is in after it) while appearing in $\sum_{i_t < j_t < k_t} \gamma'_{i_t, j_t, k_t, w, \mathbf{v}}$ for $\ell - 1$ times (as each (\mathbf{x}, \mathbf{y}) in $\alpha_{\mathbf{x}, \mathbf{y}, \mathbf{z}, w}$ in this sum requires at least two insertions). This can be seen from the specification of $S_{\mathbf{v}, i_t, j_t, k_t}$. So $\alpha_{\mathbf{x}, \mathbf{y}, \mathbf{z}, w}$ on the left side appears exactly once. By definition of $\gamma'_{i_t-1, j_t-1, k_t-1, w, \mathbf{v}}$, it appears on the right side exactly once. Finally, for every $\alpha_{\mathbf{x}, \mathbf{y}, \mathbf{z}, w}$ on the left or right side, it must have $(\mathbf{x}, \mathbf{y}) \in S_{\mathbf{v}, i^{t-1}, j^{t-1}, k^{t-1}}$, by definition of $\gamma'_{i^u, j^u, k^u, w, \mathbf{v}}$ for $u = t, t - 1$. The foregoing argument applies again. The claim follows. ■

Back to our lemma proof, Equation (A20) for $t = 1, \dots, c$ can be combined into one equation with right side $\gamma'_{w, \mathbf{v}}$ while the left side being a sum of $\gamma'_{i^c, j^c, k^c, w, \mathbf{v}}$ over all $(q + \binom{q}{3})^c$ possible (i^c, j^c, k^c) . Notice that $\gamma'_{i^t, j^t, k^t, w, \mathbf{v}}$ over (t, i^t, j^t, k^t) has a dependency in a tree structure. Therefore,

$$\gamma'_{w, \mathbf{v}} = \sum_{(i^c, j^c, k^c)} \pm \gamma'_{i^c, j^c, k^c, w, \mathbf{v}}, \quad (\text{A21})$$

where \pm can only be one of $+$ and $-$ but is not important to be precise here. Either of the two sides of Equation (A21) is the coefficient of $|w\rangle_{F_D} | \phi_{\mathbf{v}} \rangle_D$.

Let the superposition before the final measurement be $|\psi\rangle = \sum_{w', \mathbf{v}} \gamma'_{w', \mathbf{v}} |w'\rangle_{F_D} | \phi_{\mathbf{v}} \rangle_D$. Let \mathbf{v} be $v_{x'_i}$ at x'_i for $i = 1, \dots, L$ while it is 0 at any other index. Thus, by definition of Walsh-Hadamard transform, $|\psi\rangle$ can be expanded as

$$|\psi\rangle = \frac{1}{|\mathcal{Y}|^{L/2}} \sum_{w', \mathbf{v}} \sum_{u_{x'_1}, \dots, u_{x'_L}} (-1)^{u_{x'_1} v_{x'_1} + \dots + u_{x'_L} v_{x'_L}} \gamma'_{w', \mathbf{v}} |w'\rangle_{F_D} | \mathbf{u} \rangle_D, \quad (\text{A22})$$

where $u_{x'_j}$ for $j > L$ is \perp . Thus, $|w'\rangle_{F_D} | \mathbf{u} \rangle_D$ in $|\psi\rangle$ has coefficient

$$\gamma''_{w', \mathbf{u}} \stackrel{\text{def}}{=} \frac{1}{|\mathcal{Y}|^{L/2}} \sum_{w', \mathbf{v}: v_{x'_j} \neq 0, j \in [L]} (-1)^{u_{x'_1} v_{x'_1} + \dots + u_{x'_L} v_{x'_L}} \gamma'_{w', \mathbf{v}}. \quad (\text{A23})$$

Let $\gamma''_{i^t, j^t, k^t, w', \mathbf{u}}$ be the coefficient of $|w'\rangle_{F_D} | \mathbf{u} \rangle_D$ in $|\psi\rangle$ from $\text{Exp}_{i^c, j^c, k^c}$. Then,

$$\gamma''_{i^t, j^t, k^t, w', \mathbf{u}} = \frac{1}{|\mathcal{Y}|^{L/2}} \sum_{w', \mathbf{v}: v_{x'_j} \neq 0, j \in [L]} (-1)^{u_{x'_1} v_{x'_1} + \dots + u_{x'_L} v_{x'_L}} \gamma'_{i^t, j^t, k^t, w', \mathbf{v}}. \quad (\text{A24})$$

From Equation (A21), we have

$$\gamma''_{w, \mathbf{u}} = \sum_{(i^c, j^c, k^c)} \pm \gamma''_{i^c, j^c, k^c, w, \mathbf{u}}. \quad (\text{A25})$$

Hence, at least one $|\gamma''_{i^c, j^c, k^c, w, \mathbf{u}}| \geq |\gamma''_{w, \mathbf{u}}| / (q + \binom{q}{3})^c$. Since $\lambda_{i^c, j^c, k^c, \underline{x}^c, w, \mathbf{u}} = |\gamma''_{i^c, j^c, k^c, w, \mathbf{u}}|^2$ and $\lambda_{w, \mathbf{u}} = |\gamma''_{w, \mathbf{u}}|^2$, the lemma follows. □

Proof of Theorem 4. We take the implicit $x^c = x_{w, \mathbf{y}, 1}, \dots, x_{w, \mathbf{y}, c}$. Let $\lambda_{\underline{x}^c, w, \mathbf{y}}$ be $\lambda_{i^c, j^c, k^c, \underline{x}^c, w, \mathbf{y}}$ for a random (i^c, j^c, k^c) . There are $(q + \binom{q}{3})^c$ possible (i, j, k) in the support of \mathcal{U}_{IJK}^c . Then, by Lemma A5, $\lambda_{\underline{x}^c, w, \mathbf{y}} \geq \lambda_{w, \mathbf{y}} / (q + \binom{q}{3})^{3c}$. Hence,

$$\lambda \geq \sum_{(w, \mathbf{y}) \in S} \lambda_{\underline{x}^c, w, \mathbf{y}} \geq \sum_{(w, \mathbf{y}) \in S} \frac{\gamma_{w, \mathbf{y}}}{(q + \binom{q}{3})^{3c}} = \frac{\gamma}{(q + \binom{q}{3})^{3c}}, \quad (\text{A26})$$

desired! □

References

1. Michel Abdalla, Pierre Alain Fouque, Vadim Lyubashevsky, Mehdi Tibouchi, Tightly-Secure Signatures from Lossy Identification Schemes. *EUROCRYPT 2012*, 572-590.
2. H. K. Alper and J. Burdges. Two-round trip schnorr multi-signatures via delinearized witnesses. In T. Malkin and C. Peikert, editors, *CRYPTO 2021, Part I*, volume 12825 of LNCS, pages 157-188, Virtual Event, Aug. 2021. Springer, Heidelberg.
3. Ali Bagherzandi, Jung Hee Cheon and Stanislaw Jarecki, Multisignatures secure under the discrete logarithm assumption and a generalized forking lemma. *CCS 2008*, pp. 449-458, 2008.
4. Mihir Bellare, Phillip Rogaway: Random Oracles are Practical: A Paradigm for Designing Efficient Protocols. *CCS 1993*: 62-73, 1993.
5. Mihir Bellare, Gregory Neven: Multi-signatures in the plain public-Key model and a general forking lemma. *CCS 2006*: 390-399
6. Ian F. Blake, Shuhong Gao and Ronald C. Mullin, Explicit Factorization of $x^{2^k} + 1$ over F_p with Prime $p \equiv 3 \pmod{4}$. *Appl. Algebra Eng. Commun. Comput.* 4:89-94 (1993)
7. Alexandra Boldyreva, Threshold Signatures, Multisignatures and Blind Signatures Based on the Gap-Diffie-Hellman-Group Signature Scheme. *Public Key Cryptography 2003*: 31-46.
8. D. Boneh, C. Gentry, B. Lynn, and H. Shacham. Aggregate and verifiably encrypted signatures from bilinear maps. In E. Biham, editor, *EUROCRYPT 2003*, volume 2656 of LNCS, pages 416-432. Springer-Verlag, 2003.
9. Dan Boneh, Mark Zhandry, Secure Signatures and Chosen Ciphertext Security in a Quantum Computing World. *CRYPTO (2) 2013*: 361-379.
10. Cecilia Boschini, Akira Takahashi, and Mehdi Tibouchi. Musig-L: Lattice-based multi-signature with single-round online phase, *CRYPTO'22*.
11. Ran Canetti, Oded Goldreich, Shai Halevi: The Random Oracle Methodology, Revisited. *STOC 1998*: 209-218
12. Kai-Min Chung, Serge Fehr, Yu-Hsuan Huang, Tai-Ning Liao: On the Compressed-Oracle Technique, and Post-Quantum Security of Proofs of Sequential Work. *EUROCRYPT (2) 2021*: 598-629
13. Ronald Cramer, Léo Ducas, and Benjamin Wesolowski. Short stickelberger class relations and application to ideal-svp. *Eurocrypt 2017*.
14. Ivan Damgård, Claudio Orlandi, Akira Takahashi, and Mehdi Tibouchi. Two-round n-out-of-n and multisignatures and trapdoor commitment from lattices. *PKC 2021*, LNCS 12710, pages 99-130, 2021.
15. Jelle Don, Serge Fehr, Christian Majenz, Christian Schaffner: Online-Extractability in the Quantum Random-Oracle Model. *EUROCRYPT'22*
16. Léo Ducas and Alain Durmus. Ring-lwe in polynomial rings. In *PKC 2012*, LNCS 7293, pages 34-51. Springer, 2012.
17. Rachid El Bansarkhani and Jan Sturm. An efficient lattice-based multisignature scheme with applications to bitcoins, *CANS'16*, pages 140-155.
18. Nils Fleischhacker, Mark Simkin, Zhenfei Zhang: Squirrel: Efficient Synchronized Multi-Signatures from Lattices. *CCS 2022*, pages 1109-1123, 2022.
19. Masayuki Fukumitsu and Shingo Hasegawa. A tightly-secure lattice-based multisignature. *The 6th Asia Public-Key Cryptography Workshop 2019*, page 3-11, 2019.
20. Masayuki Fukumitsu and Shingo Hasegawa. A lattice-based provably secure multisignature scheme in quantum random oracle model, *ProvSec 2020*.
21. Qianqian He, Xiangjun Xin and Qinglan Yang, Security analysis and improvement of a quantum multi-signature protocol, *Quantum Information Processing*, 20:26, 2021.
22. K. Itakura and K. Nakamura, A public-key cryptosystem suitable for digital multisignatures. *NEC Research & Development*, 71:1-8, 1983.
23. S. Jiang, D. Alhadidi and H. F. Khojir, Key-and-Signature Compact Multi-Signatures for Blockchain: A Compiler with Realizations, *IEEE Transactions on Dependable and Secure Computing*, accepted, 2024.
24. S. Jiang, G. Gong, J. He, K. Nguyen and H. Wang, PAKEs: New Framework, New Techniques and More Efficient Lattice-Based Constructions in the Standard Model, *The International Conference on Practice and*

- Theory in Public-Key Cryptography (PKC'20)*, A. Kiayias, M. Kohlweiss, P. Wallden, V. Zikas (Eds.), LNCS 12110, IACR, pp. 396-427, 2020.
25. D. H. Jiang, Q. Z. Hu, X. Q. Liang, G. B. Xu, A novel quantum multi-signature protocol based on locally indistinguishable orthogonal product states. *Quantum Inf. Process.* 18(9), 268 (2019).
 26. Meenakshi Kansal, Amit Kumar Singh, Ratna Dutta, Efficient Multi-Signature Scheme Using Lattice. *Comput. J.* 65(9): 2421-2429 (2022)
 27. Meenakshi Kansal and Ratna Dutta, Round Optimal Secure Multisignature Schemes from Lattice with Public Key Aggregation and Signature Compression. *AFRICACRYPT 2020*, pages 281-300, 2020.
 28. Eike Kiltz, Vadim Lyubashevsky, and Christian Schaffner. A concrete treatment of Fiat-Shamir signatures in the quantum random-oracle model, J. B. Nielsen and V. Rijmen (Eds.), *EUROCRYPT 2018*, Springer, pages 552-586, 2018.
 29. Serge Lang, *Algebra*, GTM 211, Springer-Verlag, 2002.
 30. Qipeng Liu and Mark Zhandry, Revisiting Post-quantum Fiat-Shamir. *CRYPTO (2) 2019*: 326-355
 31. Zi-Yuan Liu, Yi-Fan Tseng, and Raylin Tso. Cryptanalysis of a round optimal lattice-based multisignature scheme. *Cryptology ePrint Archive*, Report 2020/1172, 2020.
 32. Steve Lu, Rafail Ostrovsky, Amit Sahai, Hovav Shacham, Brent Waters: Sequential Aggregate Signatures and Multisignatures Without Random Oracles. *EUROCRYPT 2006*: 465-485
 33. Vadim Lyubashevsky and Daniele Micciancio, Generalized Compact Knapsacks Are Collision Resistant. *ICALP 2006*, part 2, pages 144-155, 2006.
 34. Vadim Lyubashevsky, Chris Peikert, and Oded Regev. On ideal lattices and learning with errors over rings. *J. ACM*, 60(6):43:1-43:35, 2013.
 35. Vadim Lyubashevsky, Chris Peikert, and Oded Regev. A toolkit for Ring-LWE cryptography. In *EUROCRYPT 2013*, volume 7881 of LNCS, pages 35–54. Springer, 2013.
 36. Changshe Ma, Jian Weng, Yingjiu Li, Robert H. Deng: Efficient discrete logarithm based multi-signature scheme in the plain public key model. *Des. Codes Cryptogr.* 54(2): 121-133 (2010)
 37. Changshe Ma, Mei Jiang, Practical Lattice-Based Multisignature Schemes for Blockchains. *IEEE Access* 7: 179765-179778 (2019)
 38. Maxwell, G., Poelstra, A., Seurin, Y., Wuille, P.: Simple schnorr multi-signatures with applications to bitcoin. *Cryptology ePrint Archive*, Report 2018/068 (2018),
 39. Silvio Micali, Kazuo Ohta, Leonid Reyzin: Accountable-subgroup multisignatures: extended abstract. *CCS 2001*: 245-254.
 40. D. Micciancio and O. Regev. Worst-case to average-case reductions based on gaussian measures. *SIAM J. Comput.*, 37(1): 267-302, 2007.
 41. Satoshi Nakamoto. Bitcoin: A Peer-to-Peer Electronic Cash System, 2008. Available at <http://bitcoin.org/bitcoin.pdf>
 42. J. Nick, T. Ruffing, and Y. Seurin. MuSig2: Simple two-round Schnorr multi-signatures. *CRYPTO 2021*, Part I, LNCS 12825, pp. 189-221, Springer, 2021.
 43. Michael A. Nielsen and Isaac L. Chuang, *Quantum Computation and Quantum Information*, Cambridge University Press, New York, 2010.
 44. Chris Peikert, Alon Rosen, Efficient Collision-Resistant Hashing from Worst-Case Assumptions on Cyclic Lattices. *TCC 2006*, pages 145-166, 2006.
 45. Peter W. Shor, Algorithms for Quantum Computation: Discrete Logarithms and Factoring. *FOCS 1994*, pp. 124-134
 46. Ewa Syta, Iulia Tamas, Dylan Visher, David Isaac Wolinsky, Philipp Jovanovic, Linus Gasser, Nicolas Gailly, Ismail Khoffi, and Bryan Ford. Keeping authorities “honest or bust” with decentralized witness cosigning. *IEEE Symposium on Security and Privacy 2016*, pp. 526-545. IEEE Computer Society Press, May 2016.
 47. Dominique Unruh, Quantum Proofs of Knowledge. *EUROCRYPT 2012*: 135-152.
 48. John Watrous, *Quantum Computing*, *Lecture notes*, 2006. Available at <https://cs.uwaterloo.ca/watrous/QC-notes/>
 49. Mark Zhandry, How to Record Quantum Queries, and Applications to Quantum Indifferentiability, *CRYPTO 2019*, part II, pages 239-268.

Disclaimer/Publisher's Note: The statements, opinions and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of MDPI and/or the editor(s). MDPI and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions or products referred to in the content.